

Dewberry Engineers Inc. | 813.225.1325 1000 North Ashley Drive, Suite 801 | 813.225.1385 fax Tampa, FL 33602 | www.dewberry.com

## **FL Peninsular 2018 Lidar Project- Baker County**

Report Produced for U.S. Geological Survey

USGS Contract: G16PC00020

Report Date: March 30, 2022

SUBMITTED BY: Dewberry 1000 North Ashley Drive Suite 801 Tampa, FL 33602 813.225.1325

SUBMITTED TO: U.S. Geological Survey tnm help@usgs.gov

## TABLE OF CONTENTS

ΑΤΤΑ	CHMENTS	3
1. E	EXECUTIVE SUMMARY	4
1.1	L PROJECT TEAM	4
1.2	2 PROJECT AREA	4
1.3	3 COORDINATE REFERENCE SYSTEM	5
1.4	PROJECT DELIVERABLES	6
1.5	5 DEWBERRY PRODUCTION WORKFLOW DIAGRAM	6
2. L	LIDAR ACQUISITION REPORT- QUANTUM SPATIAL	7
2.1	1 LIDAR ACQUISITION DETAILS	
2.2	2 LIDAR SYSTEM PARAMETERS	
2.3	3 ACQUISITION STATUS REPORT AND FLIGHT LINES	9
2.4		
2.5	5 AIRBORNE KINEMATIC CONTROL	9
2.6	6 GENERATION AND CALIBRATION OF RAW LIDAR DATA	
2	2.6.1 Boresight and Relative a ccuracy	
2.7	7 FINAL CALIBRATION VERIFICATION	
3. L	LIDAR ACQUISITION REPORT- DIGITAL AERIAL SOLUTIONS	
3.1	L LIDAR ACQUISITION DETAILS	
3.2	2 LIDAR SYSTEM PARAMETERS	
3.3	3 ACQUISITION STATUS REPORT AND FLIGHT LINES	
3.4	ACQUISITION STATIC CONTROL	
3.5	5 AIRBORNE KINEMATIC CONTROL	
3.6	6 GENERATION AND CALIBRATION OF RAW LIDAR DATA	
3	3.6.1 Boresight and Relative a ccuracy	
3.7		
4. L	LIDAR PRODUCTION & QUALITATIVE ASSESSMENT	
4.1	L INITIAL PROCESSING	
4	4.1.1 Post Calibration Lidar Review	
4.2	2 DATA CLASSIFICATION AND EDITING	
4	4.2.1 Qualitative Review	
	4.2.2 Formatting Review	
5. B	BREAKLINE PRODUCTION & QUALITATIVE ASSESSMENT	
5.1	L BREAKLINE PRODUCTION METHODOLOGY	
5	5.1.1 Breakline Collection Requirements	
5.2	2 BREAKLINE QUALITATIVE ASSESSMENT	
6. D	DEM PRODUCTION & QUALITATIVE ASSESSMENT	
6.1	L DEM Production Methodology	
6.2	2 DEM QUALITATIVE ASSESSMENT	
7. D	DER IVA TIVE LIDAR PRO DUCTS	
7.1	L INTERSWATH RASTER	
7.2	2 Swath Separation Images	

	7.3	INTERSWATH AND INTRASWATH POLYGONS	32
	7.3.1	.1 Interswath Accuracy	
	7.3.2	.2 Intras wath Accura cy	
8.	LIDA	AR QUALITATIVE ASSESSMENT	
	8.1 INT	ITENSITY RANGE CORRECTION	32

## **ATTACHMENTS**

Appendix A: GPS Processing Reports Appendix B: GPS Processing Reports

## 1. EXECUTIVE SUMMARY

The primary purpose of this project was to develop a consistent and accurate surface elevation dataset derived from highaccuracy light detection and ranging (lidar) technology for the FL Peninsular 2018 Lidar Project-Baker project area.

Lidar data were processed and classified according to project specifications. Detailed breaklines and bare-earth Digital Elevation Models were produced for the project area. Project components were formatted based on a tile grid with each tile covering an area 5,000 ft by 5,000 ft. A total of 39,217 tiles will be produced for the project, providing approximately 34,950 sq. miles of coverage. A total of 643 tiles were produced for Baker County, providing approximately 576.6 sq. miles of coverage.

#### 1.1 Project Team

Dewberry served as the prime contractor for the project. In addition to project management, Dewberry was responsible for LAS classification, all lidar products, breakline production, digital elevation model (DEM) production, and quality assurance.

Dewberry completed the ground survey for the project and delivered surveyed checkpoints. The task was to acquire surveyed checkpoints for the project to use in independent testing of the vertical accuracy of the lidar-derived surface model and to acquire surveyed ground control points for use in calibration activities. The GPS base station coordinates used during lidar data acquisition were verified.

Quantum Spatial and Digital Aerial Solutions completed lidar data acquisition and data calibration for the project area.

#### 1.2 Project Area

The block area is shown in Figure 1. Baker County contains 643 5,000 ft by 5,000 ft tiles. The project tile grid contains 39,217 5,000 ft by 5,000 ft tiles.

## FL Peninsular - Baker County

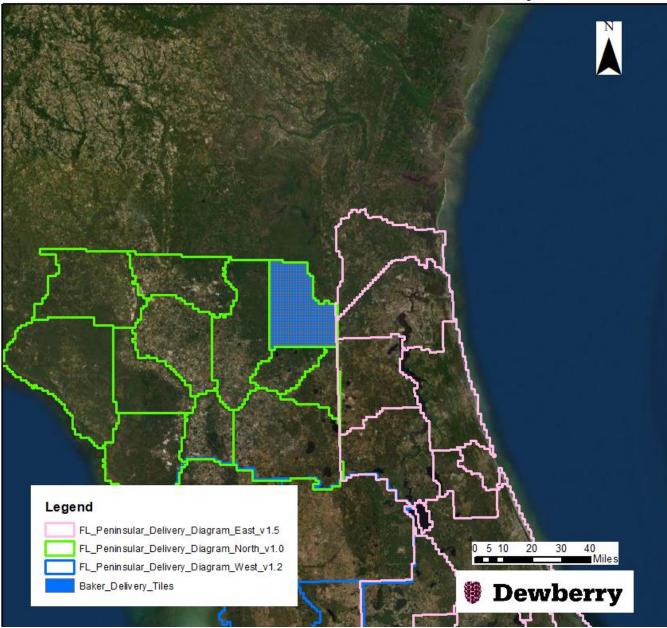


Figure 1- Project map and tile grid.

#### 1.3 Coordinate Reference System

Data produced for the project are delivered in the following spatial reference system:

Horizontal Datum:	North American Datum of 1983 with the 2011 Adjustment (NAD 83 (2011))
Vertical Datum:	North American Vertical Datum of 1988 (NAVD88)
Geoid Model:	Geoid12B
Coordinate System:	FL State Plane Zone North
Horizontal Units:	U.S. Survey Feet
Vertical Units:	U.S. Survey Feet

#### **1.4 Project Deliverables**

The deliverables for the block are as follows:

- 1. Project Extents (Esri SHP)
- 2. Calibration Points (coordinates, Esri shapefile)
- 3. Classified Point Cloud (tiled LAS)
- 4. Independent Survey Checkpoint Data (report, photos, coordinates, Esri shapefiles)
- 5. Intensity Images (tiled, 8-bit gray scale, GeoTIFF format)
- 6. Swath Separation Images (tiled raster, GeoTIFF format)
- 7. Breakline Data (file GDB)
- 8. Bare Earth Surface (tiled raster DEM, GeoTIFF format)
- 9. Interswath Raster
- 10. Interswath Polygons
- 11. Intraswath Polygons
- 12. Metadata (XML)
- 13. Block Report

#### 1.5 Dewberry Production Workflow Diagram

The diagram below outlines Dewberry's standard lidar production workflow.

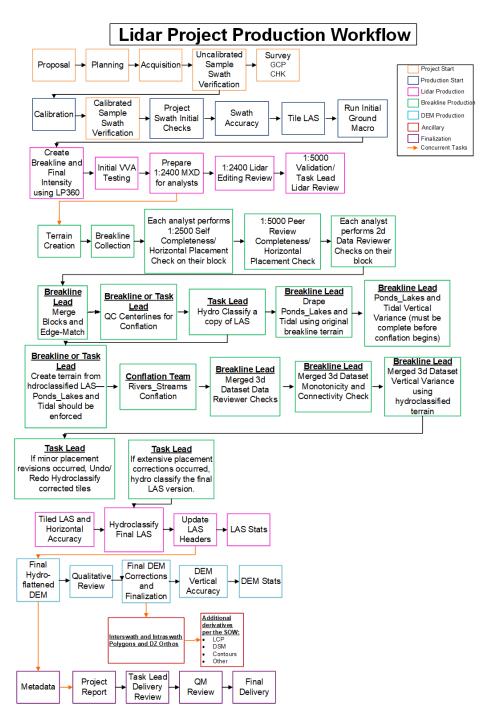


Figure 2- Dewberry's Lidar Production Workflow Diagram

## 2. LIDAR ACQUISITION REPORT- QUANTUM SPATIAL

Dewberry elected to subcontract the lidar acquisition and calibration activities to Quantum Spatial and Digital Aerial Solutions. Quantum Spatial and Digital Aerial Solutions was responsible for providing lidar acquisition, calibration, and delivery of lidar data files.

The lidar aerial acquisition for Baker County was conducted between November 28, 2018 to January 22, 2020.

#### 2.1 Lidar Acquisition Details

Quantum Spatial planned 720 passes for passes for the project area as a series of parallel flight lines with cross flight lines for the purposes of quality control. The flight plan included zigzag flight line

collection as a result of the inherent IMU drift associated with all IMU systems. In order to reduce any margin for error in the flight plan, Quantum Spatial followed FEMA's Appendix A "guidelines" for flight planning and, at a minimum, includes the following criteria:

- A digital flight line layout using Leica Mission Pro flight design software for direct integration into the aircraft flight navigation system;
- Planned flight lines, flight line numbers, and coverage area;
- Lidar coverage extended by a predetermined margin beyond all project borders to ensure necessary over-edge coverage appropriate for specific task order deliverables;
- Investigation of local restrictions related to air space and any controlled areas so that required permissions can be obtained in a timely manner with respect to project schedule; and
- Filed flight plans as required by local Air Traffic Control (ATC) prior to each mission.

Quantum Spatial monitored weather and atmospheric conditions and conducted lidar missions only when no conditions existed below the sensor that would affect the collection of data. Good lidar collection conditions include leaf-off for hardwoods and no snow, rain, fog, smoke, mist, or low clouds. Lidar systems are active sensors that do not require active light, thus allowing missions to be conducted during night hours if weather restrictions do not prevent collection. Quantum Spatial accessed reliable weather sites and indicators (webcams) to establish the highest probability for successful data acquisition.

Within 72 hours prior to the planned day(s) of acquisition, Quantum Spatial closely monitored the weather, checking all sources for forecasts at least twice daily. As soon as weather conditions were conducive to acquisition, aircraft mobilized to the project site to begin data collection. Once on site, the acquisition team took responsibility for weather analysis.

#### 2.2 Lidar System Parameters

Quantum Spatial operated three Cessna Grand Caravans (Tail # N704MD, N208NR, N604MD) and two Cessna T206 Turbo Stationair (Tail#N916WC, N917WC) outfitted with Leica ALS80 lidar systems during data collection. Table 5 details the lidar system parameters used during acquisition for this project.

Parameter	Value
System	Leica ALS80
Altitude (m above ground level)	1400
Nominal flight speed (kts)	150
Scanner pulse rate (kHz)	586
Scan frequency (Hz)	52
Pulse duration of the scanner (ns)	2.5
Pulse width of the scanner (m)	0.31
Central wavelength of the sensor laser (nm)	1064
Multiple pulses in the air	Yes
Beam divergence (mrad)	0.22
Swath width (m)	1019

Table 1. Quantum Spatial lidar system parameters.

Nominal swath width on the ground (m)	1018
Swath overlap (%)	60
Total sensor scan angle (degrees)	40
Computed down track spacing per beam (m)	0.74
Computed cross track Spacing per beam (m)	0.53
Nominal pulse spacing (NPS) (single swath) (m)	0.316
Nominal Pulse Density (NPD) (single swath) (points per sq m)	10
Aggregate NPS (m) (if NPS was designed to be met through single coverage, ANPS and NPS will be equal)	0.31
Aggregate NPD (m) (if NPD was designed to be met through single coverage, ANPD and NPD will be equal)	10.47
Maximum Number of Returns per Pulse	7

#### 2.3 Acquisition Status Report and Flight Lines

Upon notification to proceed, the flight crew loaded the flight plans and validated the flight parameters. The acquisition manager contacted air traffic control and coordinated flight pattern requirements. Lidar acquisition began immediately upon notification that control base stations were in place. During flight operations, the flight crew monitored weather and atmospheric conditions. Lidar missions were flown only when no condition existed below the sensor that would affect the collection of data. The pilot constantly monitored the course, position, pitch, roll, and yaw of the aircraft. The sensor operator monitored the lidar sensor, the position dilution of precision (PDOP), and performed the first quality control review during acquisition. The flight crew reviewed weather and cloud locations. Any flight lines impacted by unfavorable conditions were marked as invalid and re-flown immediately or at an optimal time.

#### 2.4 Acquisition Static Control

Quantum Spatial utilized FPRN and USGS CORS for the FL Peninsular lidar project area. The coordinates of all base stations used are provided in the table below. All control and calibration points are also provided in shapefile format as part of is delivery.

Name	NAD83(2011) FL Sta	te Plane East, ft	NAD83(2011), ft	NAVD88 Geoid12B, ft
	Easting (X)	Northing (Y)	Ellipsoid Height	Orthometric Height
PLTK	437738.25	1938161.29	-17.94	10.44
DLND	572080.63	1716876.59	0.28	28.38
Name	NAD83(2011) FL Sta ft	te Plane North,	NAD83(2011), ft	NAVD88 Geoid12B, ft
	Easting (X)	Northing (Y)	Ellipsoid Height	Orthometric Height
GNVL	2674388.15	256559.51	23.95	51.82

Table 2. Base stations used to control lidar acquisition.

#### 2.5 Airborne Kinematic Control

Airborne GNSS data was processed using the Applanix POSPac MMS software suite and Novatel's GrafNav software. Flights were flown with a minimum of six satellites in view (13° above the horizon)

and with a PDOP of better than four. Distances from at least one base station to aircraft were kept to a maximum of 40 km (25 miles). For all flights, the GNSS data can be classified as excellent, with GNSS residuals of 3 cm average or better but no larger than 10 cm being recorded.

GPS processing reports for each mission are included in the Appendix A attachment.

#### 2.6 Generation and Calibration of Raw Lidar Data

Availability and status of all required GPS and laser data were verified against field reports and any data inconsistencies were addressed.

Subsequently the mission points were output using Leica software initially with default values from Leica or the last mission calibrated for the system. The initial point generation for each mission calibration was verified within Microstation/TerraScan for calibration errors. If a calibration error greater than specification was observed, the appropriate roll, pitch and scanner scale corrections were calculated. The point data were then regenerated with the new calibration values and validated internally again to ensure that the errors were fully addressed.

Data collected by the lidar unit was reviewed for completeness, acceptable density, and to make sure all data were captured without errors or corrupted values. All GPS, aircraft trajectory, mission information, and ground control files were reviewed and logged. A supplementary coverage check was carried out to ensure that there were no unreported gaps in data coverage.

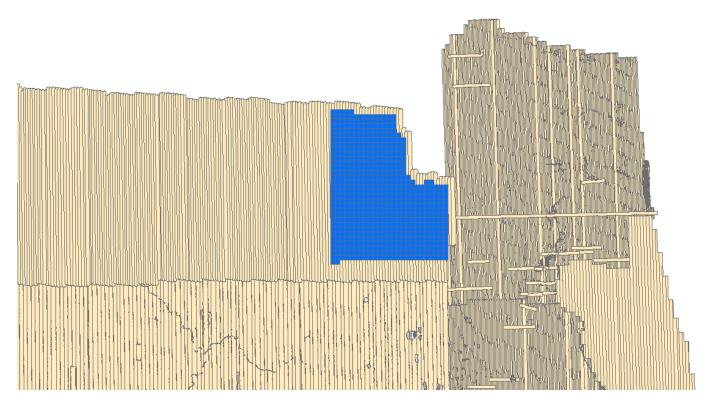


Figure 3 - Lidar swath output showing complete coverage.

#### 2.6.1 Boresight and Relative accuracy

The initial points for each mission calibration were inspected for flight line errors, flight line overlap, slivers or gaps in the data, point data minimums, or issues with the lidar unit or GPS. Roll, pitch and scanner scale were optimized during the calibration process until relative accuracy requirements were met.

Relative accuracy and internal quality were checked using at least 3 regularly spaced QC blocks in which points from all lines were loaded and inspected. Vertical differences between ground surfaces of each line were displayed. Color scale was adjusted to flag errors that were not within project specifications. Cross sections were visually inspected across each block to validate point to point, flight line to flight line, and mission to mission agreement.

The following relative accuracy specifications were used for this project:

- ≤6 cm maximum difference within individual swaths (intra-swath); and
- ≤8 cm RMSDz between adjacent and overlapping swaths (inter-swath).

A different set of QC blocks were generated for final review after any necessary transformations were applied.

#### 2.7 Final Calibration Verification

A preliminary RMSEz error check was performed by Quantum Spatial at this stage of the project life cycle in the raw Lidar dataset against GNSS static and kinematic data and compared to RMSEz project specifications. The Lidar data was examined in non-vegetated, flat areas away from breaks. Lidar ground points for each flight line generated by an automatic classification routine were used. Prior to delivery to Dewberry, the elevation data was verified internally to ensure it met Non-Vegetated Vertical Accuracy (NVA) requirements (RMSEz  $\leq$  10 cm and Accuracy at the 95% confidence level  $\leq$  19.6 cm) when compared to kinematic GNSS checkpoints.

## 3. LIDAR ACQUISITION REPORT- DIGITAL AERIAL SOLUTIONS

Dewberry elected to subcontract the lidar acquisition and calibration activities to Quantum Spatial and Digital Aerial Solutions. Quantum Spatial and Digital Aerial Solutions was responsible for providing lidar acquisition, calibration, and delivery of lidar data files.

The lidar aerial acquisition for Baker County was conducted between November 28, 2018 to January 22, 2020.

#### 3.1 Lidar Acquisition Details

Digital Aerial Solutions planned 239 passes for the project area as a series of parallel flight lines. In order to reduce any margin for error in the flight plan, Digital Aerial Solutions followed FEMA's Appendix A "guidelines" for flight planning and, at a minimum, includes the following criteria:

- A digital flight line layout using LEICA MISSION PRO flight design software for direct integration into the aircraft flight navigation system.
- Planned flight lines; flight line numbers; and coverage area.
- Lidar coverage extended by a predetermined margin beyond all project borders to ensure necessary over-edge coverage appropriate for specific task order deliverables.

• Local restrictions related to air space and any controlled areas have been investigated so that required permissions can be obtained in a timely manner with respect to schedule. Additionally, Digital Aerial Solutions will file our flight plans as required by local Air Traffic Control (ATC) prior to each mission.

Digital Aerial Solutions monitored weather and atmospheric conditions and conducted lidar missions only when no conditions exist below the sensor that will affect the collection of data. These conditions include leaf-off for hardwoods, no snow, rain, fog, smoke, mist and low clouds. Lidar systems are active sensors, not requiring

light, thus missions may be conducted during night hours when weather restrictions do not prevent collection. Digital Aerial Solutions accesses reliable weather sites and indicators (webcams) to establish the highest probability for successful collection in order to position our sensor to maximize successful data acquisition.

Within 72-hours prior to the planned day(s) of acquisition, Digital Aerial Solutions closely monitored the weather, checking all sources for forecasts at least twice daily. As soon as weather conditions were conducive to acquisition, our aircraft mobilized to the project site to begin data collection. Once on site, the acquisition team took responsibility for weather analysis.

#### 3.2 Lidar System Parameters

Digital Aerial Solutions operated a Cessna 421 (Tail # 112MJ) outfitted with a LEICA TM\_90524 lidar system during the collection of the Southern portion of the study area. Table 3 illustrates Digital Aerial Solutions system parameters for lidar acquisition on this project.

Parameter	Value
System	Leica Terrain Mapper (90524)
Altitude (m above ground level)	1500
Nominal flight speed (kts)	160
Scanner pulse rate (kHz)	1660
Scan frequency (Hz)	42.3
Pulse duration of the scanner (ns)	4
Pulse width of the scanner (m)	1.2
Central wavelength of the sensor laser (nm)	1064
Multiple pulses in the air	No
Beam divergence (mrad)	0.25
Swath width (m)	1091
Nominal swath width on the ground (m)	1091
Swath overlap (%)	30
Total sensor scan angle (degrees)	40
Computed down track spacing per beam (m)	0.58
Computed cross track Spacing per beam (m)	0.55
Nominal pulse spacing (NPS) (single swath) (m)	0.29
Nominal Pulse Density (NPD) (single swath) (points per sq m)	11.76
Aggregate NPS (m) (if NPS was designed to be met through single coverage, ANPS and NPS will be equal)	0.29
Aggregate NPD (m) (if NPD was designed to be met through single coverage, ANPD and NPD will be equal)	11.76
Maximum Number of Returns per Pulse	15

Table 3. Digital Aerial Solutions lidar system parameters.

#### 3.3 Acquisition Status Report and Flight Lines

Upon notification to proceed, the flight crew loaded the flight plans and validated the flight parameters. The Acquisition Manager contacted air traffic control and coordinated flight pattern requirements. Lidar acquisition began immediately upon notification that control base stations were in place. During flight operations, the flight crew monitored weather and atmospheric conditions. Lidar missions were flown only when no condition existed below the sensor that would affect the collection of data. The pilot constantly monitored the aircraft course, position, pitch, roll, and yaw of the aircraft. The

sensor operator monitored the sensor, the status of PDOPs, and performed the first Q/C review during acquisition. The flight crew constantly reviewed weather and cloud locations. Any flight lines impacted by unfavorable conditions were marked as invalid and re-flown immediately or at an optimal time.

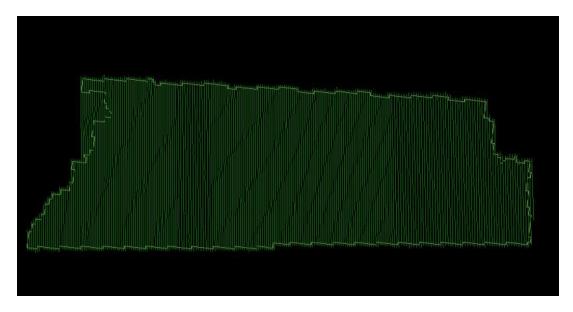


Figure 4 - Trajectories as flown by Digital Aerial Solutions

#### **3.4 Acquisition Static Control**

Digital Aerial Solutions deployed static GPS base stations during the acquisition of the Florida Peninsular. Considerations were made for location access and clear visibility of the horizon.

Additionally, these static sessions were recorded at .5 Hz samples for the highest quality post processed solution. These static base sessions were then incorporated during the kinematic post-processing of aircraft position. These base stations were either set on existing control monumentation, or new benchmarks established. The coordinates of these base stations are provided in the table below.

Name	NAD83(2011) FL State Plane North, ft		NAD83(2011), ft	NAVD88 Geoid12B, ft
Name	Easting (X)	Northing (Y)	Ellipsoid Height	Orthometric Height
40J01	2261061.738	392558.434	-53.320	37.959
40J02	2260976.046	392567.696	-54.649	36.457
LCQ01	2574908.594	436521.138	102.100	194.459
LCQ02	2574817.619	436418.205	102.864	195.223

Table	4.	Base	stations	used	to	control	lidar	acquisition.
-------	----	------	----------	------	----	---------	-------	--------------

#### **3.5 Airborne Kinematic Control**

Airborne GPS data was processed using GNSS survey network post-processing software (Grafnet 8.80). The Grafnet network involved NGS-CORS FL75, GNVL, PRRY, TALH, XCTY and ZJX1.

40J01, 40J02, LCQ01, and LCQ02 are temporary GPS marker. The weighted GNSS network adjustment results were reviewed to ensure that RMS residual values was <0.10m for all baselines, control and checkpoints used in the network. The network adjustment result showing vector, control and checkpoint residuals for all flights, the GPS data can be classified as excellent, with GPS residuals =<10 cm average.

GPS processing reports for each mission are included in Appendix B.

#### 3.6 Generation and Calibration of Raw Lidar Data

The initial step of calibration is to verify availability and status of all needed GPS and Laser data against field notes and compile any data if not complete.

LiDAR data calibration was done using Leica HxMap v2.6.0 software. HxMap is the common workflow platform for Leica airborne sensors. The processing workflow involves; Ingest, Block Creation, LiDAR Matching, Quality Assurance (QA) and Product Generation. LiDAR is processed in HxMap by generating point clouds from raw sensor data during the Ingest step. Noise filtering, sensor installation calibration and atmospheric condition parameters are also applied during the ingest process. Once all data is processed through ingest, they are assembled into a block for LiDAR Matching. The LiDAR Matching step resolves LiDAR registration errors which remain in the point clouds after sensor and installation calibration parameters are applied in the ingest step. QA tool is run on the Block after LiDAR Matching to verify quality of results.

QA results are reviewed to ensure that, 95% of patches<5cm for Vertical Scan Direction and Vertical Line Separation. Ground control points are also included to assess absolute accuracy for the point cloud data. LiDAR products are finally generated in the Product Generation step as LAS swaths (LAS 1.4). Vertical (Z) shift (calculated from QA step) is also applied during the product generation. The exported LAS 1.4 swath data from HxMap is imported into GeoCue Group's product workflow management software, GeoCue v2017. The full point cloud is tiled into a manageable size for processing in TerraScan. Final 3-D point cloud (swath) was created from the calibrated LAS v1.4 in class 0 (Created, Never Classified).

Data collected by the lidar unit is reviewed for completeness, acceptable density and to make sure all data is captured without errors or corrupted values. In addition, all GPS, aircraft trajectory, mission information, and ground control files are reviewed and logged into a database.

On a project level, a supplementary coverage check is carried out to ensure no data voids unreported by Field Operations are present.

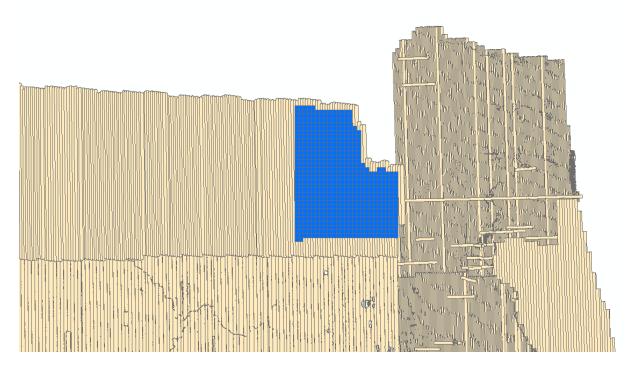


Figure 5 - Lidar swath output showing complete coverage.

#### 3.6.1 Boresight and Relative accuracy

The initial points for each mission calibration are inspected for flight line errors, flight line overlap, slivers or gaps in the data, point data minimums, or issues with the lidar unit or GPS. Roll, pitch and scanner scale are optimized during the calibration process until the relative accuracy is met.

Relative accuracy and internal quality are checked using at least 3 regularly spaced QC blocks in which points from all lines are loaded and inspected. Vertical differences between ground surfaces of each line are displayed. Color scale is adjusted so that errors greater than the specifications are flagged. Cross sections are visually inspected across each block to validate point to point, flight line to flight line and mission to mission agreement.

For this project the specifications used are as follow:

Relative accuracy <= 6 cm maximum differences within individual swaths and <=8 cm RMSDz between adjacent and overlapping swaths.




Figure 6 – Profile view showing correct roll and pitch adjustments.

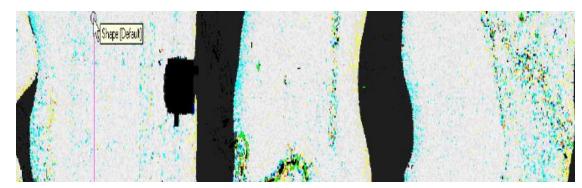


Figure 7 - QC block colored by vertical difference between swaths to check accuracy at swath edges.

A different set of QC blocks are generated for final review after all transformations have been applied.

#### **3.7 Final Calibration Verification**

The geodetic control for the Florida Peninsular Project was provided by Dewberry, for the purposes of data validation. This data set was produced to meet ASPRS "Positional Accuracy Standards for Digital Geospatial Data" (2014) for  $\leq$  10cm RMSEZ absolute vertical accuracy per task order.

## 4. LIDAR PRODUCTION & QUALITATIVE ASSESSMENT

#### **4.1 Initial Processing**

Following receipt of the calibrated swath data from the acquisition provider, Dewberry performed vertical accuracy validation of the swath data, inter-swath relative accuracy validation, intra-swath relative accuracy validation, verification of horizontal alignment between swaths, and confirmation of point density and spatial distribution. This initial assessment allowed Dewberry to determine whether the data was suitable for full-scale production.

#### 4.1.1 Post Calibration Lidar Review

The table below identifies requirements verified by Dewberry prior to tiling the swath data, running initial ground macros, and starting manual classification.

Requirement	Description of Deliverables	Additional Comments
Non-vegetated vertical accuracy (NVA) of the swath data meet required specifications of 19.6 cm at the 95% confidence level based on RMSEz (10 cm) x 1.96	The swath NVA was tested and passed specifications.	None
The NPD/NPS (or Aggregate NPD/Aggregate NPS) meets required specification of 8 ppsm or 0.35 m NPS. The NPD (ANPD) is calculated from first return points only.	The average calculated (A)NPD of this project is 8 ppsm. Densityraster visualization also passed specifications.	None
Spatial Distribution requires 90% of the project grid, calculated with cell sizes of 2*NPS, to contain at least one lidar	98% of cells (2*NPS cell size) had at least 1 lidar point within the cell.	None

Table 5. Post calibration and initial processing data verification steps.

Requirement	Description of Deliverables	Additional Comments
point. This is calculated from first return points only.		
Within swath (Intra-swath or hard surface repeatability) relative accuracy mustmeet≤6 cm maximum difference	Within swath relative accuracy passed specification.	None
Between swath (Inter-swath or swath overlap) relative accuracy must meet 8 cm RMSDz/16 cm maximum difference. These thresholds are tested in open, flat terrain.	Between swath relative accuracy passed specification, calculated from single return lidar points.	None
Horizontal Calibration-There should not be horizontal offsets (or vertical offsets) between overlapping swaths that would negatively impact the accuracy of the data or the overall usability of the data. Assessments made on rooftops or other hard planar surfaces where available.	Horizontal calibration met project requirements.	None
Ground Penetration-The missions were planned appropriately to meet project density requirements and achieve as much ground penetration beneath vegetation as possible	Ground penetration beneath vegetation was acceptable.	None
Sensor Anomalies-The sensor should perform as expected without anomalies that negatively impact the usability of the data, including issues such as excessive sensor noise and intensity gain or range-walk issues	No sensor anomalies were present.	None
Edge of Flight line bits-These fields must show a minimum value of 0 and maximum value of 1 for each swath acquired, regardless of which type of sensor is used	Edge of Flight line bits were populated correctly	None
Scan Direction bits-These fields must show a minimum value of 0 and maximum value of 1 for each swath acquired with sensors using oscillating (back-and-forth) mirror scan mechanism. These fields should show a minimum and maximum of 0 for each swath acquired with Riegl sensors as these sensors use rotating mirrors.	Scan Direction bits were populated correctly	None
Swaths are in LAS v1.4 formatting	Swaths were in LAS v1.4 as required by the project.	None

Requirement	Description of Deliverables	Additional Comments
All swaths must have File Source IDs assigned (these should equal the Point Source ID or the flight line number)	File Source IDs were correctly assigned	None
GPS timestamps must be in Adjusted GPS time format and Global Encoding field must also indicate Adjusted GPS timestamps	GPS timestamps were Adjusted GPS time and Global Encoding field were correctly set to 17	None
Intensity values must be 16-bit, with values ranging between 0-65,535	Intensity values were 16-bit	None
Point Source IDs must be populated, and swath Point Source IDs should match the File Source IDs	Point Source IDs were assigned and match the File Source IDs	None

#### 4.2 Data Classification and Editing

Once the calibration, absolute swath vertical accuracy, and relative accuracy of the data were confirmed, Dewberry utilized proprietary and TerraScan software for processing. The acquired 3D laser point clouds were tiled according to the project tile grid using proprietary software. Once tiled, the laser points were classified using a proprietary routine in TerraScan. This routine classified any obvious low outliers in the dataset to class 7 and high outliers in the dataset to class 18, after classification, class 7 & 18 were flagged with the withheld bit. Points along flight line edges that were geometrically unusable were flagged as withheld and classified to a separate class so that they would be excluded from the initial ground algorithm. After points that could negatively affect the ground were removed from class 1, the ground layer was extracted from this remaining point cloud using an iterative surface model.

This surface model was generated using four main parameters: building size, iteration angle, iteration distance, and maximum terrain angle. The initial model was based on low points being selected by a "roaming window" with the assumption that these were the ground points. The size of this roaming window was determined by the building size parameter. The low points were triangulated, and the remaining points were evaluated and subsequently added to the model if they met the iteration angle and distance constraints. This process was repeated until no additional points were added within iterations. Points that did not relate to classified ground within the maximum terrain angle were not captured by the initial model.

After the initial automated ground routine, each tile was imported into TerraScan and a surface model was created to examine the ground classification. Dewberry analysts visually reviewed the ground surface model and corrected errors in the ground classification such as vegetation, buildings, and bridges that were present following the initial processing. Dewberry analysts employed 3D visualization techniques to view the point cloud at multiple angles and in profile to ensure that non-ground points were removed from the ground classification. Bridge decks were classified to class 17 and bridge saddle breaklines were used where necessary. After the ground classification corrections were completed, the dataset was processed through a water classification routine that utilized breaklines to automatically classify hydro features. The water classification routine selected ground points within the breakline polygons and automatically classified them as class 9, water. During this water classification routine, points that were within 1 NPS distance or less of the hydrographic feature

boundaries were moved to class 20, ignored ground, to avoid hydro-flattening artifacts along the edges of hydro features.

The withheld bit was set on the withheld points previously identified in TerraScan before the ground classification routine was performed.

After manual classification, the LAS tiles were peer reviewed and then underwent a final independent QA/QC. After the final QA/QC and corrections, all headers, appropriate point data records, and variable length records, including spatial reference information, were updated and verified using proprietary Dewberry software.

#### 4.2.1 Qualitative Review

Dewberry's qualitative assessment of lidar point cloud data utilized a combination of statistical analyses and visual interpretation. Methods and products used in the assessment included profile - and map view-based point cloud review, pseudo image products (e.g., intensity orthoimages), TINs, DEMs, DSMs, and point density rasters. This assessment looked for incorrect classification and other errors sourced in the LAS data. Lidar data are peer reviewed, reviewed by task leads (senior level analysts), and verified by an independent QA/QC team at key points within the lidar workflow.

The following table describes Dewberry's standard editing and review guidelines for specific types of features, land covers, and lidar characteristics.

Category	Editing Guideline	Additional Comments
	The SOW for the project defines	
	unacceptable data voids as voids	
	greater than 4 x ANPS <sup>2</sup> , or 1.96 m <sup>2</sup> , that	
	are not related to water bodies or other	
No Data Voids	areas of low near-infrared reflectivity	No unacceptable voids were
NO Data volus	and are not appropriately filled by data	identified in this dataset
	from an adjacentswath. The LAS files	
	were used to produce density grids	
	based on Class 2 (ground) points for	
	review.	
	Artifacts in the point cloud are typically	
	caused by misclassification of points in	
	vegetation or man-made structures as	
	ground. Low-lying vegetation and	
	buildings are difficult for automated	
Artifacts	grounding algorithms to differentiate	None
Aithacts	and often must be manually removed	None
	from the ground class. Dewberry	
	identified these features during lidar	
	editing and reclassified them to Class 1	
	(unassigned). Artifacts up to 0.3 m	
	above the true ground surface may	

Table 6. Post calibration and initial processing data verification steps.

Category	Editing Guideline	Additional Comments
	have been left as Class 2 because they do not negatively impact the usability of the dataset.	
Bridge Saddles The DEM surface models are created from TINs or terrains. TIN and terrain models create continuous surfaces the input points, interpolating surface beneath bridges where no lidar data was acquired. The surface model in these areas tend to be less detailed Bridge saddles maybe created whe the surface interpolates between hig and low ground points. Dewberry identifies problems arising from brid removal and resolves them by reclassifying misclassified ground point to class 1 and/or adding bridge sadd breaklines where applicable due to interpolation.		None
Culverts and Bridges	It is Dewberry's standard operating procedure to leave culverts in the bare earth surface model and remove bridges from the model. In instances where it is difficult to determine whether the feature was a culvert or bridge, Dewberry errs on the side of culverts, especially if the feature is on a secondary or tertiary road.	None
In-Ground Structures	In-ground structures typically occur on military bases and at facilities designed for munitions testing and storage. When present, Dewberry identifies these structures in the project and includes them in the ground classification.	No in-ground structures present in this dataset
Dirt Mounds	Irregularities in the natural ground, including dirt piles and boulders, are common and maybe misinterpreted as artifacts that should be removed. To verify their inclusion in the ground class, Dewberry checked the features for any points above or below the surface that might indicate vegetation or lidar penetration and reviews ancillary layers in these locations as well. Whenever	No dirt mounds or other irregularities in the natural ground were present in this dataset

Category	Editing Guideline	Additional Comments
	determined to be natural or ground features, Dewberry edits the features to class 2 (ground)	
Irrigated Agricultural Areas	Per project specifications, Dewberry collected all areas of standing water greater than or equal to 2 acres, including areas of standing water within agricultural areas and not within wetland or defined waterbody, hydrographic, or tidal boundaries. Areas of standing water that did not meet the 2 acre size criteria were not collected.	Standing water within agricultural areas not present in the data
Wetland/Marsh Areas	Vegetated areas within wetlands/marsh areas are not considered water bodies and are not hydroflattened in the final DEMs. However, it is sometimes difficult to determine true ground in low wet areas due to low reflectivity. In these areas, the lowest points available are used to represent ground, resulting in a sparse and variable ground surface. Open water within wetland/marsh areas greater than or equal to 2 acres is collected as a waterbody.	Marshes are present in the data
Flight Line Ridges	Flight line ridges occur when there is a difference in elevation between adjacent flight lines or swaths. If ridges are visible in the final DEMs, Dewberry ensures that any ridges remaining after editing and QA/QC are within project relative accuracy specifications.	No flight line ridges are present in the data
Temporal Changes	If temporal differences are present in the dataset, the offsets are identified with a shapefile.	If temporal offsets are present in the data, the areas are outlined in the temporal.shp
Low NIR Reflectivity	Some materials, such as asphalt, tars, and other petroleum-based products, have low NIR reflectivity. Large-scale applications of these products, including roadways and roofing, may have diminished to absent lidar returns. USGS LBS allow for this characteristic of lidar but if low NIR reflectivity is causing voids in the final bare earth	No Low NIR Reflectivity is present in the data

Category	Editing Guideline	Additional Comments
	surface, these locations are identified	
	with a shapefile.	
Laser Shadowing	surface, these locations are identified with a shapefile. Shadows in the LAS can be caused when solid features like trees or buildings obstruct the lidar pulse, preventing data collection on one or more sides of these features. First return data is typically collected on the side of the feature facing toward the incident angle of transmission (toward the sensor), while the opposite side is not collected because the feature itself blocks the incoming laser pulses. Laser shadowing typically occurs in areas of single swath coverage because data is only collected from one direction. It can	No Laser Shadowing is present in the data
	be more pronounced at the outer edges of the single coverage area where higher scanning angles correspond to more area obstructed by features. Building shadow in particular can be more pronounced in urban areas where structures are taller. Data are edited to the fullest extent possible within the point cloud. As long as data meet other project requirements (density, spatial distribution, etc.), no additional action taken.	

#### 4.2.2 Formatting Review

After the final QA/QC was performed and all corrections were applied to the dataset, all lidar files were updated to the final format requirements and the final formatting, header information, point data records, and variable length records were verified using proprietary tools. The table below lists the primary lidar header fields that are updated and verified.

Parameter	Project Specification	Pass/Fail
LAS Version	1.4	Pass
Point Data Record Format	6	Pass
Horizontal Coordinate Reference System	NAD83 (2011) FL State Plane Zone North in WKT format	Pass

Table 7. Classified lidar formatting parameters

Parameter	Project Specification	Pass/Fail
Vertical Coordinate Reference System	NAVD88 (Geoid 12B), U.S. Survey Ft in WKT format	Pass
Global Encoder Bit	17 for adjusted GPS time	Pass
Time Stamp	Adjusted GPS time (unique timestamps)	Pass
System ID	Sensor used to acquire data	Pass
	The sensor shall be able to collect	
Multiple Returns	multiple returns per pulse and the return numbers are recorded	Pass
Intensity	16-bit intensity values recorded for each pulse	Pass
Classification	Class 1: Unclassified Class 2: Ground Class 6: Buildings Class 7: Low Noise (Withheld bit applied) Class 9: Water Class 17: Bridge Decks Class 18: High Noise (Withheld bit applied) Class 20: Ignored Ground Class 22: Temporal Exclusion	Pass
Withheld Points	Withheld bits set	Pass
Scan Angle	Recorded for each pulse	Pass
XYZ Coordinates	Recorded for each pulse	Pass

# 5. BREAKLINE PRODUCTION & QUALITATIVE ASSESSMENT

#### 5.1 Breakline Production Methodology

Breaklines were manually digitized within an Esri software environment, using full point cloud intensity imagery, bare earth terrains and DEMs, the lidar point cloud, and ancillary ortho imagery where appropriate.

When data characteristics are suitable, Dewberry may use eCognition software to generate initial, automated water polygons, which are then manually reviewed and refined where necessary.

Breakline features with static or semi-static elevations (ponds and lakes, bridge saddles, and soft feature breaklines) were converted to 3D breaklines within the Esri environment where breaklines were draped on terrains or the las point cloud. Subsequent processing was done on ponds/lakes to identify the minimum z-values within these features and re-applied that minimum elevation to all vertices of the breakline feature.

Linear hydrographic features show downhill flow and maintain monotonicity. These breaklines under went conflation by using a combination of Esri and LP360 software. Centerlines were draped on terrains, enforced for monotonicity, and those elevations were then assigned to the bank lines for the final river/stream z-values.

Tidal breaklines may have been converted to 3D using either method, dependent on the variables within each dataset.

#### 5.1.1 Breakline Collection Requirements

The table below outlines breakline collection requirements for this dataset.

Parameter	Project Specification	Additional Comments
Ponds and Lakes	Breaklines are collected in all inland ponds and lakes ~2 acres or greater. These features are flat and level water bodies at a single elevation for each vertex along the bank.	None
Hydrographic Features	Breaklines are collected for all streams and rivers 8 ft nominal width or wider as dual line drains and single line drains for features <8 ft in nominal width but greater than 0.5 mi in length. The dual line drain features are flat and level bank to bank, gradient will follow the surrounding terrain and the water surface will be at or below the surrounding terrain. Streams/river channels will break at culvert locations however not at elevated bridge locations.	None
Coastal Feature	Breaklines are collected as polygon features depicting water bodies such as oceans, seas, gulfs, bays, inlets, salt marshes, very large lakes, etc. Includes any significant water body that is affected by tidal variations. Tidal variations over the course of collection, and between different collections, can result in discontinuities along shorelines. This is considered normal and should be retained. Variations in water surface elevation resulting from tidal variations during collection should not be removed or adjusted. Features should be captured as a dual line with	None

Table 8. Breakline collection requirements

	one line on each bank. Each vertex placed shall maintain vertical integrity. Parallel points on opposite banks of the tidal waters must be captured at the same elevation to ensure flatness of the water feature. The entire water surface edge is at or below the immediate surrounding terrain.	
Islands	Donuts will exist where there are islands greater than 1 acre in size within a hydro feature.	None
Bridge Saddle Breaklines	Bridge Saddle Breaklines are collected where bridge abutments were interpolated after bridge removal causing saddle artifacts.	None
Soft Features	Soft Feature Breaklines are collected where additional enforcement of the modeled bare earth terrain was required, typically on hydrographic control structures or vertical waterfalls, due to large vertical elevation differences within a short linear distance on a hydrographic feature.	None
Connectors	A CONNECTOR will be collected where a hydrographic feature is collected on either side of the road. The connector must snap to the adjoining hydrological features.	None

#### **5.2 Breakline Qualitative Assessment**

Dewberry performed both manual and automated checks on the collected breaklines. Breaklines underwent peer reviews, breakline lead reviews (senior level analysts), and final reviews by an independent QA/QC team. The table below outlines high level steps verified for every breakline dataset.

Parameter	Requirement	Pass/Fail	
	Collect breaklines according to project		
Collection	specifications using lidar-derived data, including	Pass	
	intensityimagery, bare earth ground models,		
	densitymodels, slope models, and terrains.		

Table	9.	Breakline	verification	steps.
-------	----	-----------	--------------	--------

	1	, , , , , , , , , , , , , , , , , , , ,
Placement	Place the breakline inside or seaward of the shoreline by 1-2 x NPS in areas of heavy vegetation or where the exact shoreline is hard to delineate.	Pass
Completeness	Perform a completeness check, breakline variance check, and all automated checks on each block before designating that block complete.	Pass
Merged Dataset	Merge completed production blocks. Ensure correct horizontal and vertical snapping between all production blocks. Confirm correct horizontal placement of breaklines.	Pass
Merged Dataset Completeness Check	Check entire dataset for features that were not captured but that meet baseline specifications or other metrics for capture. Features should be collected consistently across tile boundaries.	Pass
Edge Match	Ensure breaklines are correctly edge-matched to adjoining datasets. Check completion type, attribute coding, and horizontal placement.	Two waterbodies on Baker/Duval edge have vertical differences due to acquisition time.
Vertical Consistency	Waterbodies shall maintain a constant elevation at all vertices Vertices should not have excessive min or max z-values when compared to adjacent vertices Intersecting features should maintain connectivity in X, Y, Z planes Dual line streams shall have the same elevation at any given cross-section of the stream	Pass
Vertical Variance	Using a terrain created from lidar ground (class 2, 8, and 20 as applicable) and water points (class 9) to compare breakline Z values to interpolated lidar elevations to ensure there are no unacceptable discrepancies.	Pass
Monotonicity	Dual line streams generally maintain a consistent down-hill flow and collected in the direction of flow – some natural exceptions are allowed	Pass
Тороlоду	Features must not overlap or have gaps Features must not have unnecessary dangles or boundaries	Pass
Hydro-classification	The water classification routine selected ground points within the breakline polygons and automatically classified them as class 9, water. During this water classification routine,	Pass

	points that were within 1 NPS distance or less of the hydrographic feature boundaries were moved to class 20, ignored ground, to avoid hydroflattening artifacts along the edges of hydro features.	
Hydro-flattening	Perform hydro-flattening and hydro- enforcement checks. Tidal waters should preserve as much ground as possible and can be non-monotonic.	Pass

## 6. DEM PRODUCTION & QUALITATIVE ASSESSMENT

#### 6.1 DEM Production Methodology

Dewberry utilized LP360 to generate DEM products and both ArcGIS and Global Mapper for QA/QC.

The final classified lidar points in all bare earth classes were loaded into LP360 along with the final 3D breaklines and the project tile grid. A raster was generated from the lidar data with breaklines enforced and clipped to the project tile grid. The DEM was reviewed for any issues requiring corrections, including remaining lidar misclassifications, erroneous breakline elevations, incorrect or incomplete hydro-flattening or hydro-enforcement, and processing artifacts. The formatting of the DEM tiles was verified before the tiles were loaded into Global Mapper to ensure that there was no missing or corrupt data and that the DEMs matched seamlessly across tile boundaries. A final qualitative review was then conducted by an independent review department within Dewberry.

#### **6.2 DEM Qualitative Assessment**

Dewberry performed a comprehensive qualitative assessment of the bare earth DEM deliverables to ensure that all tiled DEM products were delivered with the proper extents, were free of processing artifacts, and contained the proper referencing information. Dewberry conducted the review in ArcGIS using a hillshade model of the full dataset with a partially transparent colorized elevation model overlaid. The tiled DEMs were reviewed at a scale of 1:5,000 to look for artifacts caused by the DEM generation process and to verify correct and complete hydro-flattening and hydro-enforcement. Upon correction of any outstanding issues, the DEM data was loaded into Global Mapper for its second review and to verify corrections.

The table below outlines high level steps verified for every DEM dataset.

Parameter	Requirement	Pass/Fail
Digital Elevation Model (DEM) of bare-earth w/ breaklines	DEM of bare-earth terrain surface (2.5') is created from lidar ground points and breaklines. DEMs are tiled without overlaps or gaps, show no edge artifact or mismatch, DEM deliverables are .tif format	Pass
DEM Compression	DEMs are not compressed	Pass

Table	10	DFM	verification	stens
Iable	10.		vermeation	sicps.

· · · · · · · · · · · · · · · · · · ·		
Areas outside surveyboundary are		
coded as NoData. Internal voids (e.g.,	Pass	
open water areas) are coded as NoData		
Ensure DEMs were hydro-flattened or		
hydro-enforced as required by project	Pass	
specifications		
Verify monotonicity of all linear	Pass	
hydrographic features		
Ensure adherence of breaklines to bare-		
earth surface elevations, i.e., no floating	Pass	
or digging hydrographic feature		
Verify removal of bridges from bare-	Deer	
earth DEMs and no saddles present	Pass	
Correct any issues in the lidar		
classification that were visually	Dees	
expressed in the DEMs. Reprocess the	Pass	
DEMs following lidar corrections.		
Split the DEMs into tiles according to the	Deer	
project tiling scheme	Pass	
Verify all properties of the tiled DEMs,		
including coordinate reference system		
information, cell size, cell extents, and	Pass	
that compression is not applied to the		
tiled DEMs		
Load all tiled DEMs into Global Mapper		
and verify complete coverage within the	Deep	
(buffered) project boundary and verify	Pass	
that no tiles are corrupt		
	coded as NoData. Internal voids (e.g., open water areas) are coded as NoData Ensure DEMs were hydro-flattened or hydro-enforced as required by project specifications Verify monotonicity of all linear hydrographic features Ensure adherence of breaklines to bare- earth surface elevations, i.e., no floating or digging hydrographic feature Verify removal of bridges from bare- earth DEMs and no saddles present Correct any issues in the lidar classification that were visually expressed in the DEMs. Reprocess the DEMs following lidar corrections. Split the DEMs into tiles according to the project tiling scheme Verify all properties of the tiled DEMs, including coordinate reference system information, cell size, cell extents, and that compression is not applied to the tiled DEMs Load all tiled DEMs into Global Mapper and verify complete coverage within the (buffered) project boundary and verify	

## 7. DERIVATIVE LIDAR PRODUCTS

USGS required several derivative lidar products to be created. Each type of derived product is described below.

#### 7.1 Interswath Raster

Interswath raster representing interswath alignment have been delivered. This raster was created from the last return of all points except points classified as noise or flagged as withheld. The images are in .TIFF format.

#### 7.2 Swath Separation Images

Swath separation images representing interswath alignment have been delivered. These images were created from the last return of all points except points classified as noise or flagged as withheld. The images are in .TIFF format. The swath separation images are symbolized by the following ranges:

- 0-8 cm: Green
- 8-16 cm: Yellow
- >16 cm: Red

#### 7.3 Interswath and Intraswath Polygons

#### 7.3.1 Interswath Accuracy

The Interswath accuracy, or overlap consistency, measures the variation in the lidar data within the swath overlap. Interswath accuracy measures the quality of the calibration or boresight adjustment of the data in each lift. Per USGS specifications, overlap consistency was assessed at multiple locations within overlap in non-vegetated areas of only single returns. As with precision, the interswath consistency was reported by way of a polygon shapefile delineating the sample areas checked and attributed with the following and using the cells within each polygon as sample values:

- Minimum difference in the sample area (numeric)
- Maximum difference in the sample area (numeric)
- RMSDz (Root Mean Square Difference in the vertical/z direction) of the sample area (numeric). Intraswath Accuracy

#### 7.3.2 Intraswath Accuracy

The intraswath accuracy, or the precision of lidar, measures variations on a surface expected to be flat and without variation. Precision is evaluated to confirm that the lidar system is performing properly and without gross internal error that may not be otherwise apparent. To measure the precision of a lidar dataset, level or flat surfaces were assessed. Swath data were assessed using only first returns in non-vegetated areas.

Precision was reported by way of a polygon shapefile delineating the sample areas checked and attributed with the following and using the cells within each polygon as sample values:

- Minimum slope-corrected range (numeric)
- Maximum slope-corrected range (numeric)
- RMSDz of the slope-corrected range (numeric).

## 8. LIDAR QUALITATIVE ASSESSMENT

#### 8.1 Intensity Range Correction

Intensity values are determined by the strength of the return pulse and is influenced by a number of factors, including the reflectivity of the target. Low reflectivity targets, like road surfaces, typically appear as darker pixels in the intensity imagery. Higher reflective surfaces like paint stripes or wet surfaces result in higher intensity return and will have brighter pixels in the intensity imagery.

Brightness at nadir in the intensity imagery and related depressions in the DEM are present in this dataset. The issues are located within areas of wetland marsh. Marshes are defined as areas of low flat ground that are typically always wet and soft. The wetlands may not appear visibly "wet" in the DEM, intensity imagery, or aerial imagery but water is present at or above the soil level causing saturated or waterlogged soil for a sufficient period of the year.

While water or wet surfaces typically absorbs most of the NIR wavelength, lidar pulses at or near nadir have a higher probability of returning some energy to the lidar sensor whereas lidar pulses at larger incident angles will be more likely to scatter and reflect in the opposite direction of the incident angle. This can result in water features, especially larger water features, showing a "striping" pattern of light and dark in the intensity imagery.

Due to ranging differences in bright and dark targets due to range walk, these ranging errors are corrected during initial processing of sensor data. However once the maximum receiver threshold is reached there is a phenomena known as "time over threshold" that occurs. This occurs in extremely reflective environments, and the received values are brighter than the receivers dynamic (or static) range. The end result is that the target is known to be "very bright" but it's unknown the magnitude of brightness over the threshold, or the timing of the waveform curve over that threshold. Primarily due to the inability to fit a gaussian pulse correctly to the return it has an inherent ranging error that cannot be corrected any larger than the maximum correction for bright targets.

For these areas that are a result of time over threshold errors, there is not a known "brightness" of the target return that can be used for a correction. In the case of flat areas with consistent intensity (e.g. runway paint stripes), the error can be corrected based on the geometric offset between the planar data since intensity is assumed to be constant in the error area. Unfortunately in the Florida project examples, it is visible that there is an "arc" to the offset points. This is likely due to the fact that the intensity is still changing as the reflectance angle approaches its maximum. Due to this non-linear nature and the true return intensity value being unknown creates a situation that cannot be directly or simply corrected without additional sensor and return modeling.