


# **Data Validation Report**

# from the National Geospatial Technical Operations Center in Support of the 3D Elevation Program

### IA\_NorthCentral\_3\_2020

2022-01-25

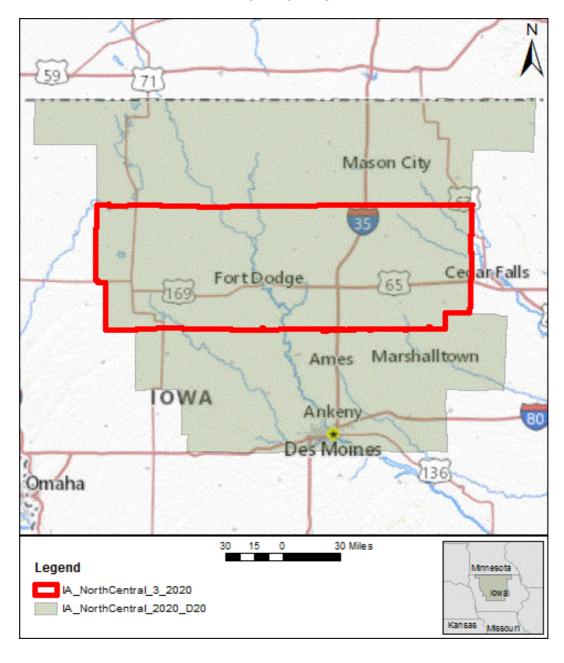





Project Name: IA\_NorthCentral\_2020\_D20

Report Date: 2022-01-25

# Based on this review, the delivered data is **EXPECTED TO MEET** 3D Elevation Program requirements.

## **Work Unit Summary Information**

Project Name: IA_NorthCentral_2020_D20	Project ID: 190802		
WU Name: IA_NorthCentral_3_2020	Work Unit ID: 219975		
Mechanism: GPSC	Lidar Base Spec: 2.1		
Quality Level: 2	P-Method: 7 - Linear-Mode Lidar		
Horizontal EPSG Code: 6344	Vertical EPSG Code: 5703	Geoid Model: GEOID 12B	
The National Map Help Desk Email: tnm_help@usgs.gov			

The U.S. Geological Survey evaluates absolute vertical accuracy of the lidar and lidar-derived bare earth digital elevation model (DEM) data at the project level. Data are produced to meet 9.8 cm absolute vertical accuracy at the 95-percent confidence level in non-vegetated, open terrain. To review vertical accuracy results, please see the project report

#### **Breaklines**

#### Based on this Review, the USGS-NGTOC ACCEPTS the Breaklines

Breaklines are visually reviewed in conjunction with the bare earth DEM for spatial and geometric accuracy. Breaklines are confirmed to be three dimensional (3D) features and that elevations are at or just below the immediately surrounding terrain. Single- and double-line drainages are reviewed to ensure downstream flow. The USGS recognizes that differences in collection methodology, resampling techniques, and other factors that are unique to proprietary production do occur, and these will result in minor horizontal and vertical differences between breaklines derived on the fly.

Error Type	Subtype	Quantity
------------	---------	----------

#### **Reporting Metadata**

Based on this Review, the USGS-NGTOC ACCEPTS the Reporting Metadata

Reports from the contractor, including calibration, collection, and processing methods, are reviewed for accurate information. For more information, please see the work units metadata.

Error Type	Subtype	Ouantity
		Z

#### **FGDC XML Metadata**

Based on this Review, the USGS-NGTOC ACCEPTS the FGDC XML Metadata

CSGDM .xml metadata are parsed using the USGS Geospatial Metadata Validation Service and reviewed for accurate information. CSDGM is maintained by the Federal Geographic Data Committee (FGDC).

Error Type	Subtype	Ouantity

#### **Spatial Metadata**

Based on this Review, the USGS-NGTOC ACCEPTS the Spatial Metadata

Spatial metadata from the contractor, including raster and vector datasets, are evaluated together with pertinent deliverables for geometric fidelity and attribution accuracy. For more information, please see the work units metadata.

Error Type	Subtype	lOuantity
1=1.01 1.9PC	Juntype	i Quantity





Project Name: IA\_NorthCentral\_2020\_D20

Report Date: 2022-01-25

# Raster Metadata Based on this Review, the USGS-NGTOC ACCEPTS the Raster Metadata None Error Type Subtype Quantity

#### DEM

#### Based on this Review, the USGS-NGTOC ACCEPTS the DEM

Visual review is performed on .tif bare earth rasters at a 1:5,000 or larger viewing scale to validate point cloud geometry, raster processing methodology, point classification, and breaklines. Comprehensive review is completed to ensure consistency and accuracy across all files. For additional information, please see this work units metadata folder.

Error Type Quantity

#### **Pointcloud**

#### Based on this Review, the USGS-NGTOC ACCEPTS the Pointcloud

Visual and statistical review is performed on classified .las files to validate adherence to contracted specifications. A comprehensive review is completed to ensure consistency and accuracy across all files, including the spatial reference system. Classification verification is limited to the minimum required by applicable Lidar Base Specification. Classifications beyond the minimum are not verified by USGS. LAS files are evaluated to ensure the public header block, point data records, and variable/extended variable length records are correctly populated. For additional information, please see the work units metadata folder.

Error Type Quantity





Project Name: IA\_NorthCentral\_2020\_D20

Report Date: 2022-01-25