

## General Information

### Mission Information

Project name	211021_A_5060420_nad2011_FINAL
Processing date	2021-10-27 17:38:03
Mission date	2021-10-21 14:34:51
Mission duration	01:41:26.000
Processing mode	IN-Fusion PP-RTX

### Rover Hardware Information

Product	POS AV 610 VER6 HW2.5-12
Serial number	S/N9825
IMU type	57
Receiver type	BD982
Antenna type	AV39

## Project File List

### Rover Data Files

File name	File type
survey1.pos	POS Data

### Input Files

File Name	File Type
Ephm2940.21g	GLONASS Broadcast Ephemeris
Ephm2940.21n	GPS Broadcast Ephemeris

### Output Files

Filename	File type
sbt_211021_A_5060420_nad2011_FINAL.out	SBET Trajectory File
sbt_211021_A_5060420_nad2011_FINAL.shp	Shapefile Export Output

## Rover Data Summary

First raw data file	survey1.pos		
Last raw data file	survey1.pos		
Start GPS week	2180		
Start time	398090.188 (10/21/2021 14:34:50)		
End time	404177.645 (10/21/2021 16:16:17)		
Start of fine alignment	398434.234 (10/21/2021 14:40:34)		
Available subsystems	Primary GNSS, IMU		
POS Event Input	None		
Correction data	None		
<b>IMU Installation Lever Arms &amp; Mounting Angles</b>			
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	90.000
Reference to Primary GNSS lever arm (m)	-0.497	-0.045	-1.199
Reference to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000


## Rover Data QC

### Raw IMU Import QC Summary


IMU data input file	imu_211021_A_5060420_nad2011_FINAL.dat
IMU data check log file	imudt_211021_A_5060420_nad2011_FINAL.log
IMU Records Processed	1217323
Termination Status	Normal
IMU Anomalies	0

## Primary Observables & Satellite Data


### GPS/GLONASS L1 Satellite Lock/Elevation

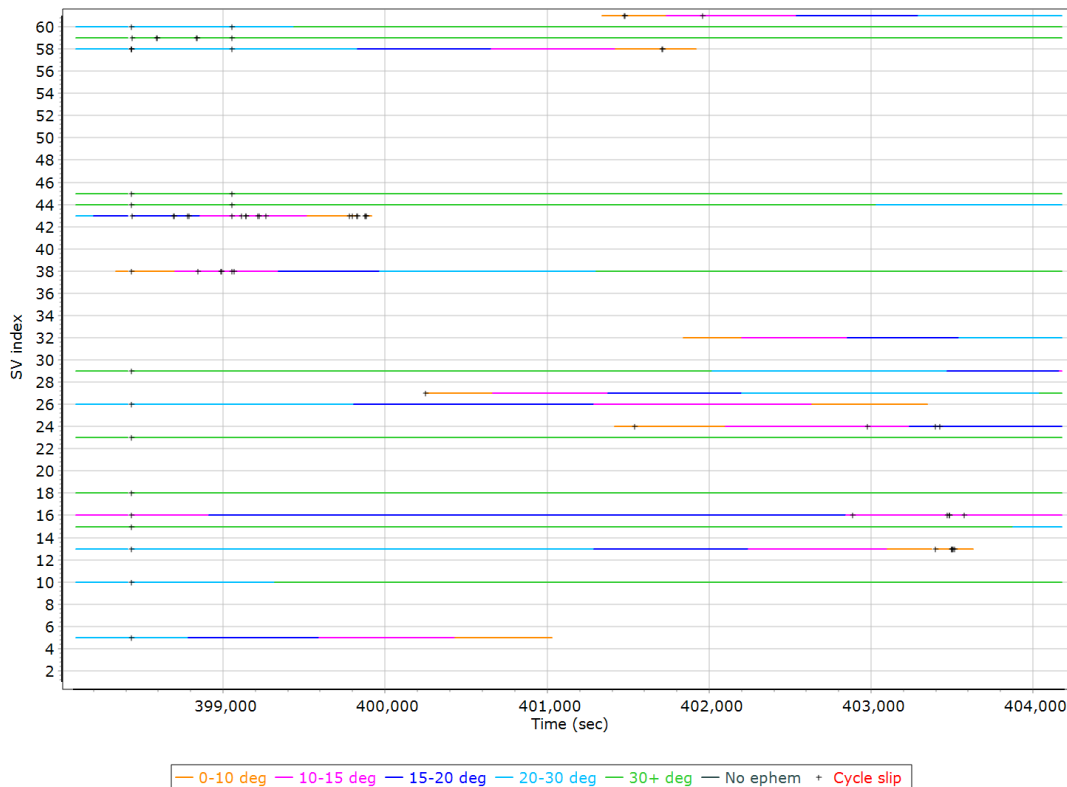


### GPS L1 SNR

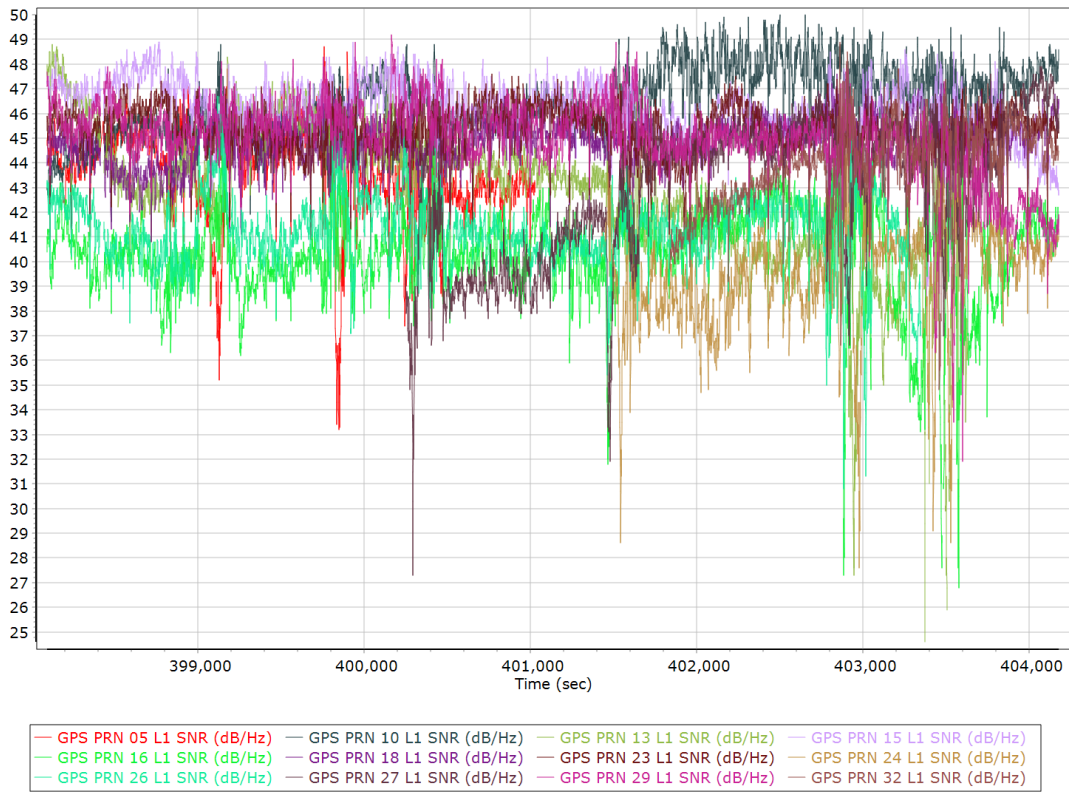


### GLONASS L1 SNR

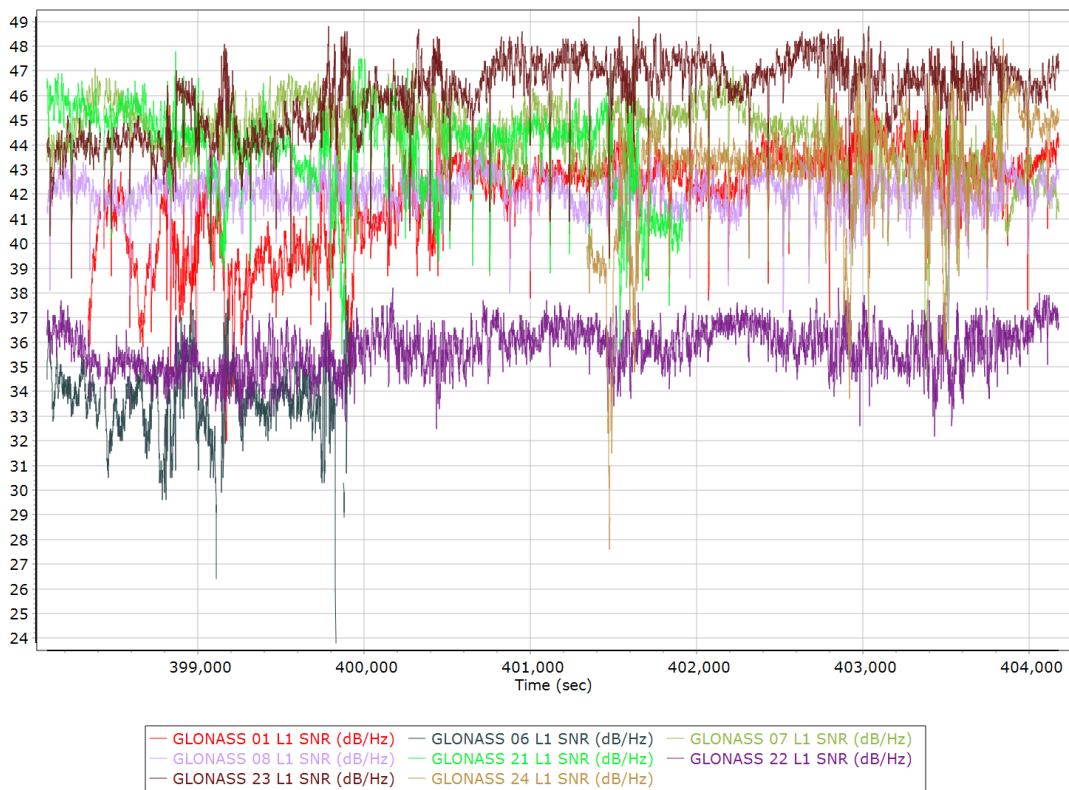


### GPS/GLONASS L2 Satellite Lock/Elevation

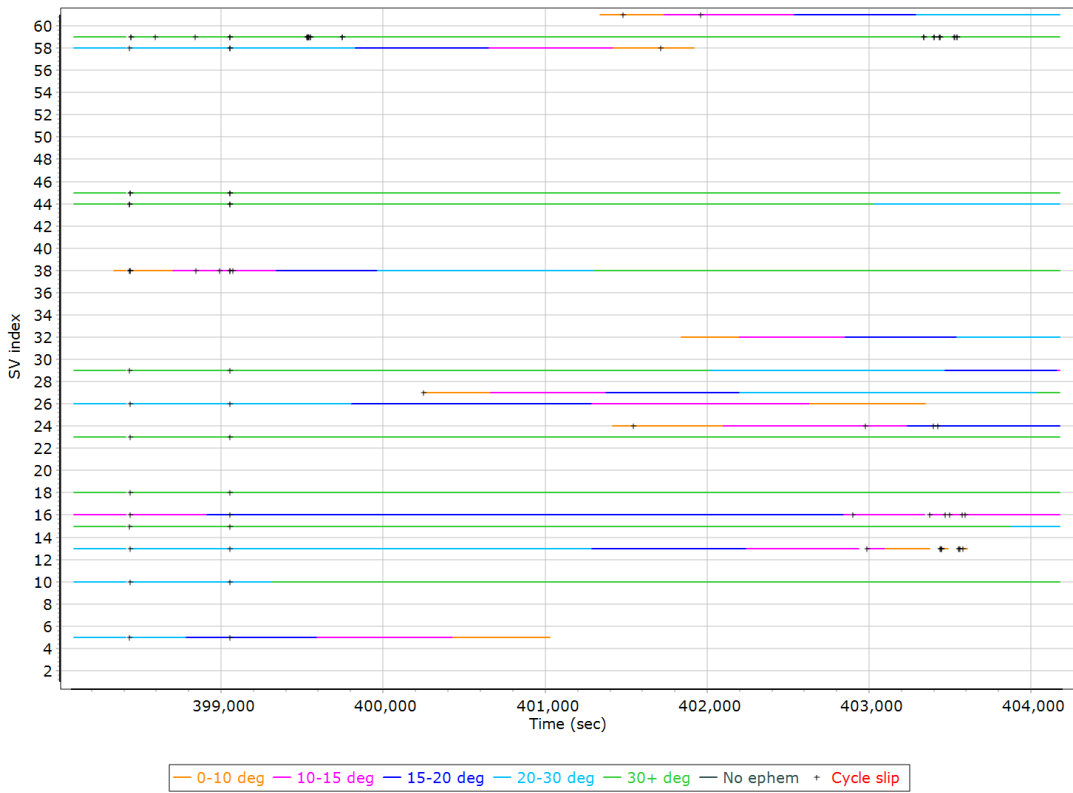


### GPS L2 SNR

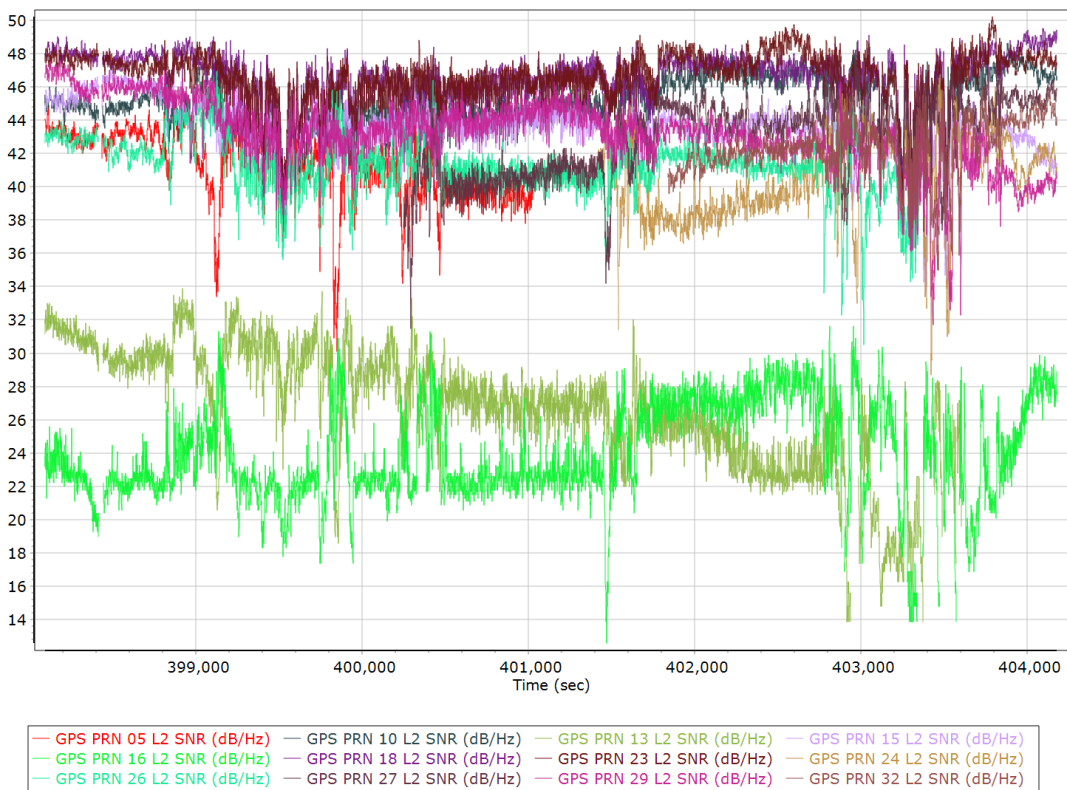


### GLONASS L2 SNR

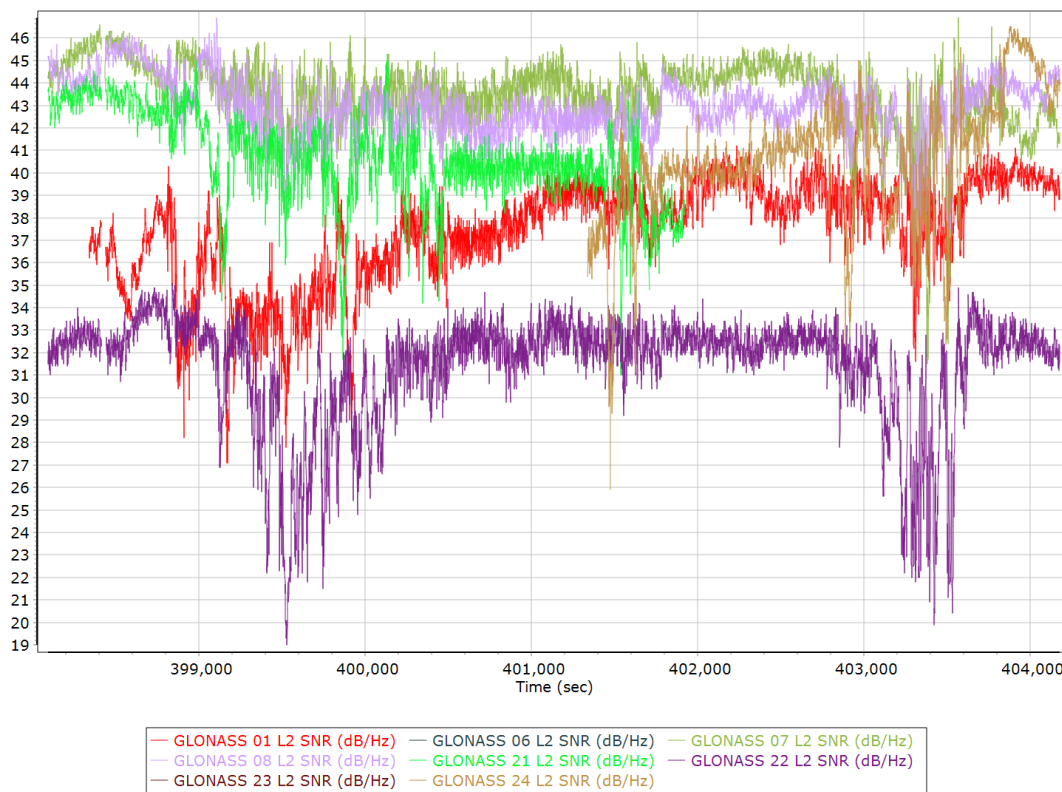


### BEIDOU Satellite Lock/Elevation

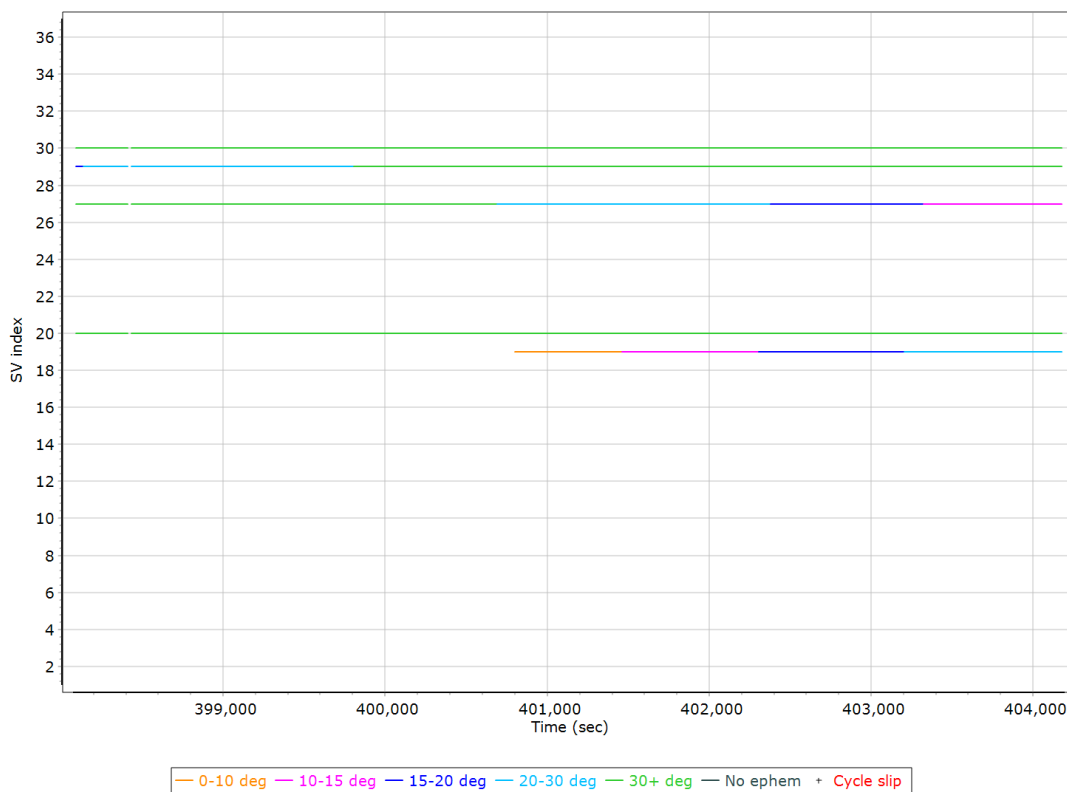

### BEIDOU SNR

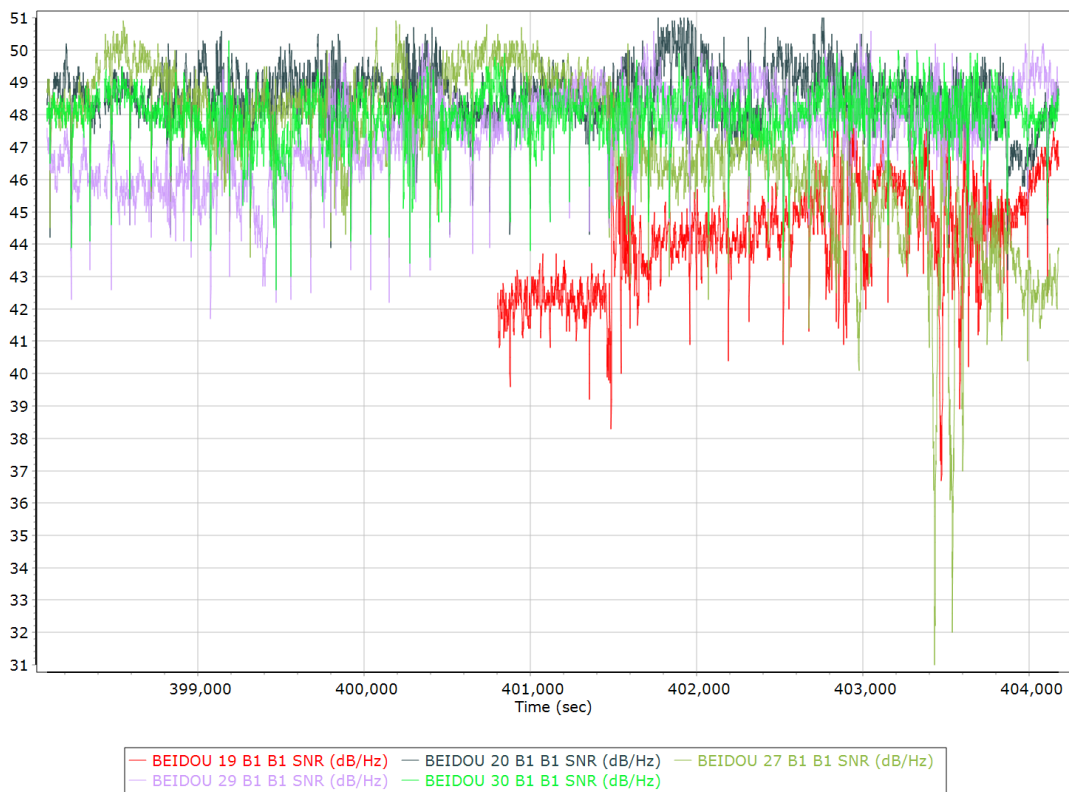


### GALILEO Satellite Lock/Elevation

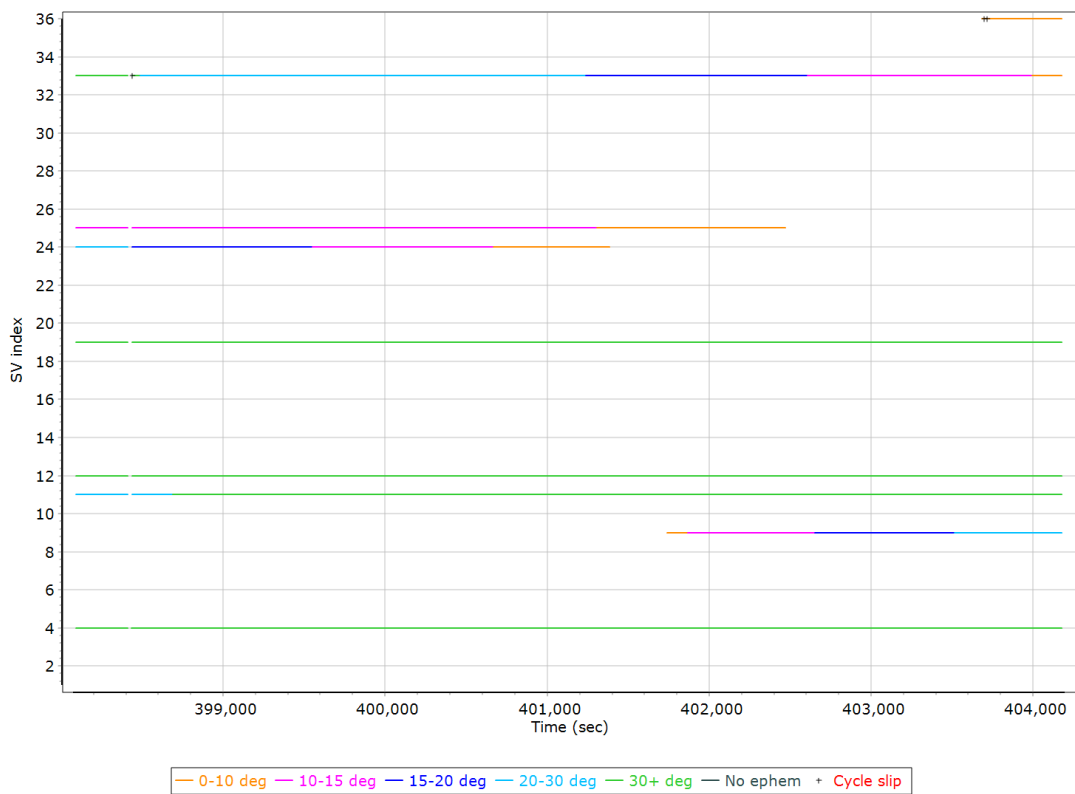




## GALILEO SNR

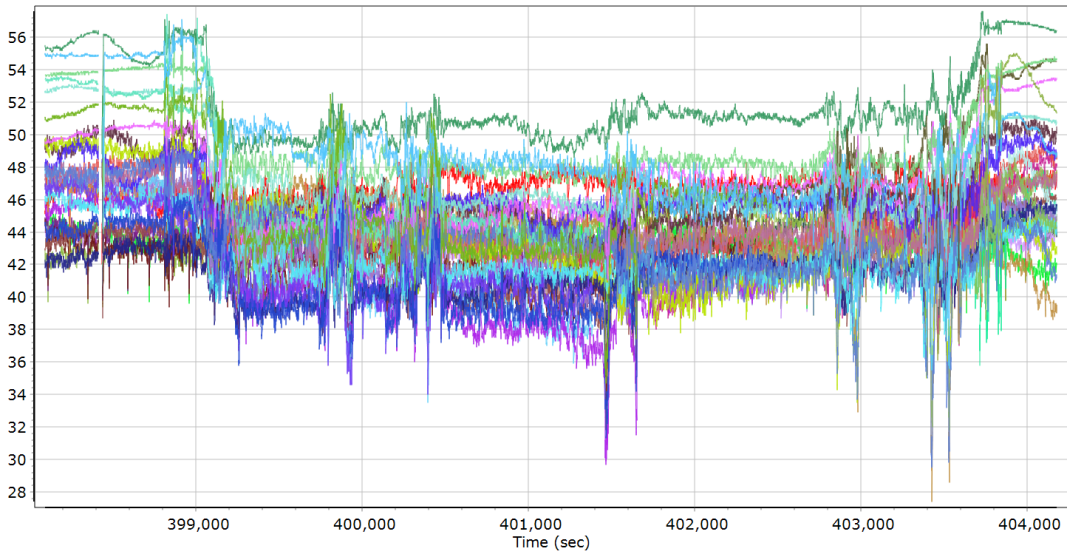


— GALILEO 04 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)	— GALILEO 09 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
— GALILEO 11 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)	— GALILEO 12 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
— GALILEO 19 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)	— GALILEO 24 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
— GALILEO 25 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)	— GALILEO 33 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
— GALILEO 36 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)	— GALILEO 04 L5E5A BPSK10_PD SNR (dB/Hz)
— GALILEO 09 L5E5A BPSK10_PD SNR (dB/Hz)	— GALILEO 11 L5E5A BPSK10_PD SNR (dB/Hz)
— GALILEO 12 L5E5A BPSK10_PD SNR (dB/Hz)	— GALILEO 19 L5E5A BPSK10_PD SNR (dB/Hz)
— GALILEO 24 L5E5A BPSK10_PD SNR (dB/Hz)	— GALILEO 25 L5E5A BPSK10_PD SNR (dB/Hz)
— GALILEO 33 L5E5A BPSK10_PD SNR (dB/Hz)	— GALILEO 36 L5E5A BPSK10_PD SNR (dB/Hz)
— GALILEO 04 E5B BPSK10_PD SNR (dB/Hz)	— GALILEO 09 E5B BPSK10_PD SNR (dB/Hz)

## Smoothed Trajectory Information


### Top View

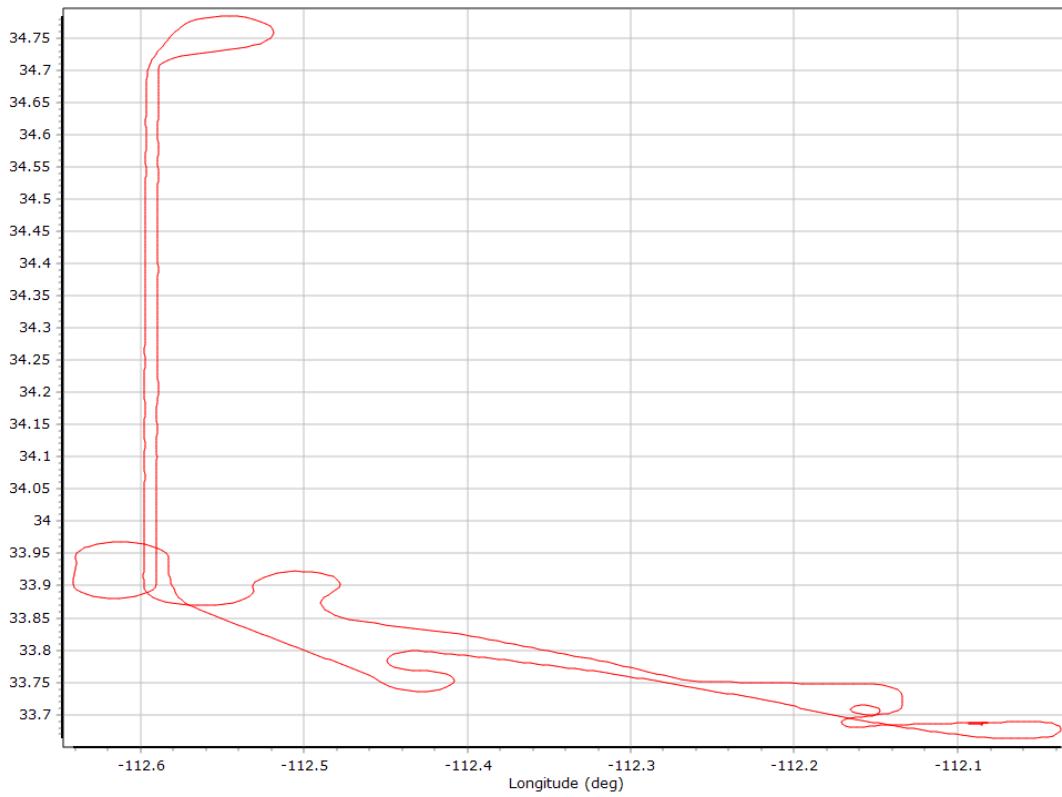


### Altitude

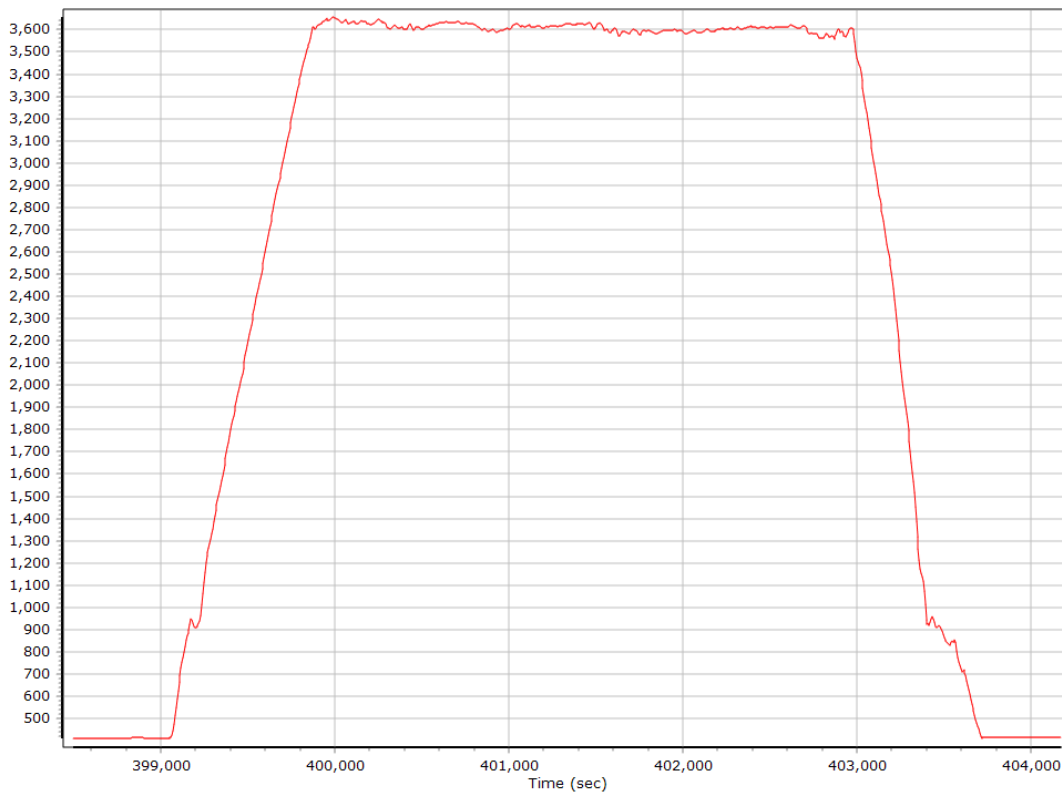


## Roll/Pitch

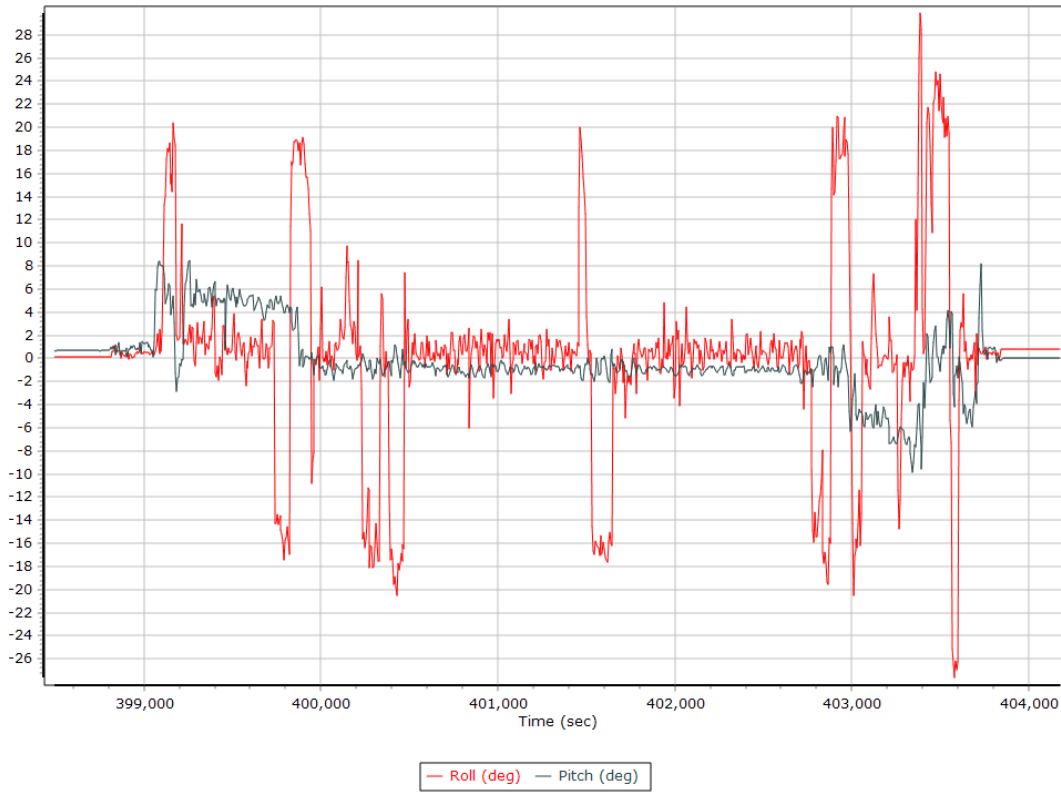


## Heading

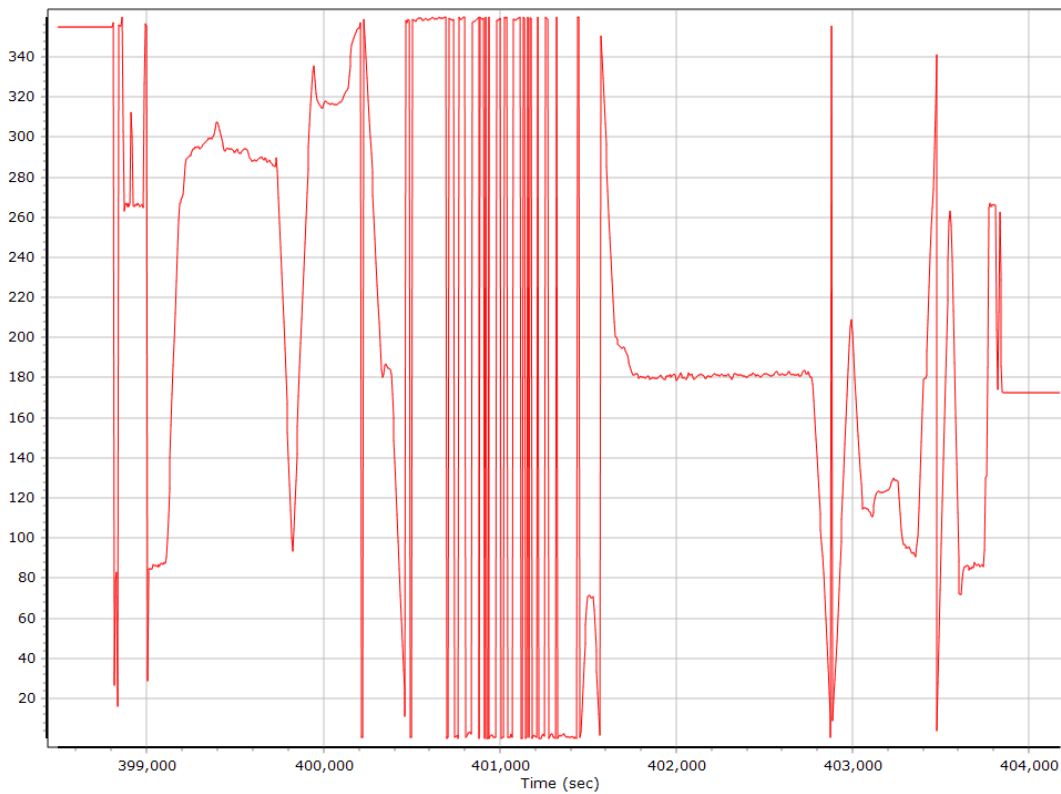


## North/East Velocity

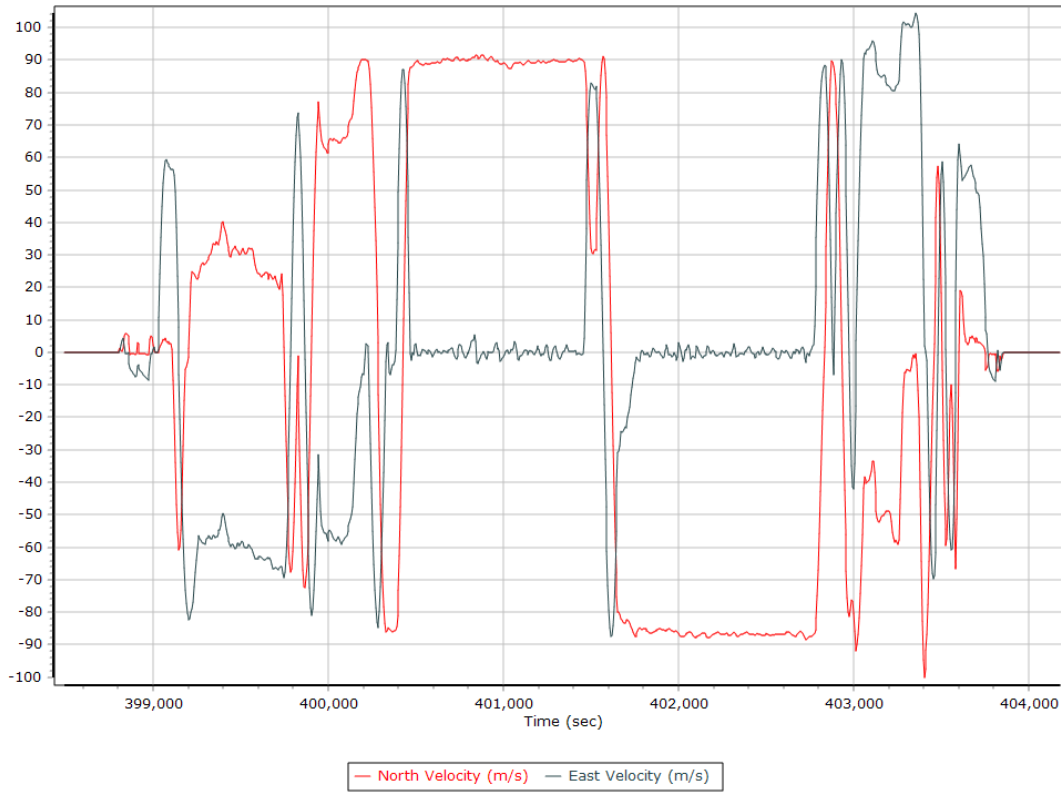


## Down Velocity

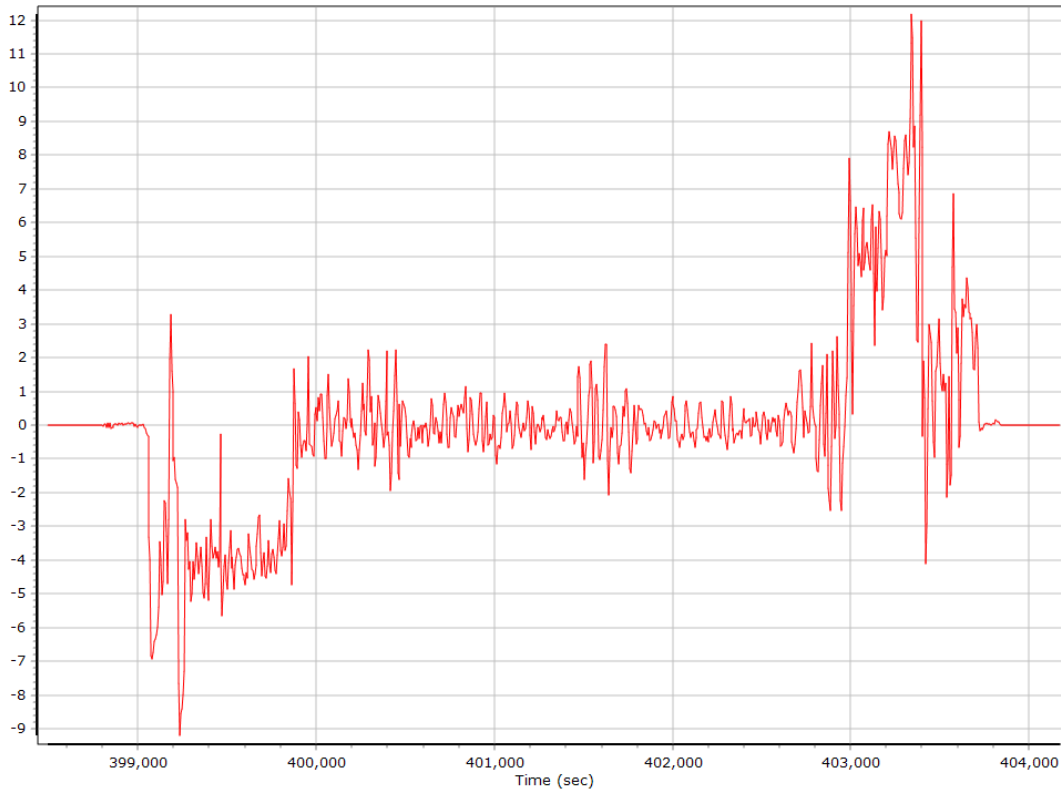


## Total Speed

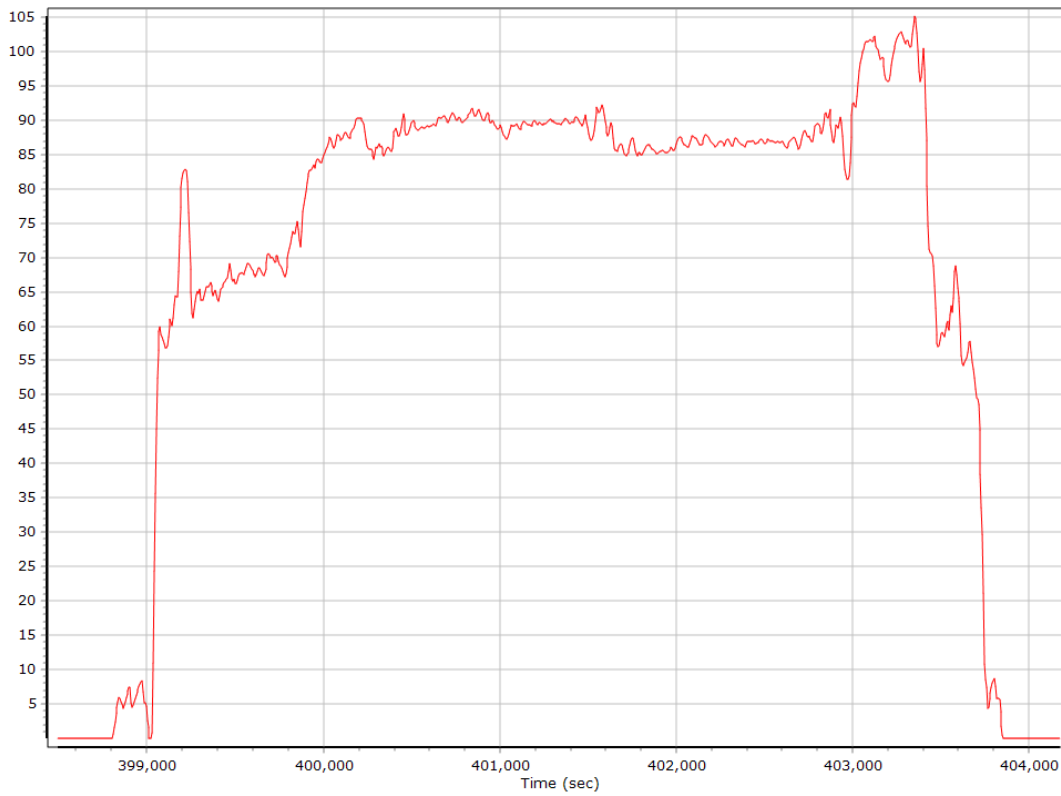


## Ground Speed

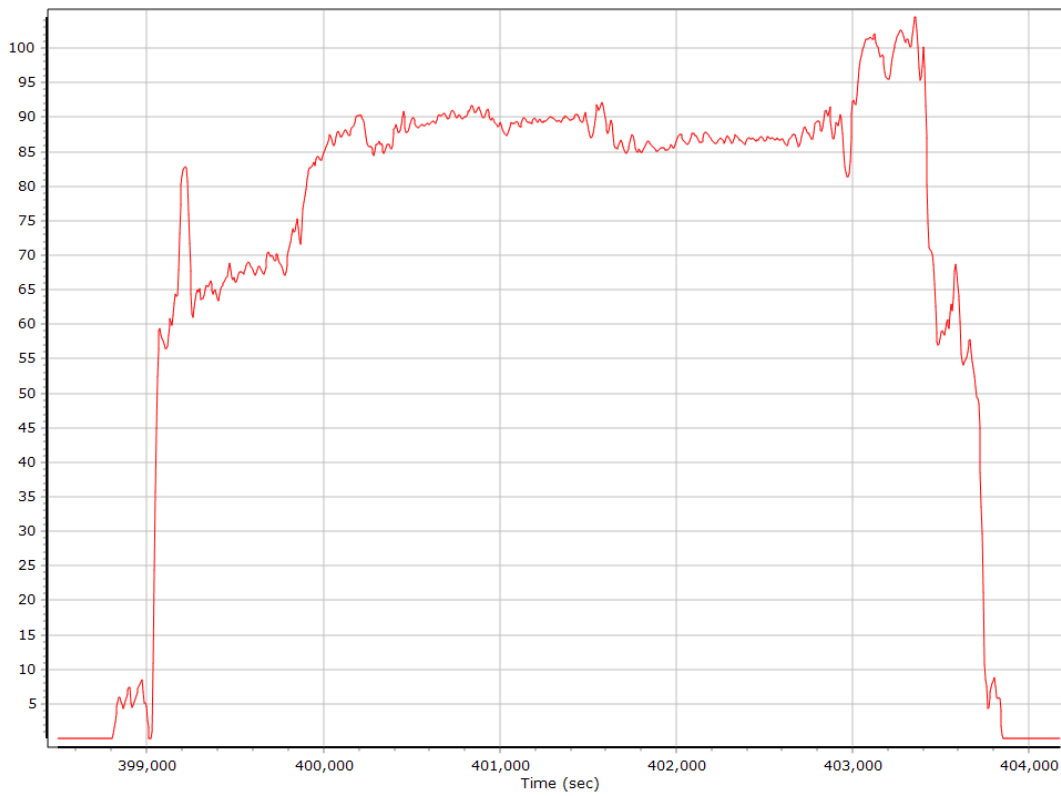

## Body Acceleration

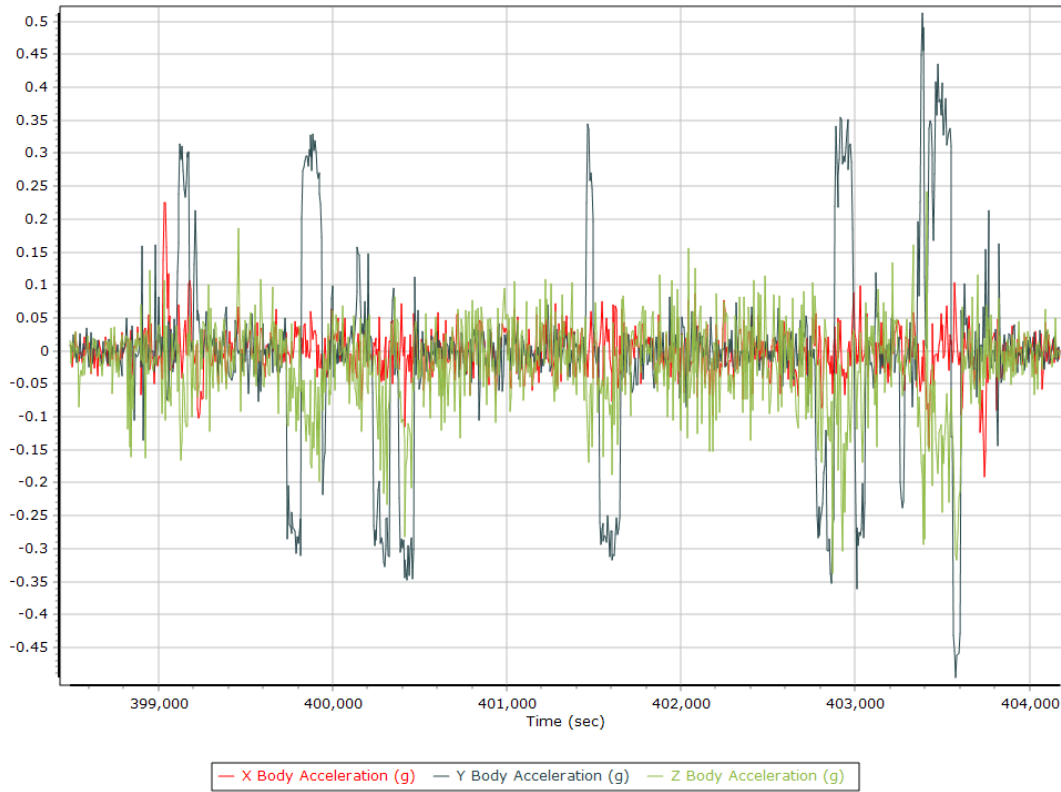

## Total Body Acceleration

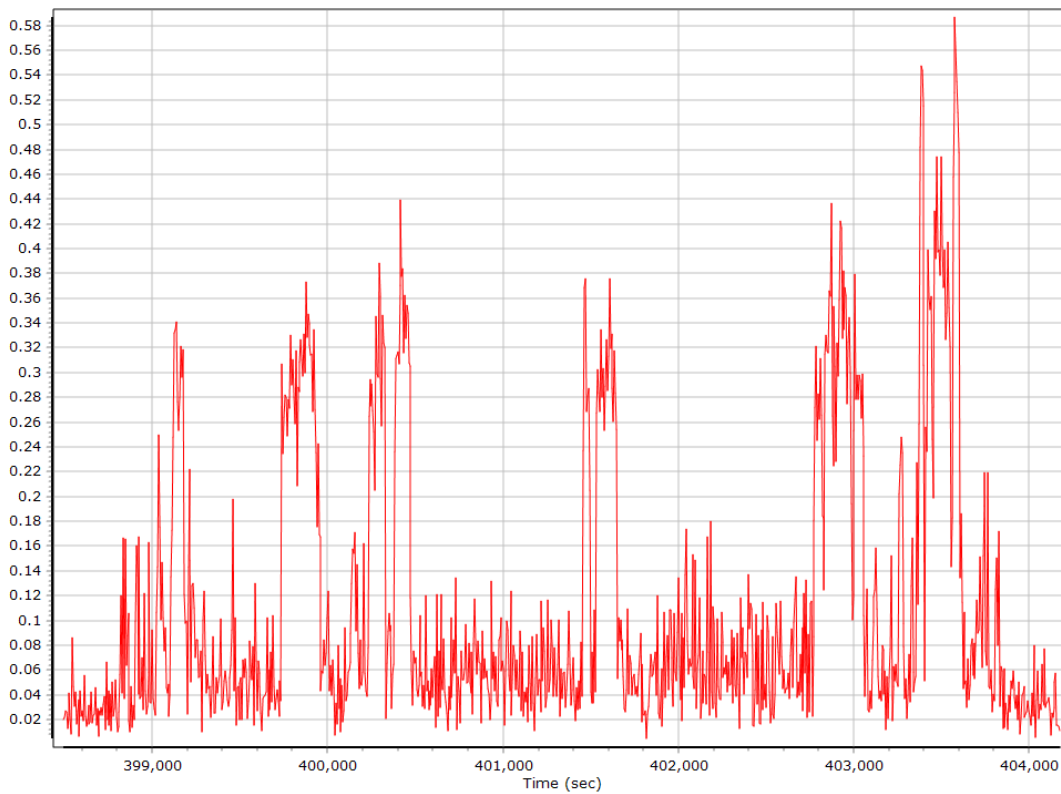


## Body Angular Rate




## Forward Processed Trajectory Information

### Top View

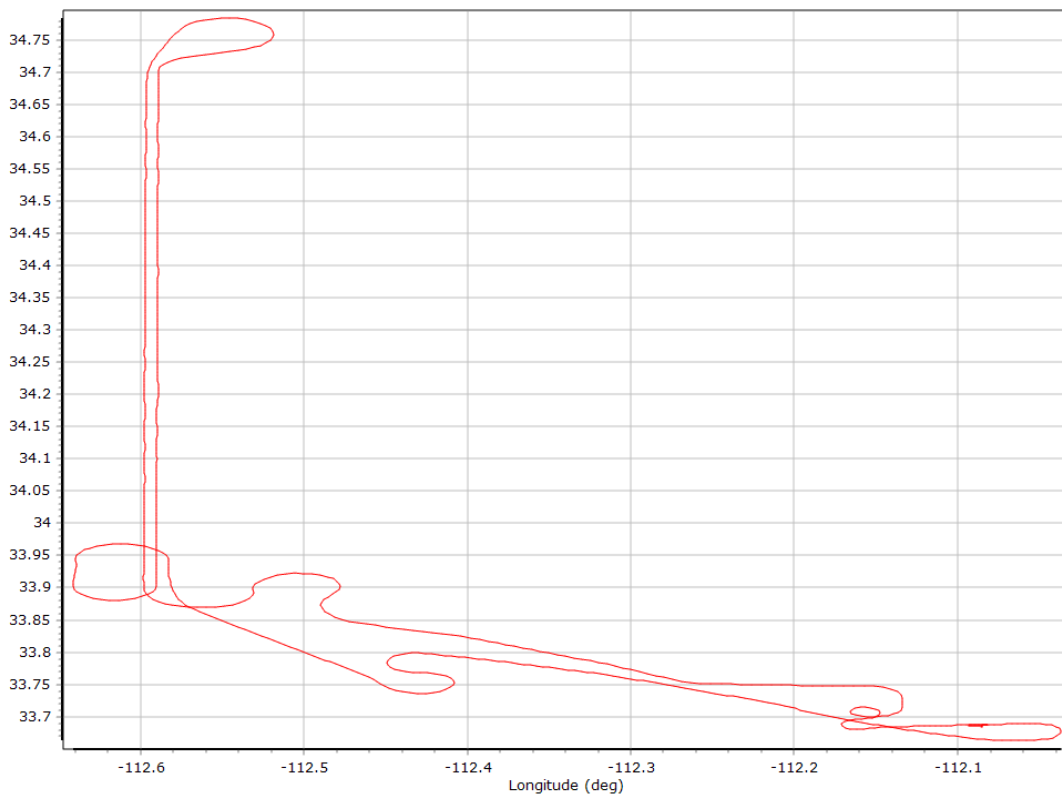


### Altitude

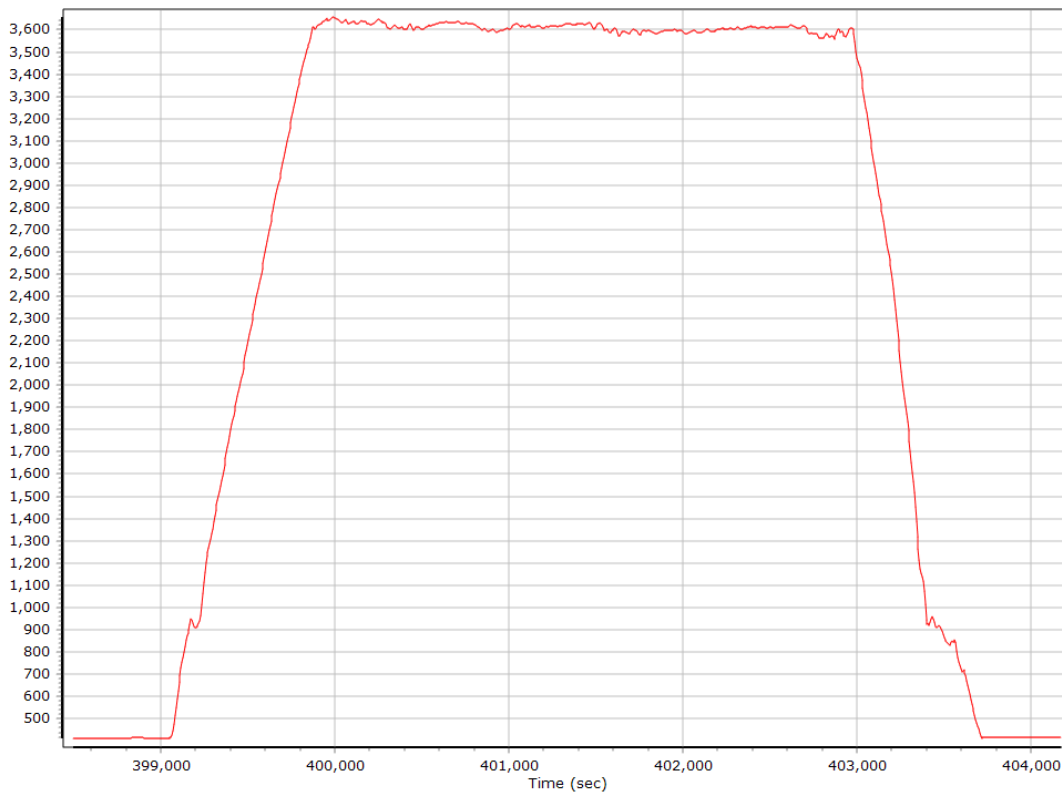





## Roll/Pitch

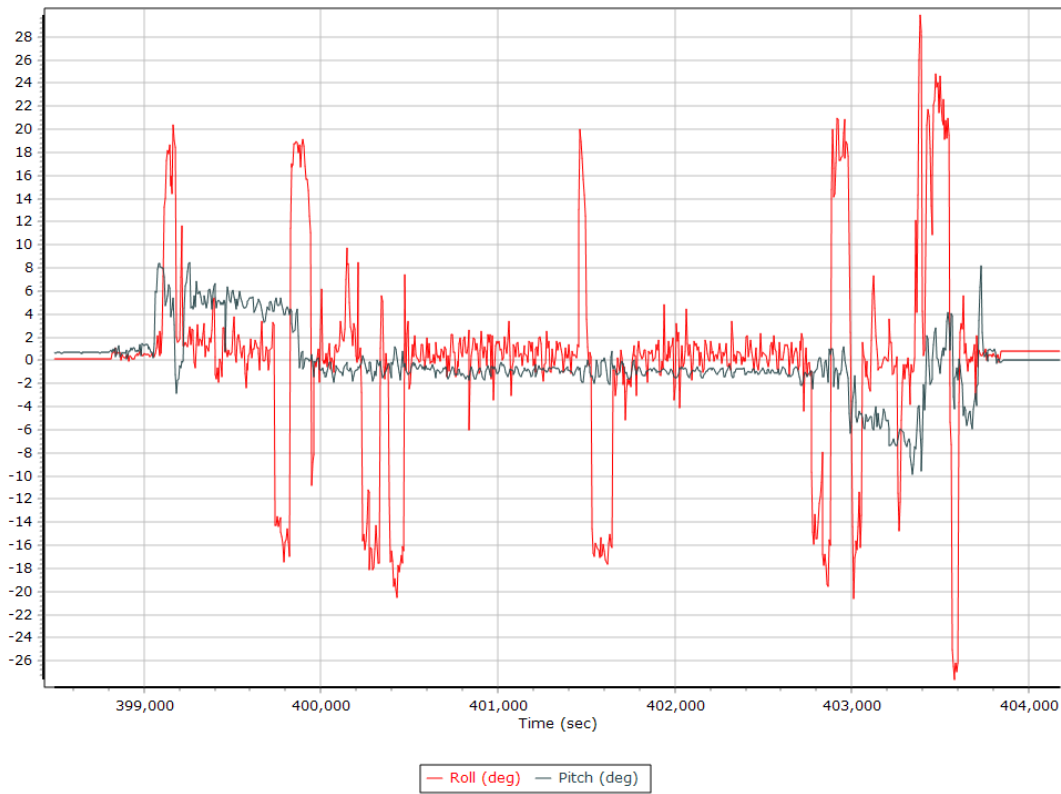


## Heading

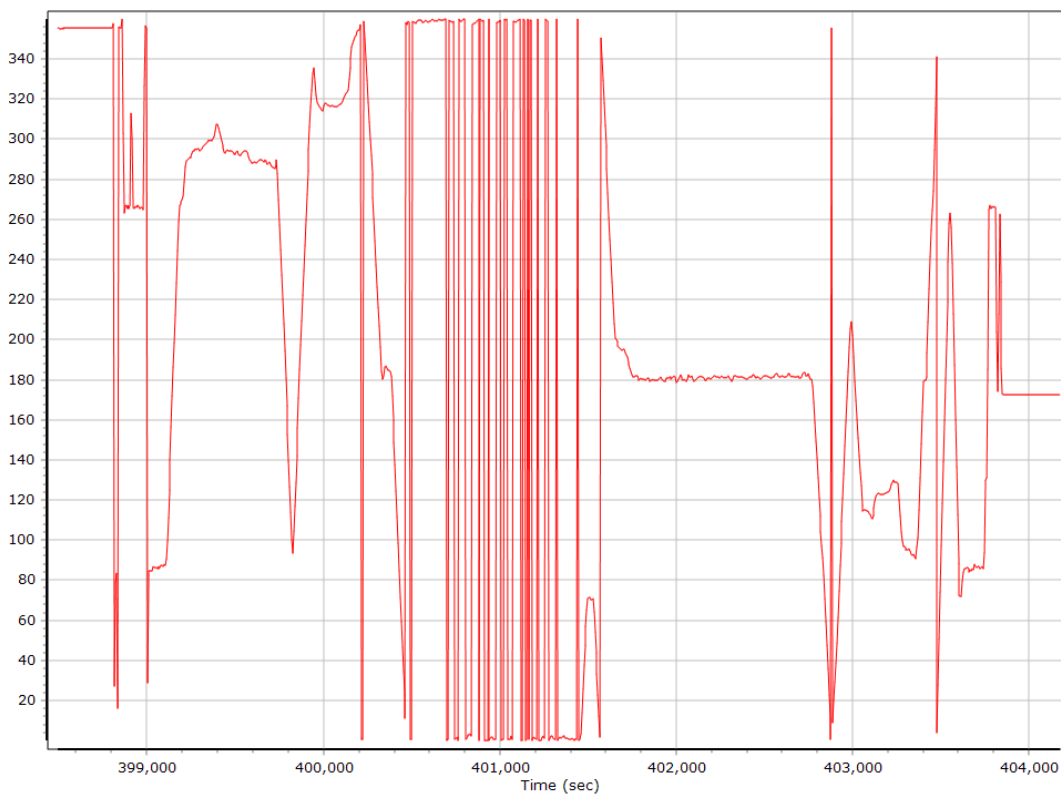


## North/East Velocity

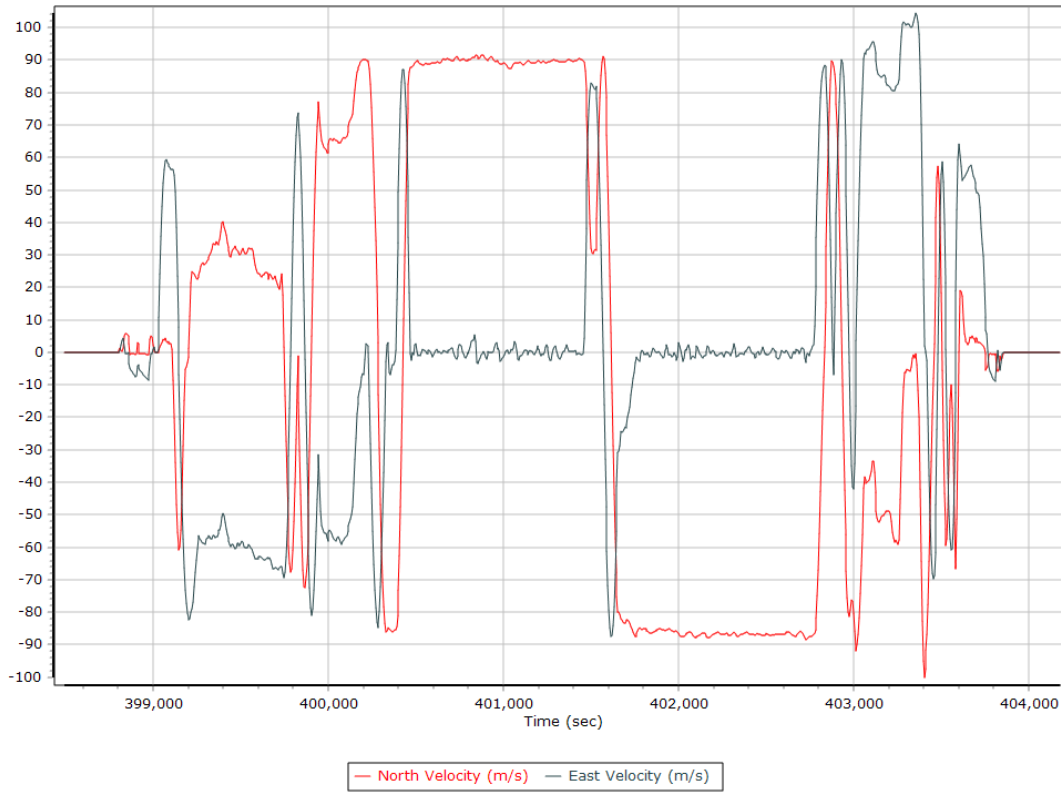


## Down Velocity

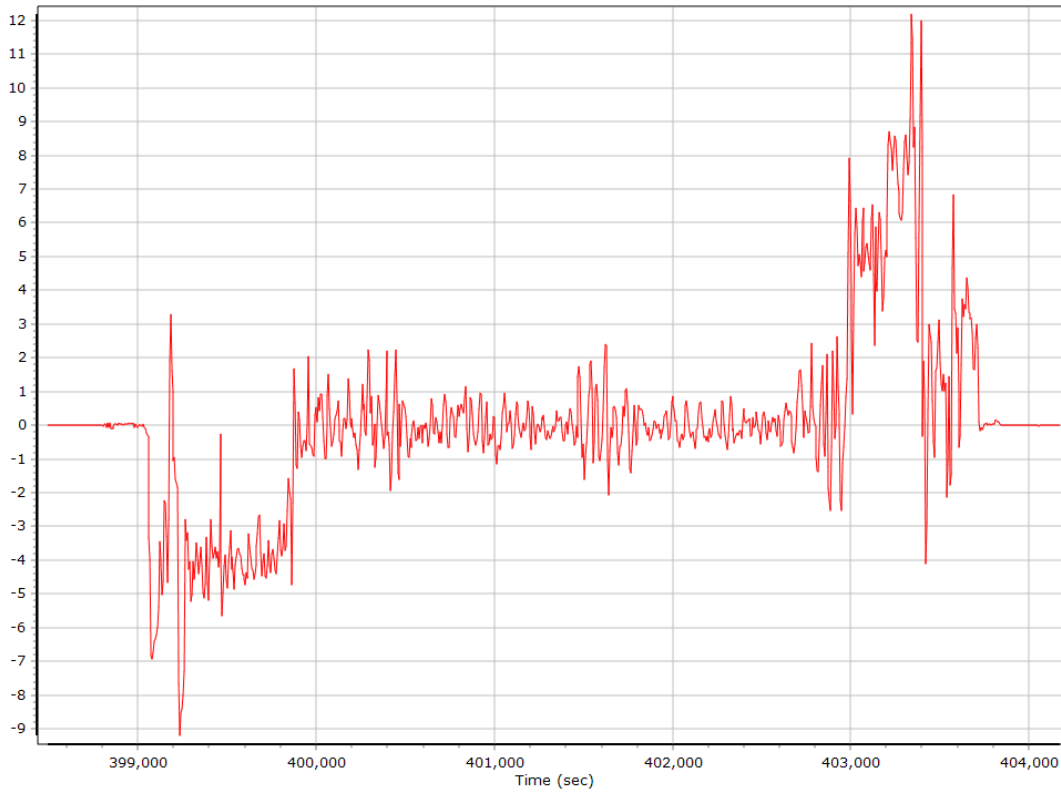


## Total Speed

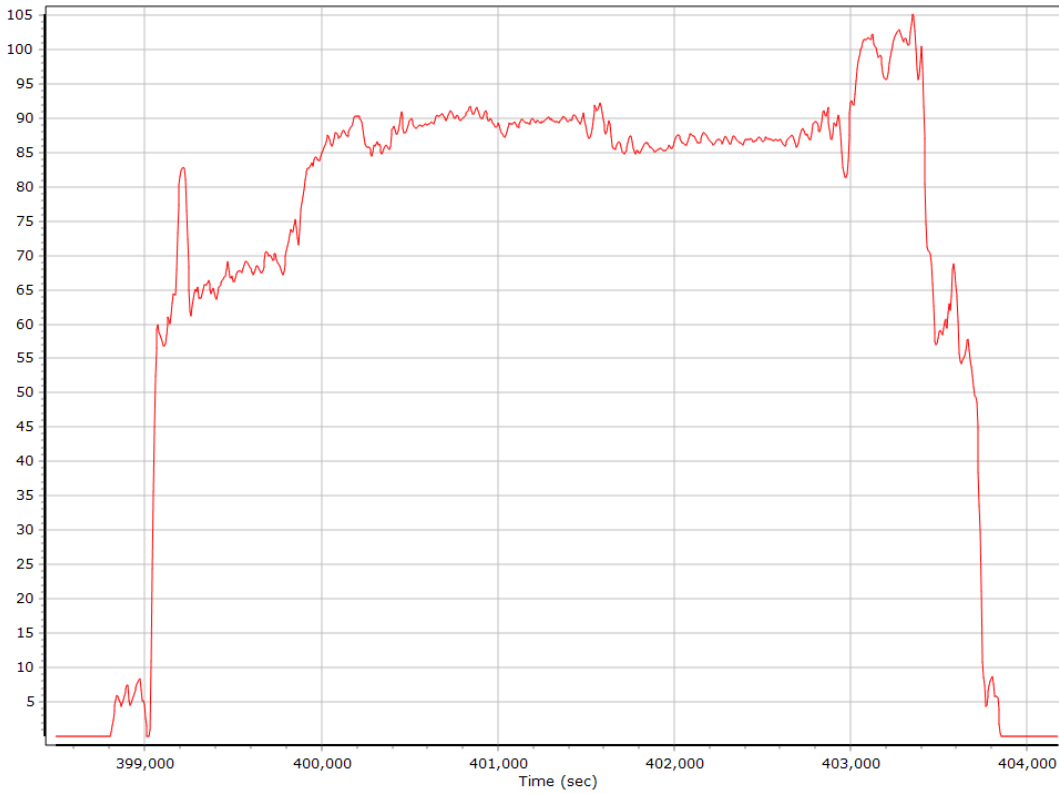


## Ground Speed

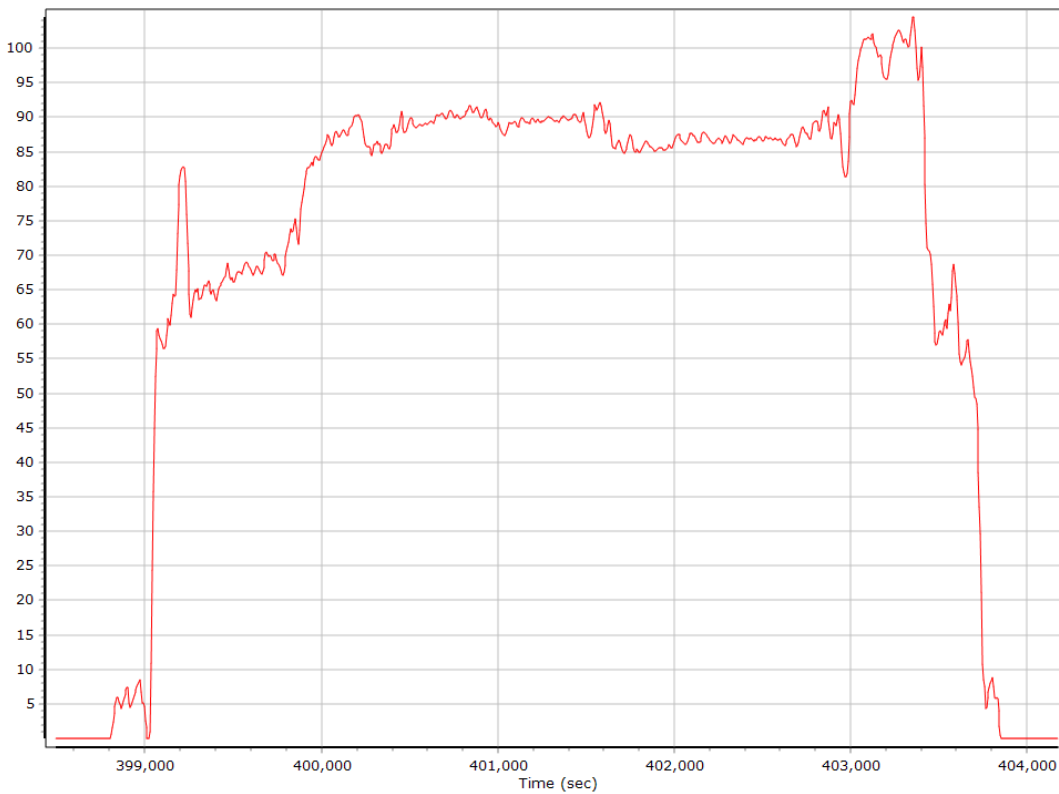

## Body Acceleration

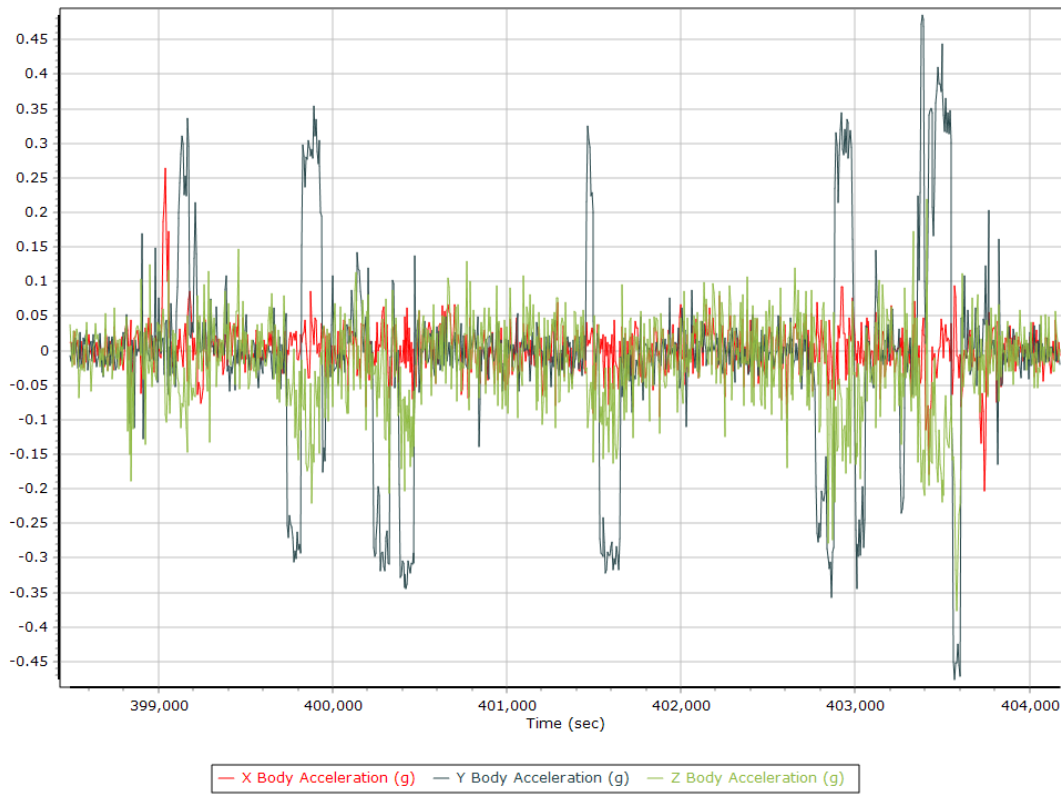

## Total Body Acceleration

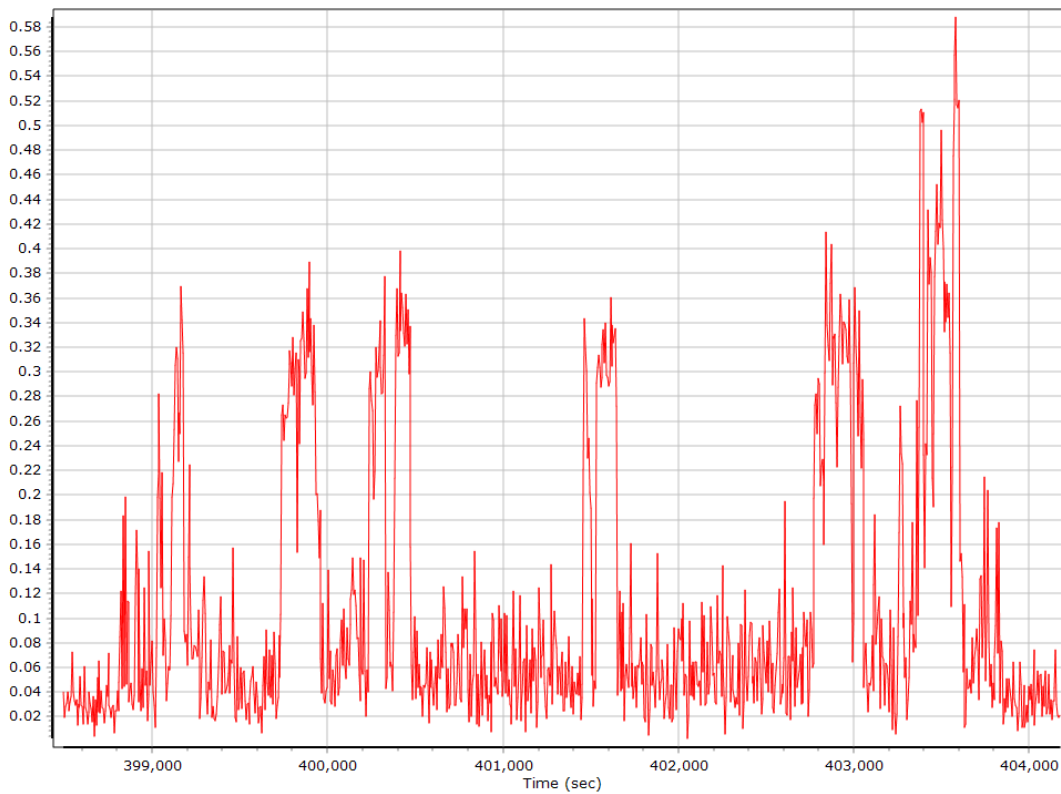

## Body Angular Rate




## GNSS QC


### GNSS QC Statistics

Statistics	Min	Max	Mean
Baseline length (km)	0.00	0.00	
Number of GPS SV	7	11	9
Number of GLONASS SV	0	5	4
Number of QZSS SV	0	0	0
Number of BEIDOU SV	0	0	0
Number of GALILEO SV	2	7	6
Total number of SV	10	22	20
PDOP	0.99	6.74	1.13
QC Solution Gaps	28.00	28.00	
Solution Type	Fixed	Float	No solution
Epoch (sec)	6018.00	0.00	28.00
Percentage	99.54	0.00	0.46


### Num SVs in solution

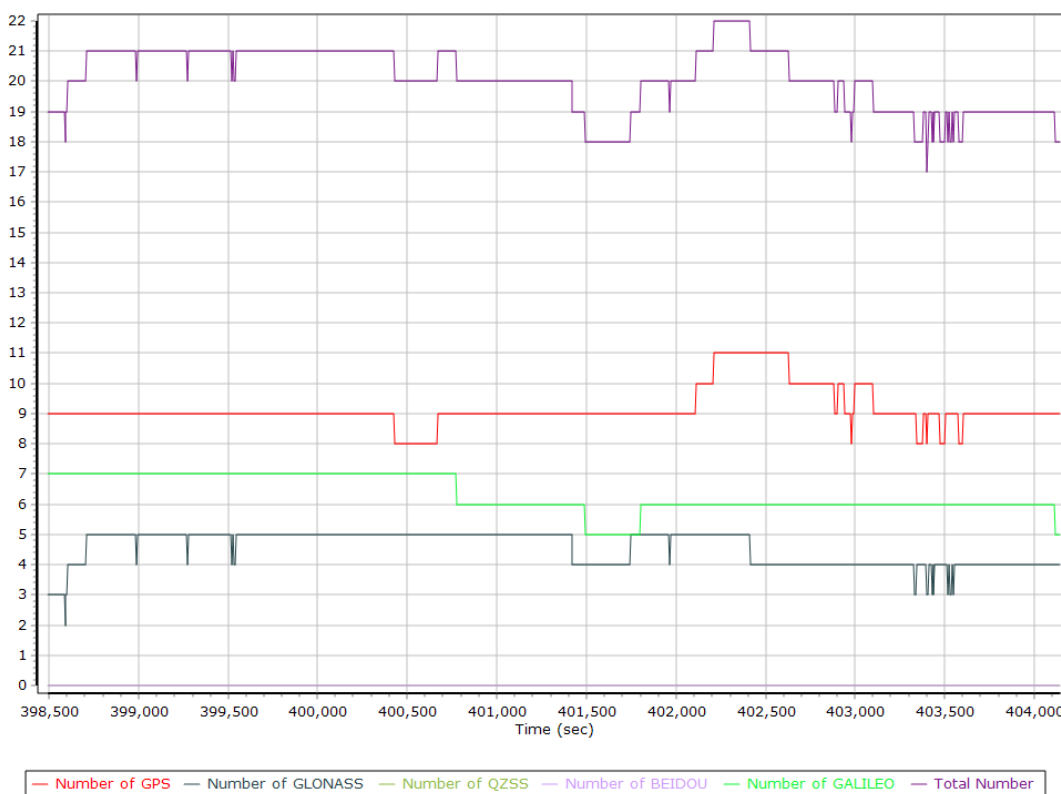


### Forward/Reverse Separation

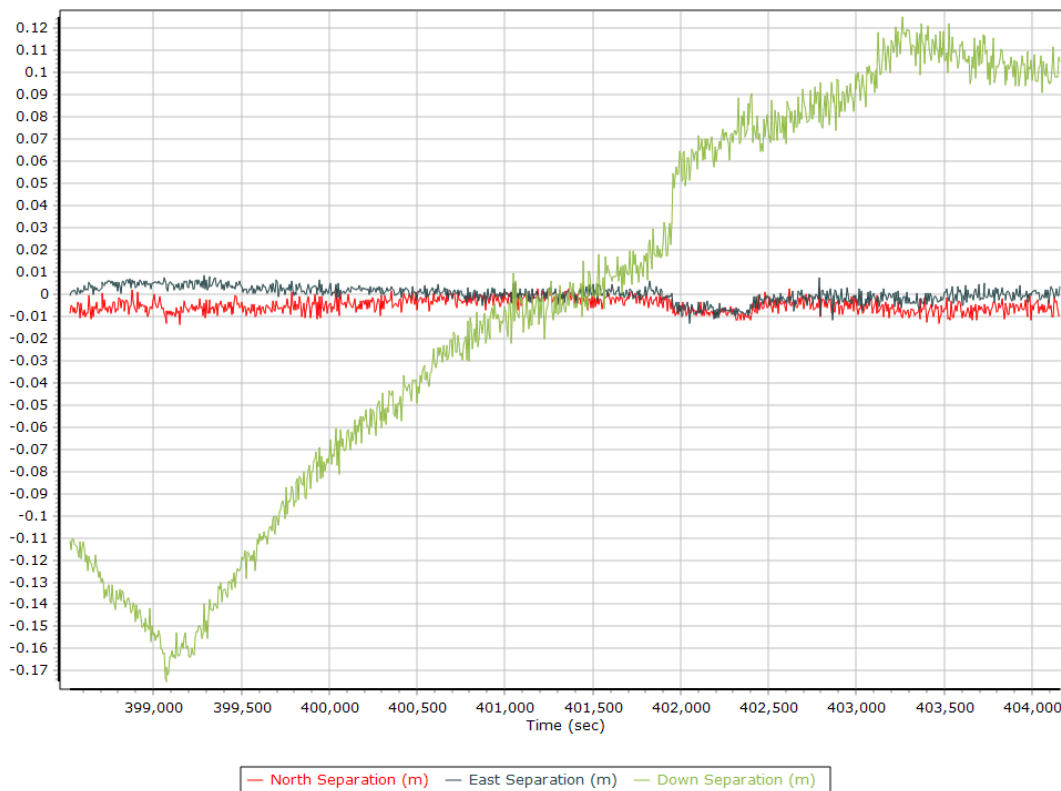


### PDOP

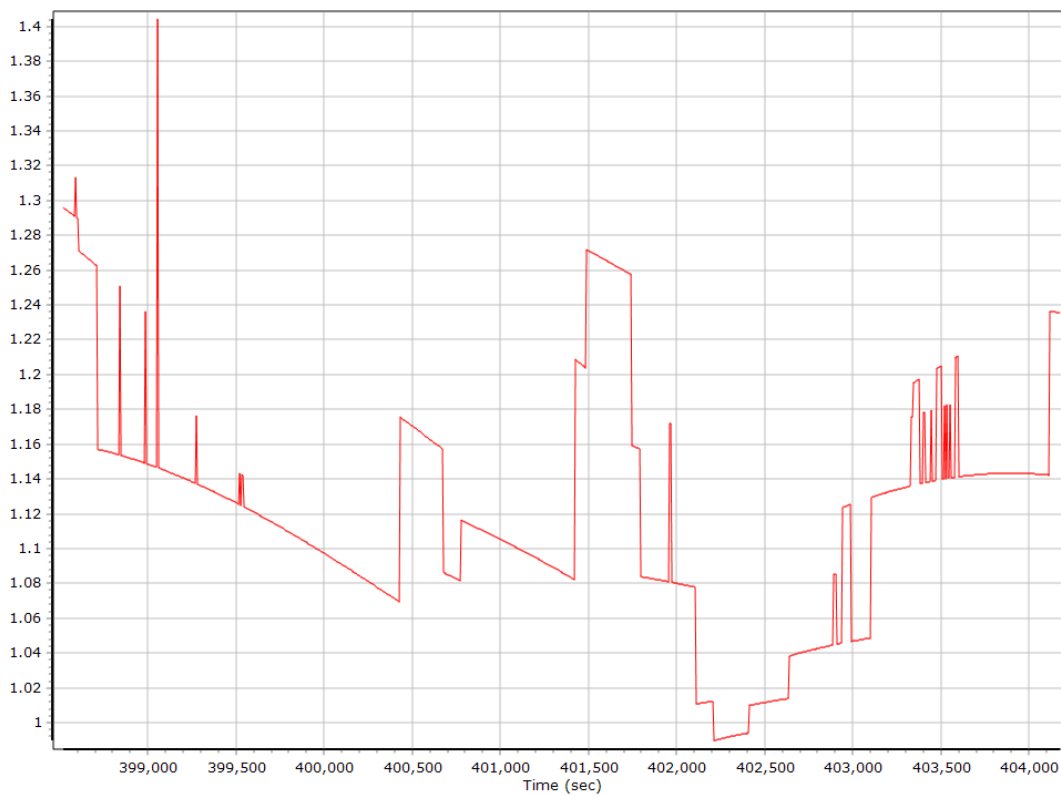

## Estimated Position Accuracy

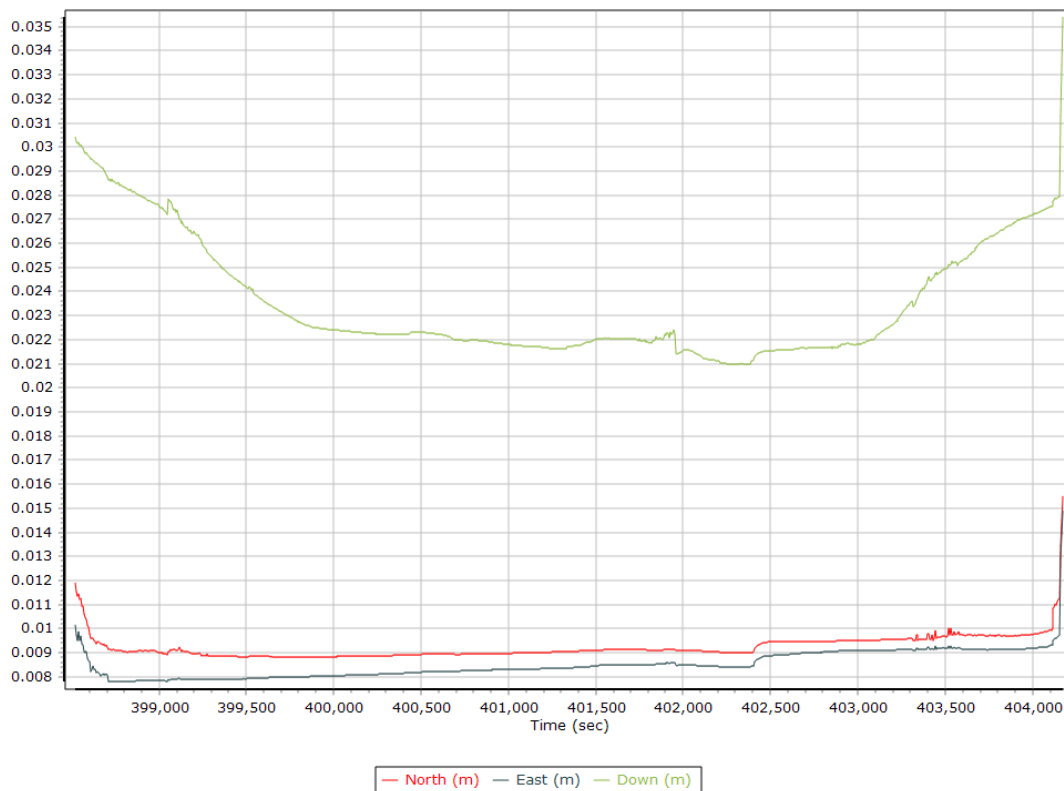


## GPS Residuals

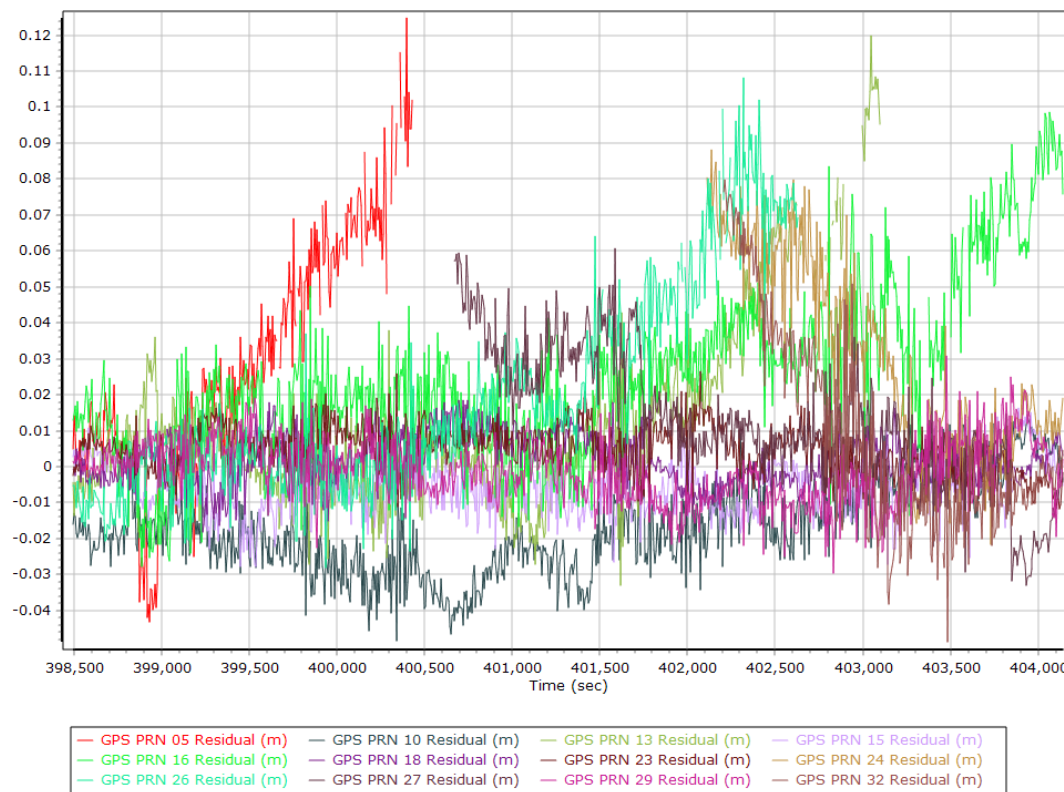




## GLONASS Residuals

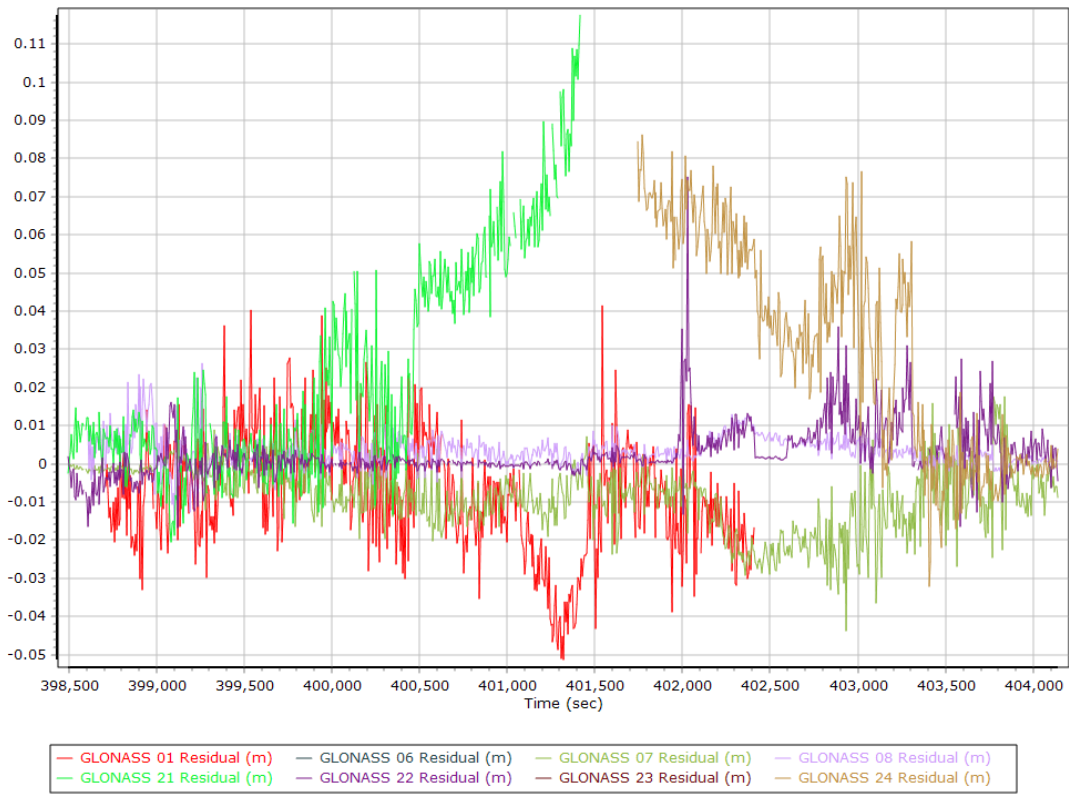

## GALILEO Residuals

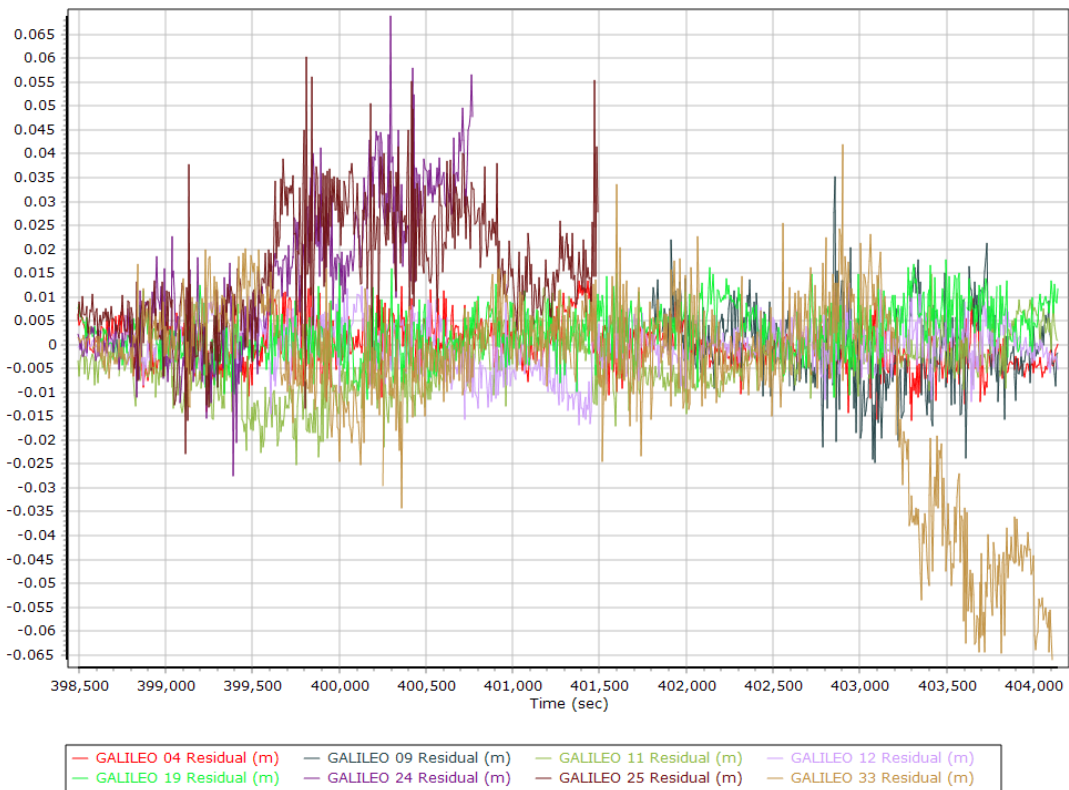

## GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion PP-RTX		
Stabilized mount	False		
Processing start time	398091.000 (10/21/2021 14:34:51)		
Processing end time	404177.000 (10/21/2021 16:16:17)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	90.000
Reference to Primary GNSS lever arm (m)	-0.515	-0.050	-1.220
Reference to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000


## Calibrated Installation Parameters

### Reference-Primary GNSS Lever Arm (m)


#### Reference-Primary GNSS Lever Arm Automatic Calibration Results

Original Reference to Primary GNSS lever arm (m)	-0.497	-0.045	-1.199
Iteration 1 Reference to Primary GNSS lever arm (m)	-0.515	-0.049	-1.221
Iteration 2 Reference to Primary GNSS lever arm (m)	-0.515	-0.050	-1.220
Primary GNSS Lever Arm In use	Iteration 2		


### X Reference-Primary GNSS Lever Arm (m)

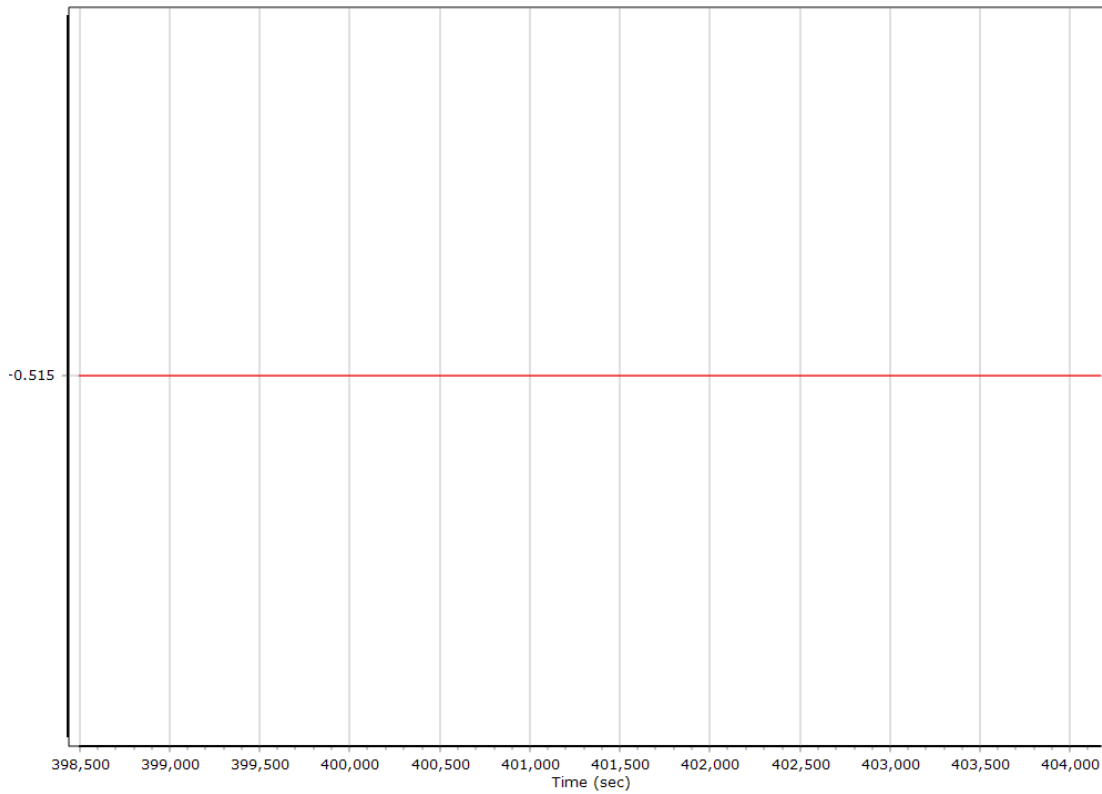


### Y Reference-Primary GNSS Lever Arm (m)

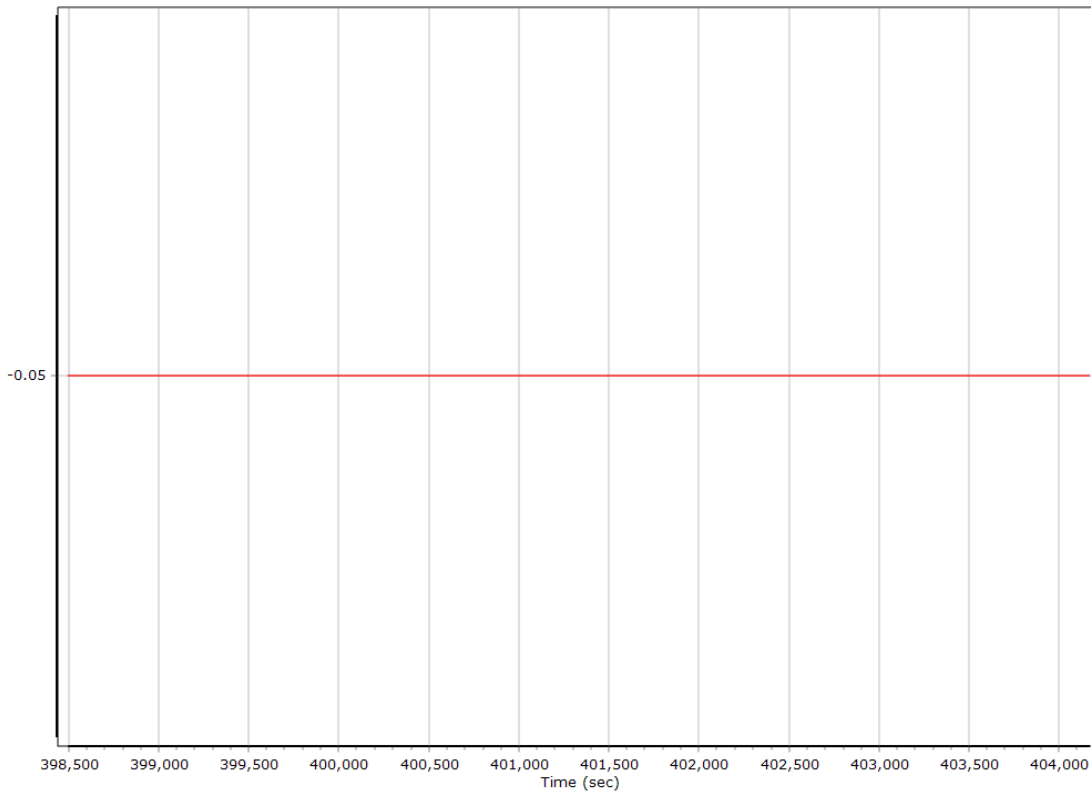

### Z Reference-Primary GNSS Lever Arm (m)

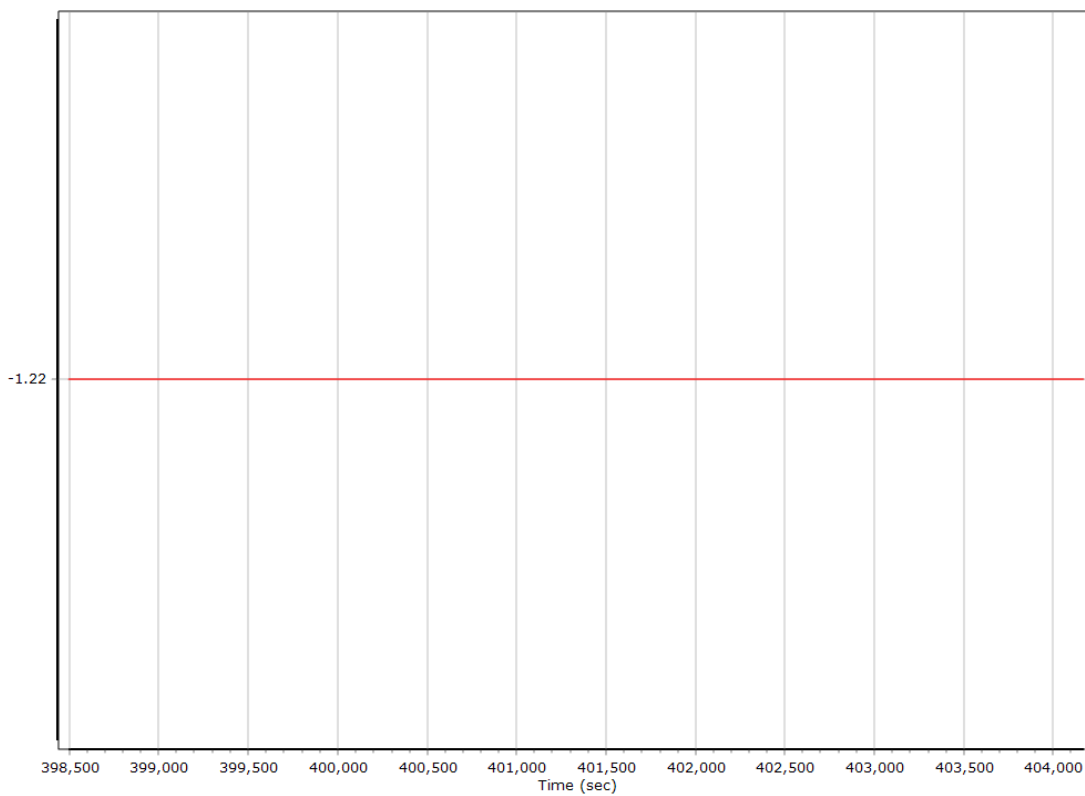


### Reference-Primary GNSS Lever Arm Figure of Merit

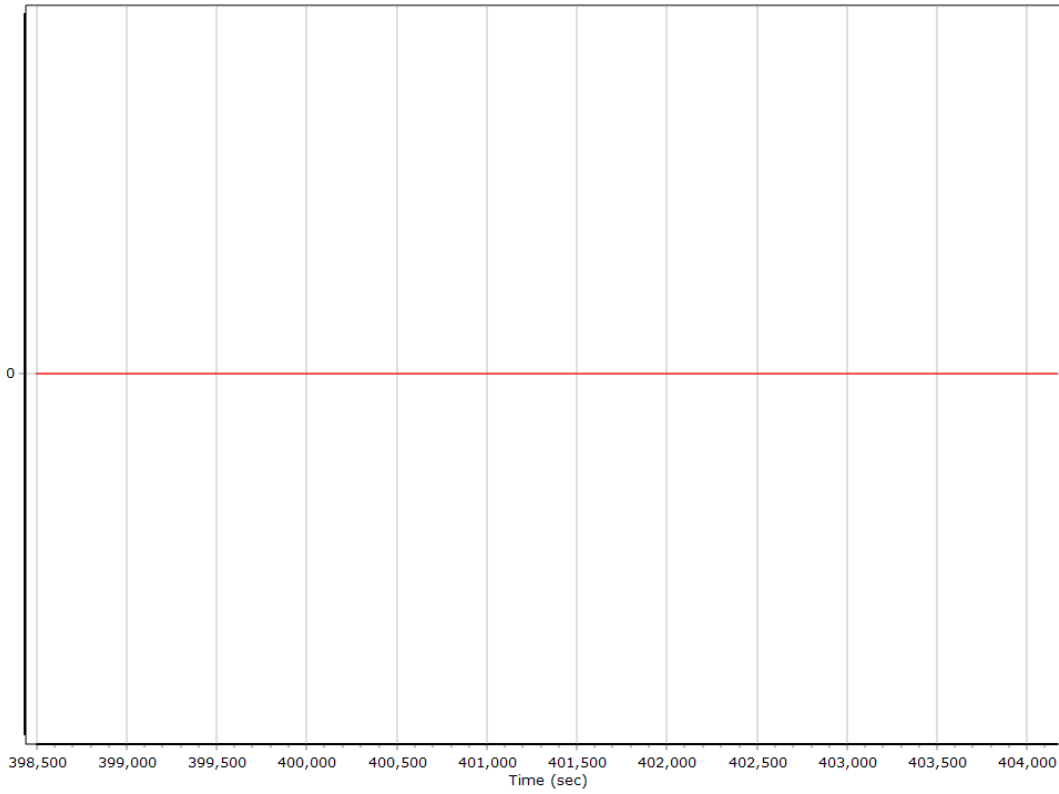


## IN-Fusion QC

### Forward Processed Estimated Errors, Reference Frame


#### Accelerometer Bias (micro-g)

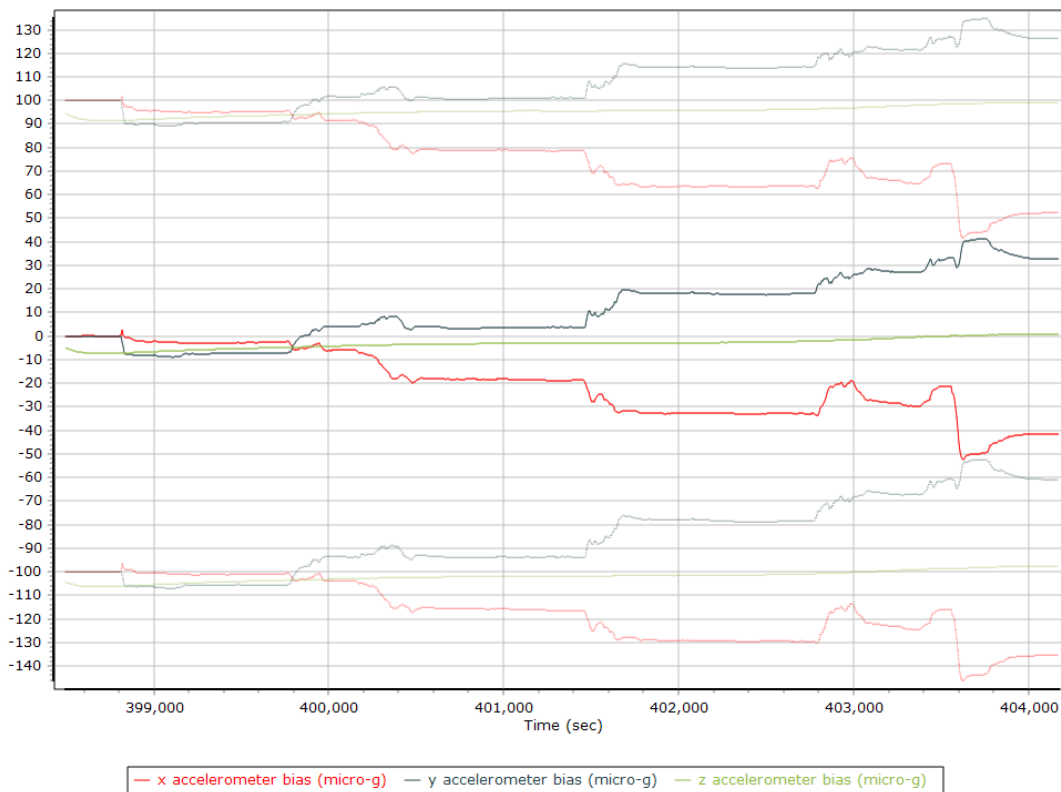


#### X Accelerometer Bias (micro-g)

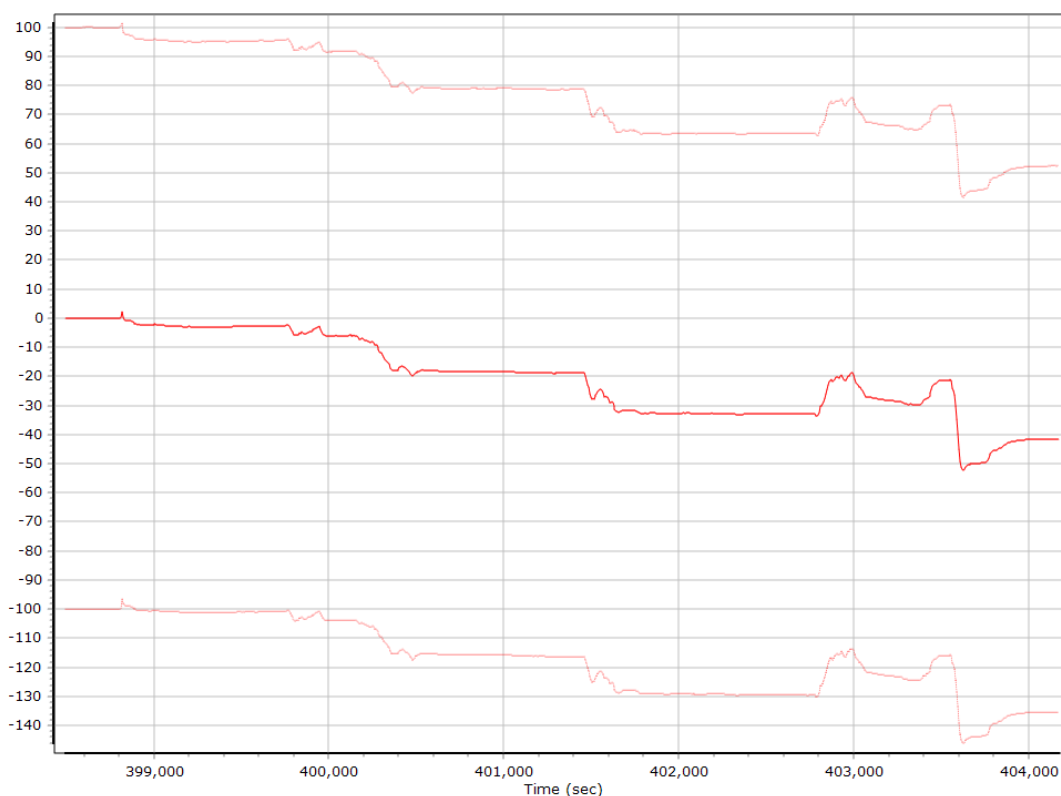

### Y Accelerometer Bias (micro-g)

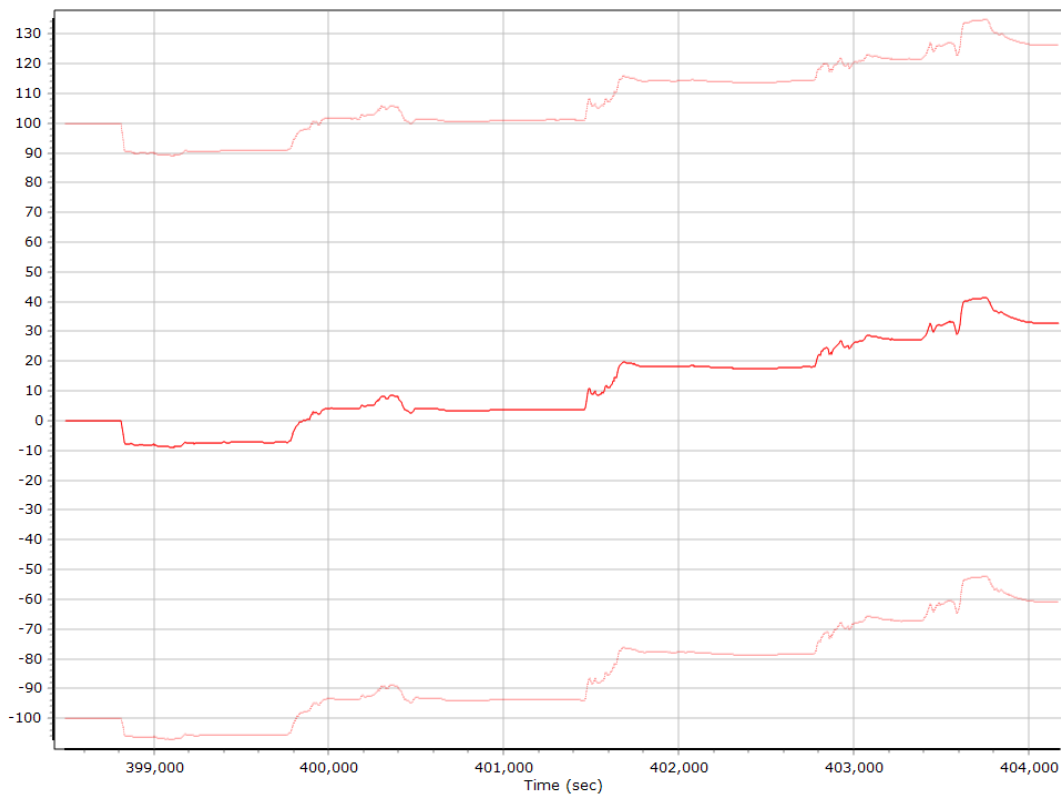


### Z Accelerometer Bias (micro-g)

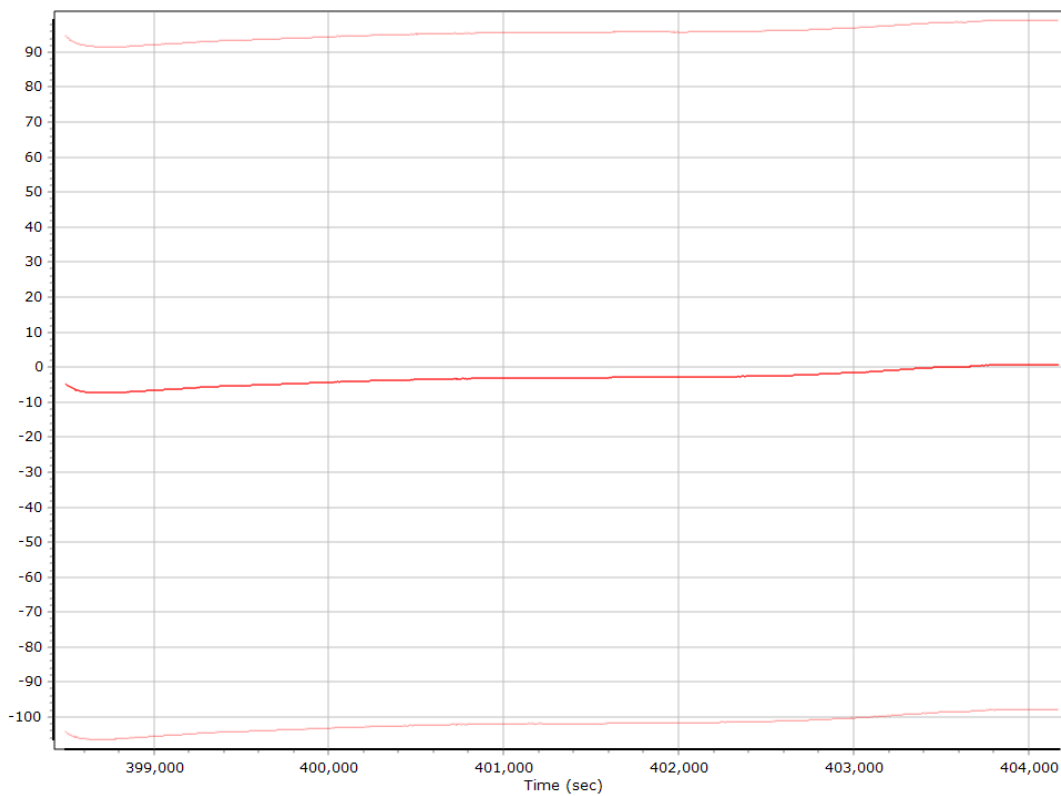

### Accelerometer Scale Error (ppm)



### X Accelerometer Scale Error (ppm)

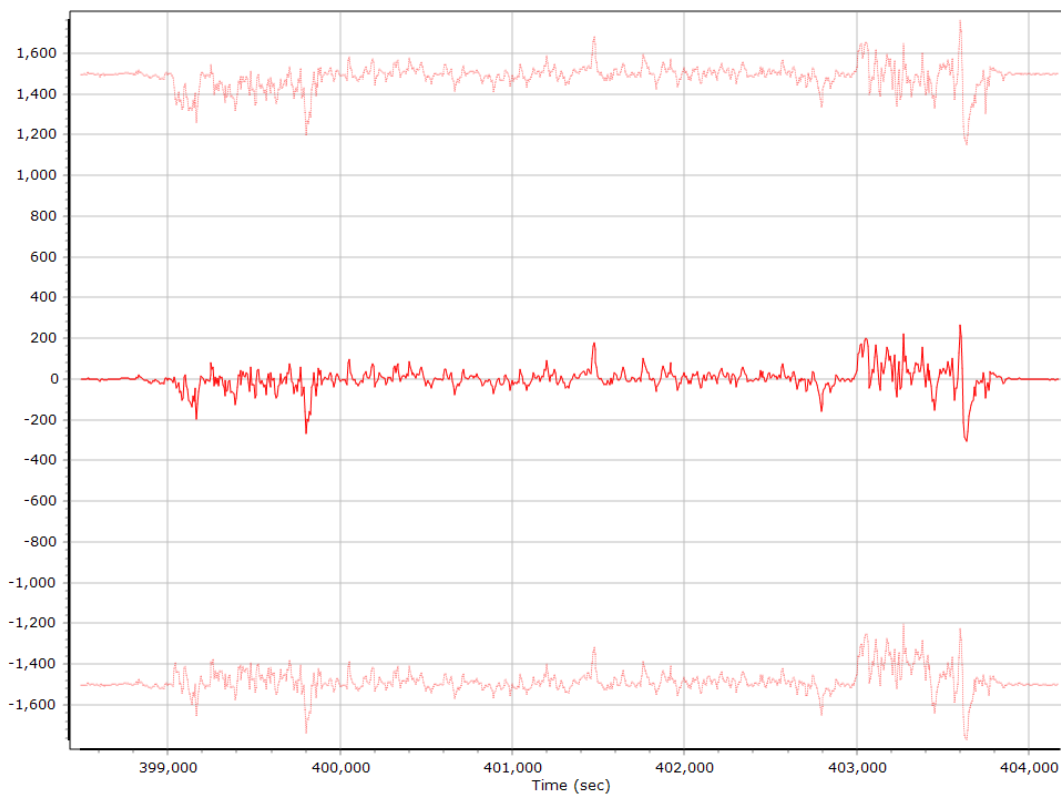





### Y Accelerometer Scale Error (ppm)




### Z Accelerometer Scale Error (ppm)

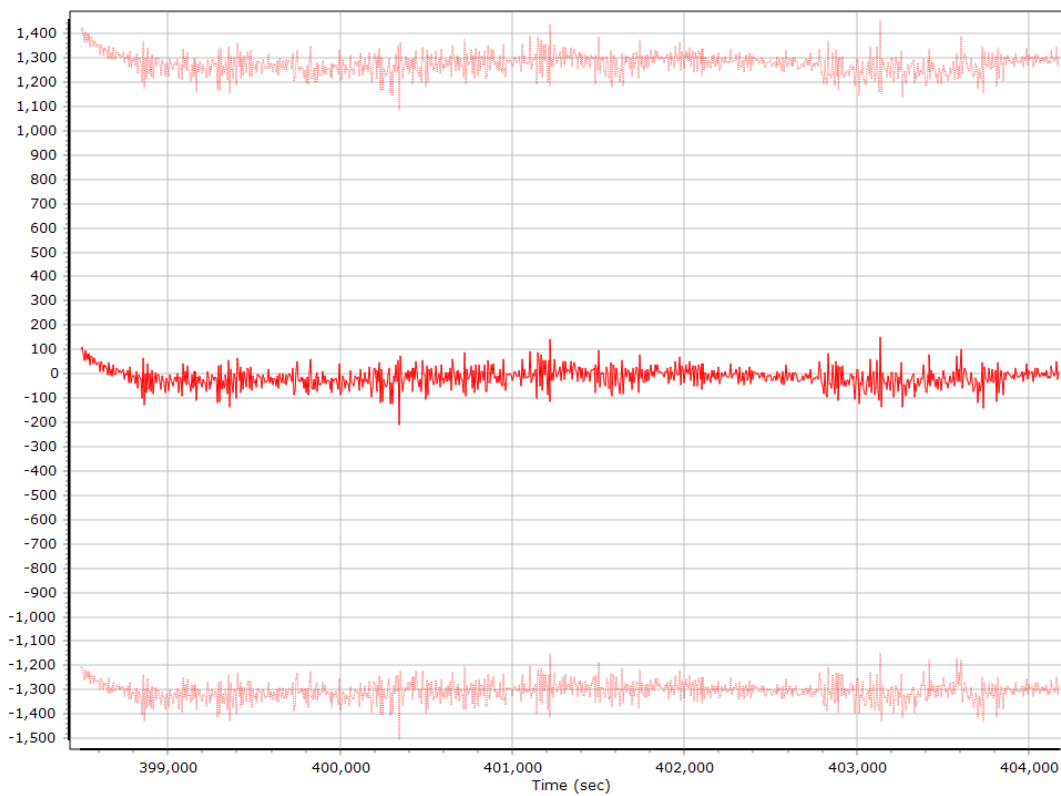


### Gyro Bias (deg/h)

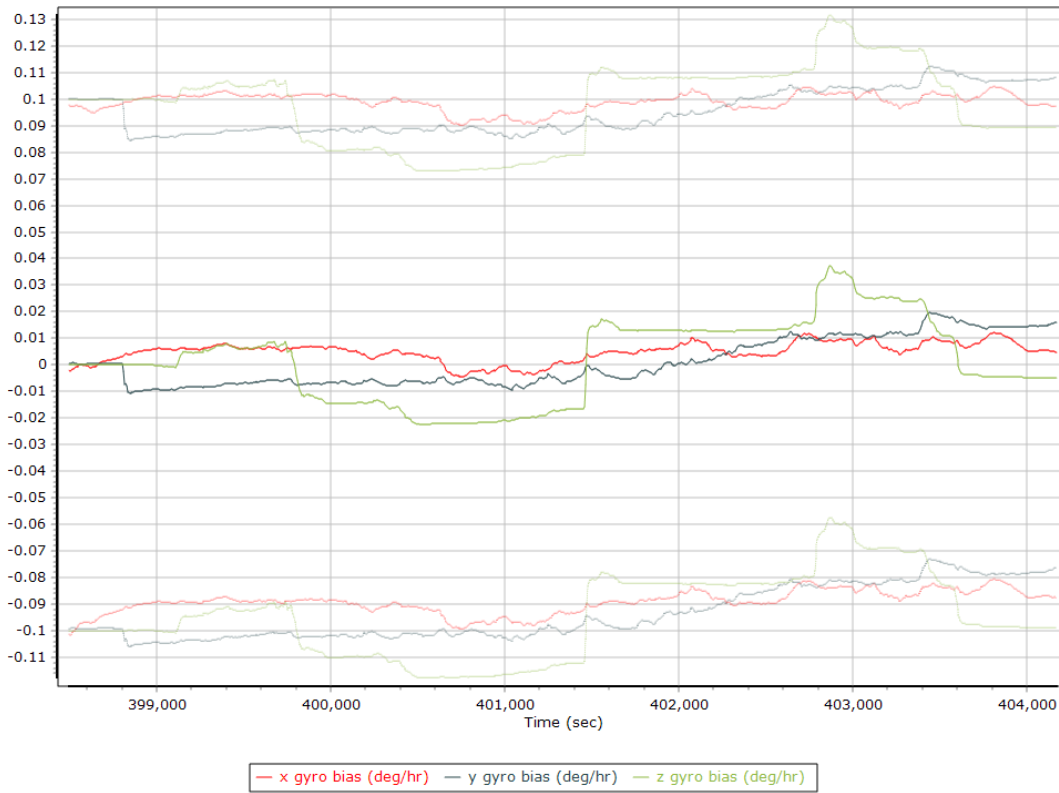


### X Gyro Bias (deg/h)

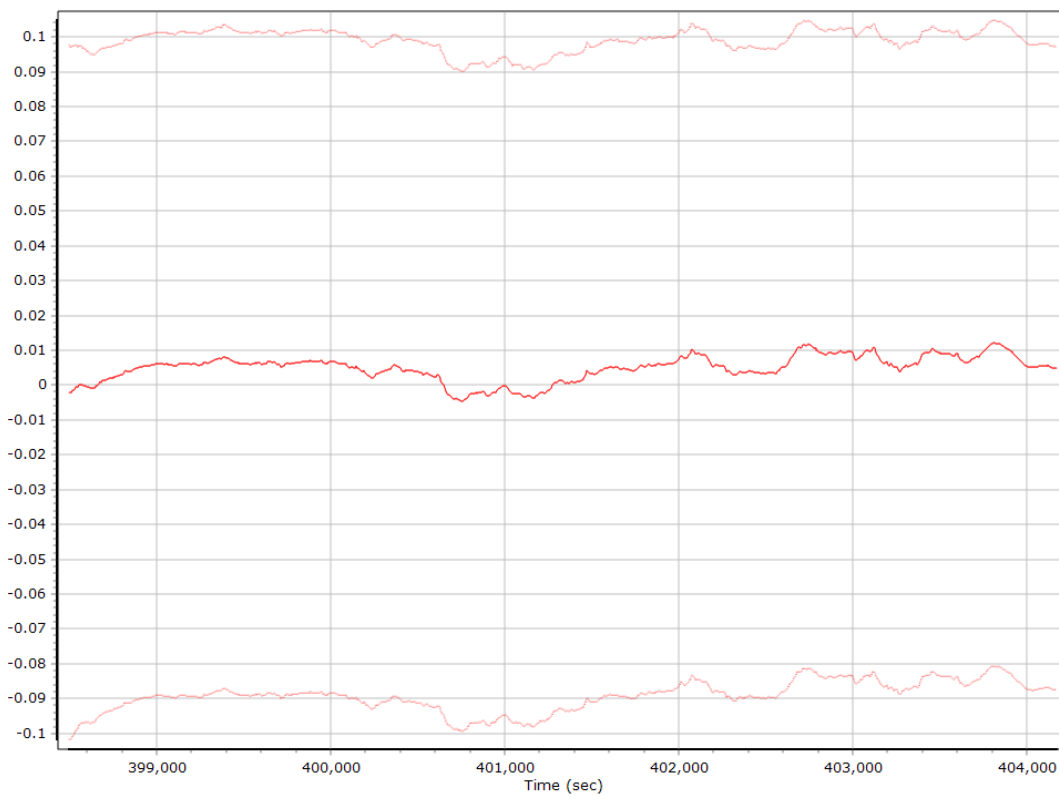


### Y Gyro Bias (deg/h)

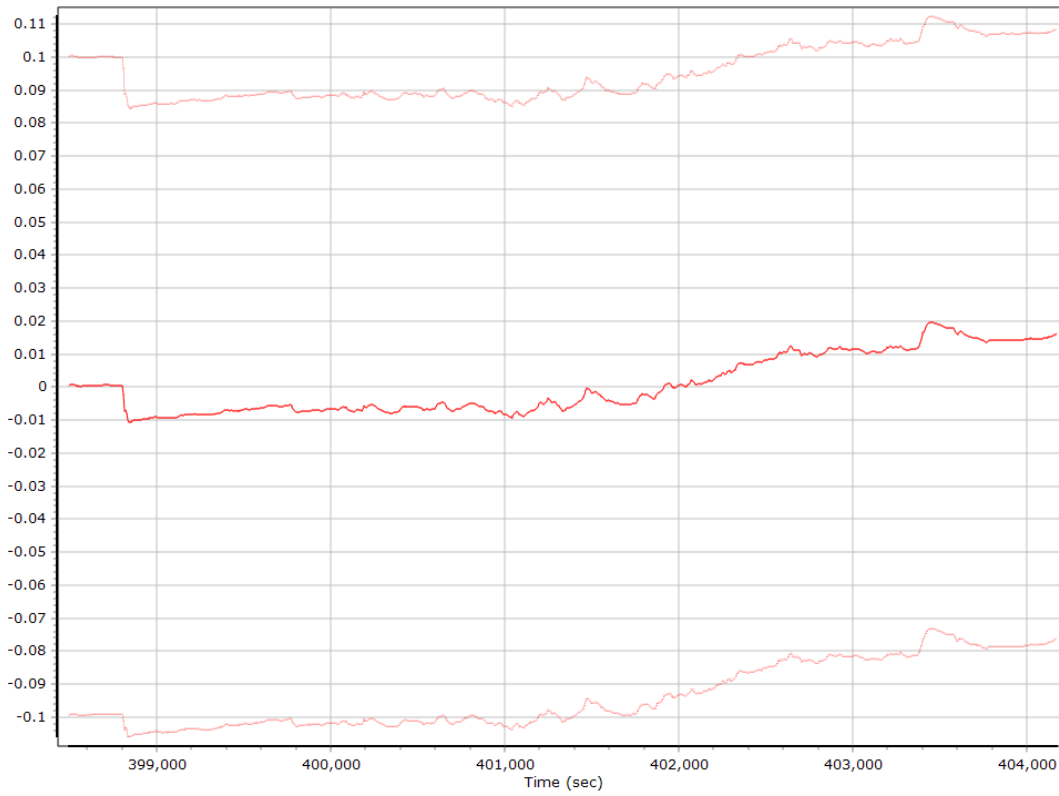


### Z Gyro Bias (deg/h)

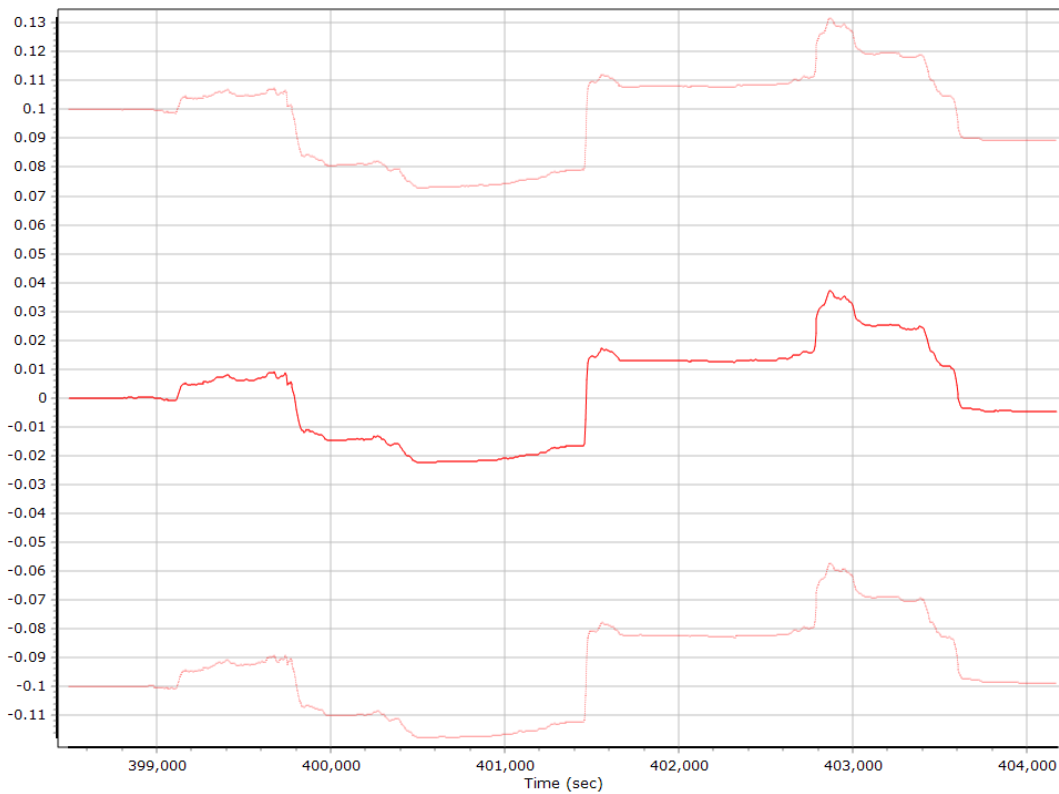


### Gyro Scale Error (ppm)

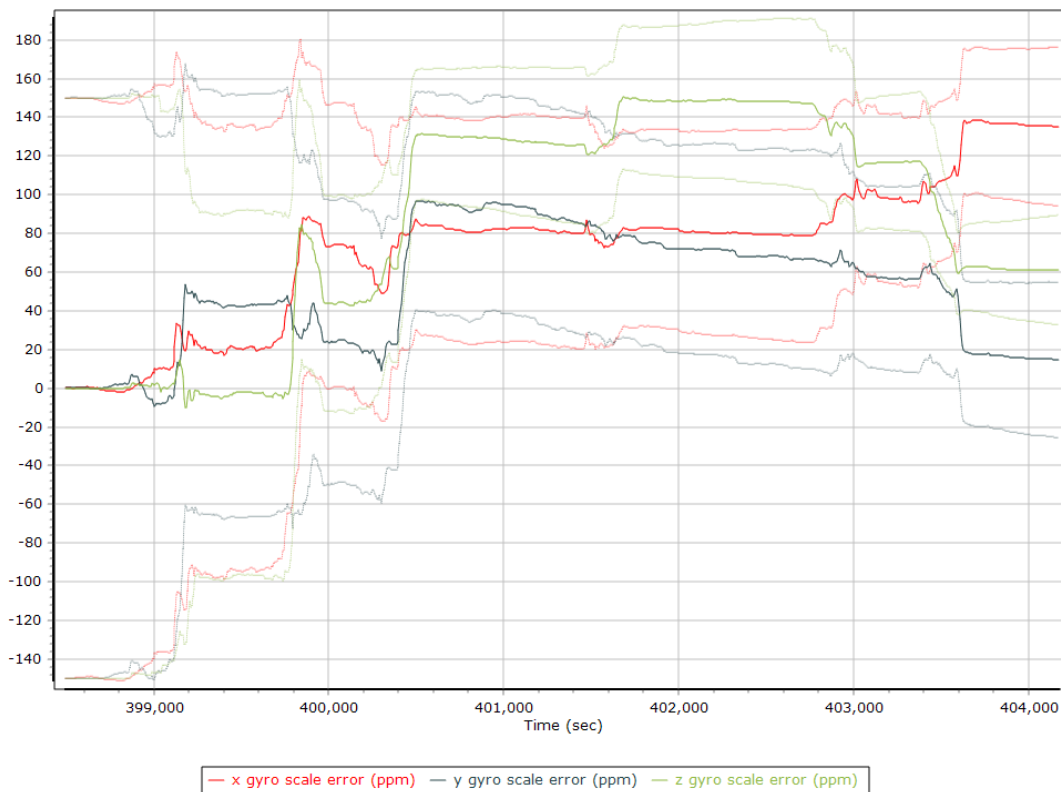


### X Gyro Scale Error (ppm)

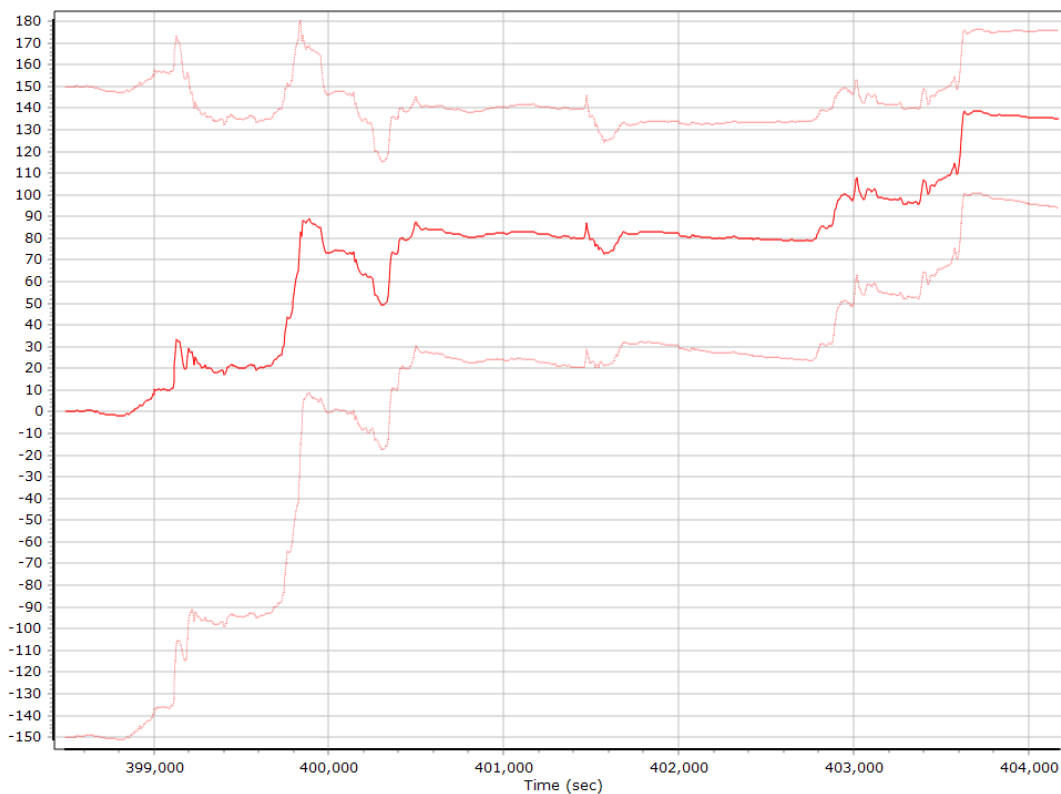

### Y Gyro Scale Error (ppm)

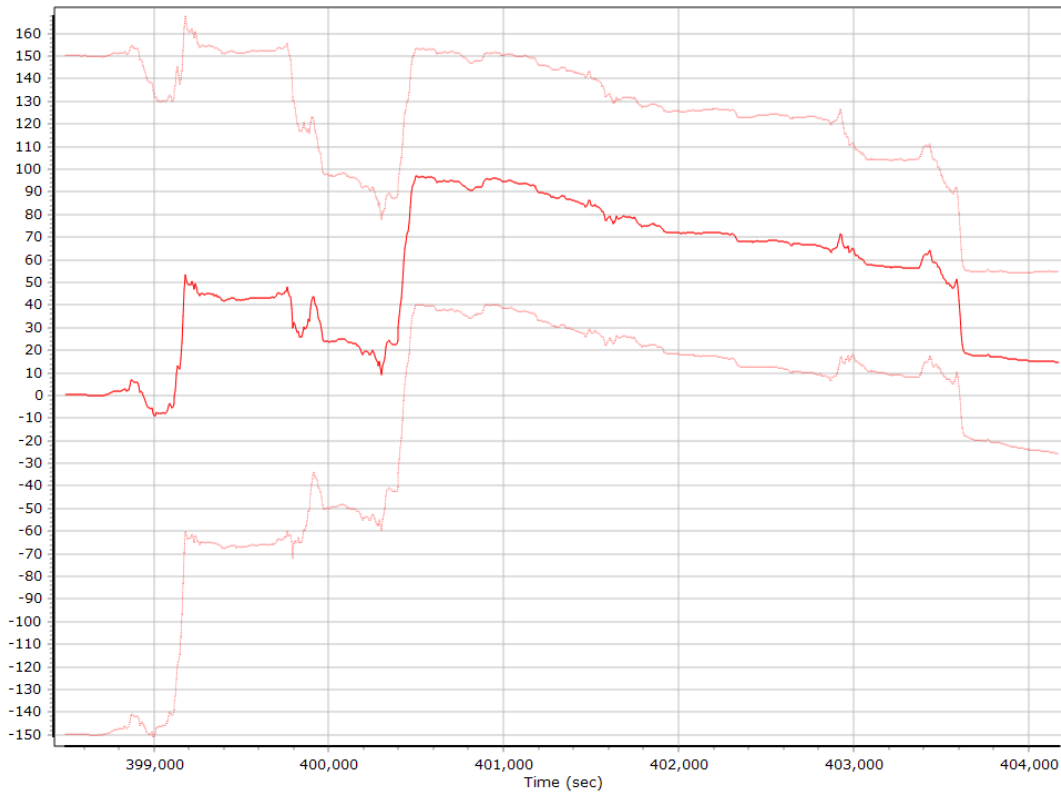


### Z Gyro Scale Error (ppm)

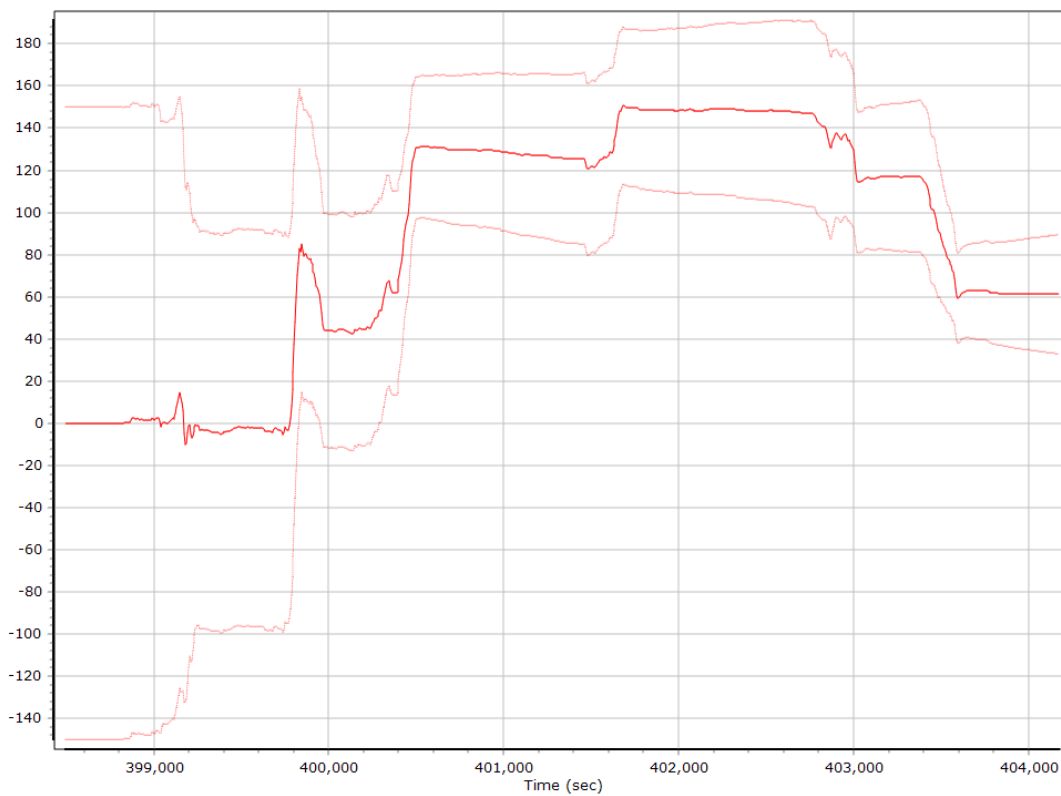


## Smoothed Performance Metrics


### Position Error RMS (m)

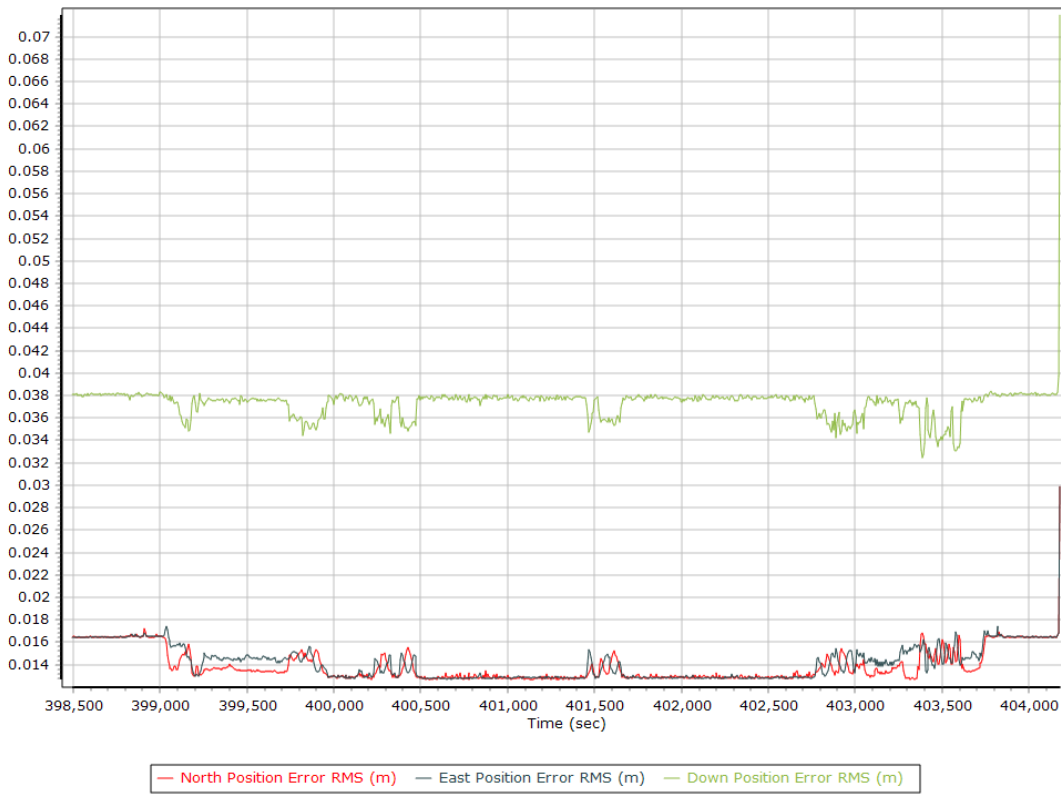


### Velocity Error RMS (m/s)

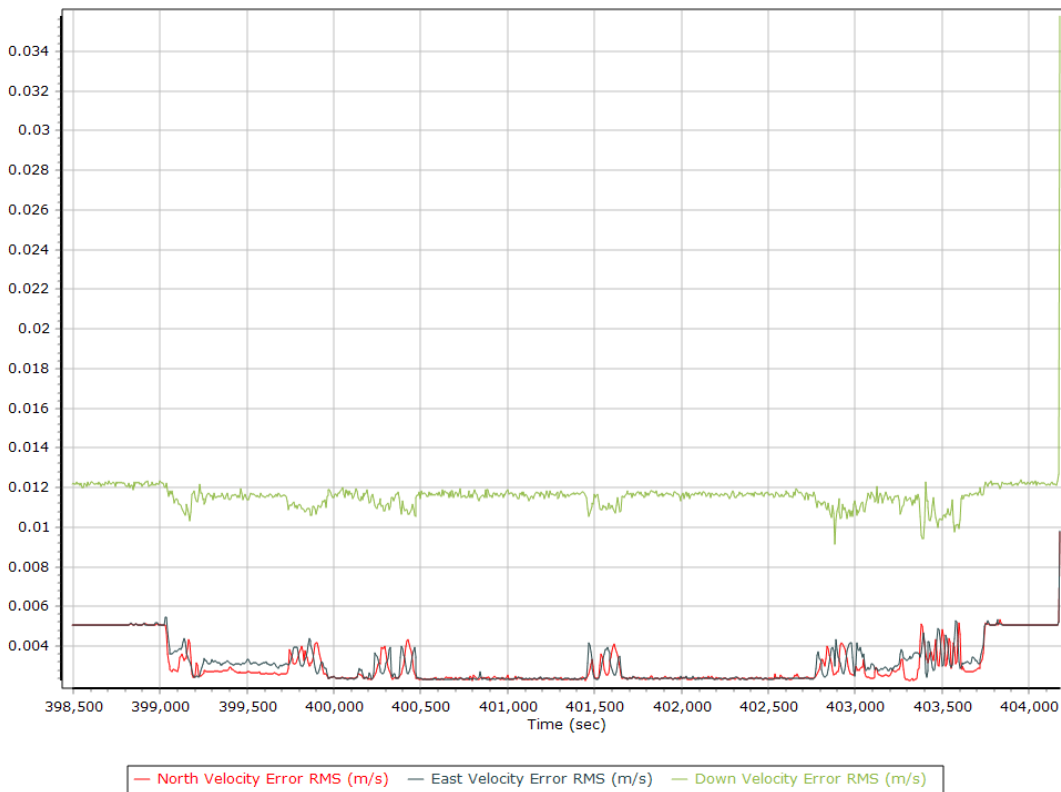

### Roll/Pitch Error RMS (arc-min)

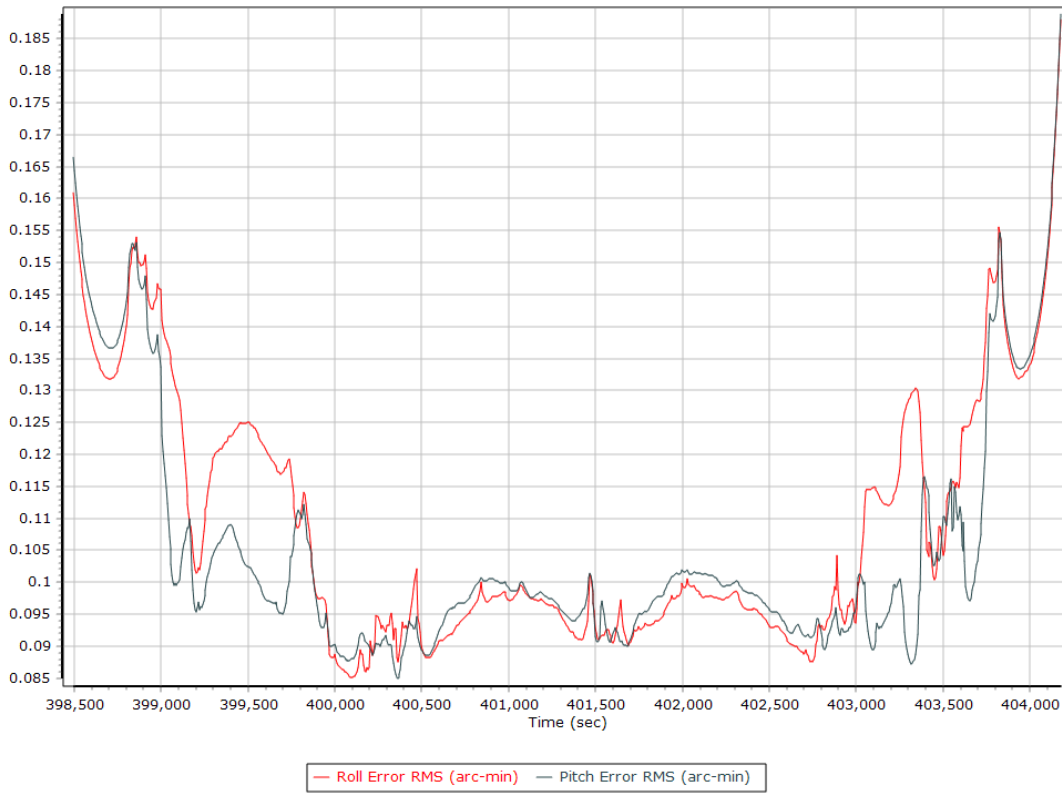


### Heading Error RMS (arc-min)

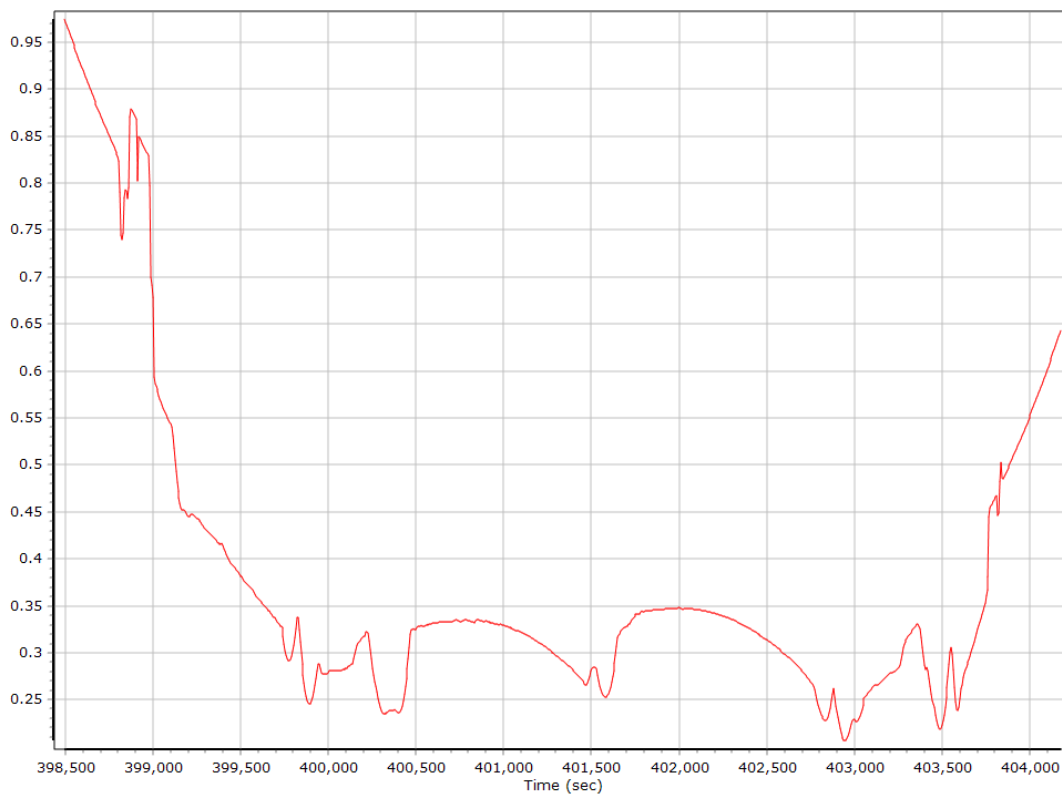


## Forward Processed Performance Metrics

### Position Error RMS (m)

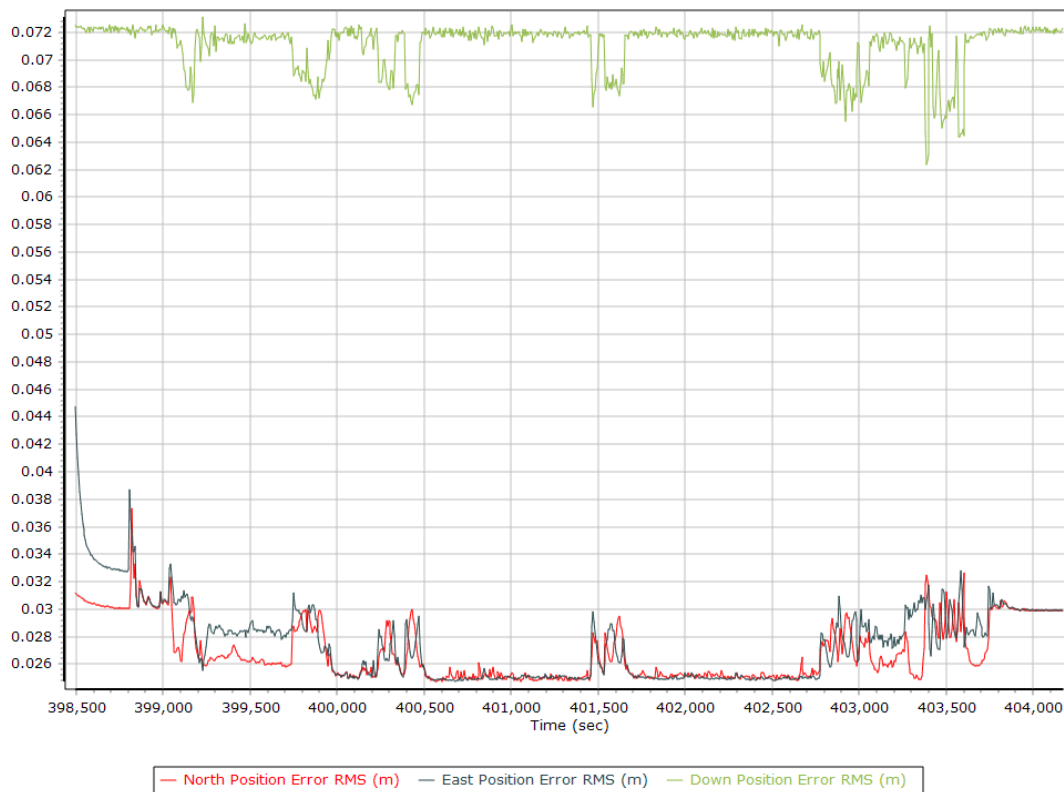


### Velocity Error RMS (m/s)

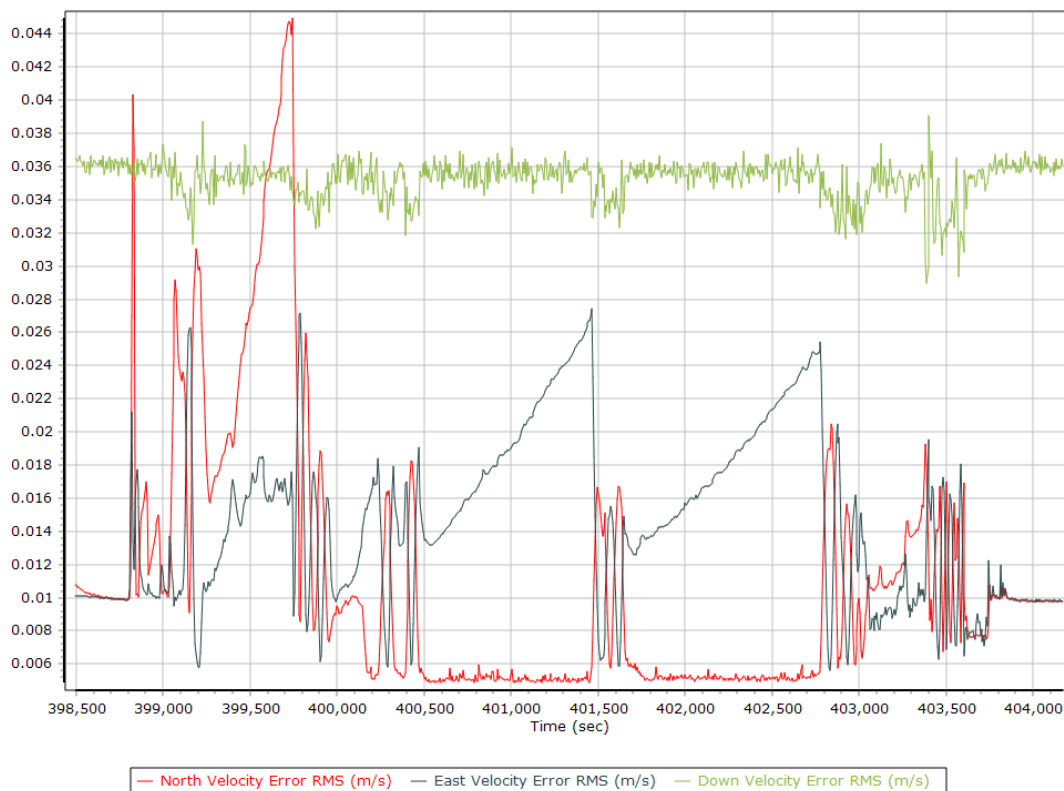




### Roll/Pitch Error RMS (arc-min)

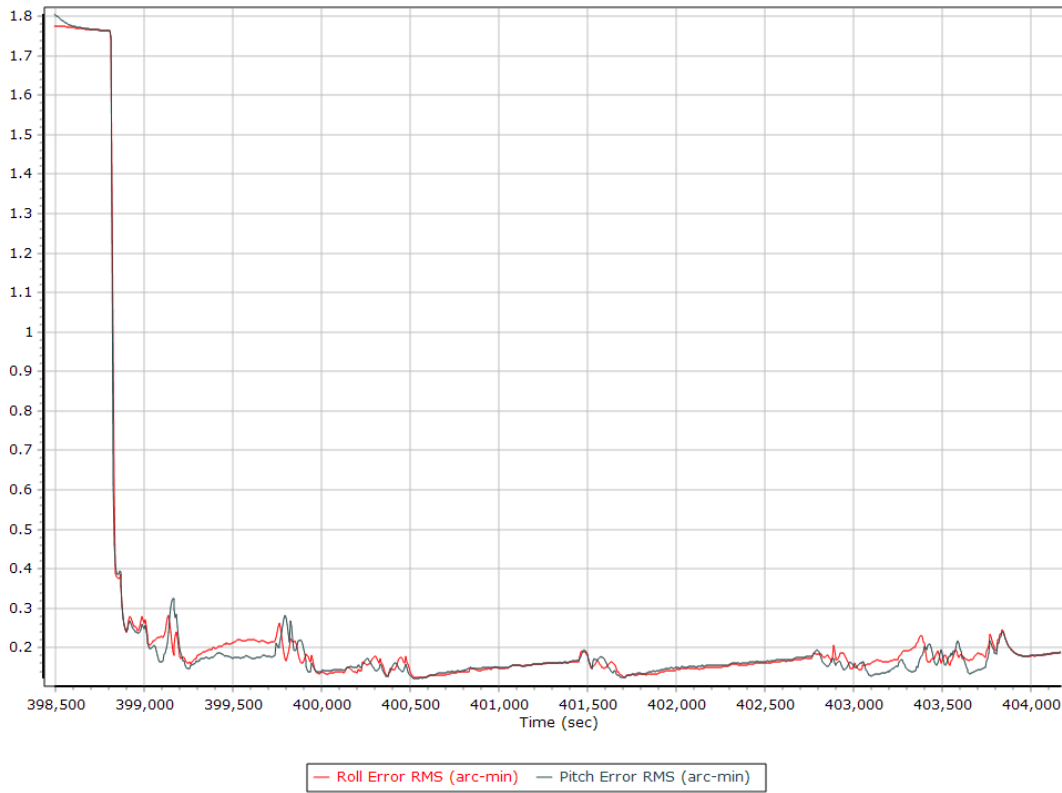


### Heading Error RMS (arc-min)

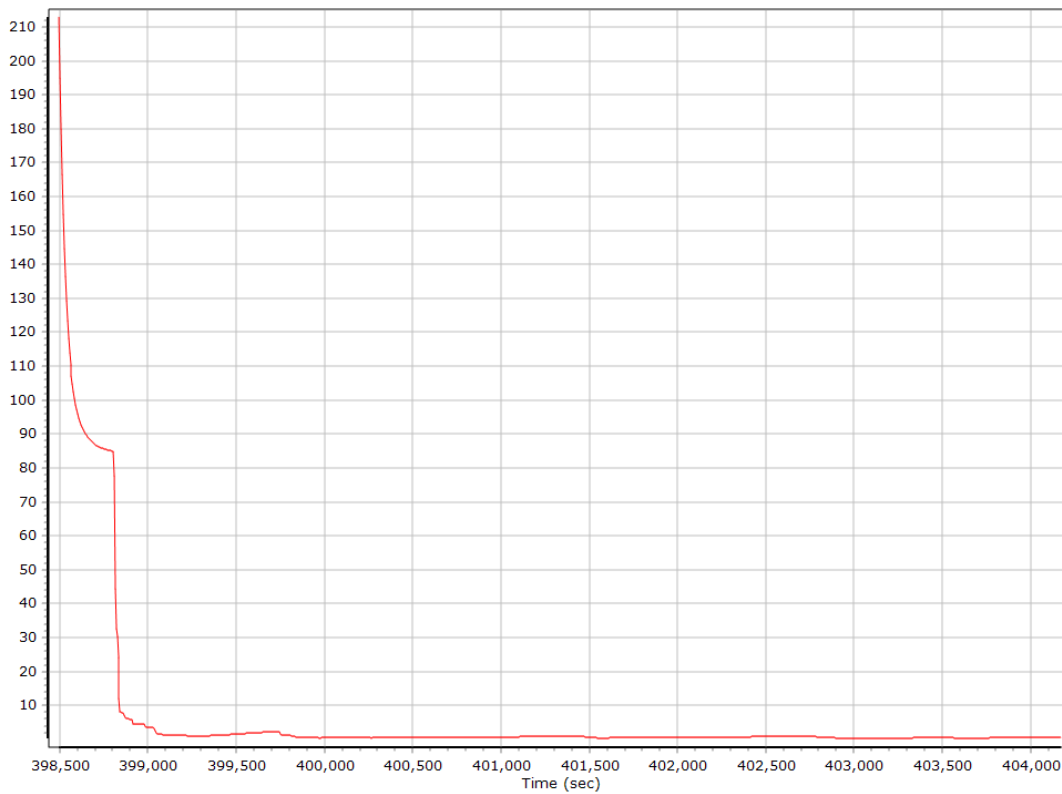


## Forward Processed Solution Status


### Processing Mode

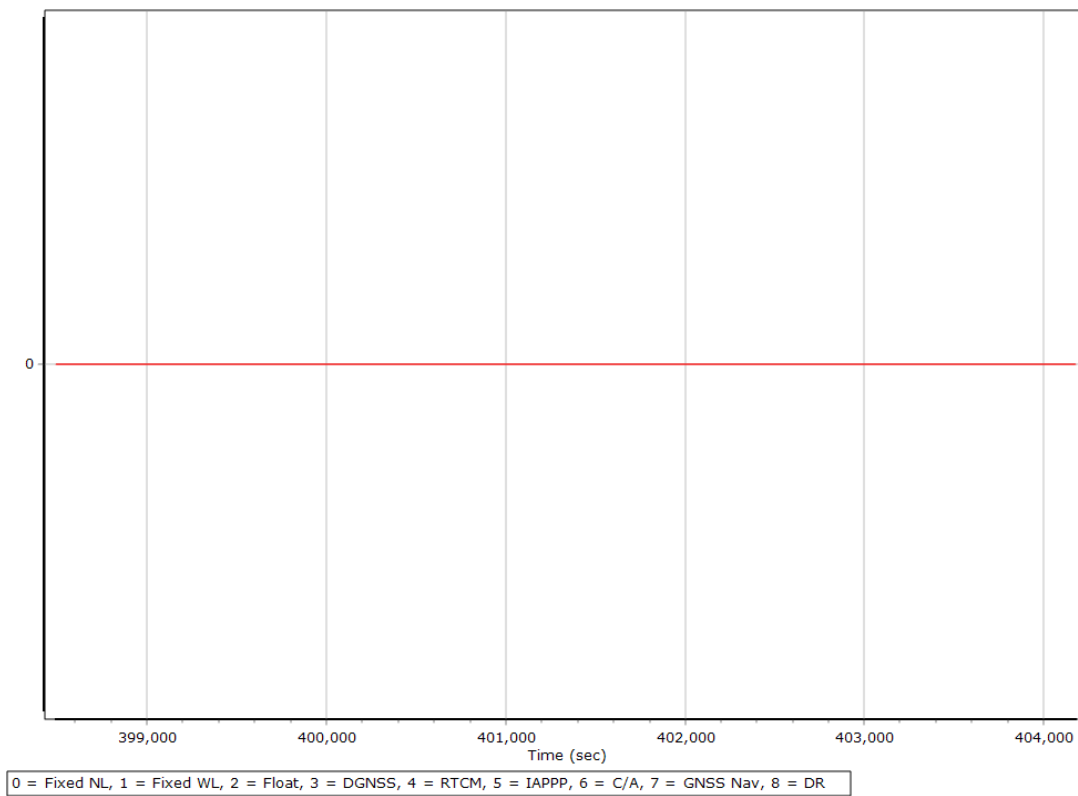

### Number of Satellites

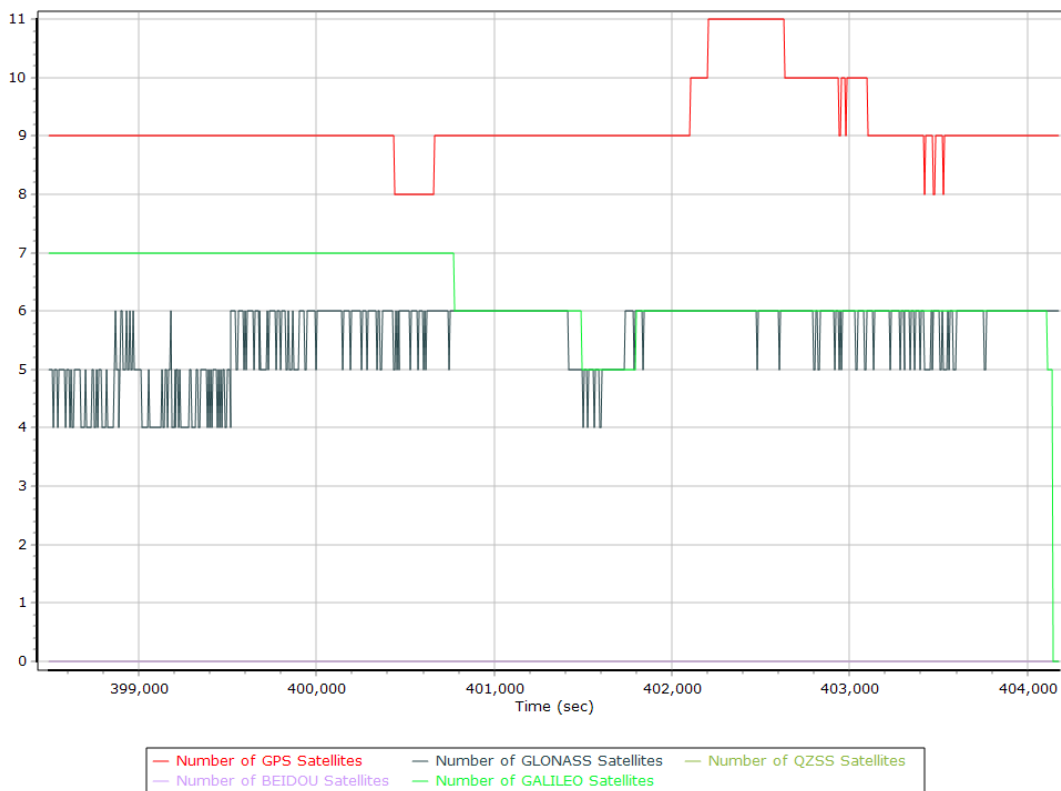

## Baseline Length

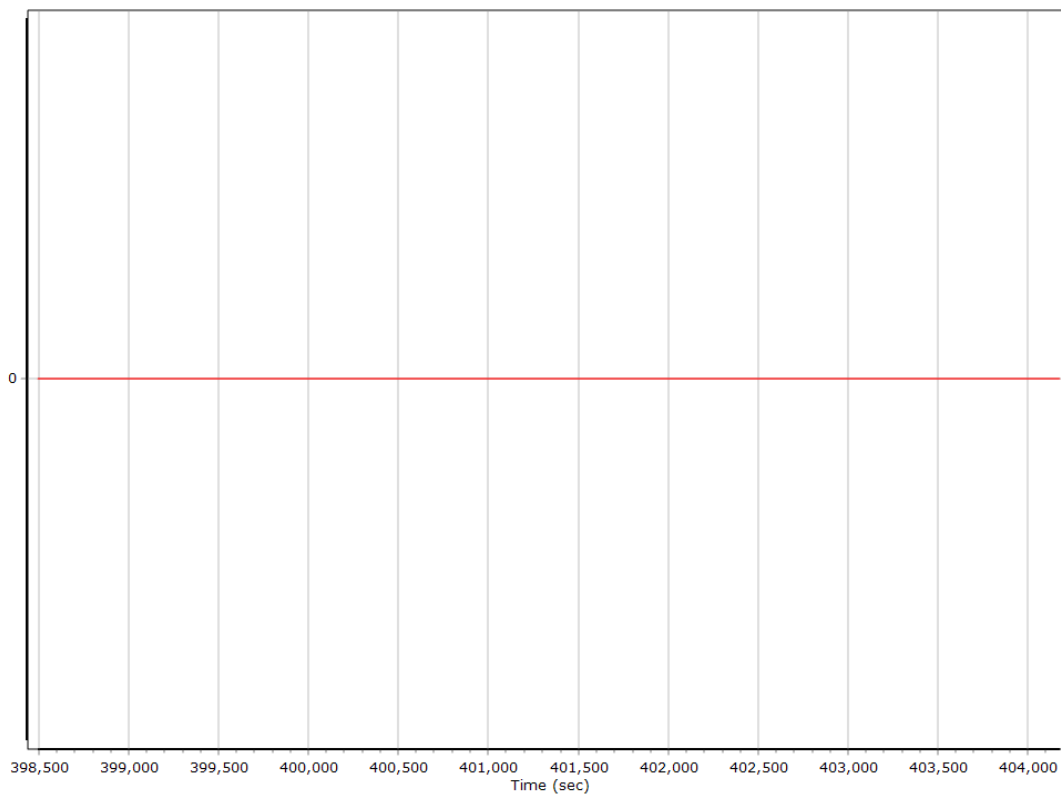

## Export Summary

Export file	sbet_211021_A_5060420_nad2011_FINAL.shp		
Export format	Shapefile		
Solution in use	Post-processed		
Output rate	Specified Distance Interval		
Distance Interval (m)	10.000		
Reference to Output lever arm (m)	0.000	0.000	0.000
Reference mounting angles (deg)	0.000	0.000	0.000
Output units (Coordinate / Lat & Lon)	Meter	Deg Decimal	
Export start time	398436.005 (10/21/2021 14:40:36)		
Export end time	404177.000 (10/21/2021 16:16:17)		
Height option	Ellipsoid Height		
WGS84 height flag	False		
Grid	Universal Transverse Mercator		
Zone	UTM North 12 (114W to 108W)		
Datum	NAD83 (2011)		
Ellipsoid	GRS 1980		
Local Transformation	NONE		
Target Epoch	2021.80274		