



sanborn
www.sanborn.com | 1.866.726.2676

USGS CO DRCOG (QL1)

Project ID: 193312

Work Unit ID: 193309

Lidar Report

May 2021

EXECUTIVE SUMMARY

[The Sanborn Map Company, Inc.](#) (Sanborn) was tasked to provide remote sensing services in the form of lidar. Utilizing a multi-return system, Light Detection and Ranging (Lidar) detects 3-dimensional positions and attributes to form a point cloud. The high accuracy airborne system is integrated with both Global Navigation Satellite System (GNSS) and an Inertial Measure Unit (IMU) for accurate position and orientation. Acquisition of the project area's ~294mi² was completed on August 3rd, 2020.

The Leica TerrainMapper was used to collect data for the aerial survey campaign. The sensor is attached to the aircraft's underside and emits rapid laser pulses that are used to calculate ranges between the aircraft and subsequent terrain below. The Airborne Lidar System (ALS) is boresighted by completing multiple passes over a known ground surface before the project acquisition. During data processing, the system calibration parameters are updated and used during post-processing of the lidar point cloud.

Differential GNSS unit in aircraft sampled positions at 2Hz or higher frequency. Lidar data was only acquired when GNSS PDOP is ≤ 4 and at least 6 satellites are in view. Collection conditions were for leaf-off vegetation. The atmosphere was free of clouds and fog between the aircraft and ground. The ground was free of snow and extensive flooding or any other type of inundation.

The contents of this report summarize the methods used to establish the base station coordinates, perform the lidar data acquisition and processing as well as the results of these methods.

CONTENTS

EXECUTIVE SUMMARY	1
CONTENTS	2
1.0 INTRODUCTION	3
1.1 CONTACT INFORMATION.....	3
1.2 PURPOSE OF LIDAR ACQUISITION	3
1.3 PROJECT LOCATION	3
2.0 ACQUISITION.....	4
2.1 INTRODUCTION.....	4
2.2 ACQUISITION PARAMETERS	4
2.3 FIELD WORK PROCEDURES.....	4
3.0 PROCESSING	6
3.1 INTRODUCTION.....	6
3.2 COORDINATE REFERENCE SYSTEM.....	7
3.3 LIDAR MATCHING.....	8
3.4 LIDAR CLASSIFICATION	12
3.5 ACCURACY ASSESSMENT.....	12
4.0 PRODUCT GENERATION	14
CLASSIFIED POINT CLOUD	14
BARE-EARTH DIGITAL ELEVATION MODEL (DEM).....	15
BREAKLINES	16
FIRST-RETURN DIGITAL SURFACE MODEL (DSM).....	17
FIRST-RETURN INTENSITY IMAGES	18
LAST-RETURN SWATH SEPARATION IMAGES	19
SWATH POLYGONS	20
OTHER DELIVERABLES	20

1.0 INTRODUCTION

This document contains the technical write-up of the lidar campaign, including system calibration techniques, and the collection and processing of the lidar data.

1.1 Contact Information

Questions regarding the technical aspects of this report should be addressed to:

Shawn Benham, PMP
Vice President of Programs
The Sanborn Map Company, Inc.
1935 Jamboree Drive, Suite 100
Colorado Springs, CO 80920
(719) 502-1296
sbenham@sanborn.com

1.2 Purpose of Lidar Acquisition

The objective of this project is to collect accurate measurements of the bare-earth surface as well as above ground features to be provided as geometric inputs for surface and/or change modeling as is relates survey assessments.

1.3 Project Location

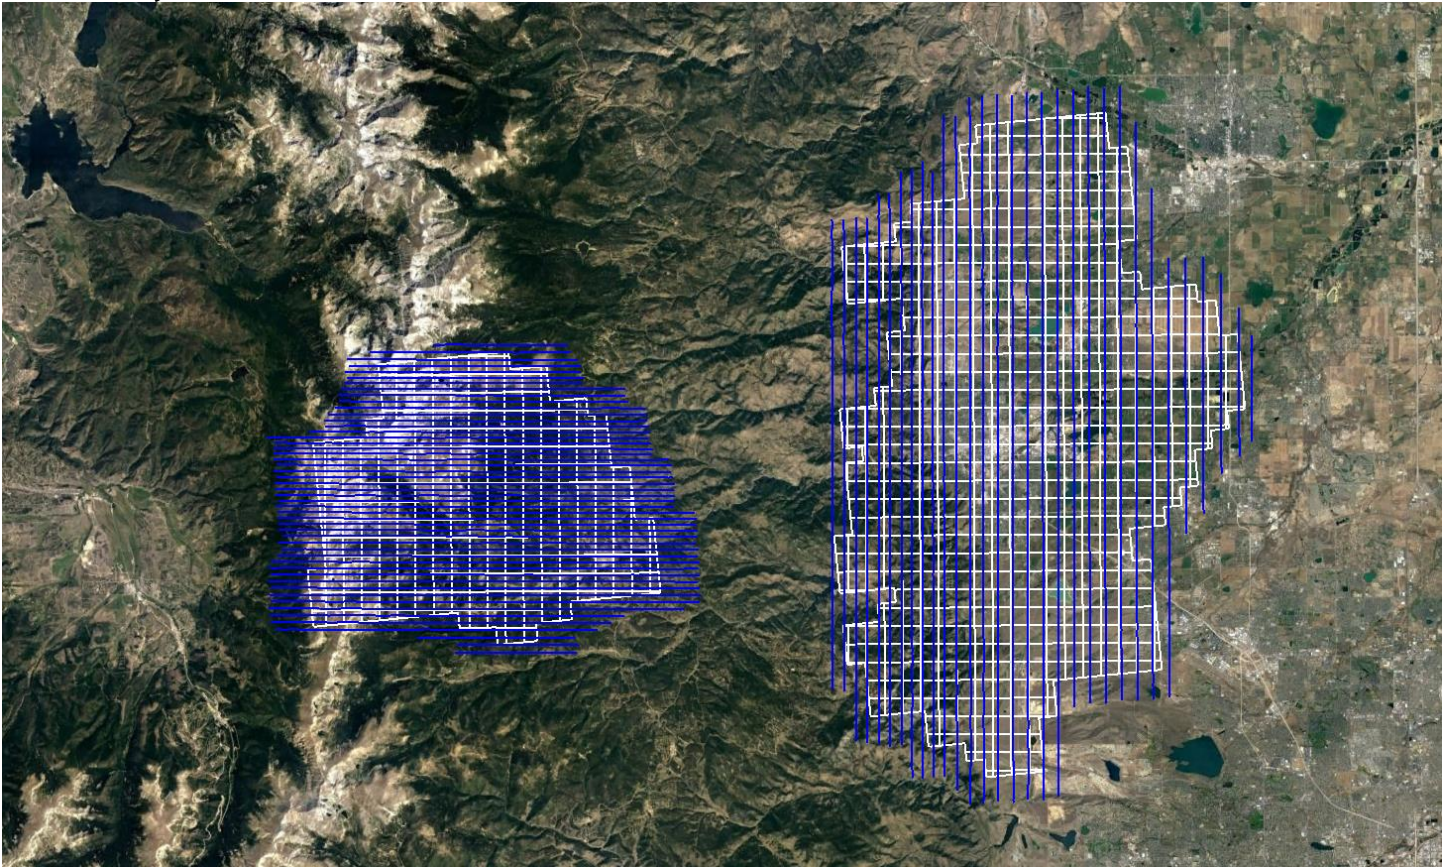


Figure 1: Tile Index and Trajectories As-Flown

2.0 ACQUISITION

2.1 Introduction

This section outlines the lidar system, flight reporting, and data acquisition methodology used during the collection of the lidar campaign. Although Sanborn conducts all lidar missions with the same rigorous and strict procedures and processes, all lidar collections are unique.

2.2 Acquisition Parameters

Sanborn specifically defined the collection parameters to accomplish the desired project specifications. **Table 1** shows the planned acquisition parameters utilized for this aerial survey with the sensor(s) installed.

Planned Acquisition Parameters		
Aircraft	N2326B - CESSNA TU206G	N735BT - CESSNA TU206G
Sensor	Leica TerrainMapper	Leica TerrainMapper
Max Number of Returns	15	15
Point Spacing (m)	0.35	0.35
Point Density (pls/m²)	8.3	8.3
Flying Height (AGL) (m)	2419	2875
Air Speed (kts)	120	120
Field of View (degrees)	28	20
Scan Rate (Hz)	124.8	124.9
Pulse Rate (kHz)	949	811.8
Laser Footprint (m)	0.57	0.67
Wavelength (nm)	1064	1064
Multi-Pulse	Yes	Yes
Swath Width (m)	1184	1014
Overlap (%)	28	24

Table 1: Lidar Acquisition Parameters

2.3 Field Work Procedures

Sanborn's standard procedure before every mission is to perform pre-flight checks to ensure correct operation of all systems. All cables were checked, and the sensor head glass was cleaned. A three-minute static session was conducted on the ground with the engines running prior to take-off to establish fine-alignment of the IMU and to resolve GNSS ambiguities.

The project acquisition consisted of five (5) mission(s). During the data collection, the operator recorded information on log sheets which includes weather conditions, lidar operation parameters, flight line statistics and PDOP.

Preliminary data processing was performed in the field immediately following the missions for quality control of GNSS data and to ensure sufficient coverage of the project AOI. Any problematic data could then be re-flown immediately as required. Final data processing was completed in the Colorado Springs, CO office. **Table 2** below shows the flight acquisition metrics for the entire collection. **Table 3** contains the base station names and locations in operation during acquisition. Base station coordinates are provided in NAD83 (2011), Geographic Coordinate System, Ellipsoid, Meters.

Date	Sensor	Serial #	Tail #	MissionID	PDOP	Start (UTC)	End (UTC)
5/29/2020	Leica TerrainMapper	TM91555	N2326B	20200529A	0.9	13:19:37	17:57:12
5/30/2020	Leica TerrainMapper	TM91555	N2326B	20200530A	0.9	13:35:07	17:24:19
7/16/2020	Leica TerrainMapper	TM91555	N735BT	20200716A	1.0	12:28:31	17:14:42
8/2/2020	Leica TerrainMapper	TM91555	N735BT	20200802A	1.0	13:05:10	17:10:45
8/3/2020	Leica TerrainMapper	TM91555	N735BT	20200803A	0.9	13:08:58	17:05:02

Table 2: Collection Date Time by Mission

Designation	Type	PID	Latitude (N)	Longitude (W)	Elevation
COBD	SmartNet	n/a	40 03 49.88550	105 12 11.29920	1573.492
COWI	SmartNet	n/a	39 55 01.76819	105 47 09.99273	2683.303
P041	CORS	DG7429	39 56 58.17034	105 11 39.36207	1728.856
TMG2	CORS	DQ7576	40 07 47.85534	105 13 59.04492	1669.128
TMGO	CORS	AF9516	40 07 51.36578	105 13 57.76235	1672.995

Table 3: GNSS Reference Station Coordinates

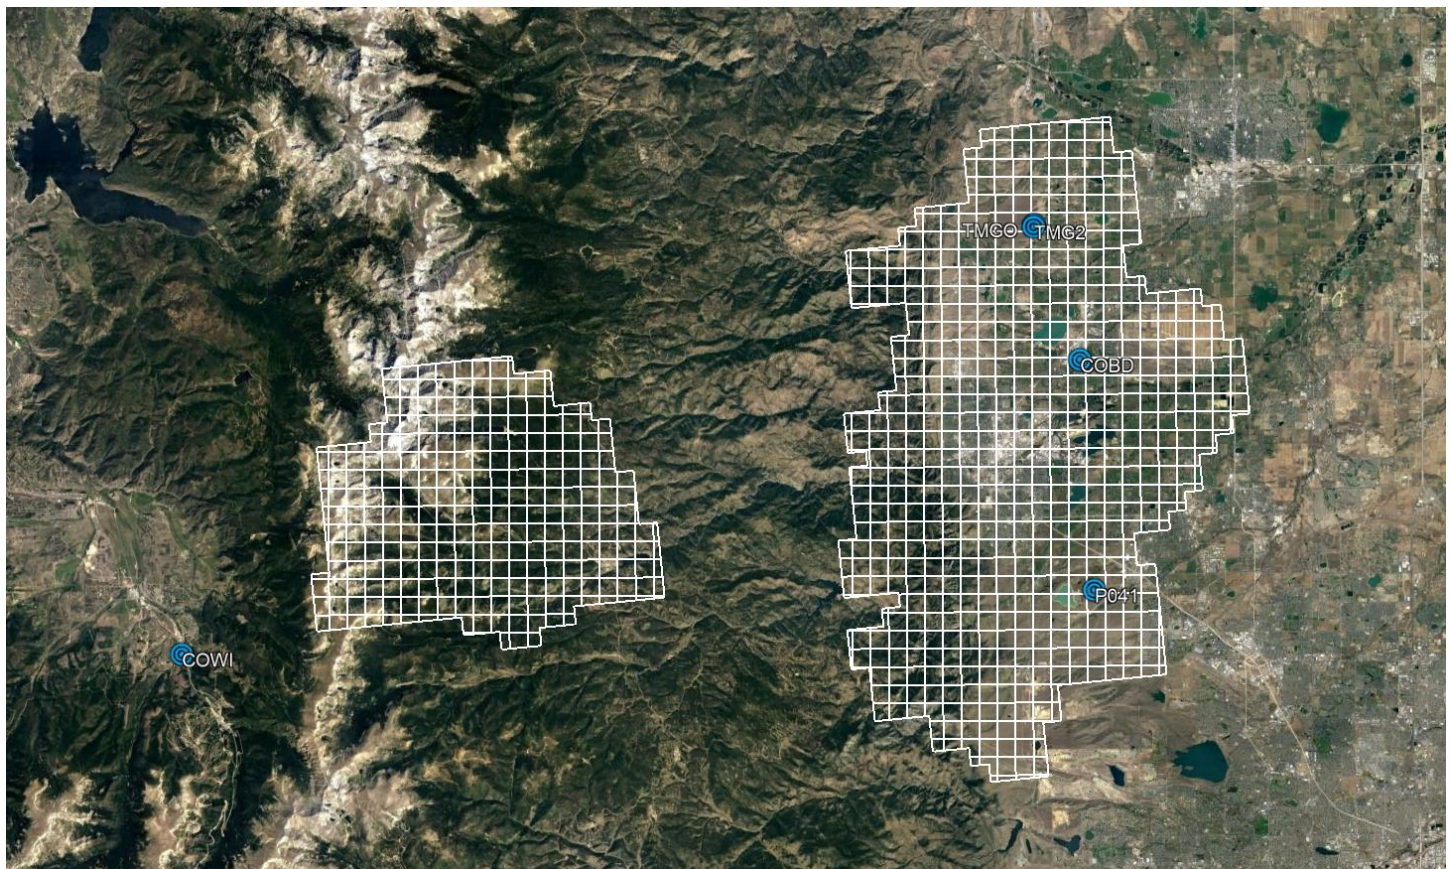


Figure 2: GNSS Reference Stations

3.0 PROCESSING

3.1 Introduction

The GNSS/IMU data was post-processed using Waypoint Inertial Explorer software to create Smoothed Best Estimate Trajectory (SBET) file(s). The SBET was then combined with the laser range measurements in Leica HxMap software to produce the 3-dimensional coordinates resulting in an accurate set of Raw Point Cloud (RPC) mass points. These raw swath (*.las) files are output in WGS84, UTM, Ellipsoid, Meters and transformed to the project Coordinate Reference System (CRS) upon ingest into GeoCue before project wide lidar matching.


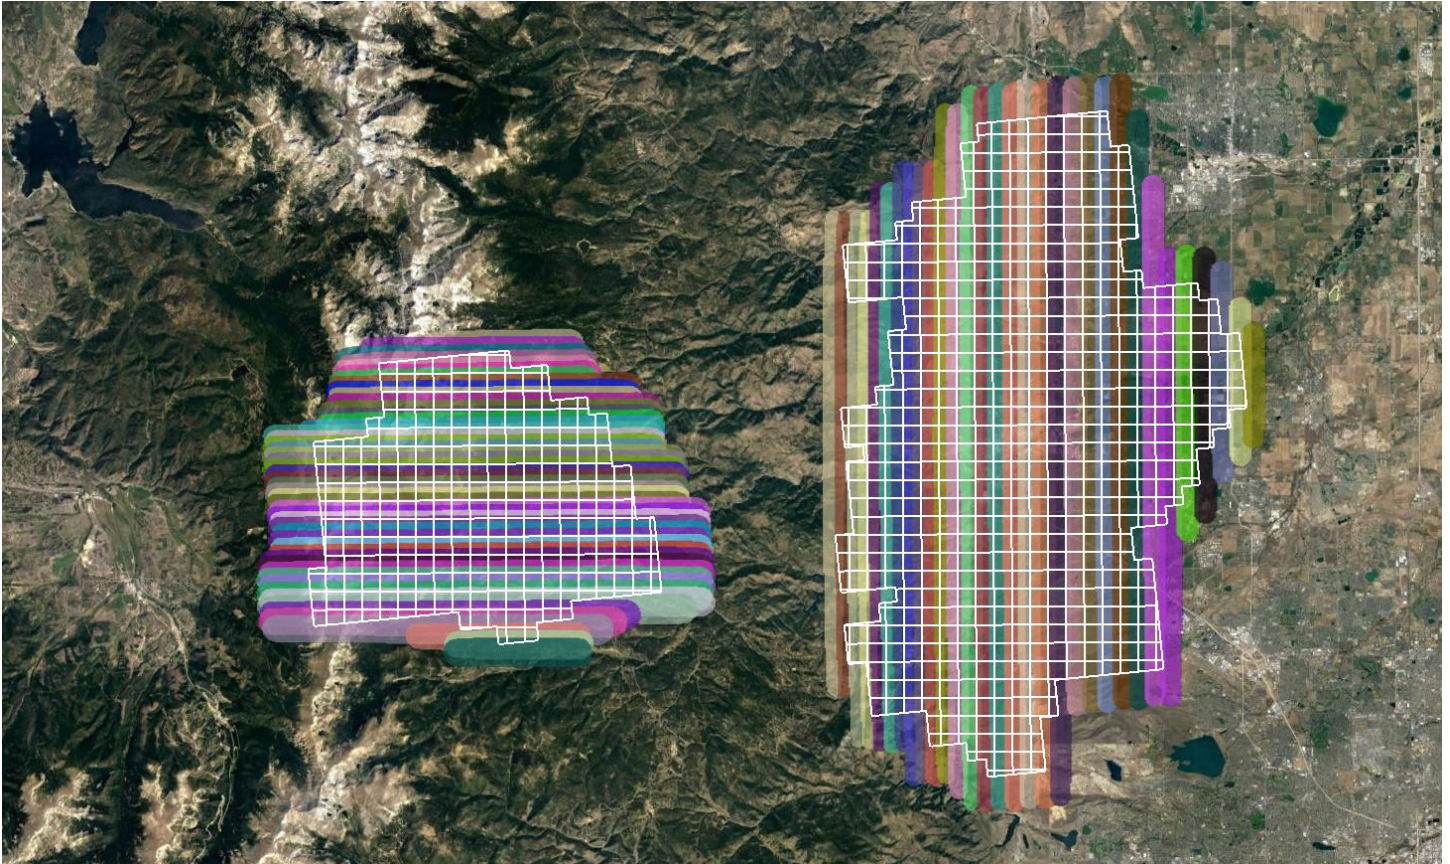


Figure 3: Raw Swath Coverage

The Leica HxMap pre-processing software created raw swath files with all return values. This multi-return information was processed and classified to obtain the required feature for delivery. All lidar data is processed using the ASPRS binary LAS format version 1.4. **Table 4** illustrates the achieved point cloud statistics.

Category	Value
Aggregate Total Points	19,912,349,351
Aggregate Nominal Pulse Spacing (m)	0.25
Aggregate Nominal Pulse Density (pls/m ²)	16.1
Aggregate Nominal Pulse Spacing (ft)	0.82
Aggregate Nominal Pulse Density (pls/ft ²)	1.5

Table 4: Point Cloud Statistics

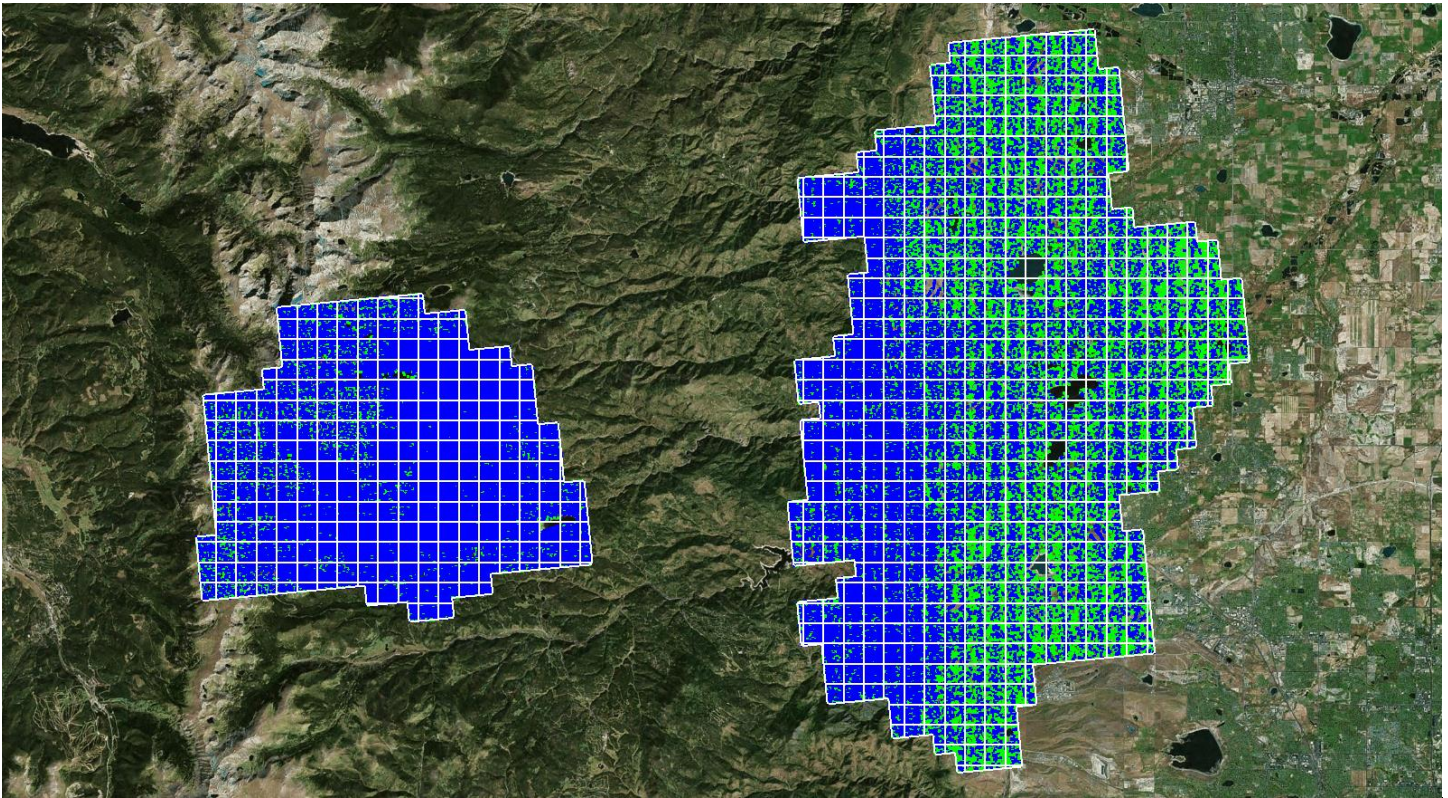

No Data	< 8pts/m ²	8 to 16pts/m ²	> 16pts/m ²

Figure 4: Point Cloud Density

3.2 Coordinate Reference System

- Horizontal Datum:** North American Datum of 1983 (2011)
- Projection:** Universal Transverse Mercator Zone 13 North
- Vertical Datum:** North American Vertical Datum of 1988
- Geoid Model:** Geoid18
- Units:** Meters

3.3 Lidar Matching

Sanborn uses pre-processing software and the latest boresight values to combine the processed SBET with the laser scan files to produce the lidar point cloud. The data is processed by mission and/or block and is output in ASPRS LASv1.4 Point Data Record Format (PDRF) 6 with 16bit linearly scaled intensities to the nearest 0.001 3D position. Each mission is produced in WGS84, UTM, Ellipsoid, Meters and transformed to the project CRS upon import into GeoCue.

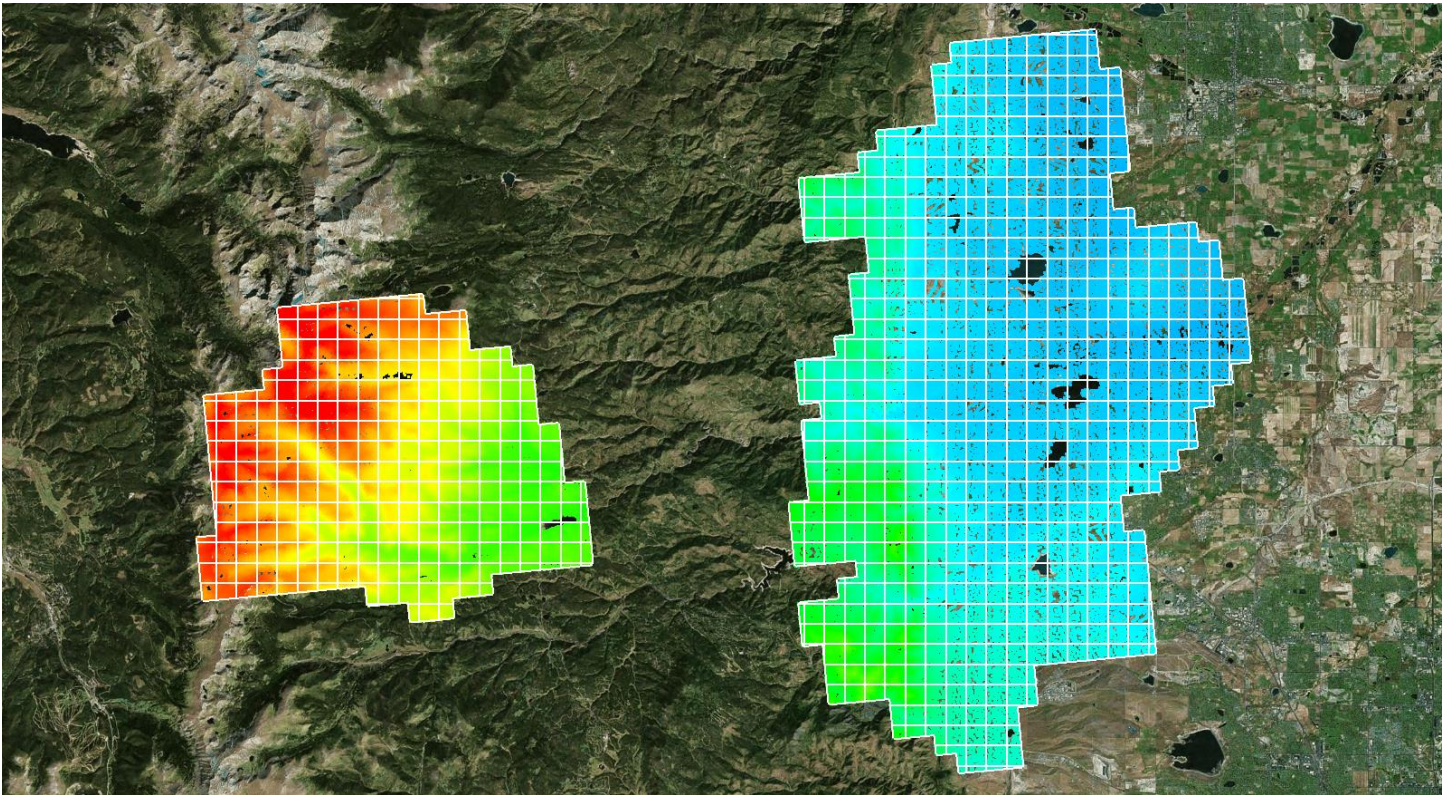


Figure 5: Point Cloud Elevation

Each mission is imported into GeoCue where each individual flight line is assigned a unique Source ID number. The SBET is cut per swath into TerraScan Trajectory files based on Source ID number and timestamp; these are utilized during the lidar matching process. The project area(s) are broken into logical blocks based on AOIs or predetermined delivery blocks and the individual flight lines are populated into lidar matching tile grids. These lidar matching tile grids are prepared for scanner, line, mission, block and eventual project wide lidar matching routines by first running point cloud filters to identify ground and building features to be used during any TerraMatch processes.

Sanborn takes advantage of both visual and statistical validation methodologies to review and ensure both the individual precision and alignment of the lidar dataset. Swath Precision Images modulated by Intensity are representative of the intraswath alignment and provide a holistic qualitative look at the goodness of fit within each swath. Swath Separation Images modulated by Intensity are representative of the interswath alignment and provide a holistic qualitative look at the positional quality of the point cloud. The images are reviewed in their entirety. Furthermore, the set of TerraMatch Tie Lines are used to produce a Tie Line Report to statistically assess the X, Y, and Z offset averages and magnitudes for the whole project including each line individually. This visual and statistical review guarantees the relative accuracy of the lidar dataset. **Table 5** outlines the relative accuracy requirements of the project. **Tables 6 – 9** are the relative accuracies achieved.

Category	Value (m)	Value (ft)
Smooth Surface Repeatability	≤0.060	≤0.197
Swath overlap difference, RMSDz	≤0.080	≤0.262

Table 5: Relative Accuracy Requirements


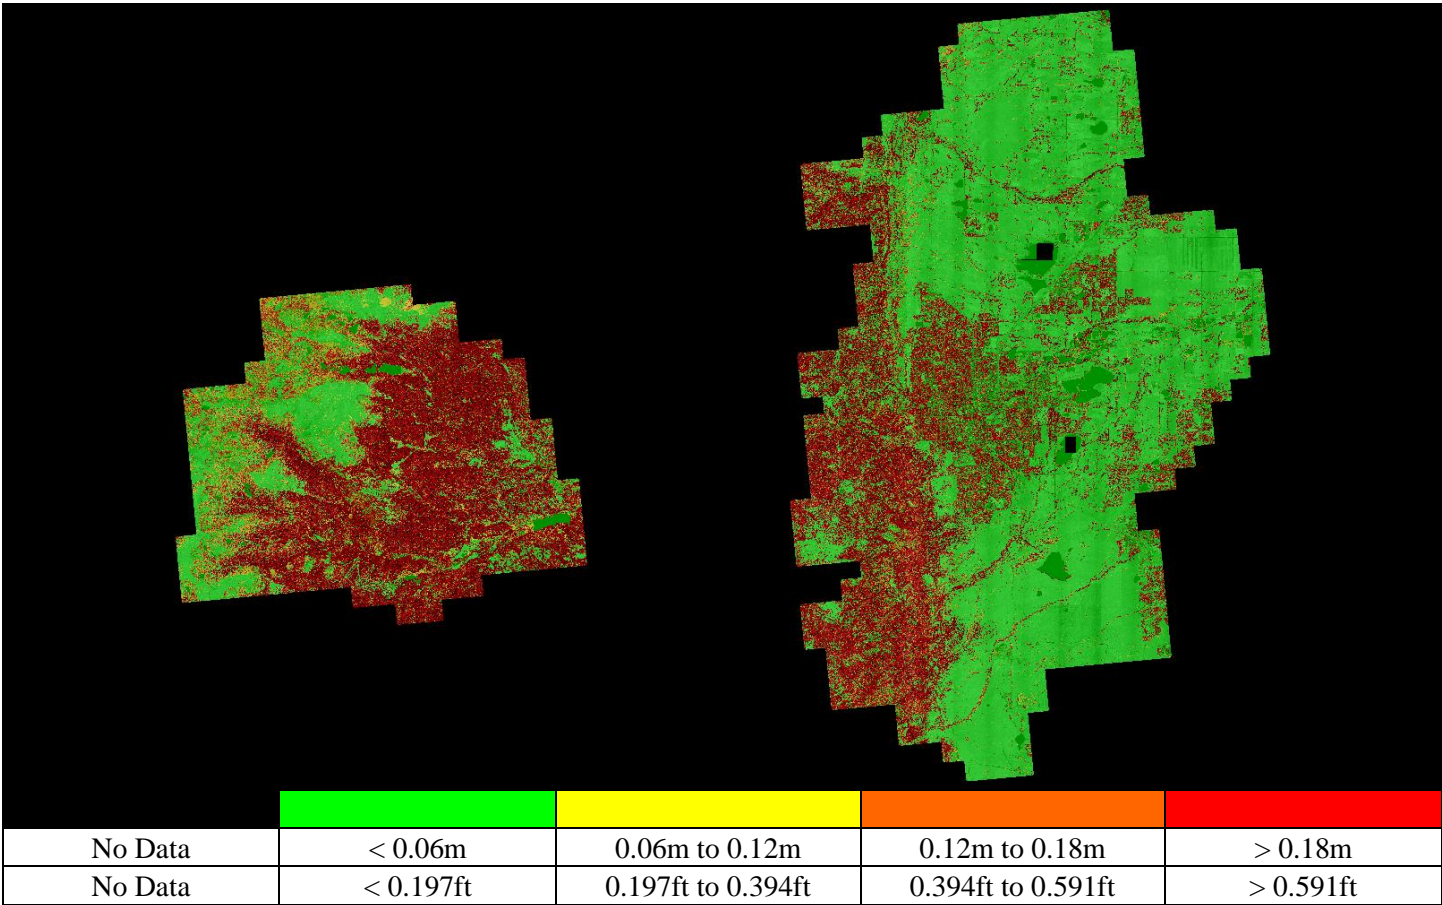


Figure 6: Swath Precision

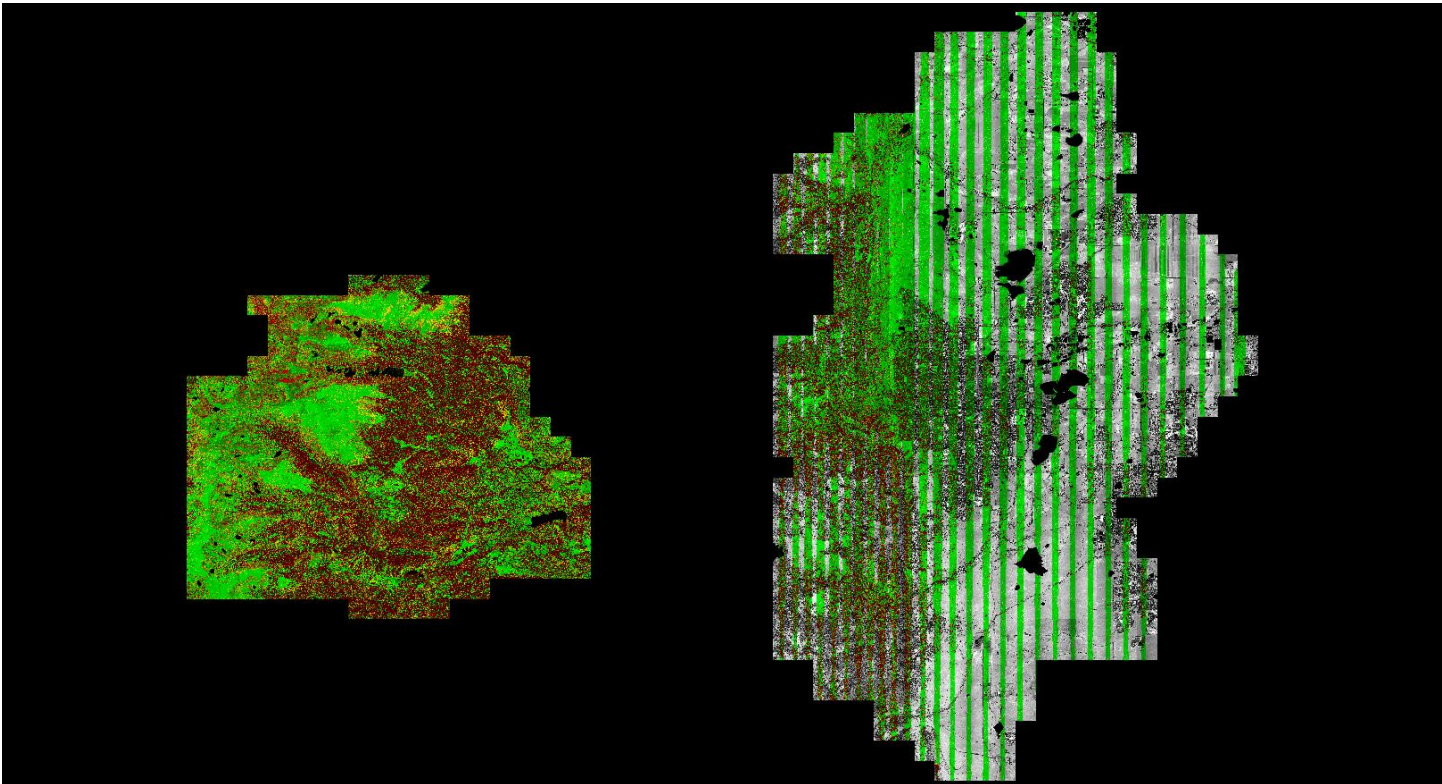

No Data	< 0.08m	0.08m to 0.16m	0.16m to 0.24m	> 0.24m
No Data	< 0.262ft	0.262ft to 0.524ft	0.524ft to 0.786ft	> 0.786ft

Figure 7: Swath Separation

Line	X	Y	Z	Line	X	Y	Z	Line	X	Y	Z
1	0.024	0.018	0.006	31	0.019	0.016	0.006	234	0.020	0.023	0.012
2	0.017	0.015	0.007	32	0.038	0.021	0.006	235	0.029	0.023	0.012
3	0.012	0.013	0.007	33	0.018	0.016	0.006	236	0.027	0.024	0.012
4	0.010	0.010	0.007	34	0.017	0.016	0.005	237	0.027	0.025	0.015
5	0.016	0.014	0.007	211	-	-	0.028	238	0.027	0.027	0.015
6	0.015	0.013	0.007	212	-	-	0.018	239	0.028	0.028	0.017
7	0.014	0.014	0.007	213	-	-	0.019	240	0.041	0.046	0.020
8	0.014	0.009	0.008	214	-	-	0.017	241	0.038	0.047	0.018
9	0.016	0.009	0.007	215	-	-	0.028	242	0.029	0.026	0.014
10	0.014	0.011	0.008	216	-	-	0.017	243	0.021	0.024	0.012
11	0.013	0.014	0.007	217	-	-	0.018	244	0.028	0.021	0.014
12	0.011	0.008	0.007	218	0.008	0.014	0.018	245	0.026	0.022	0.012
13	0.023	0.016	0.006	219	0.011	0.022	0.016	246	0.045	0.026	0.020
14	0.016	0.010	0.006	220	0.013	0.014	0.015	247	0.039	0.032	0.030
15	0.020	0.012	0.006	221	0.055	0.080	0.019	248	0.027	0.022	0.016
16	0.019	0.014	0.006	222	0.041	0.044	0.018	249	0.026	0.020	0.018
17	0.016	0.012	0.006	223	0.050	0.018	0.016	250	0.030	0.026	0.012
18	0.021	0.014	0.006	224	0.034	0.042	0.014	251	0.031	0.027	0.017
19	0.016	0.012	0.006	225	0.023	0.038	0.012	252	0.048	0.033	0.020
20	0.020	0.013	0.006	226	0.023	0.028	0.012	253	0.016	0.016	0.014
24	0.023	0.015	0.007	227	0.026	0.052	0.013	254	0.025	0.017	0.013
25	0.020	0.011	0.006	228	0.042	0.040	0.013	255	0.023	0.024	0.015
26	0.021	0.013	0.006	229	0.034	0.030	0.016	256	0.029	0.033	0.018
27	0.017	0.012	0.006	230	0.023	0.030	0.014	257	0.018	0.040	0.020
28	0.018	0.011	0.005	231	0.016	0.020	0.013	258	0.034	0.030	0.016
29	0.038	0.023	0.006	232	0.022	0.030	0.016	259	0.031	0.021	0.014
30	0.022	0.013	0.006	233	0.033	0.027	0.015	260	0.026	0.022	0.017

Table 6: Average Magnitudes by Line (Meters)

Category	X	Y	Z
Average Magnitude	0.020	0.014	0.009
RMS Values	0.031	0.021	0.013
Maximum Values	0.159	0.155	0.113
Observation Weight	37882.0	37882.0	138612.0

Table 7: Internal Observation Statistics (Meters)

Category	Mismatch
Average 3D Mismatch	0.01578
Average XY Mismatch	0.02905
Average Z Mismatch	0.00910

Table 8: Overall Relative Accuracy (Meters)

Category	Observations
Section Lines	37,467
Roof Lines	18,426

Table 9: Vector Observations

3.4 Lidar Classification

Lidar filtering was accomplished using GeoCue with TerraSolid processing and modeling software. The filtering process reclassifies all the data into classes within the point cloud classification scheme. Once the data is classified, the entire dataset is reviewed and manually edited for anomalies that are outside the required guidelines of the product specification or contract requirements. This can include, but is not limited to, classifying bridges, structures, filling culverts, and manually analyzing the bare-earth surface by classifying features that belong in non-extraneous classification codes. **Table 10** outlines a statistical summary of the point classes leveraged in the lidar dataset.

Code	Class	Points
1	Unclassified	14,825,306,411
2	Ground	5,047,449,721
7	Low Noise	29,058,421
9	Water	2,343,430
17	Bridge Decks	998,571
18	High Noise	6,907,840
20	Ignored Ground	284,957
21	Snow	0
22	Temporal	0
Flag	Overlap	10,481,652,617
Flag	Withheld	35,966,248

Table 10: Lidar Classification Statistics

3.5 Accuracy Assessment

The lidar dataset was evaluated using a total of fifteen (15) check points (8 NVA + 7 VVA). The result provided a vertical accuracy that fell within project specifications. Please see the **Attachment A** for the full Vertical Accuracy Report and the project *Metadata* for an in-depth accuracy assessment. **Table 11** outlines the absolute accuracy requirements of the project. **Table 12** shows high level statistics and mean errors for the area processed by Sanborn.

Category	Value (m)	Value (ft)
RMSEz	≤0.100	≤0.328
@ 95-Percent Confidence Level	≤0.196	≤0.643
@ 95 th Percentile	≤0.300	≤0.984

Table 11: Absolute Accuracy Requirements

Broad Land Cover Type	# of Points	RMSEz	95% Confidence Level	95th Percentile
NVA of Point Cloud	8	0.053	0.103	
NVA of Bare Earth	8	0.063	0.124	
NVA of DEM	8	0.062	0.121	
VVA of Bare Earth	7	0.072		0.103
VVA of DEM	7	0.064		0.092

Table 12: Vertical Accuracy Assessment of Check Points (Meters)

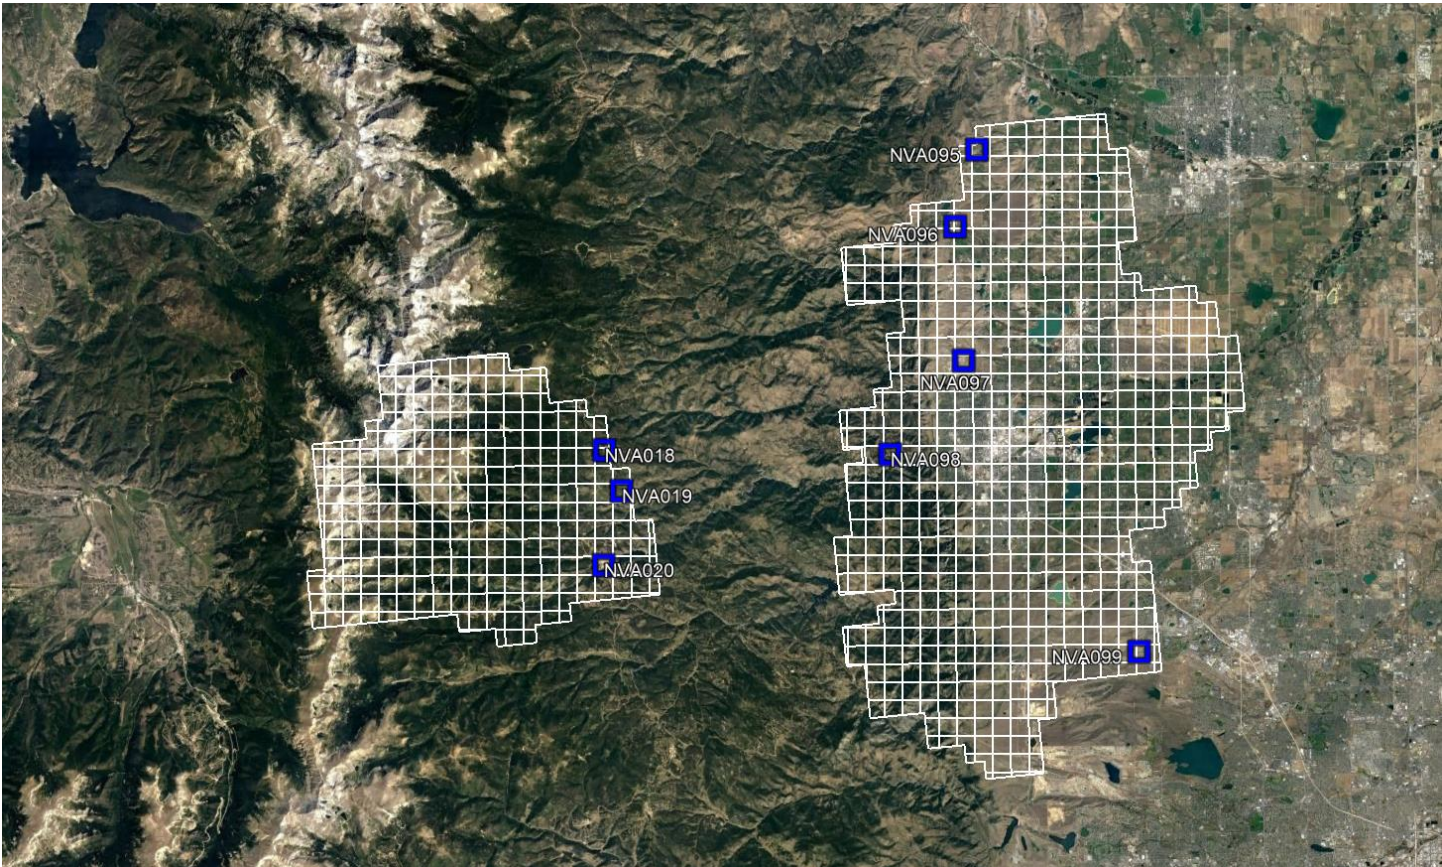


Figure 8: Non-vegetated Check Point Distribution

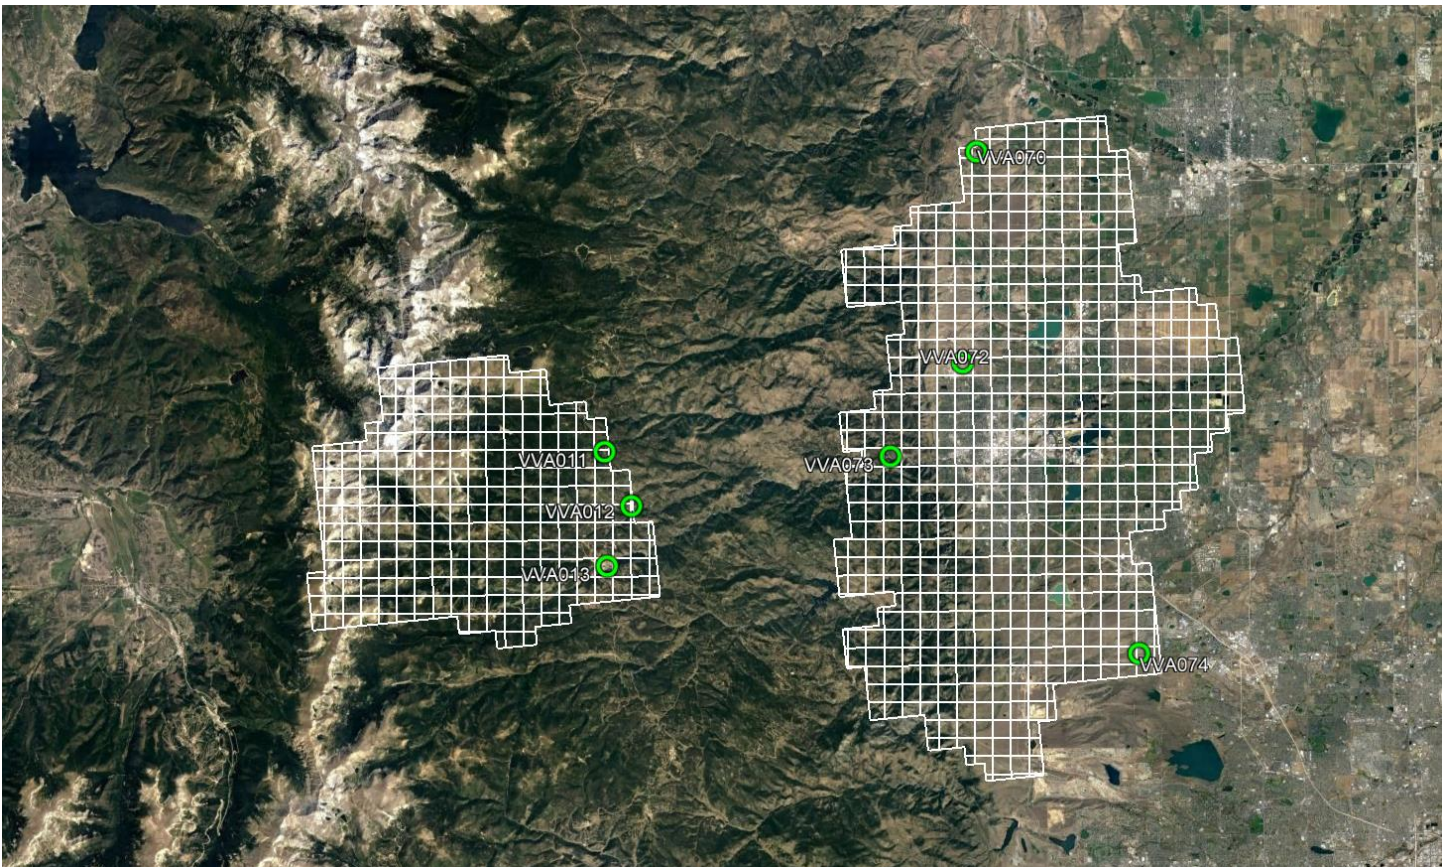



Figure 9: Vegetated Check Point Distribution

4.0 PRODUCT GENERATION

The following products were generated using the final coordinate system as defined in the contract:


Classified Point Cloud

The Classified Point Cloud, containing all returns, is delivered in LASv1.4 (*.las) format and meets project specifications. The Classified Point Cloud contains file names referencing the tile index.

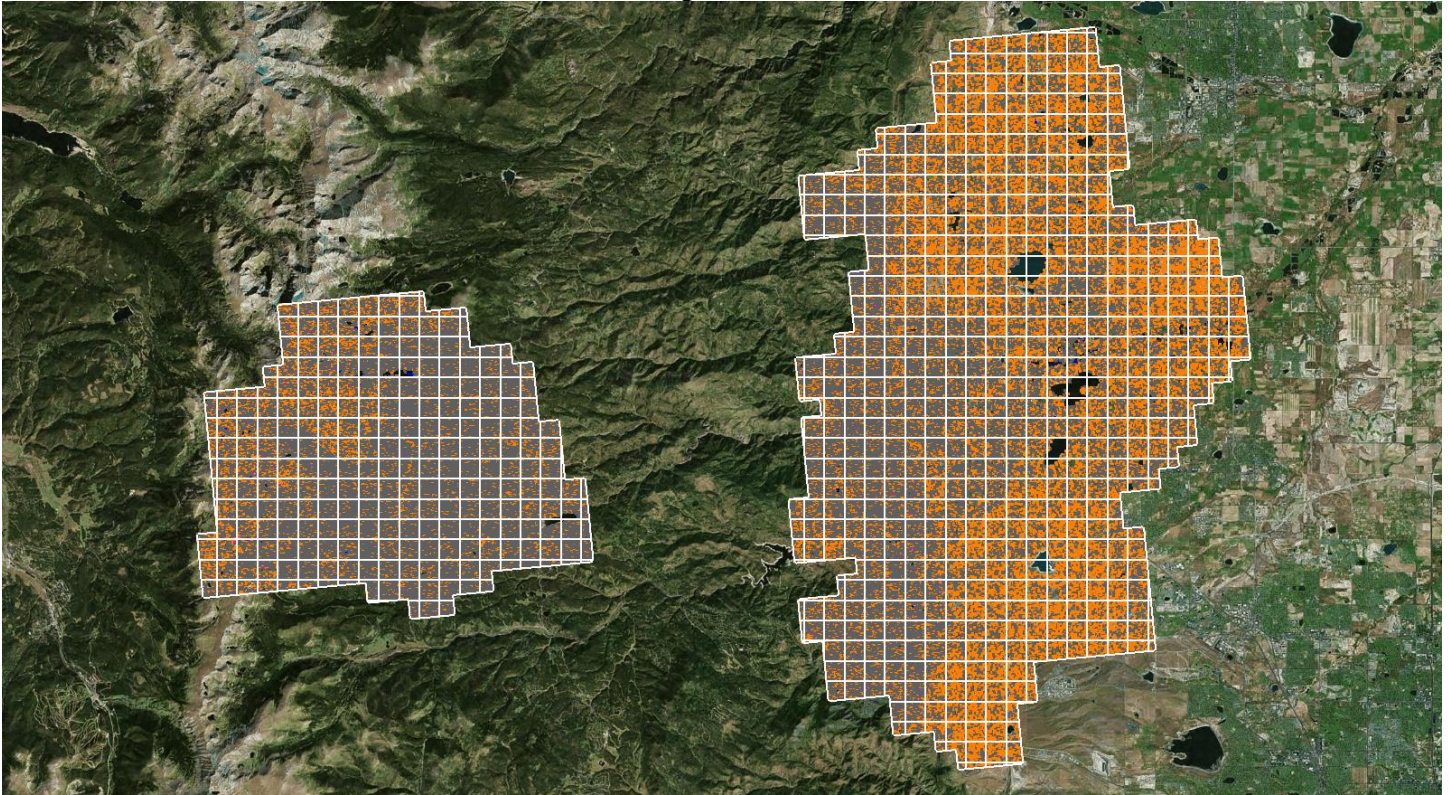


Bare-earth Digital Elevation Model (DEM)

32-bit GeoTIFF (*.tif) elevation rasters were created from the bare-earth points in the processed lidar dataset and hydro-flattened breaklines. Bare-earth rasters were produced the bilinear interpolation methodology and GDAL v2.4.0 was used to define the CRS. Each pixel contains an elevation.

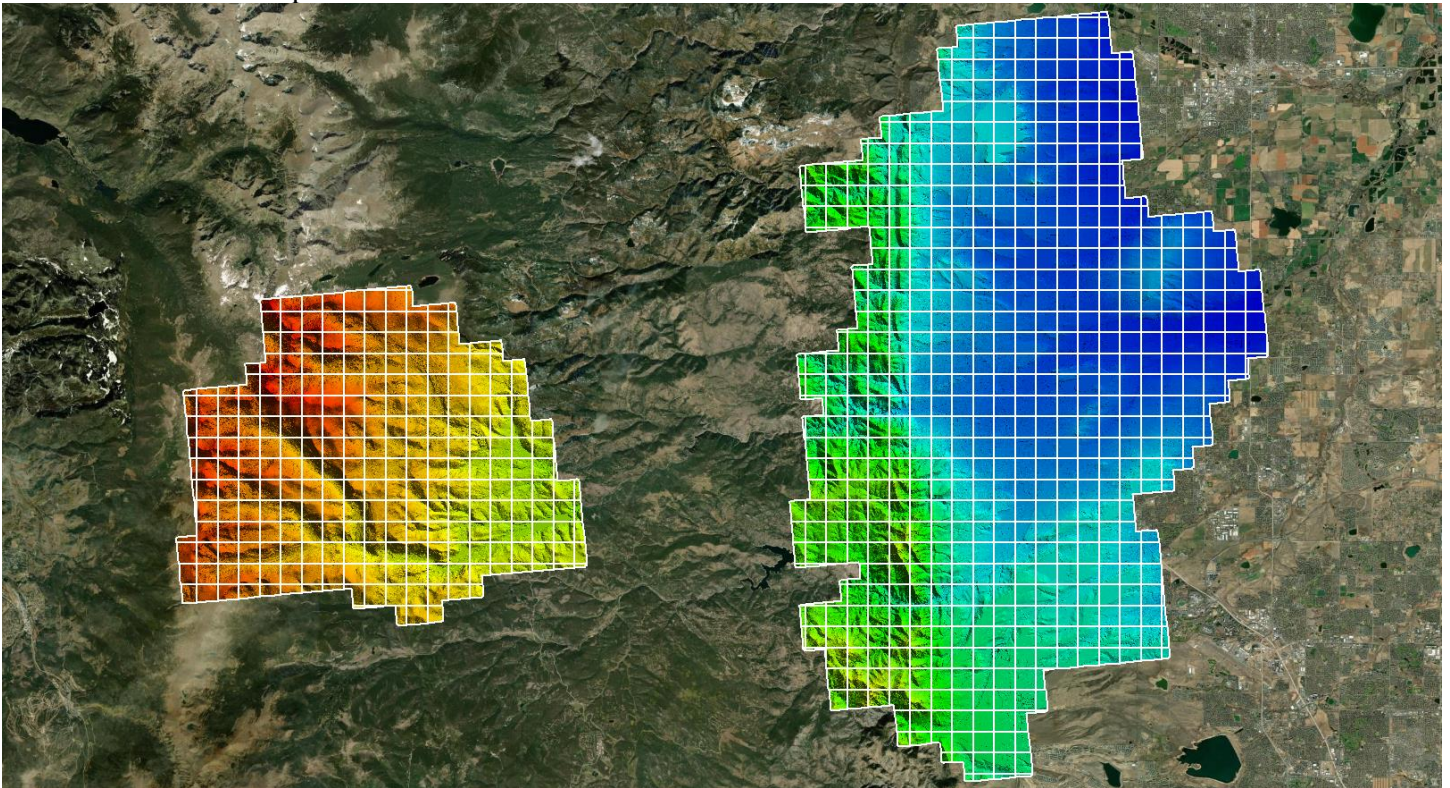


Breaklines

Hydro-flattened breaklines were generated from digitized water features conflated to the elevations derived from the bare-earth points in the processed lidar dataset. Delivered in Esri (*.gdb) format.

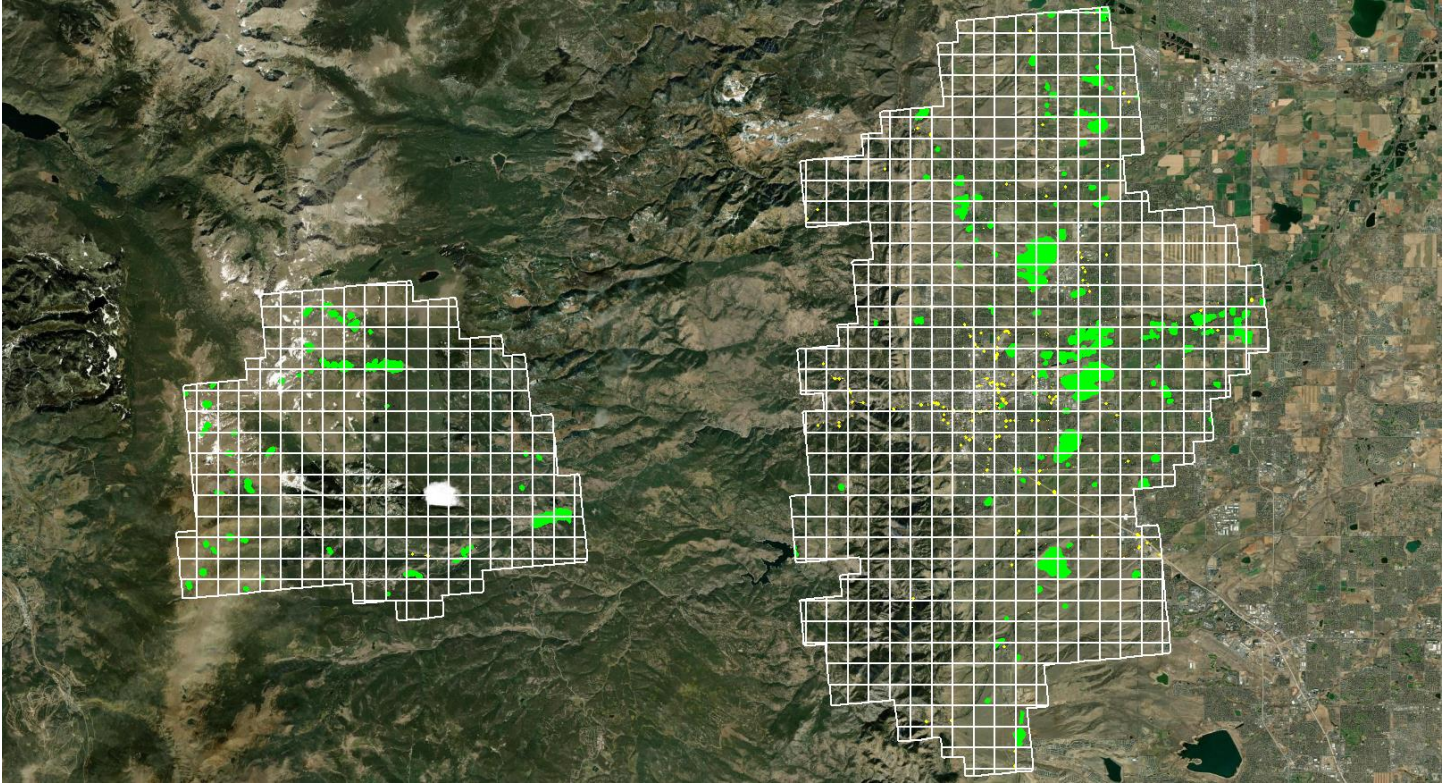


First-return Digital Surface Model (DSM)

32-bit GeoTIFF (*.tif) elevation rasters were created from the first-return points in the processed lidar dataset. All overlap classes were ignored during this process. First-return rasters were produced the bilinear interpolation methodology and GDAL v2.4.0 was used to define the CRS. Each pixel contains an elevation.

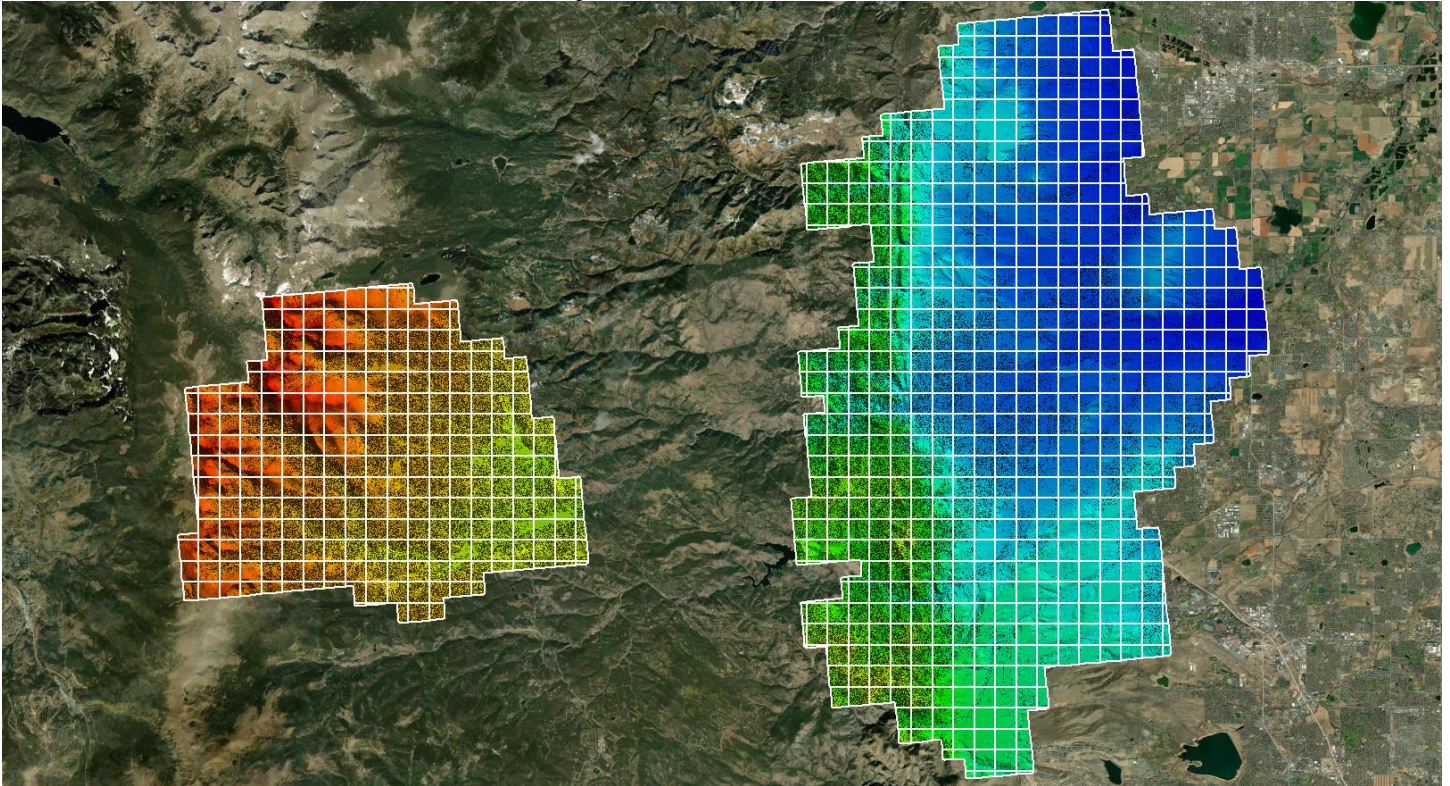


First-return Intensity Images

8-bit GeoTIFF (*.tif) intensity rasters were created from the first-return points in the processed lidar dataset. All overlap classes were ignored during this process. GDAL v2.4.0 was used to define the CRS.

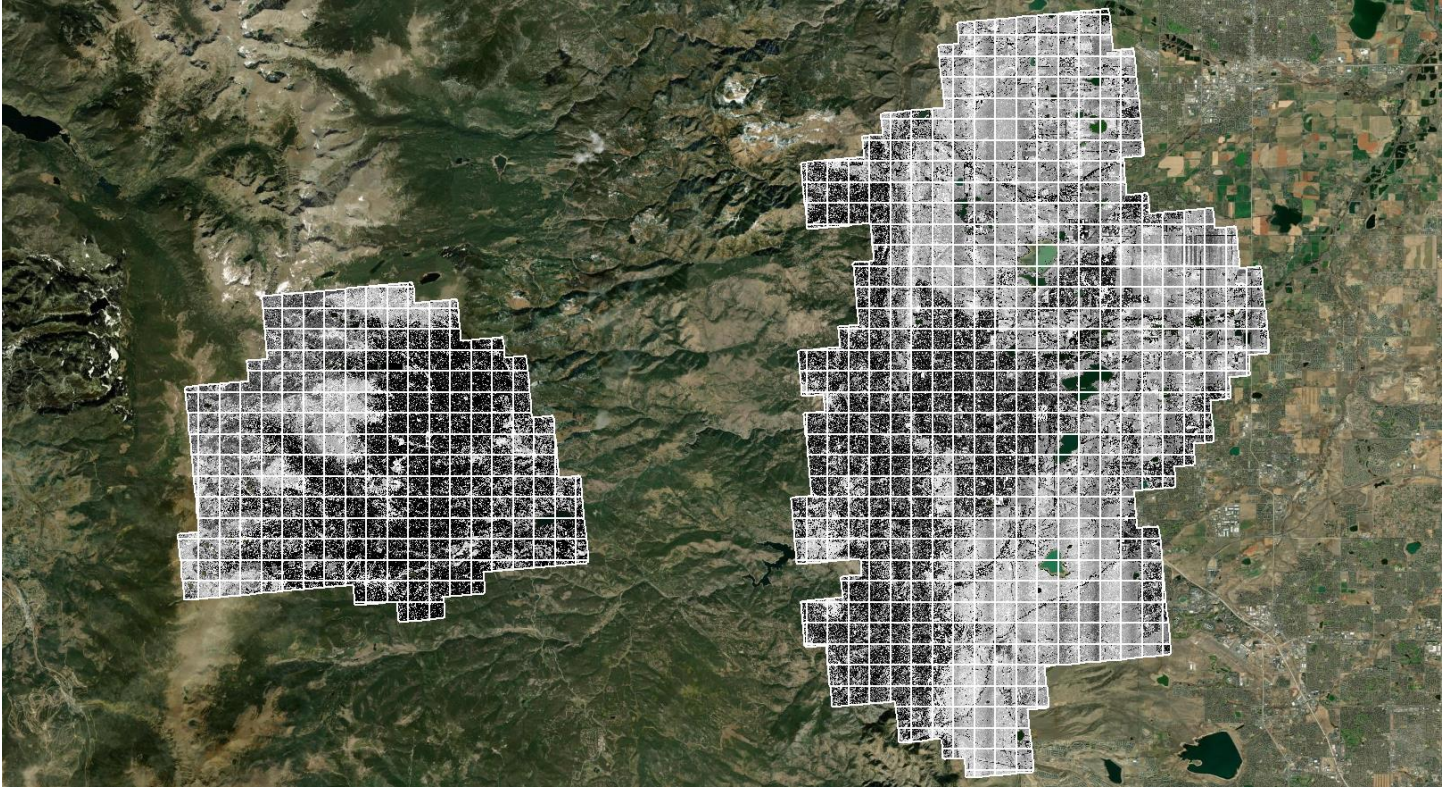


Last-return Swath Separation Images

24-bit GeoTIFF (*.tif) swath separation images modulated by intensity were created from the last-return points in the processed lidar dataset. GDAL v2.4.0 was used to define the CRS.

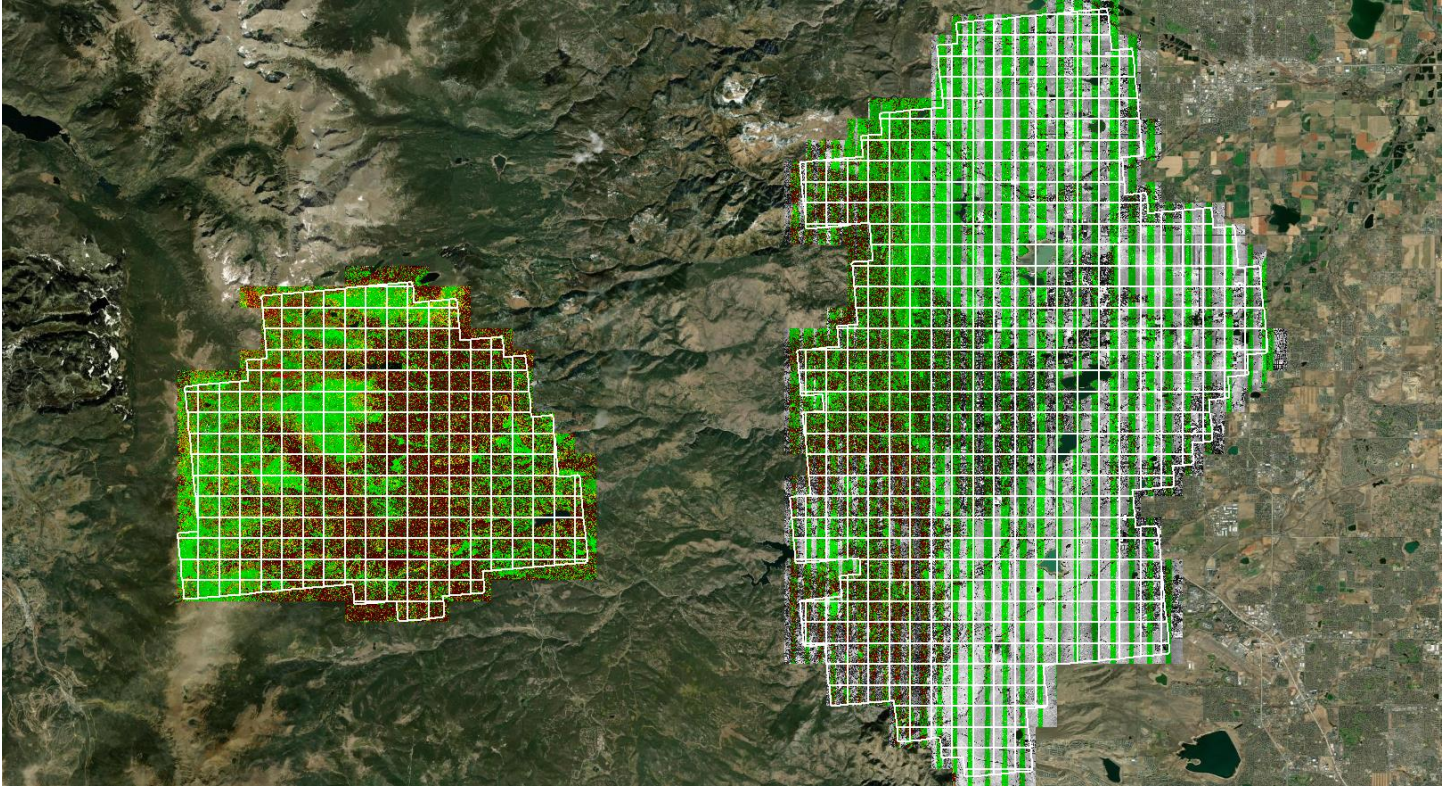

Swath Polygons

Polygons features representing either the convex or concave hull of swaths, where each record is an individual swath or channel within a swath. Delivered in Esri (*.shp) format.

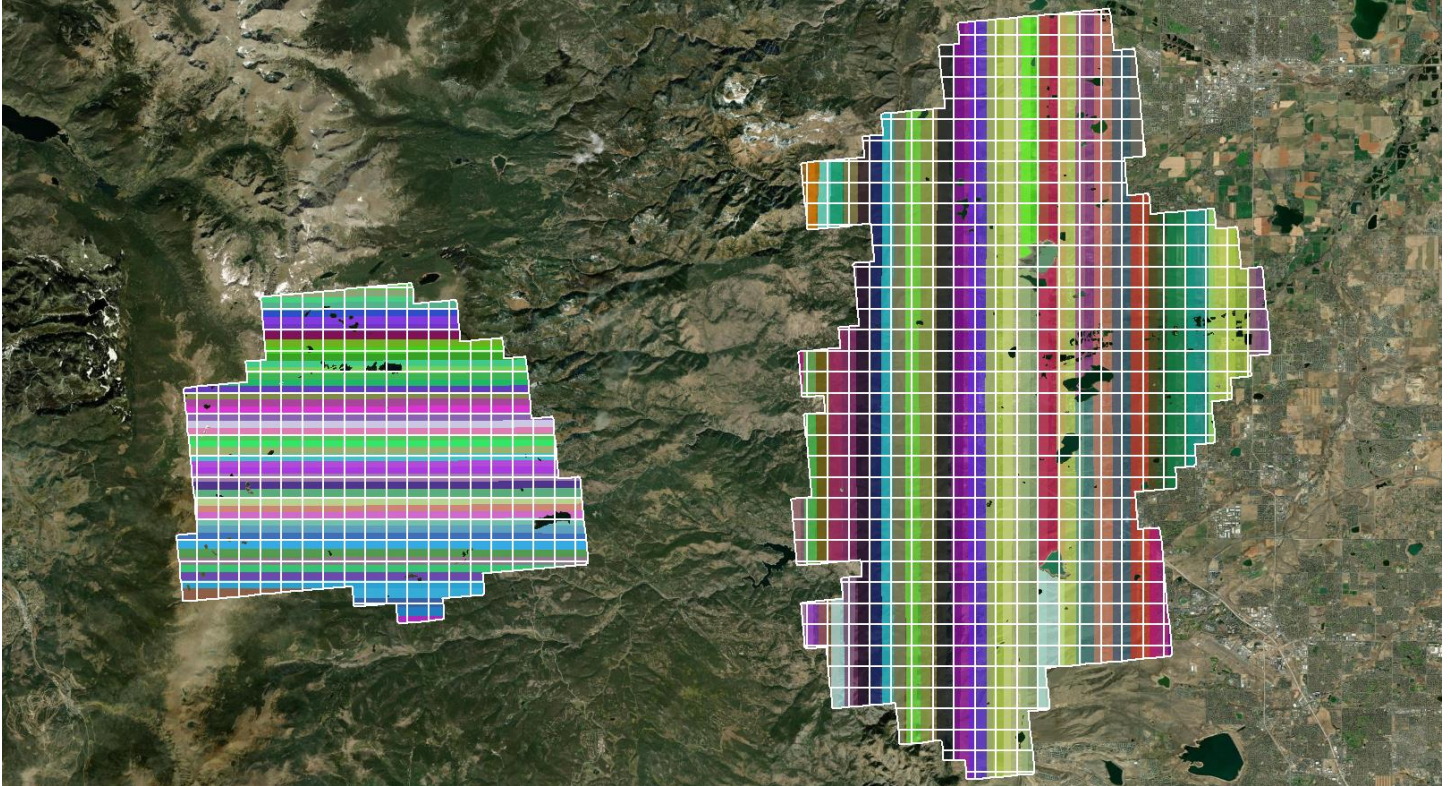

Other Deliverables

Metadata

Vertical Accuracy Report

A final quality assurance process was undertaken to validate all deliverables for the project. Prior to release of data for delivery, Sanborn's Quality Control/Quality Assurance department reviews the data and then releases it for delivery.