


LiDAR ACCURACY REPORT

Project: Marshall County, KS
Delivery Order No. 0021
Contract No.: W912P9-07-0518
Date: 4-April-2010
Submitted by: Wade Williams, Project Manager

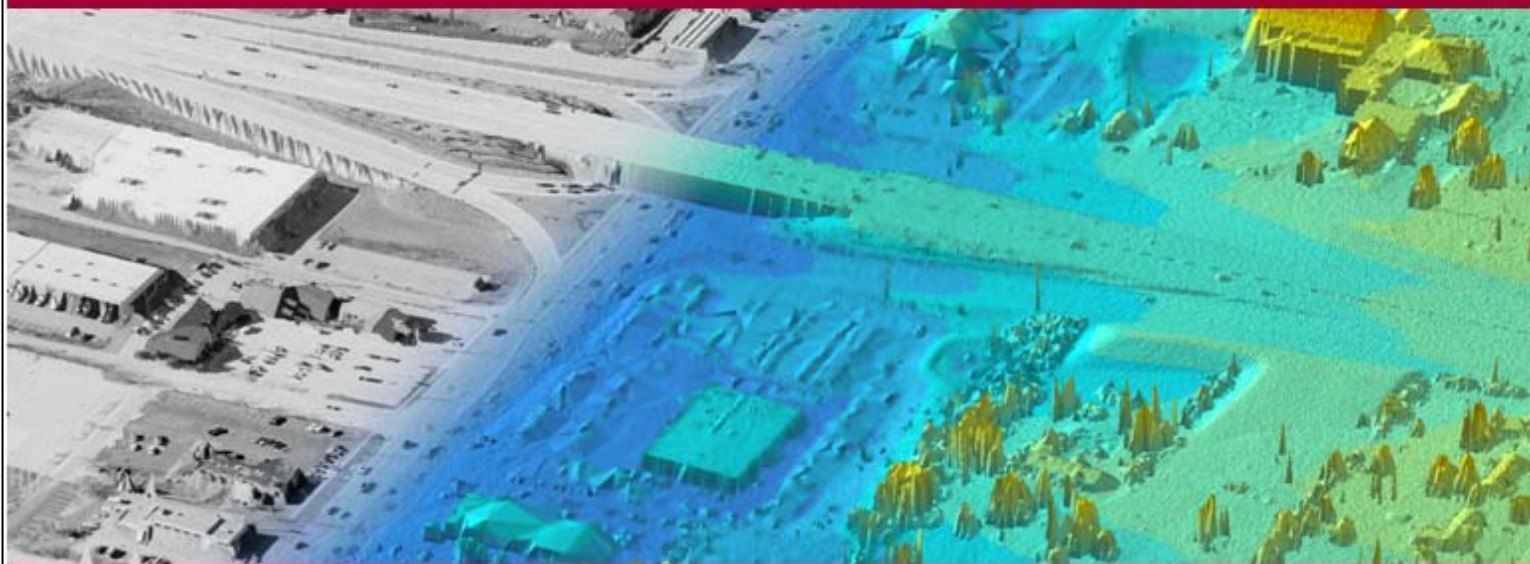

US Army Corps of Engineers, St. Louis District

Project Overview

The St. Louis District of the United States Army Corps of Engineers (USACE) contracted with Surdex Corporation in February of 2010 to collect LiDAR elevation data over Marshall County in Kansas. The post processed elevation data was to meet National Digital Elevation Program (NDEP) standards of a vertical accuracy of 15 centimeters RMSE.

Project Area

This report covers the collection of LiDAR elevation data over Marshall County. The project limits are presented in the graphics below. The project area consisted of approximately 900 square miles of elevation data.



Figure 1 Marshall County Project Area

LiDAR Data Collection Scenario

The LiDAR elevation data for this project was collected with a Leica ALS-50II MPIA aerial LiDAR sensor system. The project design called for acquisition of LiDAR data with flight lines aligned with the length of the project area. The nominal collection scenario called for the acquisition of nominal point spacing of 1.4m on the ground.

Marshall County LiDAR Evaluation

The field survey for this project consisted of a combination of primary control (23) and LiDAR check points (54). The graphic below presents these points on the project area map.

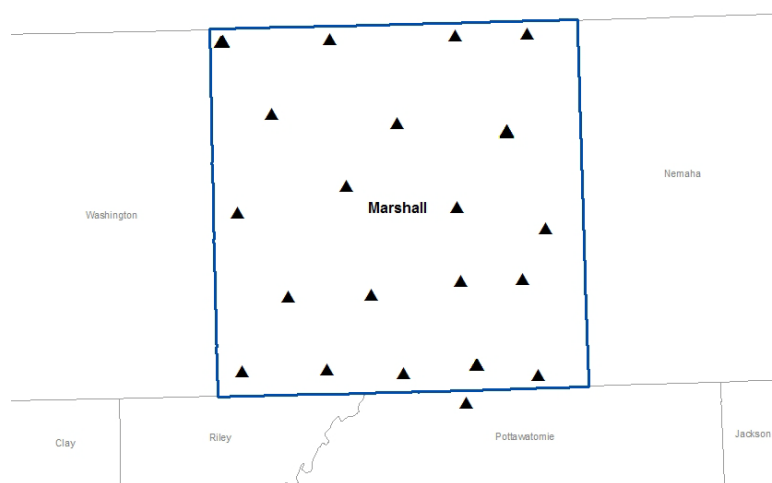


Figure 2 Marshall County Control

These points consisted of various types of ground cover including asphalt, gravel, short grass, tall grass and trees. Examples to the types of points surveyed are included below.





The required LiDAR elevation data values were derived within ArcGIS from the bare earth .las files. For each control point location a LiDAR elevation value was derived and exported and the surface value subtracted from the survey elevation. These derived values were imported into Excel and comparisons were performed to generate statistics by ground cover type and for the overall dataset.

Results

The table below presents the results of the accuracy analysis for Marshall County. All values are in meters.

Stat	Primary Control	Hard Surface	Grass	Trees	Overall
Count	23	24	20	10	77
Average	0.01	-0.02	-0.4	-0.06	-0.01
RMSE	0.10	0.13	0.06	0.12	0.10
95% Confidence Level	0.20	0.25	0.12	0.23	0.21

As indicated above the LiDAR surface meets project specifications of RMSE less than 15cm, with an overall RMSE of 10 cm.