# LiDAR Quality Assessment Report

The USGS National Geospatial Technical Operations Center, Data Operations Branch is responsible for conducting reviews of all Light Detection and Ranging (LiDAR) point-cloud data and derived products delivered by a data supplier before it is approved for inclusion in the National Elevation Dataset. The USGS recognizes the complexity of LiDAR collection and processing performed by the data suppliers and has developed this Quality Assessment (QA) procedure to accommodate USGS collection and processing specifications with flexibility. The goal of this process is to assure LiDAR data are of sufficient quality for database population and scientific analysis. Concerns regarding the assessment of these data should be directed to the Chief, Data Operations Branch, 1400 Independence Road, Rolla, Missouri 65401.

SD_MORiver-Dewberry_2016-Block6

NGTOC

Jessica Self
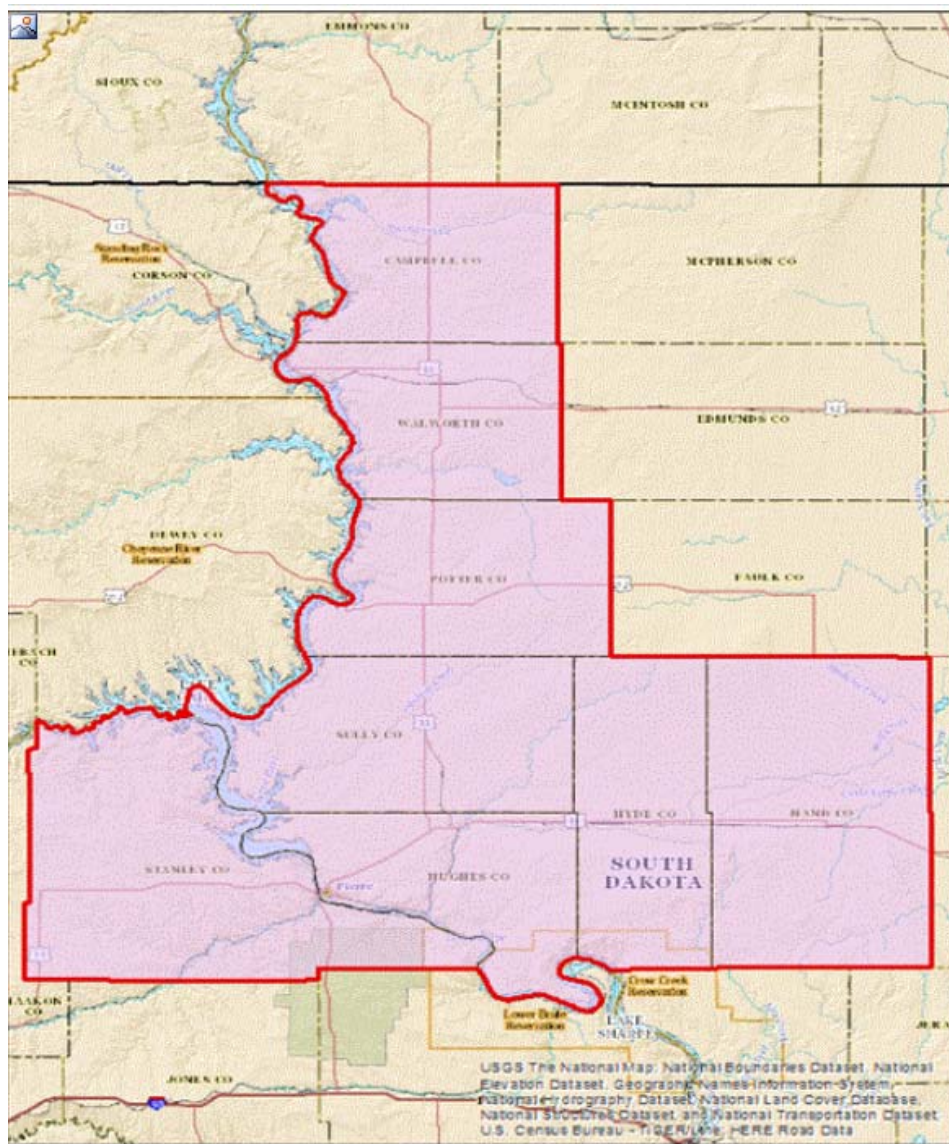
Project Information

Project: SD_MORiver-Dewberry_2016-Block6

Contractor: Dewberry

Project Type: GPSC

Applicable Specification: NGP LiDAR Base Specification V 1.2

Project Points of Contact:

Name:	Type:	Email:
Dan Vincent	CPT	dvinc@usgs.gov

REPORT QUALIFICATION SUMMARY:
Task Order Overall:
Does Not Meet Requirements
Metadata:
1 of 1   Reviews Accepted
0 Reviews Not Accepted
Vertical Accuracy:
0 of 1   Reviews Accepted
1 Reviews Not Accepted
Swath/Raw LAS:
0 of 1   Reviews Accepted
0 Reviews Not Accepted
Tiled/Classified LAS:
0 of 1   Reviews Accepted
1 Reviews Not Accepted
Breakline:
1 of 1   Reviews Accepted
0 Reviews Not Accepted
DEM(s):
0 of 1   Reviews Accepted
1 Reviews Not Accepted
NED Review:
0 of 1   DEM tile reviews recommended for NED 1/3rd
0 of 1   DEM tile reviews recommended for NED 1/9th

Project Subdivision: Lots

List Subdivision:
-

of: 7

Dates Collected Range:

Collection Start: 6/11/2016

Collection End: 6/28/2016

Project Aliases:

Licensing:
Public Domain

Project Description:

This task is for a high resolution data set of Geiger-Mode lidar covering approximately 8104 square miles affecting Campbell, Walworth, Potter, Sully, Stanley, Hughes, Hyde and Hand counties in South Dakota.

Review Information

Reviewer:	Jessica Self		Date Delivered:	6/1/2018

3rd Party QA Performed: ☐   Date Assigned: 6/4/2018

Action To Contractor Date:	Issue Description:	Return Date:
	See report	

Review Complete:

Dates Project Worked:

Start: 6/22/2018
End: 7/12/2018

Project Materials Received

All project deliverables must be supplied according to collection and processing specifications. The USGS will postpone the QA process when any of the required deliverables are missing. When deliverables are missing, the Contracting Officer Technical Representative (COTR) will be contacted by the Elevation Section supervisor and informed of the problem. Processing will resume after the COTR has coordinated the deposition of remaining deliverables.

METADATA

Deliverables	Delivered	XML Metadata	Required	Format	Quantity	Additional Details
Collection Report:	☑		☑	*PDF*	1	
Survey Report:	☑		☑	*PDF*	1	
Processing Report:	☑		☑	*PDF*	1	
QA/QC Report:	☑		☑	*PDF*	1	
Project Level XML Metadata:	☐		☐	*XML*		
Project Extent:	☑	☑	☑	*.shp*	1	
Tile Scheme:	☑	☑	☑	*.shp*	1	
Control (Calibration) Points:	☑	☑	☑	*.shp*	1	

| Check (Validation) Points: | ☑ | ☑ | ☑ | _.shp_ | _1_ | |

| Additional Comments: | |

LIDAR DATA

Deliverables	Delivered	XML Metadata	Required	Format	Quantity	Additional Details
Swath Data:	☐	☐	☐	Select…		
Classified/ Tiled Data:	☑	☑	☑	.las	1,000	Block 6
Additional Comments:						

DERIVED DELIVERABLES

Deliverables	Delivered	XML Metadata	Required	Format	Quantity	Additional Details
DEM Tiles:	☑	☑	☑	IMG	1,000	Block 6
Breaklines:	☑	☑	☑	FGD	1	
Additional Comments:						

OTHER

| Additional Comments: | |

Geographic Information

Area Extent:	1522.44	Sq. Miles
Tile Size:	2,000 x 2,000	Meters
DEM/DTM Grid Spacing:	.5	Meters

Coordinate Reference System:

NAD_1983_2011_UTM_Zone_14N

| Projection: | Transverse Mercator |

Horizontal Datum:	NAD83	○ Meters ○ U.S. Feet ○ Int'l Feet
Vertical Datum:	NAVD88	○ Meters ○ U.S. Feet ○ Int'l Feet

THIS PROJECTION COORDINATE REFERENCE SYSTEM IS CONSISTENT ACROSS THE FOLLOWING DELIVERABLES

☑ *Project Extent*   ☑ *Tiled/Classified XML Metadata*
☑ *Project Extent XML Metadata*   ☑ *Tiled/Classified LiDAR*
☑ *Project Tile Scheme*   ☑ *DEM(s)*
☑ *Project Tile Scheme XML Metadata*   ☑ *DEM XML Metadata*
☑ *Control Points*   ☑ *Breakline(s)*
☑ *Control Points XML Metadata*   ☑ *Breakline XML Metadata*
☑ *Checkpoints*
☑ *Checkpoint XML Metadata*

Additional Comments:

Collection Information

Quality Level: *1*
Configured Nominal Pulse Spacing:

.35   Meters

Additional Comments:

Metadata Review Accepted

Vendor provided metadata files have been parsed using 'mp' metadata parser. Any errors generated by the parser are documented below for reference and/or corrective action.
Parser can be found @ http://geo-nsdi.er.usgs.gov/validation/

The Project Extent XML Metadata parsed underline without ***errors.***

Check if 'Best Use' metadata for NED: ☐

The Project Tile Scheme XML Metadata parsed without ***errors.***

Check if 'Best Use' metadata for NED: ☐

The Control Point XML Metadata parsed without ***errors.***

Check if 'Best Use' metadata for NED: ☐

The Check Point XML Metadata parsed without ***errors.***

Check if 'Best Use' metadata for NED: ☐

The Classified XML Metadata parsed without ***errors.***

Check if 'Best Use' metadata for NED: ☐

The DEM XML Metadata parsed without errors.
Check if 'Best Use' metadata for NED: ☑

The Breakline XML Metadata parsed without errors.
Check if 'Best Use' metadata for NED: ☐

Additional Comments:	

Based on this review, the USGS accepts the xml metadata provided.

End of Metadata Review

Vertical Accuracy Review **Not Accepted**

ASPRS recommends that checkpoint surveys be used to verify the vertical accuracy of LiDAR data sets. Checkpoints are to be collected by an independent survey firm licensed in the particular state(s) where the project is located. While subjective, checkpoints should be well distributed throughout the dataset. National Standards for Spatial Data Accuracy (NSSDA) guidance states that checkpoints may be distributed more densely in the vicinity of important features and more sparsely in areas that are of little or no interest. Checkpoints should be distributed so that points are spaced at intervals of at least ten percent of the diagonal distance across the dataset and at least twenty percent of the points are located in each quadrant of the dataset.

NSSDA and ASPRS require that a minimum of twenty checkpoints (thirty is preferred) are collected for each major land cover category represented in the LiDAR data. Checkpoints should be selected on flat terrain, or on uniformly sloping terrain in all directions from each checkpoint. They should not be selected near severe breaks in slope, such as bridge abutments, edges of roads, or near river bluffs. Checkpoints are an important component of the USGS QA process. There is the presumption that the checkpoint surveys are error free and the discrepancies are attributable to the LiDAR dataset supplied.

For this dataset, USGS checked the spatial distribution of checkpoints with an emphasis on the bare-earth (open terrain) points; the number of points per class; the methodology used to collect these points; and the relationship between the data supplier and checkpoint collector. When independent control data are available, USGS has incorporated this into the analysis.

Required Vertical Accuracy

◉ *Yes* ○ *No*

REQUIRED NON-VEGETATED VERTICAL ACCURACY FOR SWATH AND DEM FILES

Required Unit:	Centimeters
Required # of checkpoints:	166
Required RMSEz:	10
*Required Vertical Accuracy (RMSEz * 95th CI)*	19.6

REQUIRED VEGETATED VERTICAL ACCURACY FOR DEM FILES

Required Unit:	Centimeters
Required # of checkpoints:	119
Required Vertical Accuracy (@ 95th	

percentile)

| 29.4 |

Additional Required Vertical Accuracy Information:

Reported Vertical Accuracy

◉ *Yes* ○ *No*

REPORTED NON-VEGETATED VERTICAL ACCURACY FOR SWATH LIDAR FILES

Reported Unit: | Centimeters |

Reported # of checkpoints: | 171 |

Reported RMSEz: | 0.156 |

*Reported Vertical Accuracy (RMSEz * 95th CI)* | |

REPORTED NON-VEGETATED VERTICAL ACCURACY FOR DEM FILES

Reported Unit: | Centimeters |

Reported # of checkpoints: | 171 |

Reported RMSEz: | 0.156 |

*Reported Vertical Accuracy (RMSEz * 95th CI)* | |

REPORTED VEGETATED VERTICAL ACCURACY FOR DEM FILES

Reported Unit: | Centimeters |

Reported # of checkpoints: | 130 |

Reported Vertical Accuracy (95th percentile) | 0.447 |

Additional Reported Vertical Accuracy Information:

Reviewed Vertical Accuracy

◉ *Yes* ○ *No*

CHECKPOINT REVIEW

Checkpoints are well distributed?   ☑

Enough checkpoints for task order?   ☑

Checkpoints meet USGS LiDAR base-spec in quantity and   ☑
quality?

REVIEWED NON-VEGETATED VERTICAL ACCURACY FOR SWATH LIDAR FILES

Reviewed Unit: Centimeters

Reviewed # of checkpoints: 163

Reviewed RMSEz: 9

*Reviewed Vertical Accuracy (RMSEz ** *   17.64
95th CI)

REVIEWED NON-VEGETATED VERTICAL ACCURACY FOR DEM FILES

Reviewed Unit: Centimeters

Reviewed # of checkpoints: 170

Reviewed RMSEz: 8.06

*Reviewed Vertical Accuracy (RMSEz ** *   15.8
95th CI)

REVIEWED VEGETATED VERTICAL ACCURACY

Required Unit: Centimeters

Required # of checkpoints: 130

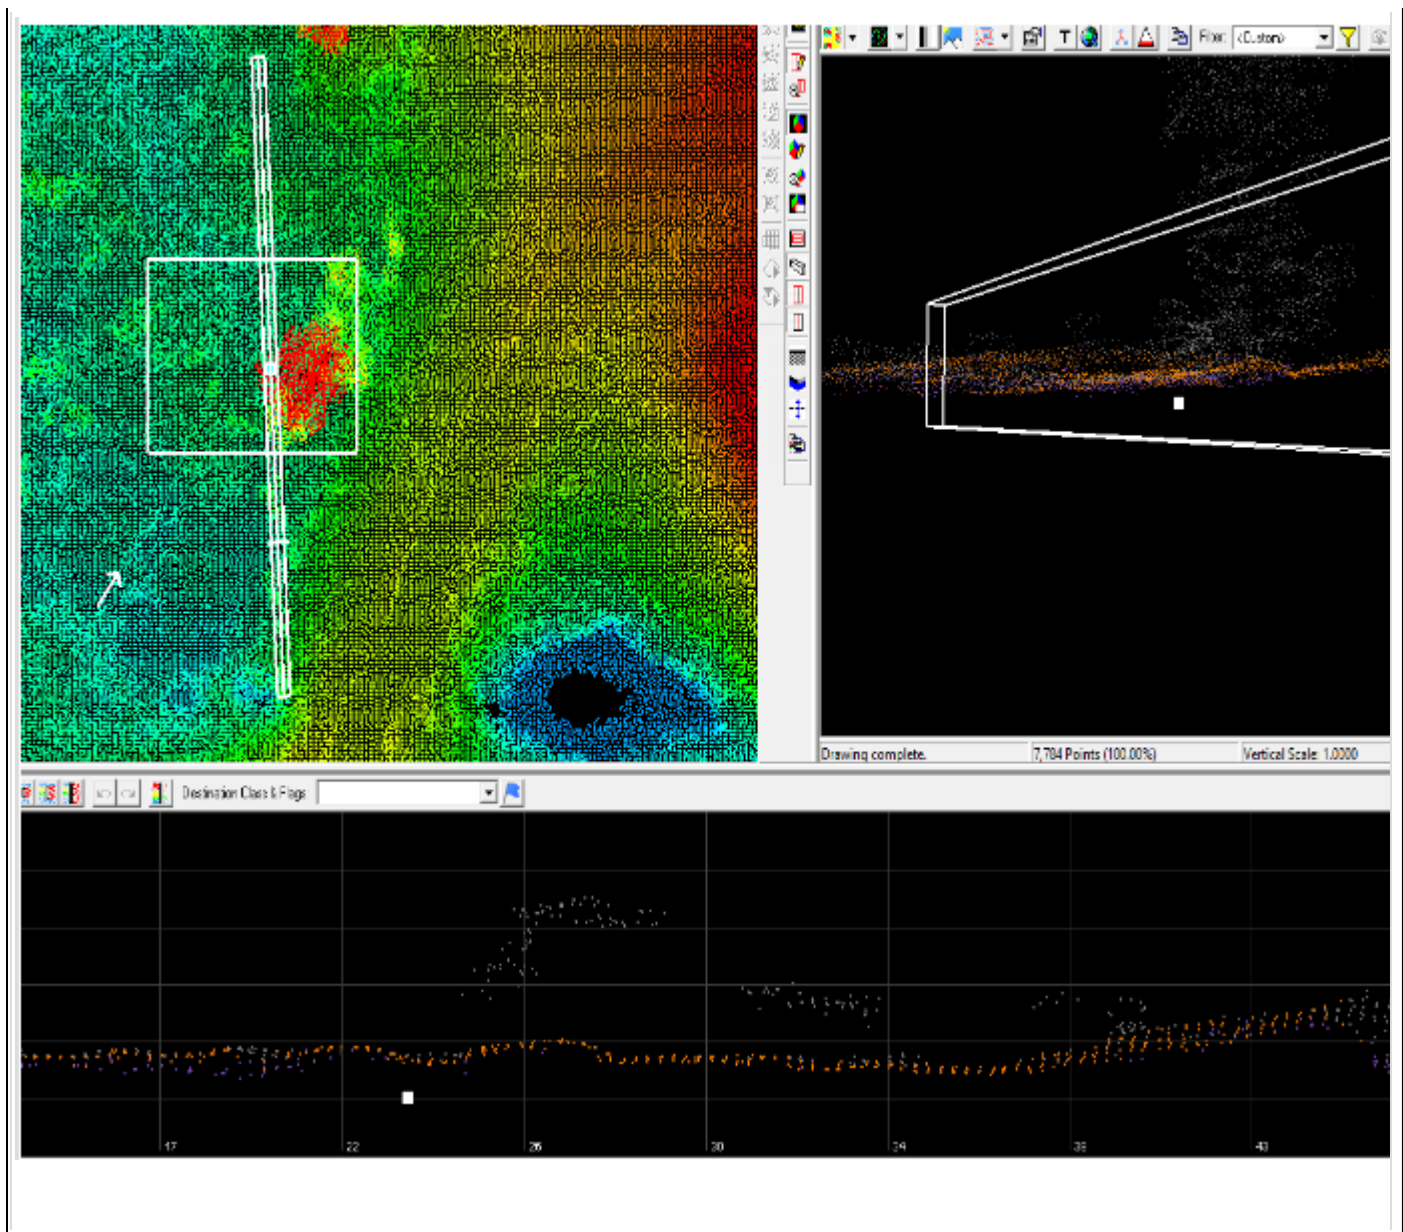*Reviewed Vertical Accuracy (95th*   42.31
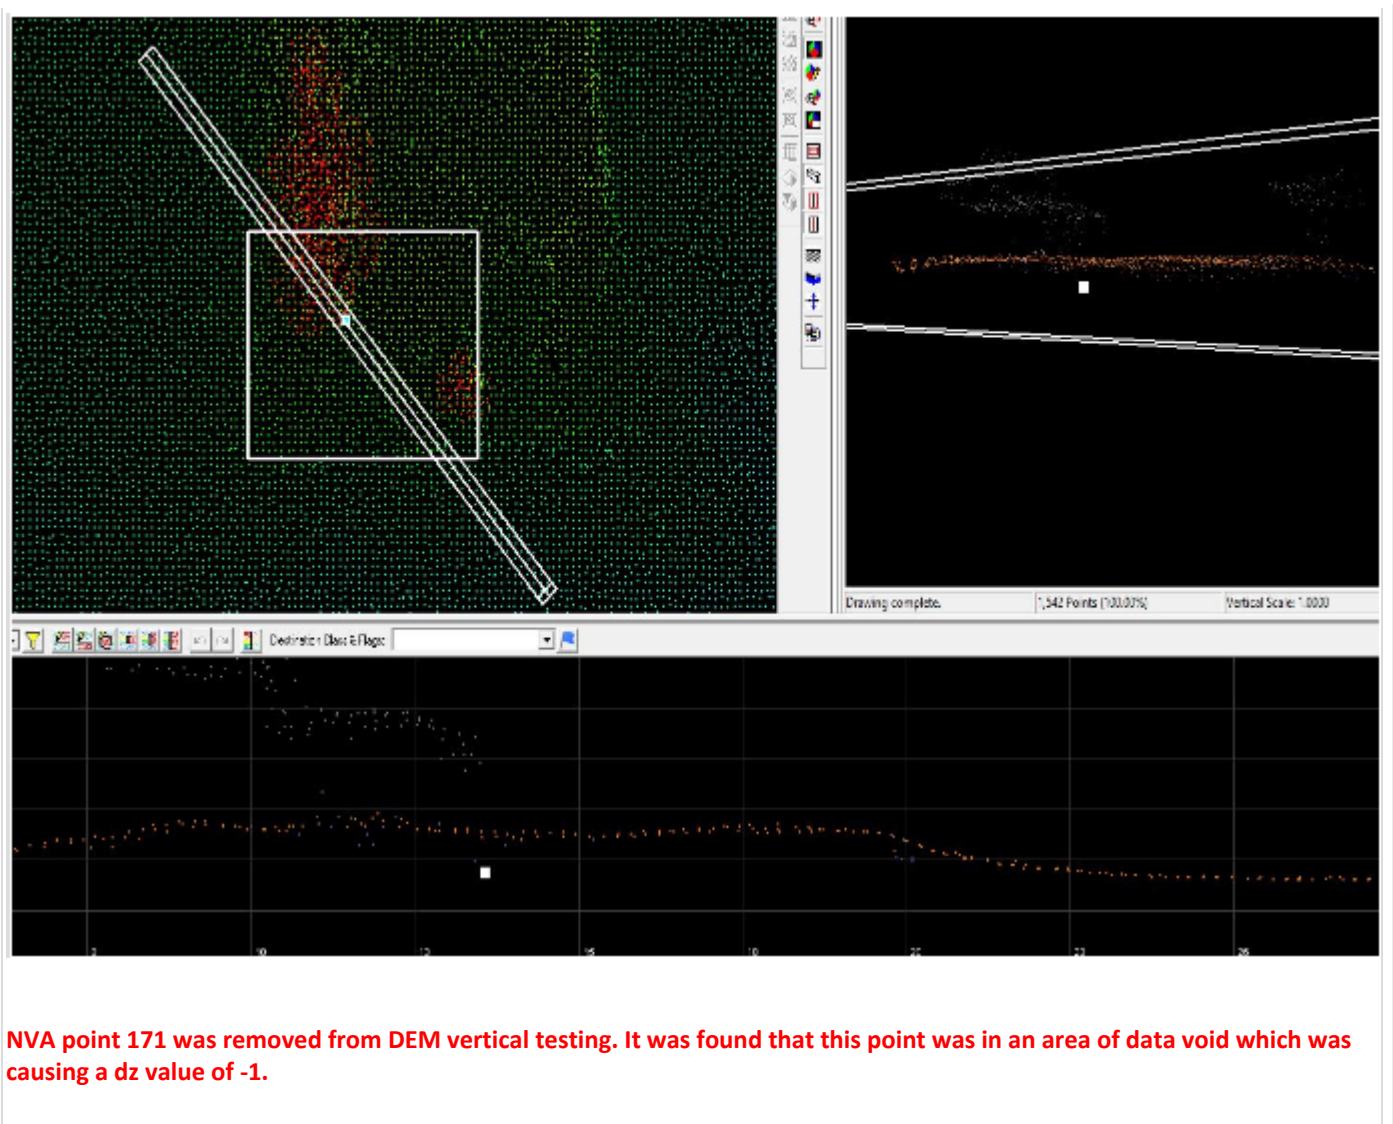*percentile)*

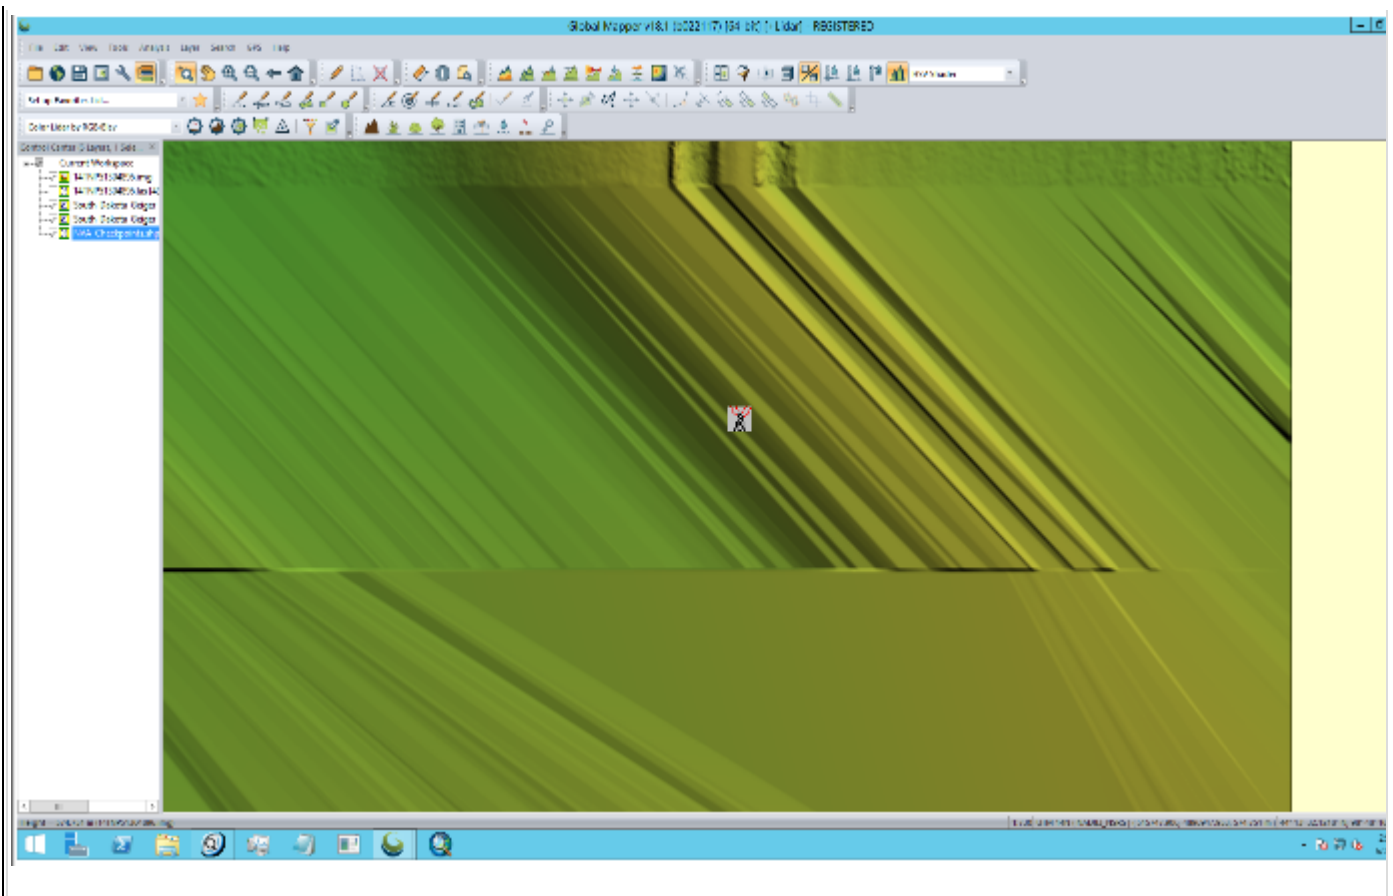Checkpoint Distribution Image
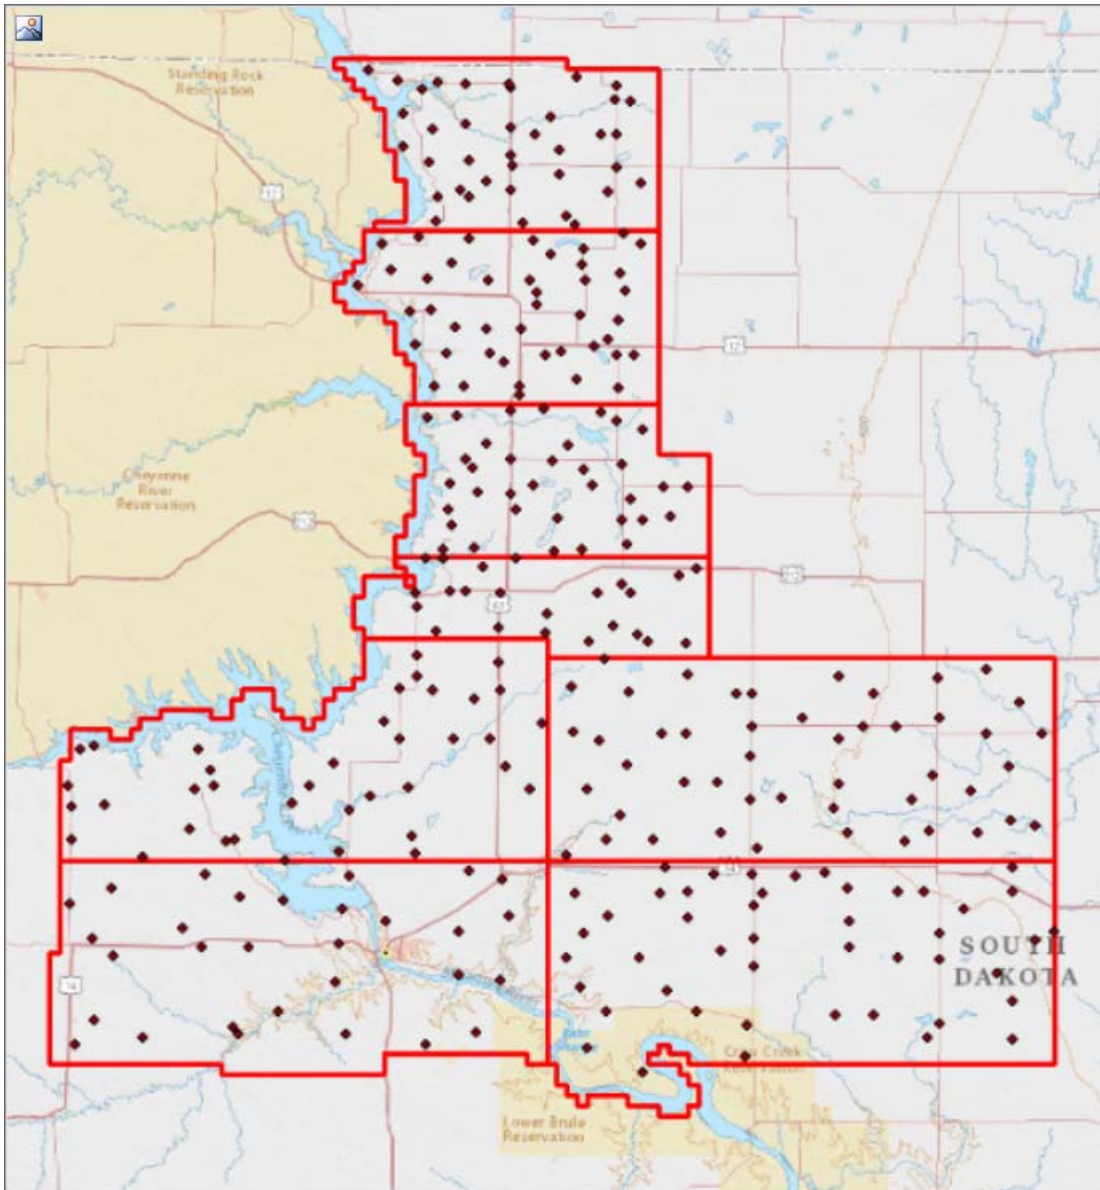
Vertical Accuracy Results:

VVA testing failed to meet USGS specifications. Three of the worst points are pictured below, showing the checkpoint below the ground surface.
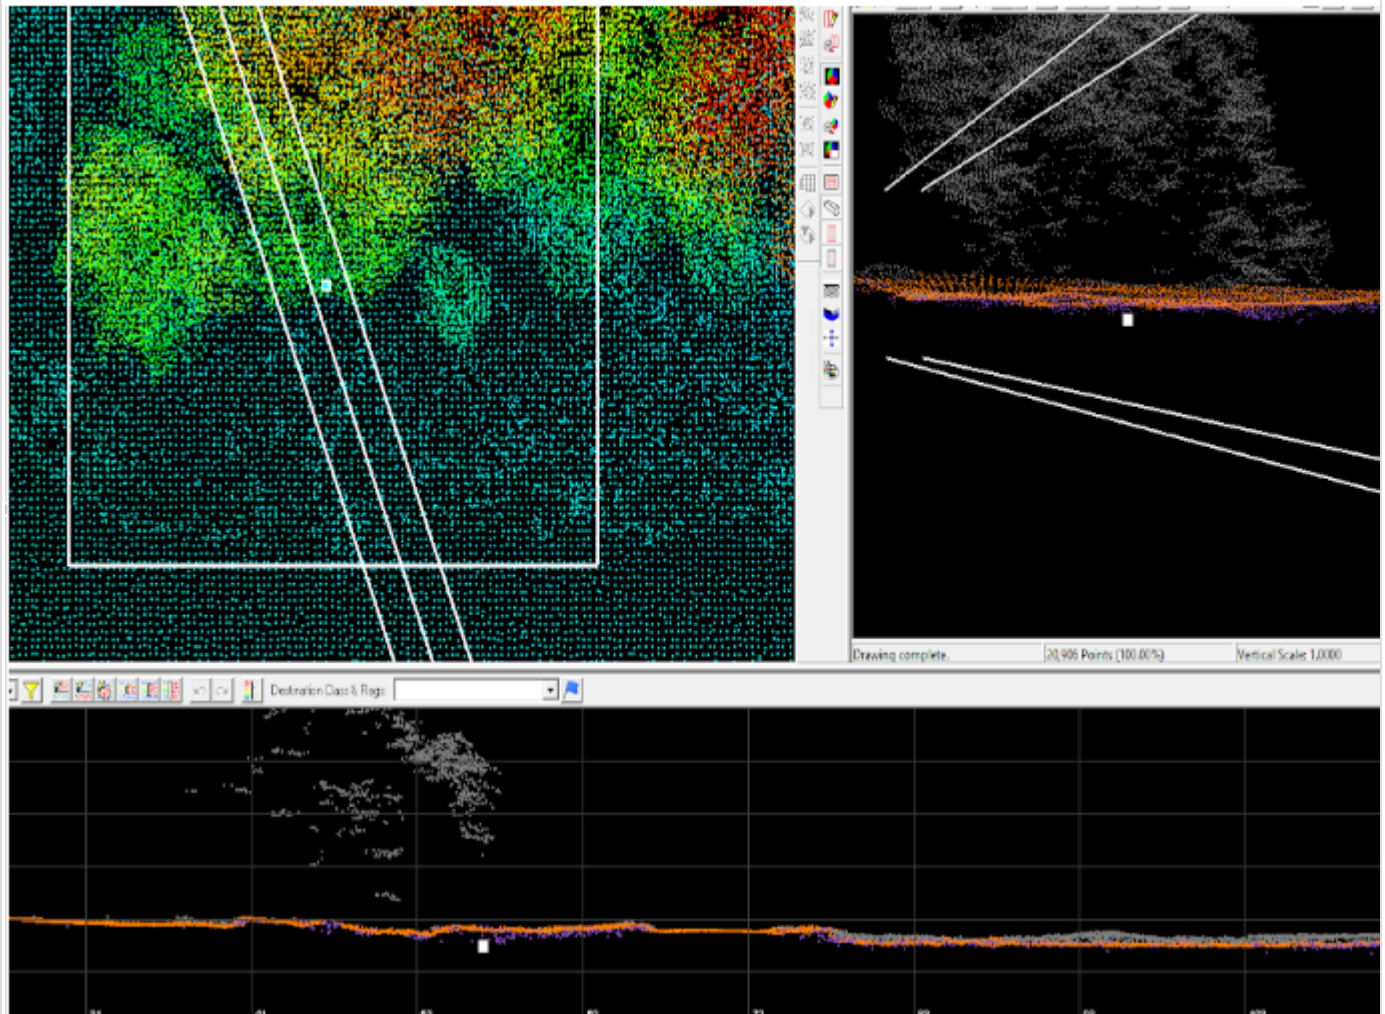
NVA point 171 was removed from DEM vertical testing. It was found that this point was in an area of data void which was causing a dz value of -1.

Additional Reviewed Vertical Accuracy Information:	

Based on this review, the USGS <u>does not accept</u> the vertical accuracy.

<div align="center">End of Vertical Accuracy Review</div>

Raw-Swath LiDAR Review

LAS swath files or raw unclassified LiDAR data are reviewed to assess the quality control used by the data supplier during collection. Furthermore, LAS swath data are checked for positional accuracy. The data supplier should have calculated the Non-Vegetated Vertical Accuracy using ground control checkpoints measured in clear open terrain (*see Vertical Accuracy Review Section*).

Review Required: ◉ *Yes* ○ *No* *Not Delivered*

Tiled/Classified LiDAR Review **Not Accepted**

Classified LAS tile files are used to build digital terrain models using the points classified as ground. Therefore, it is important that the classified LAS are of sufficient quality to ensure that the derivative product accurately represents the landscape that was measured. Classified LAS Tiles are comprised as follows, "all project swaths, returns, and collected points, fully calibrated, adjusted to ground, and classified and cut, by tiles, excluding calibration swaths, cross-ties, and other swaths not used, or intended to be used, in product generation".

Review Required: ◉ *Yes* ○ *No*

CLASSIFIED LIDAR TILE CHARACTERISTICS

☑ *Separate folder for classified/tiled LiDAR files*

LAS Version: <u>1.4</u>

Point Record Format: <u>6</u>

If specified, *.wpd files for full waveform data have been provided:<u>Not Required</u>

☑ *Classified LAS tile files conform to project tiling scheme*
☑ *Quantity of classified LAS tile files conforms to project tiling scheme*
☑ *Classified LAS tile files do not overlap*
☑ *Classified LAS tile files are uniform in size*
☑ *Correct and properly formatted georeference information is included in all LAS file headers, including the use of OGC 2001 Well Known Text (WKT).*
☐ *Adjusted GPS time used with the global encoder id set to 1*

17

☑ *Classified LAS tile files have no points classified as '12' (Overlap) and correctly use overlap bit.*
☑ *Point classifications are limited to the standard values listed below:*

Code	Description	Used
1	Processed, but unclassified	☑
2	Bare-earth/Ground	☑
7	Noise (low, manually identified, if needed)	☑
8	Model key points	☐
9	Water	☑
10	Ignored ground (breakline proximity)	☑
11	Withheld (if the "Withheld Bit" is not implemented in the processing software	☐
17	Bridges	☑
18	Noise (high, manually identified, if needed)	☐

Additional comments:

Possible classification issue: ground and low noise points in areas where there could be vegetation in fields. It is not certain that the ground points are actual ground.

Based on this review, the USGS <u>does not accept</u> classified/tiled LiDAR data.

End of Tiled/Classified LiDAR Review

Breakline Review Accepted
Breaklines are vector feature classes that are used to hydro-flatten the bare earth Digital Elevation Models.

Review Required: ⦿ *Yes* ◯ *No*

BREAKLINE FILE CHARACTERISTICS:

☑ Separate folder for breakline files.
☑ Breaklines contain elevation values.
Elevation values stored in <u>Geometery (ZEnabled)</u>   .
Units: <u>Meters</u>

☑ Waterbody Breaklines.

Polyline ☐ Polygon ☑
☑ Single elevation value per waterbody feature.
☑ Required.
Waterbody Elevations were created via <u>Unknown</u>   waterbody level techniques.

☑ Double Line Stream Breaklines (Streams Approximately > 100 ft).

Polyline ☐ Polygon ☑
Downstream DLS Flow is <u>Monotonic</u>   .
☑ Required.

☐ Single Line Breaklines.
☑ No missing or misplaced breaklines.

Based on this review, the USGS <u>accepts</u> the breakline files.

End of Breakline Review

DEM Review **Not Accepted**

The derived bare-earth file(s) receive a review of the vertical accuracies provided by the data supplier, vertical accuracies calculated by the USGS using supplied and independent checkpoints (*see the prior Vertical Accuracy Review Section*), and a thorough visual review for any anomalies or inconsistencies in assessing the quality of the DEM(s).

BARE-EARTH DEM TILE CHARACTERISTICS:

☐ Separate folder for bare-earth DEM files
Raster File Type: <u>IMG</u>
Raster Cell Size: 0.5   <u>Meters</u>
Tile bit depth/pixel Type: 32_BIT_FLOAT
Interpolation or Resampling Technique: <u>Unknown</u>

☑ DEM tiles do not overlap
☑ DEM tiles conform to Project Tiling Scheme
☑ Quantity of DEM files conforms to Project Tiling Scheme
☑ DEM tiles are uniform in size

☑ DEM tiles properly edge match and free of edge artifacts
☑ Tiles are free from Spikes and Pits
☐ Tiles are free from Data Holidays (*voids due to processing or collection errors*)

Using the footprint and dissolve tool in ArcGIS, the following gaps were found: CORRECTED 9/2018

Between tiles 14TMQ42304952 and 14TMQ42304954:

Between tiles 14TMQ42704952 and 14TMQ42704954:

Between tiles 14TMQ42904952 and 14TMQ42904954:

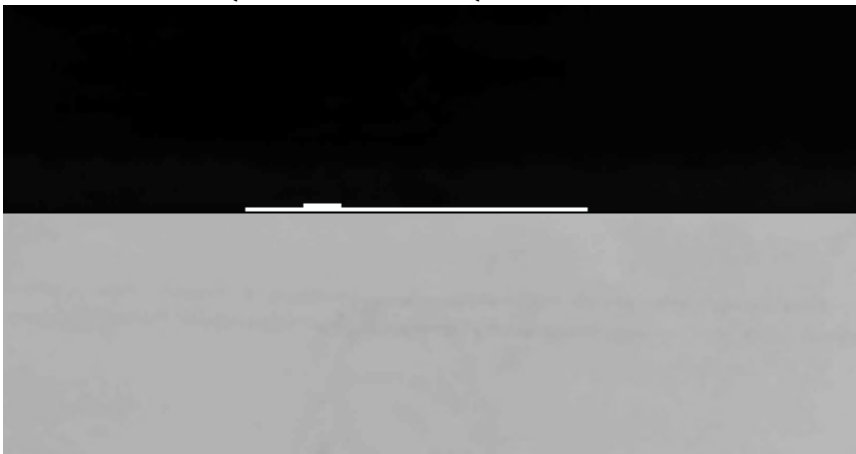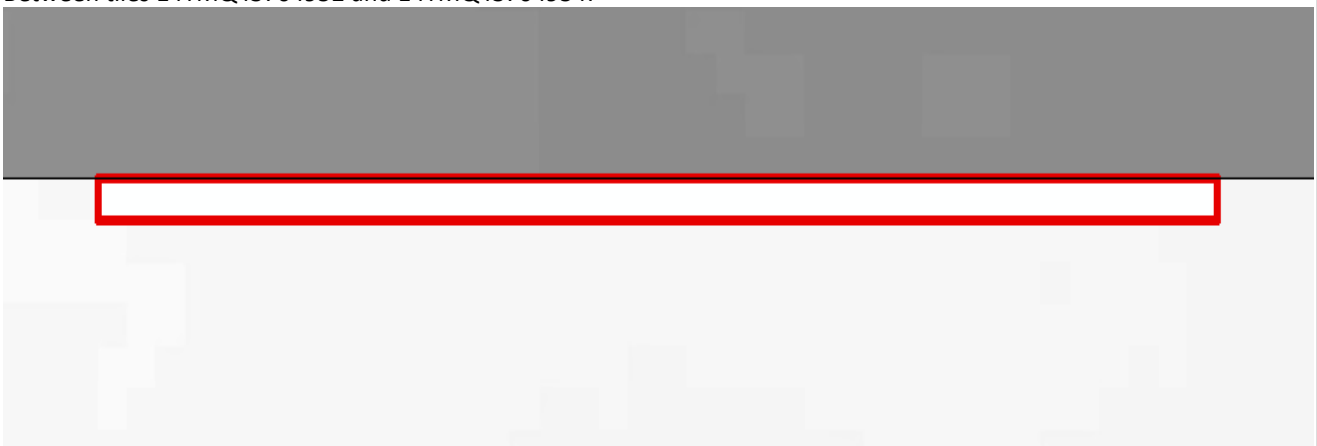Between tiles 14TMQ43104952 and 14TMQ43104954:

Between tiles 14TMQ43304952 and 14TMQ43304954:
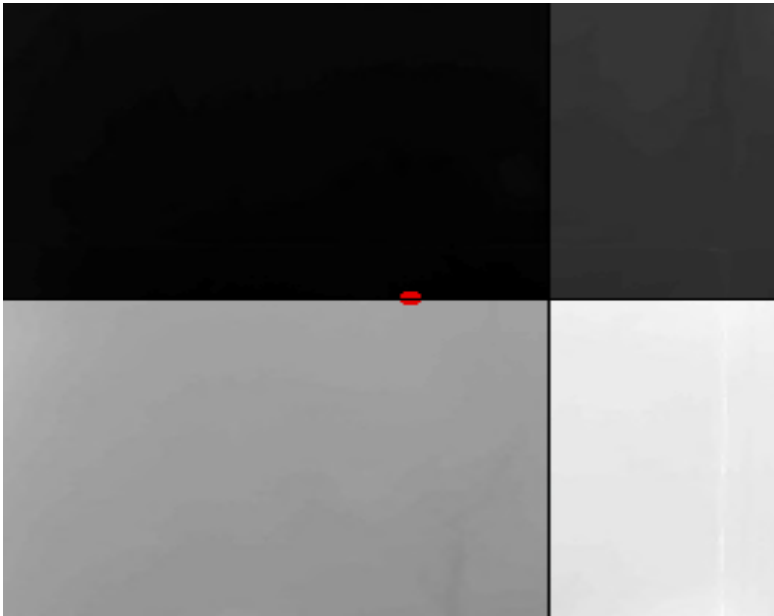
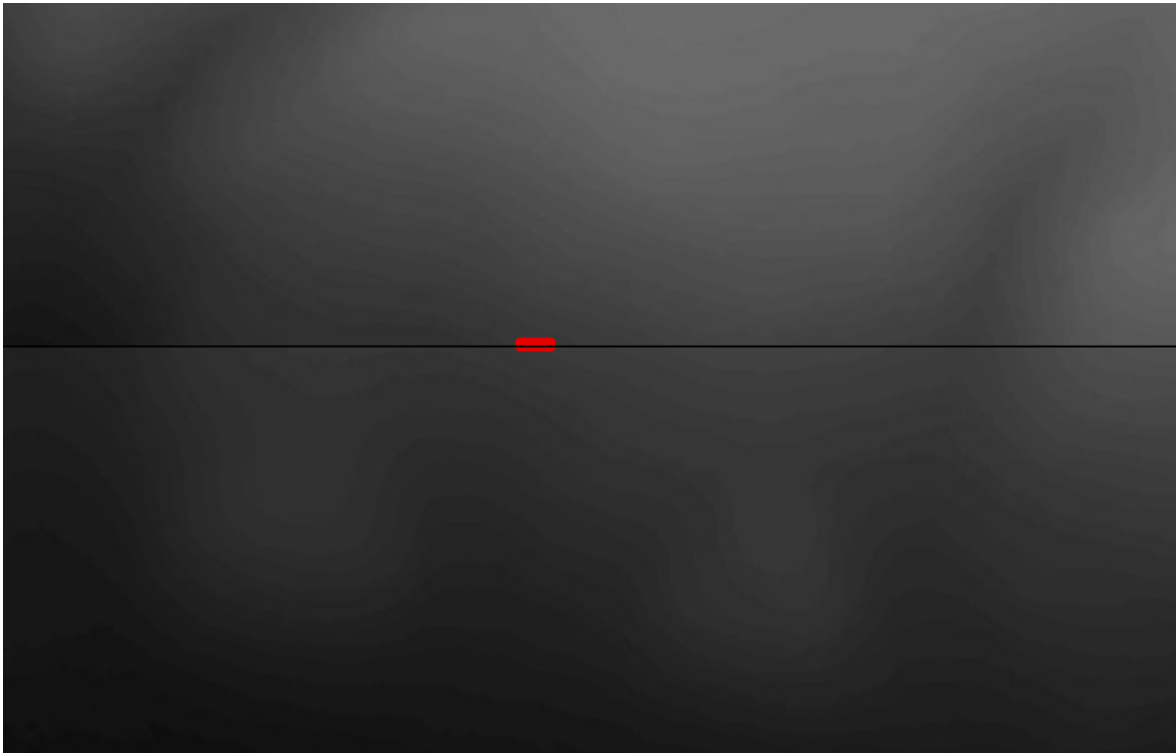Between tiles 14TMQ43504952 and 14TMQ43504954:
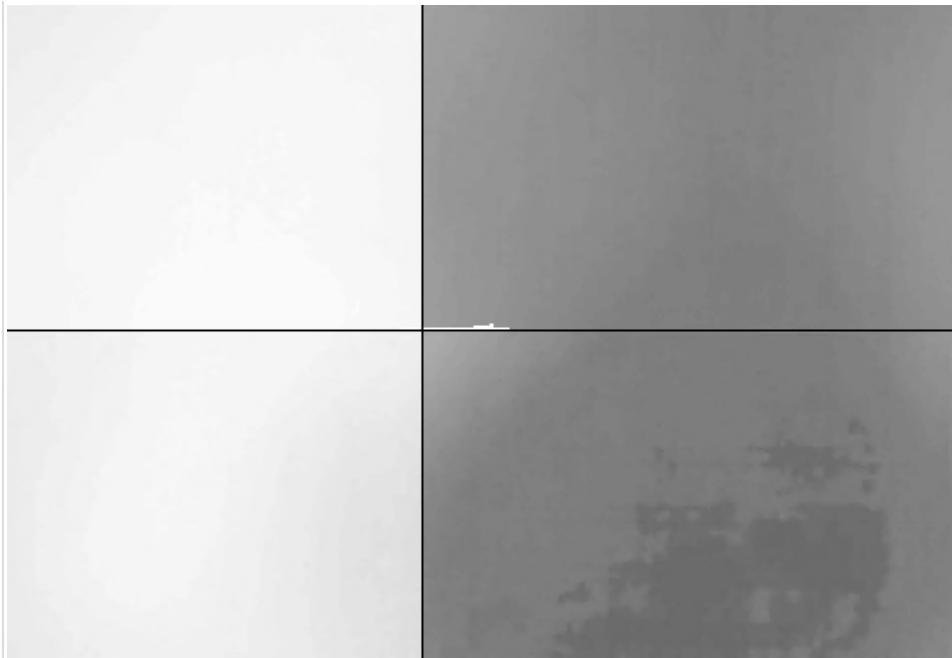

Between tiles 14TMQ43704952 and 14TMQ43704954:
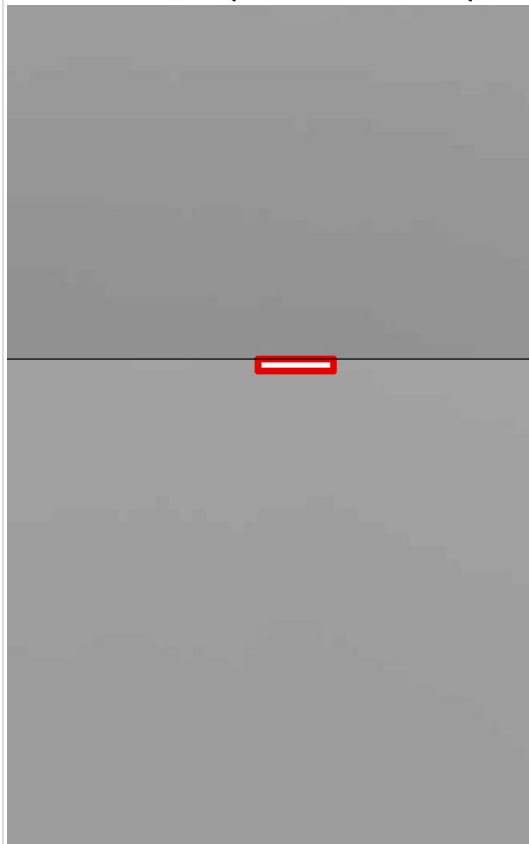

Between tiles 14TMQ43904952 and 14TMQ43904954:
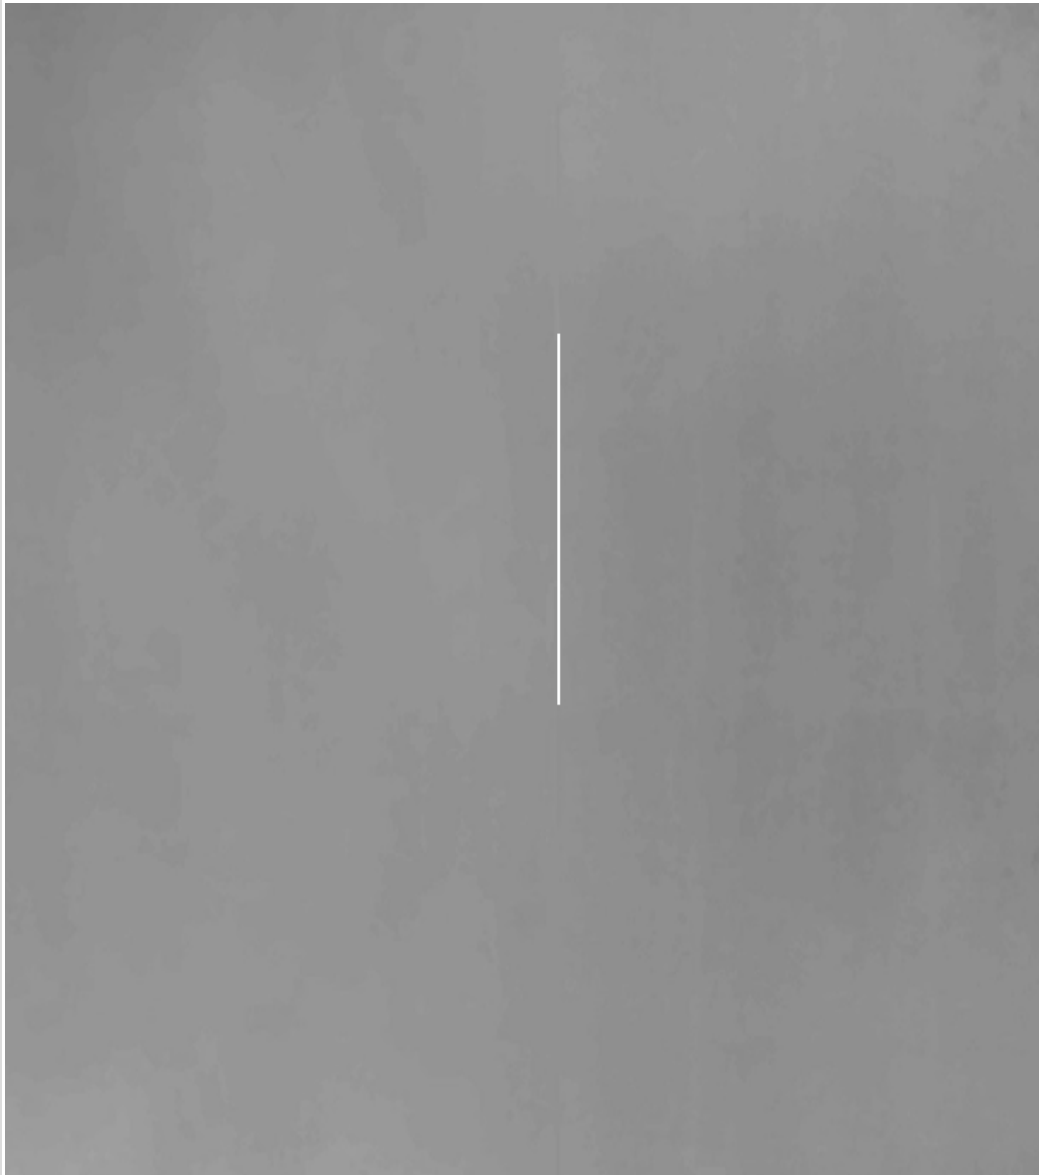
Between tiles 14TMQ44104952 and 14TMQ44104954:

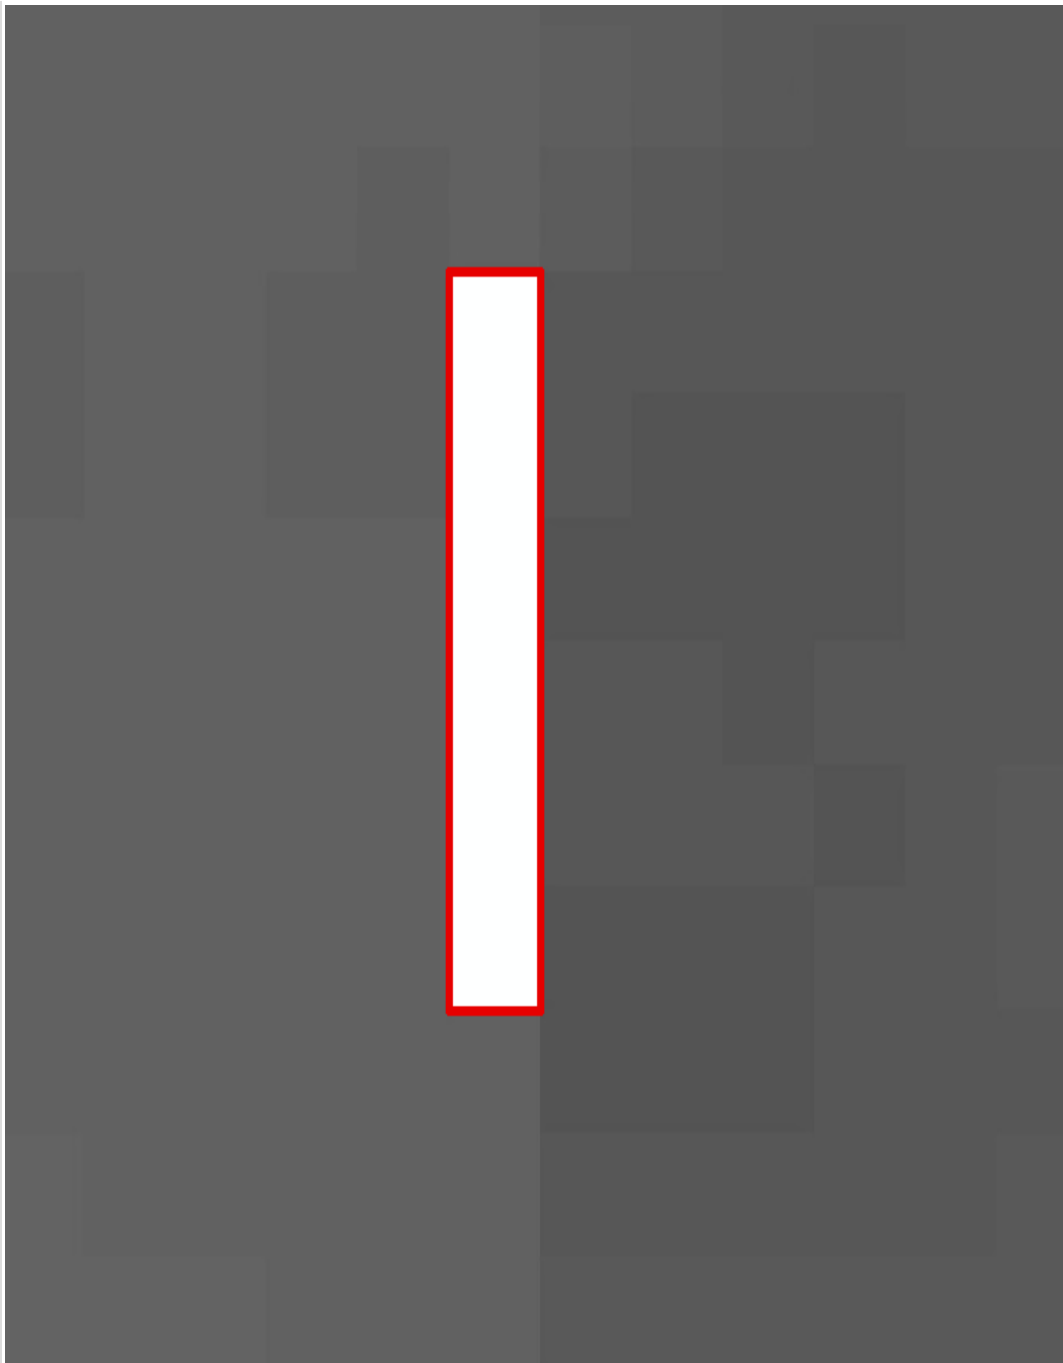Between tiles 14TMQ44304952 and 14TMQ44304954 and 14TMQ44504952 and 14TMQ44504954:

Between tiles 14TNQ49904952 and 14TNQ49904954:

Gaps inside 14TMQ47104936:

Gap inside 14TMQ47104944:

There are many more "no data" areas through out the block found by zooming into the footprint shapefile. See shapefile in error folder. Corrected 9/18/18

☑ Tiles do not exhibit systematic sensor error or cornrowing

Hydro Treatment: hydro-flattened

DEM tiles are properly Hydro Flattened ◯ Yes ◉ No

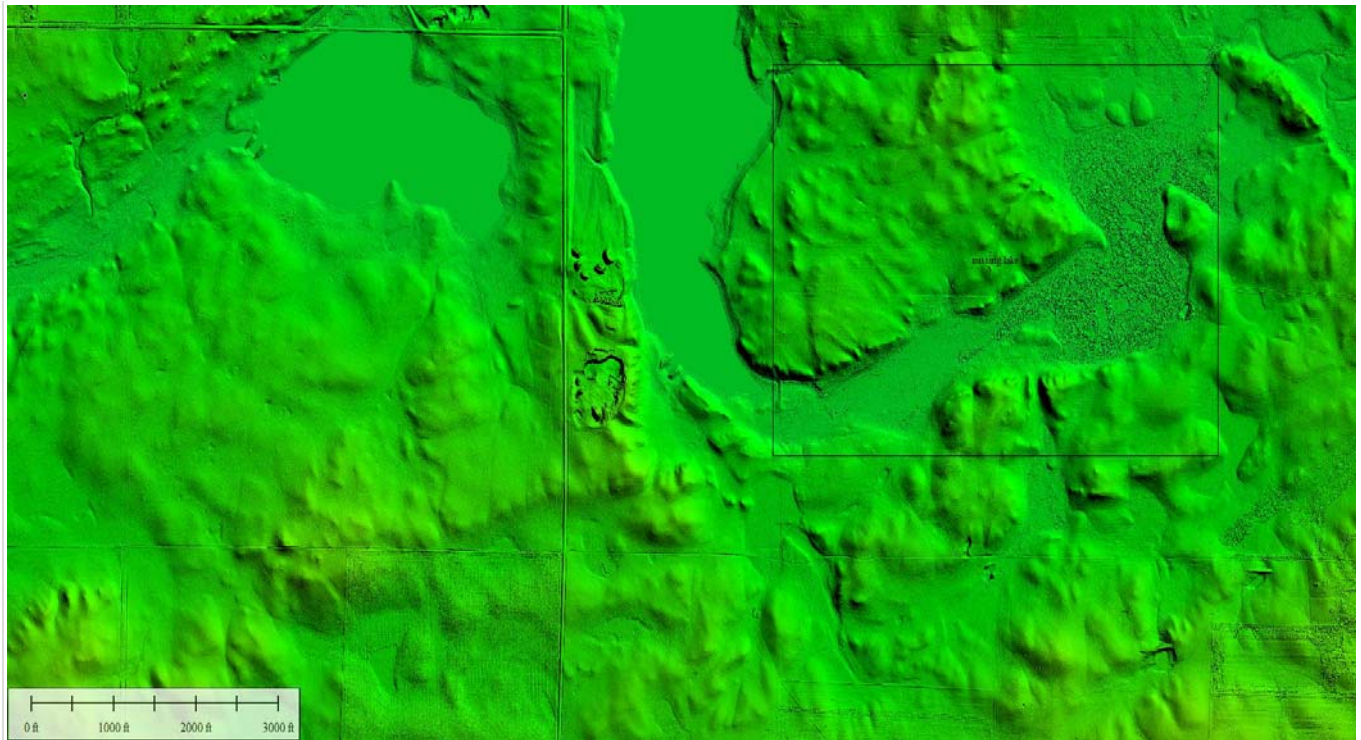☐ Waterbodies 2 Acres or greater are flattened

There are several ponds/lakes that were classified as ground in full or partially, and a few water bodies need to be hydroflattened. See error shapefile for examples found. There are possible more that were not found during DEM review. Corrected 9/18/18

incomplete lake

44° 48' 39.5415" N, 99° 53' 06.0890" W
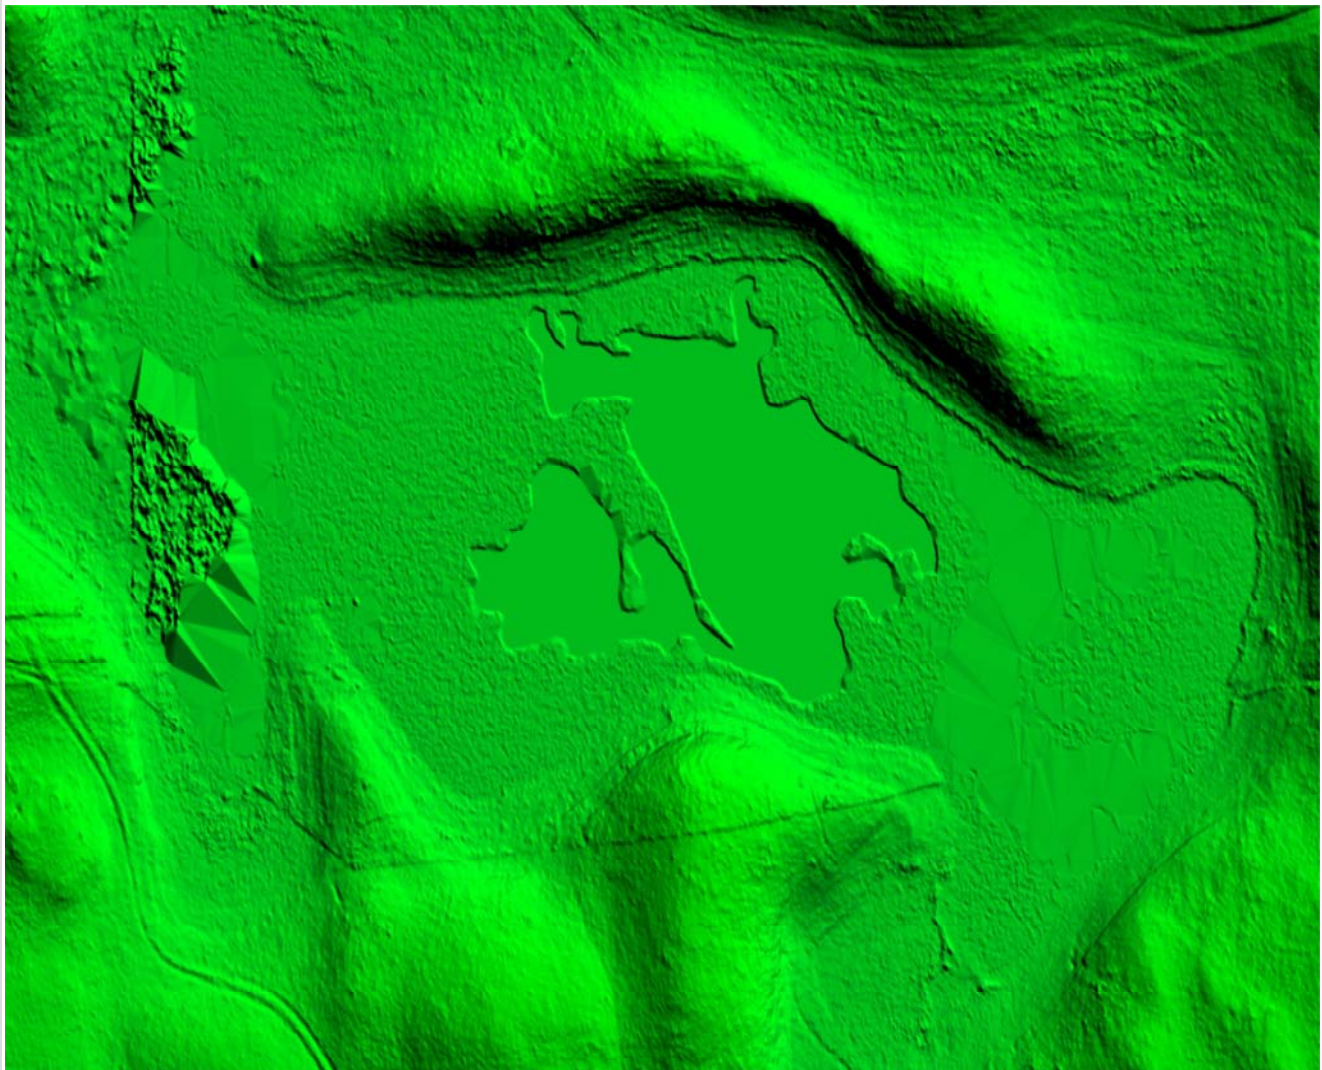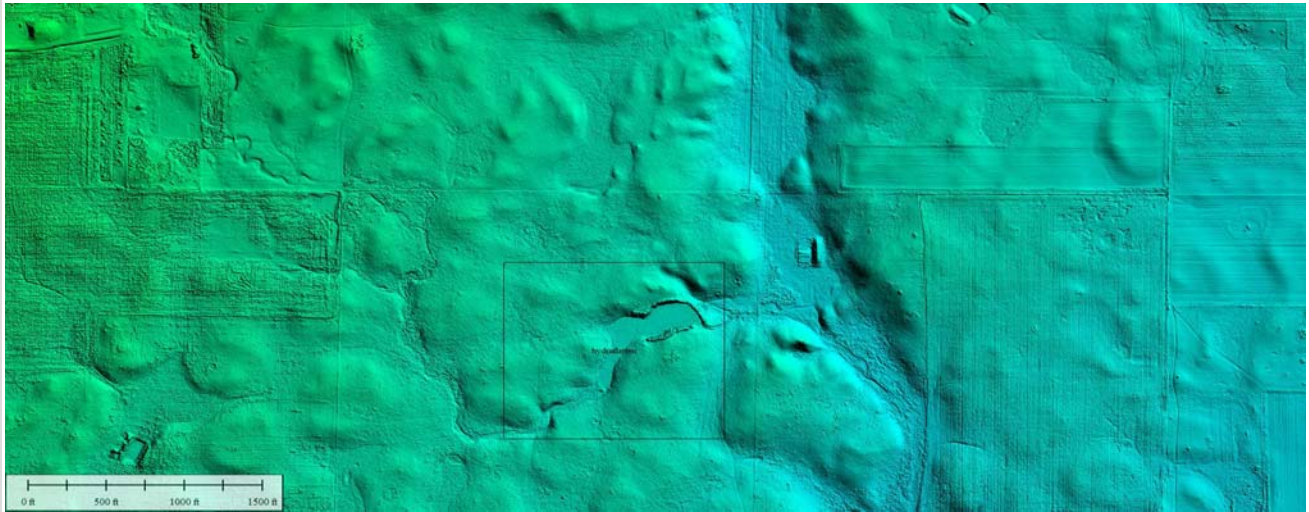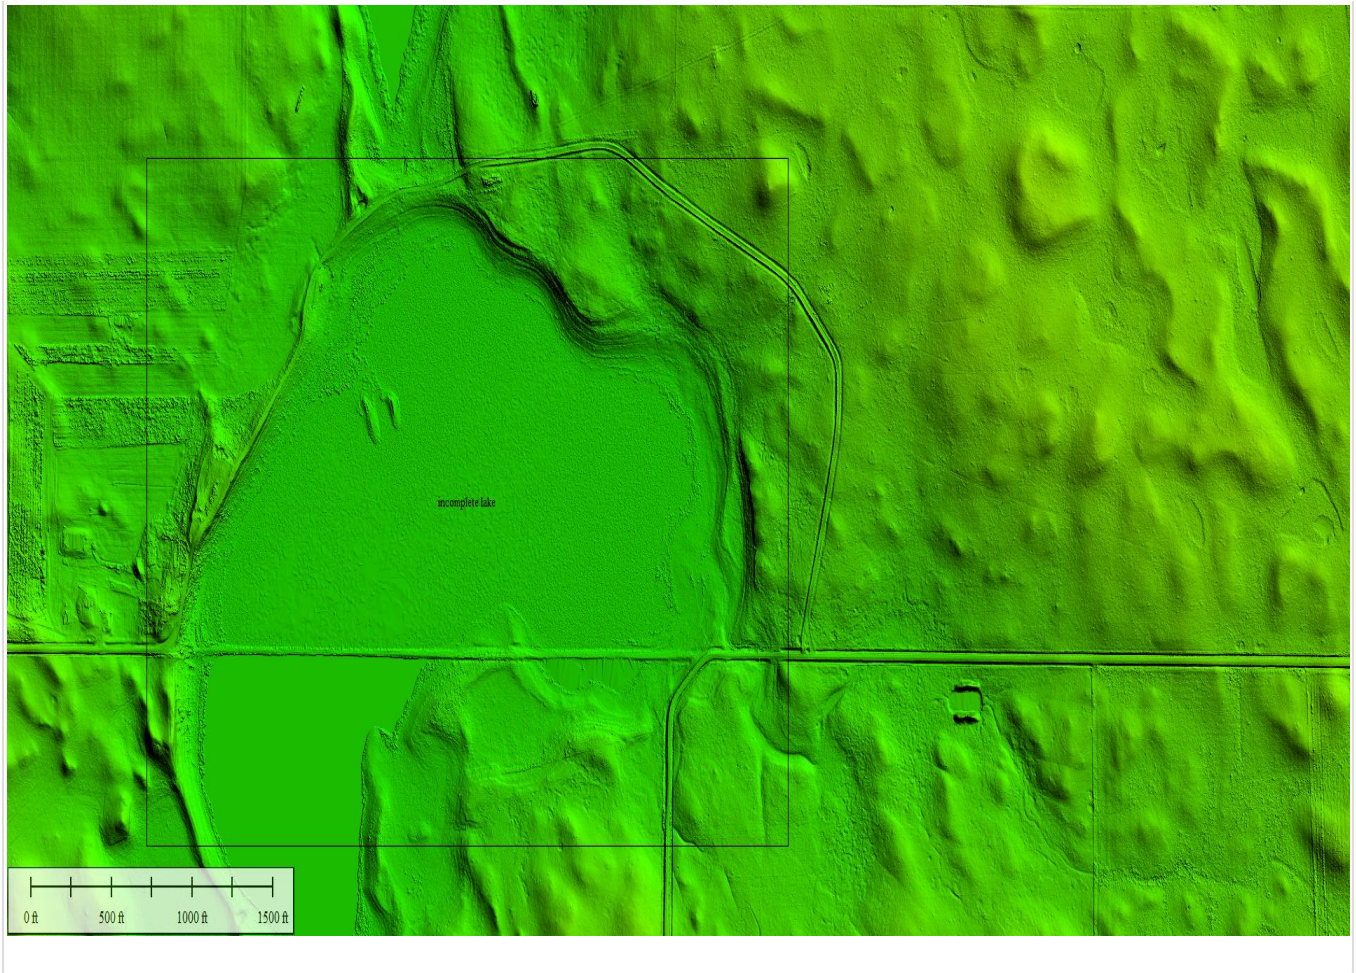
☑ Streams 100 ft.   or greater are flattened in a downstream manner
☑ Tidal Boundaries/Shorelines are flattened

☑ No missing islands 1 Acre   or larger
☑ Bridges/Overpasses are properly removed
☑ Culverts are maintained (Not Hydro Enforced)
☑ Depressions, Sinks, are not filled in (Not Hydro Conditioned)
☐ Vegetation properly removed

All through out block 5 there are areas of a possible classification issue: ground and low noise points in areas where there could be vegetation in fields.

☑ Manmade structures properly removed

Tiles recommended for NED 1/3rd: ◯ Yes. ◯ No.
Tiles recommended for NED 1/9th: ◯ Yes. ◯ No.

Tiles recommended for NED 1 Meter: ⭕ Yes. ⭕ No.

LAS dataset recommended for distribution: <u>Select...</u>

Based on this review, the USGS <u>does not accept</u> the DEM tiles.

End of DEM Review

Based on this review, the provided delivery <u>Does Not Meet</u> the Contract and/or Task Order requirements.

Additional Comments:

INTERNAL COMMENTS

END OF REPORT (v2.4.0)