

**State of Illinois  
Department of Transportation  
Fulton County, IL  
Vertical Accuracy Assessment Report**

**AERO-METRIC, INC.  
4020 Technology Parkway  
Sheboygan, WI 53083**

**AERO-METRIC Project No. 1-101202.01**

**Background**

The National Standard for Spatial Data Accuracy (NSSDA)<sup>1</sup> defines guidelines for testing and reporting the accuracy of digital geospatial data. The NSSDA makes the assumption that all errors follow a normal error distribution where Root-Mean-Square-Error (RMSE) procedures apply. The Federal Emergency Management Agency (FEMA)<sup>2</sup> guidelines implement the NSSDA standards and recommend the survey of a minimum of 20 checkpoints per ground cover category representative of the area being tested. A minimum of three categories (60 checkpoints) is required. The National Digital Elevation Program (NDEP)<sup>3</sup> and the American Society for Photogrammetry and Remote Sensing (ASPRS)<sup>4</sup> provide an alternative method for reporting the vertical accuracy whereby errors in vegetation categories are not assumed to follow a normal error distribution. The ASPRS guidelines are directly referenced to the assessment of LiDAR digital data. A minimum of 60 checkpoints is again recommended, with up to 100 points preferred. For the Fulton County project, five major ground cover categories were defined by Aero-Metric as representative of the project area (hard surface, short grass, tall grass, brush, and woods). A total of 1618 checkpoints were collected over the entire project area including profile or cross section points.

Aero-Metric’s vertical accuracy assessment for the Fulton County project was carried out in accordance with the two methods mentioned above. The first method (defined by NSSDA and FEMA) assumes all errors follow a normal error distribution and the newer second method (defined by NDEP and ASPRS) assumes that errors in some land cover categories may not follow a normal error distribution. Comparing the two methods helps determine the amount of systematic errors that may exist in the five ground cover categories: hard surface, short grass, tall grass, brush, and woods. The following table summarizes the criteria used to evaluate the vertical data. Criteria highlighted in yellow refer to the NSSDA and FEMA guidelines and those highlighted in orange refer to the NDEP and ASPRS guidelines.

**Table 1: DTM Acceptance Criteria**

<i>Criteria</i>	<i>Acceptable Value</i>
RMSE <sub>z</sub> = NSSDA vertical accuracy statistic at 68% confidence level (1.0 x RMSE <sub>z</sub> )	0.60 ft for all ground cover categories combined
Accuracy <sub>z</sub> = NSSDA vertical accuracy statistic at the 95% confidence level (1.96 x RMSE <sub>z</sub> )	1.19 ft (RMSE <sub>z</sub> x 1.9600) for all ground cover categories combined
Fundamental Vertical Accuracy (FVA) in open terrain only = 95% confidence level	1.19 ft (RMSE <sub>z</sub> x 1.9600) for open terrain only
Supplemental Vertical Accuracy (SVA) in individual ground cover categories = 95% confidence level	1.19 ft (based on 95 <sup>th</sup> percentile per category; this is a target value only, not mandatory)
Consolidated Vertical Accuracy (CVA) in all ground cover categories combined = 95% confidence level	1.19 ft (based on combined 95 <sup>th</sup> percentile)

Aero-Metric tested the digital vertical data using the following steps:

1. Crawford, Murphy & Tilly Inc. ground survey personnel collected and processed GPS data for each of the ground cover checkpoints. These points were distributed throughout ground cover category areas within the project limits.
2. The checkpoints were compared to the digital vertical data using the TerraSolid, LTD program, TerraScan. The program creates a TIN surface from the digital vertical data and computes vertical differences between the surface and the surveyed checkpoints. An output file records the vertical differences and associated statistics.
3. The results were analyzed by Aero-Metric to assess the quality of the data. Various accuracy parameters as defined by the NDEP and ASPRS guidelines were used in the review process. Also, the overall descriptive statistics of each dataset were computed to assess any tendencies or inconsistencies. The following tables, graphs, and figures illustrate the data quality.

**Using the NDEP and ASPRS Guidelines for Vertical Accuracy Testing**

The required Fundamental Vertical Accuracy (FVA) and the optional Supplemental Vertical Accuracy (SVA) and Consolidated Vertical Accuracy (CVA) are specified by the NDEP and ASPRS guidelines. FVA determines how well the digital data was collected in open terrain type ground cover where all errors are presumed to be random. The SVA determines how well the digital data represents the actual ground in each of the ground cover categories, tested separately. The CVA determines the overall accuracy of all the ground categories combined as one test.

**FVA** for this project is calculated using only the checkpoints in the *Hard Surface* ground cover category. The digital data in this category is most likely to represent the actual ground surface and the random errors will follow a normal error distribution. The FVA shows how well the LiDAR collection used to produce the digital vertical data represents the actual ground. With a normal error distribution, the vertical accuracy at the 95% confidence level is computed as the vertical root mean square error (RMSE<sub>v</sub>) of the checkpoints x 1.9600, as specified in Appendix 3-A of the NSSDA guidelines. As shown in Table 1, the FVA for this project (2 ft contours) is 1.19 ft.

**CVA** is calculated with all the checkpoints in all the ground cover categories combined. There is a possibility that the digital vertical data may yield errors that do not follow a normal distribution. CVA at the 95% confidence level equals the 95<sup>th</sup> percentile error for all checkpoints in all ground cover categories combined. The CVA produces a listing of the 5% outliers that are larger than the 95<sup>th</sup> percentile and that may not follow the normal error distribution.

**SVA** is computed for each ground cover category separately. There again is a possibility that the digital vertical data may yield errors that do not follow a normal error distribution. Systematic errors per ground cover category are identified. For each category, the SVA at the 95% confidence level equals the 95<sup>th</sup> percentile error for all checkpoints in each individual ground cover category. The individual SVA statistics are used to analyze the data based on each of the ground cover categories.

Table 2 summarizes the vertical accuracy by Fundamental, Consolidated, and Supplemental methods:

**Table 2: FVA, CVA, and SVA Vertical Accuracy at 95% Confidence Level**

<i>Ground Cover Category</i>	<i># of Points</i>	<i>FVA Fundamental Vertical accuracy Spec = 1.19 ft</i>	<i>CVA Consolidated Vertical accuracy Spec = 1.19 ft</i>	<i>SVA Supplemental Vertical accuracy Spec = 1.19 ft</i>
Total Combined	162		0.732	
Hard Surface	26	0.617		0.480
Short Grass	26			0.536
Tall Grass	56			0.747
Brush	27			0.849
Woods	27			0.653

The digital vertical data for the Marshall County meets all mandatory and target specifications as per the following vertical accuracy tests:

Compared with the 1.19 ft FVA specification, FVA tested 0.617 ft at the 95% confidence level on the hard surfaces ground cover category, based on  $RMSE_z \times 1.9600$ . The NSSDA specifies that vertical accuracy at the 95% confidence level equals  $RMSE_z \times 1.9600$ ; the NDEP and ASPRS state that this method is valid only when random errors follow a normal error distribution, as in the hard surface category.

Compared with the 1.19 ft CVA specification, CVA tested 0.732 ft at the 95% confidence level on the hard surfaces, short grass, tall grass, brush, and woods ground cover categories combined, based on the 95<sup>th</sup> Percentile. NDEP and ASPRS guidelines specify that vertical accuracy at the 95% confidence level equals the 95<sup>th</sup> percentile when random errors may not follow a normal error distribution, as in vegetated or obstructed areas. Table 3 lists the 5% outliers larger than the 95<sup>th</sup> percentile (0.732 ft).

**Table 3: 5% Outliers Larger than 95<sup>th</sup> Percentile**

<i>Ground Cover Category</i>	<i>Elev. Diff (ft)</i>	
Hard Ground	0.782	One of the errors were larger than the CVA standard (1.19ft) which permits up to 5% of the checkpoints, 8 out of 162, to be larger than 1.19 ft.
Tall Grass	0.875	
Tall Grass	0.837	
Tall Grass	1.012	
Brush	1.326	
Brush	0.734	
Brush	0.891	
Brush	0.751	
Woods	0.732	

Compared with the 1.19 ft SVA target values, SVA tested 0.480 ft at the 95% confidence level on hard surfaces; 0.536 ft in short grass; 0.747 ft in tall grass; 0.849 ft in brush; and 0.653 ft in woods ground cover categories, based on the 95<sup>th</sup> Percentile

Figure 1 illustrates the SVA by specific ground cover category. Figure 2 illustrates the magnitude of the differences between the checkpoints and the digital vertical data by specific ground cover category and sorted from lowest to highest. None of the checkpoints are beyond the 1.19 ft criteria shown in figure 2. This meets the 95% requirement, where up to 5% of the checkpoints could be outside the 1.19 ft criteria.

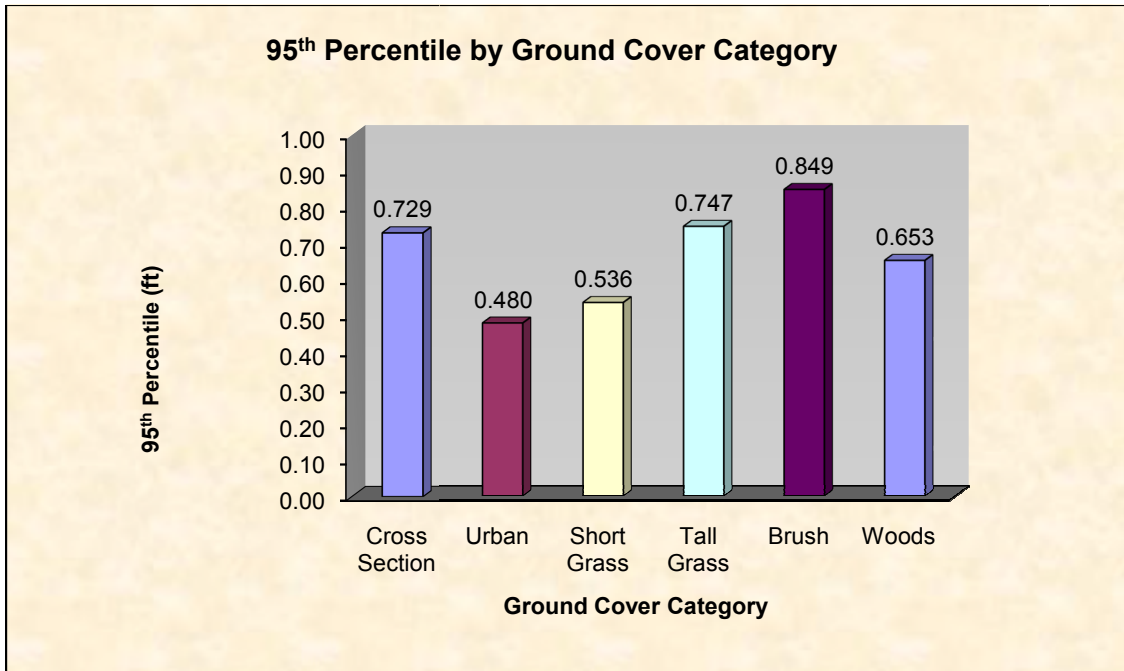


Figure 1: Graph of SVA Values by Ground Cover Category

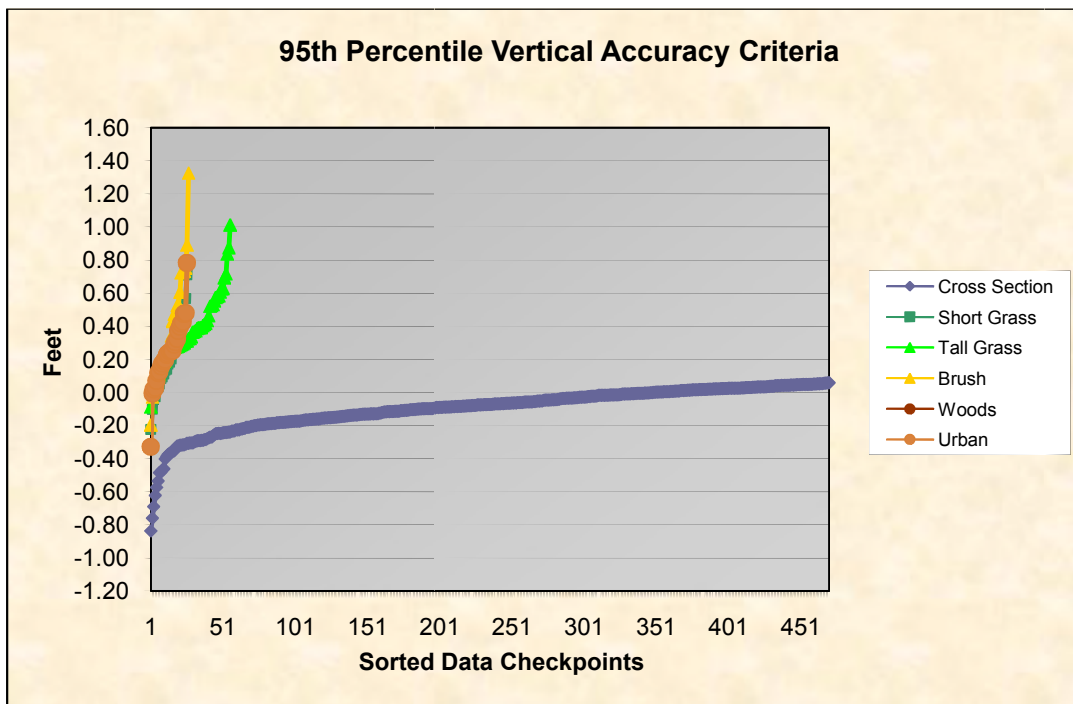


Figure 2: Magnitude of Elevation Discrepancies, Sorted from Largest Negative to Largest Positive

**Vertical Accuracy Testing in Accordance with NSSDA and FEMA Procedures**

The NSSDA and FEMA guidelines were both published before it was recognized that digital data errors do not always follow a normal error distribution. Future changes to these guidelines are expected to follow those of the NDEP and ASPRS. In order to comply with FEMA’s current requirements, RMSE<sub>z</sub> and other statistics were computed in all five ground cover categories, individually and combined. These statistics are shown in Figures 3 and 4 and Table 4 below.

Figure 3 shows the RMSE<sub>z</sub> values as calculated for each ground cover category separately.

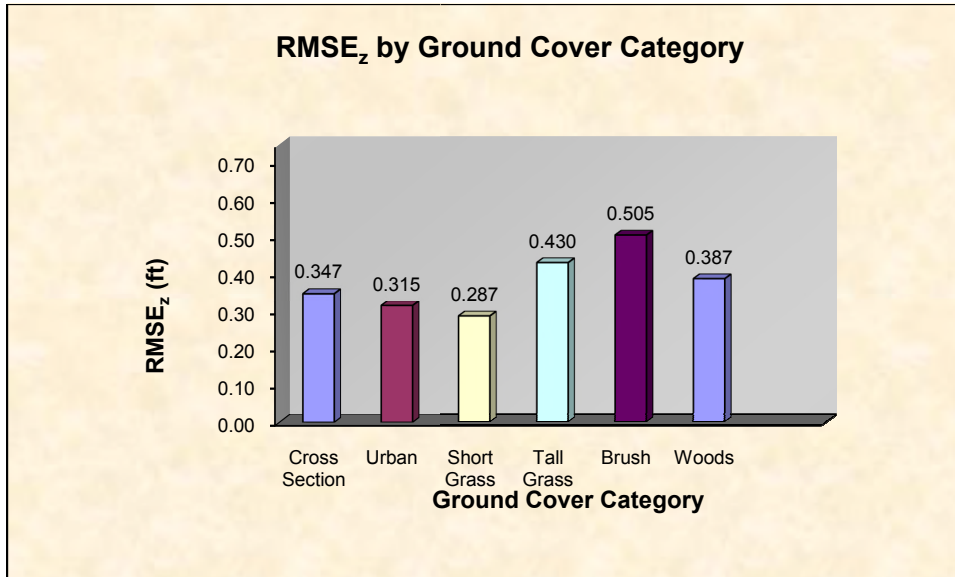


Figure 3: RMSE<sub>z</sub> statistics by Ground Cover Category

Table 4: Overall Descriptive Statistics by Ground Cover Category

Land Cover Category	RMSE <sub>z</sub> (ft)	Mean (ft)	Median (ft)	Skew	Std Dev (ft)	# of Points	Min (ft)	Max (ft)
Consolidated	0.401	0.317	0.287	0.642	0.246	162	-0.327	1.326
Cross Section	0.347	0.197	0.163	0.551	0.286	1454	-0.835	1.324
Urban	0.315	0.240	0.243	-0.098	0.208	26	-0.327	0.782
Short Grass	0.287	0.200	0.177	0.353	0.210	26	-0.223	0.711
Tall Grass	0.430	0.372	0.332	0.616	0.218	56	-0.087	1.012
Brush	0.505	0.387	0.299	0.830	0.330	27	-0.196	1.326
Woods	0.387	0.317	0.266	0.173	0.226	27	-0.062	0.732

Figure 4 shows a histogram of the elevation differences between the field surveyed checkpoints and the TIN surface computed from the digital vertical data. The histogram shows the number of occurrences (frequency) along the vertical axis that fell within the 0.20 ft ranges shown along the horizontal axis.

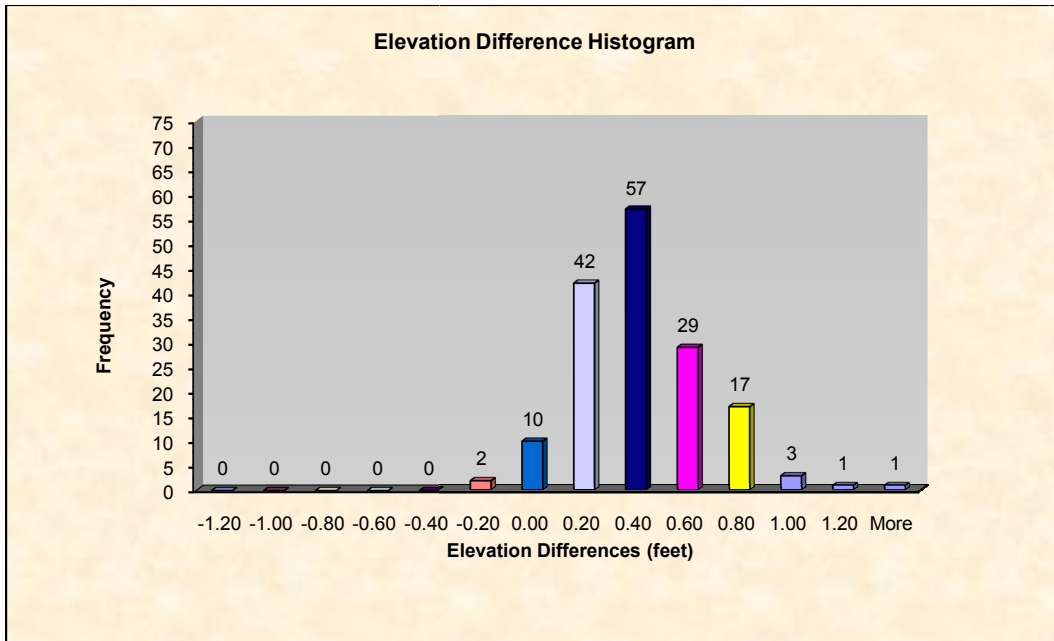


Figure 4: Histogram of Elevation Discrepancies within 0.2 ft bands

### Summary and Conclusions

The vertical accuracy testing methods derived from the NSSDA/FEMA and NDEP/ASPRS guidelines, when applied to the Marshall County, verify that the digital vertical data provided by AERO-METRIC is well suited for the production of 2 ft contours.

Per NSSDA/FEMA guidelines:  $(FVA) RMSE_z \times 1.9600 = 95\% \text{ confidence level}$   
 $0.351 \times 1.9600 = 0.617 \text{ ft}$

Per NDEP/ASPRS guidelines: 95<sup>th</sup> percentile (CVA) = 95% confidence level  
 $= 0.732 \text{ ft}$

Both of the 95% confidence level test results exceed the required 1.19 ft accuracy level to support the generation of 2 ft contours.

<sup>1</sup> Part 3: *National Standards for Spatial Data Accuracy (NSSDA)*, “Geospatial Positioning Accuracy Standards,” published by the Federal Geographic Data Committee (FGDC), 1998

<sup>2</sup> Appendix A, *Guidance for Aerial Mapping and Surveying*, “Guidelines and Specifications for Flood Hazard Mapping Partners,” published by the Federal Emergency Management Agency (FEMA), April 2003

<sup>3</sup> *Guidelines for Digital Elevation Data*, Version 1.0, published by the National Digital Elevation Program (NDEP), May 2004

<sup>4</sup> *ASPRS Guidelines, Vertical Accuracy Reporting for Lidar Data*, published by the American Society for Photogrammetry and Remote Sensing (ASPRS), May 2004