

# FL Lower Choctawhatchee NFWFMD Lidar 2017 B17

Report Produced for U.S. Geological Survey

USGS Contract: G16PC00020

Task Order: G17PD00328

Report Date: 4/3/2018

SUBMITTED BY:

**Dewberry**

1000 North Ashley Drive Suite 801  
Tampa, FL 33602  
813.225.1325

SUBMITTED TO:

**U.S. Geological Survey**

1400 Independence Road  
Rolla, MO 65401  
573.308.3810

## Table of Contents

Executive Summary .....	4
The Project Team.....	4
Survey Area.....	4
Date of Survey.....	4
Coordinate Reference System .....	5
Lidar Vertical Accuracy .....	6
Project Deliverables.....	6
Project Tiling Footprint.....	7
Lidar Acquisition Report .....	8
Lidar Acquisition Details.....	8
Lidar System parameters.....	8
Acquisition Status Report and Flightlines .....	9
Lidar Control .....	10
Airborn GPS Kinematic .....	11
Generation and Calibration of Laser Points (raw data) .....	11
Boresight and Relative accuracy.....	12
Preliminary Vertical Accuracy Assessment.....	14
Lidar Processing & Qualitative Assessment .....	14
Initial Processing.....	14
Final Swath Vertical Accuracy Assessment.....	15
Inter-Swath (Between Swath) Relative Accuracy .....	16
Intra-Swath (Within a Single Swath) Relative Accuracy .....	17
Horizontal Alignment .....	18
Point Density and Spatial Distribution.....	19
Data Classification and Editing.....	21
Lidar Qualitative Assessment .....	23
Visual Review .....	23
Data Voids .....	23
Artifacts .....	23
Bridge Removal Artifacts .....	24
Culverts and Bridges .....	26
Interpolation within Resort Areas .....	27
Dirt Mounds.....	28
Formatting.....	29
Derivative Lidar Products.....	30

Low Confidence Polygons.....	30
Lidar Positional Accuracy .....	30
Background.....	30
Survey Vertical Accuracy Checkpoints .....	31
Vertical Accuracy Test Procedures .....	38
NVA .....	38
VVA .....	38
Vertical Accuracy Results .....	39
Horizontal Accuracy Test Procedures .....	42
Horizontal Accuracy Results .....	42
Breakline Production & Qualitative Assessment Report.....	43
Breakline Production Methodology .....	43
Breakline Qualitative Assessment .....	43
Breakline Checklist.....	44
Data Dictionary .....	45
Horizontal and Vertical Datum.....	45
Coordinate System and Projection.....	45
Inland Streams and Rivers.....	45
Inland Ponds and Lakes.....	47
Tidal Waters.....	48
Beneath Bridge Breaklines.....	49
DEM Production & Qualitative Assessment.....	50
DEM Production Methodology .....	50
DEM Qualitative Assessment .....	52
DEM Vertical Accuracy Results.....	53
DEM Checklist.....	54
Appendix A: Survey Report .....	56
1. Introduction .....	56
2. Project Details.....	56
Appendix B: Complete List of Delivered Tiles.....	59
Appendix C: GPS Processing .....	71
Mission 1 – 5417099a GNSS Processing.....	71
Mission 1 – 5417099a Sensor Errors.....	77
Mission 2 – 5417122a GNSS Processing.....	81
Mission 2 – 5417122a Sensor Errors .....	85
Mission 3 – 5417123a GNSS Processing.....	90

Mission 3 – 5417123a Sensor Errors .....	95
Mission 4 – 5417123b GNSS Processing .....	100
Mission 4 – 5417123b Sensor Errors.....	105
Mission 5 – 5417126a Sensor Errors .....	116
Mission 6 – 5417126b GNSS Processing .....	121
Mission 6 – 5417126b Sensor Errors.....	126
Mission 7 – 5417127a GNSS Processing.....	131
Mission 7 – 5417127a Sensor Errors .....	136
Mission 8 – 5417136a GNSS Processing .....	141
Mission 8 – 5417136a Sensor Errors.....	146
Mission 9 – 5417137a GNSS Processing.....	151
Mission 9 – 5417137a Sensor Errors .....	156

## Executive Summary

The primary purpose of this project was to develop a consistent and accurate surface elevation dataset derived from high-accuracy Light Detection and Ranging (lidar) technology for the FL Lower Choctawhatchee NFWFMD Project Area.

The lidar data were processed and classified according to project specifications. Detailed breaklines and bare-earth Digital Elevation Models (DEMs) were produced for the project area. Data was formatted according to tiles with each tile covering an area of 1500m by 1500m. A total of 3,893 tiles were produced for the project encompassing an area of approximately 3,081 sq. miles.

## THE PROJECT TEAM

Dewberry served as the prime contractor for the project. In addition to project management, Dewberry was responsible for LAS classification, all lidar products, breakline production, Digital Elevation Model (DEM) production, and quality assurance.

Dewberry's Frederick C. Rankin completed ground surveying for the project and delivered surveyed checkpoints. His task was to acquire surveyed checkpoints for the project to use in independent testing of the vertical accuracy of the lidar-derived surface model. Please see Appendix A to view the separate Survey Report that was created for this portion of the project.

Airborne Imaging Inc. completed lidar data acquisition and data calibration for the project area.

## SURVEY AREA

The project area addressed by this report falls within the Florida counties of Walton, Holmes, Jackson, Washington, Bay, Calhoun and Gulf.

## DATE OF SURVEY

The lidar aerial acquisition was conducted from April 9, 2017 thru May 17, 2017.

## **COORDINATE REFERENCE SYSTEM**

Data produced for the project were delivered in the following reference system.

**Horizontal Datum:** The horizontal datum for the project is North American Datum of 1983 with the 2011 Adjustment (NAD 83 (2011))

**Vertical Datum:** The Vertical datum for the project is North American Vertical Datum of 1988 (NAVD88)

**Coordinate System:** UTM Zone 16N

**Units:** Horizontal units are in meters, Vertical units are in meters.

**Geoid Model:** Geoid12B (Geoid 12B was used to convert ellipsoid heights to orthometric heights).

## **LIDAR VERTICAL ACCURACY**

For the FL Lower Choctawhatchee NFWFMD Lidar Project, the tested  $RMSE_z$  of the classified lidar data for checkpoints in non-vegetated terrain equaled **5.1 cm** compared with the 10 cm specification; and the NVA of the classified lidar data computed using  $RMSE_z \times 1.9600$  was equal to **9.9 cm**, compared with the 19.6 cm specification.

For the FL Lower Choctawhatchee NFWFMD Lidar Project, the tested VVA of the classified lidar data computed using the 95<sup>th</sup> percentile was equal to **14.3 cm**, compared with the 29.4 cm specification.

Additional accuracy information and statistics for the classified lidar data, raw swath data, and bare earth DEM data are found in the following sections of this report.

## **PROJECT DELIVERABLES**

The deliverables for the project are listed below.

1. Raw Point Cloud Data (Swaths)
2. Classified Point Cloud Data (Tiled)
3. Bare Earth Surface (Raster DEM – IMG Format)
4. Intensity Images (8-bit gray scale, tiled, GeoTIFF format)
5. Breakline Data (File GDB)
6. Independent Survey Checkpoint Data (Report, Photos, & Points)
7. Low Confidence Polygons (shapefile)
8. Calibration Points
9. Metadata
10. Project Report (Acquisition, Processing, QC)
11. Project Extents, Including a shapefile derived from the lidar deliverable

### PROJECT TILING FOOTPRINT

Three thousand eight hundred ninety two (3,893) tiles were delivered for the project. Each tile's extent is 1,500 meters by 1,500 meters (see Appendix B for a complete listing of delivered tiles).

## FL Lower Choctawhatchee NFWWMD Lidar Project

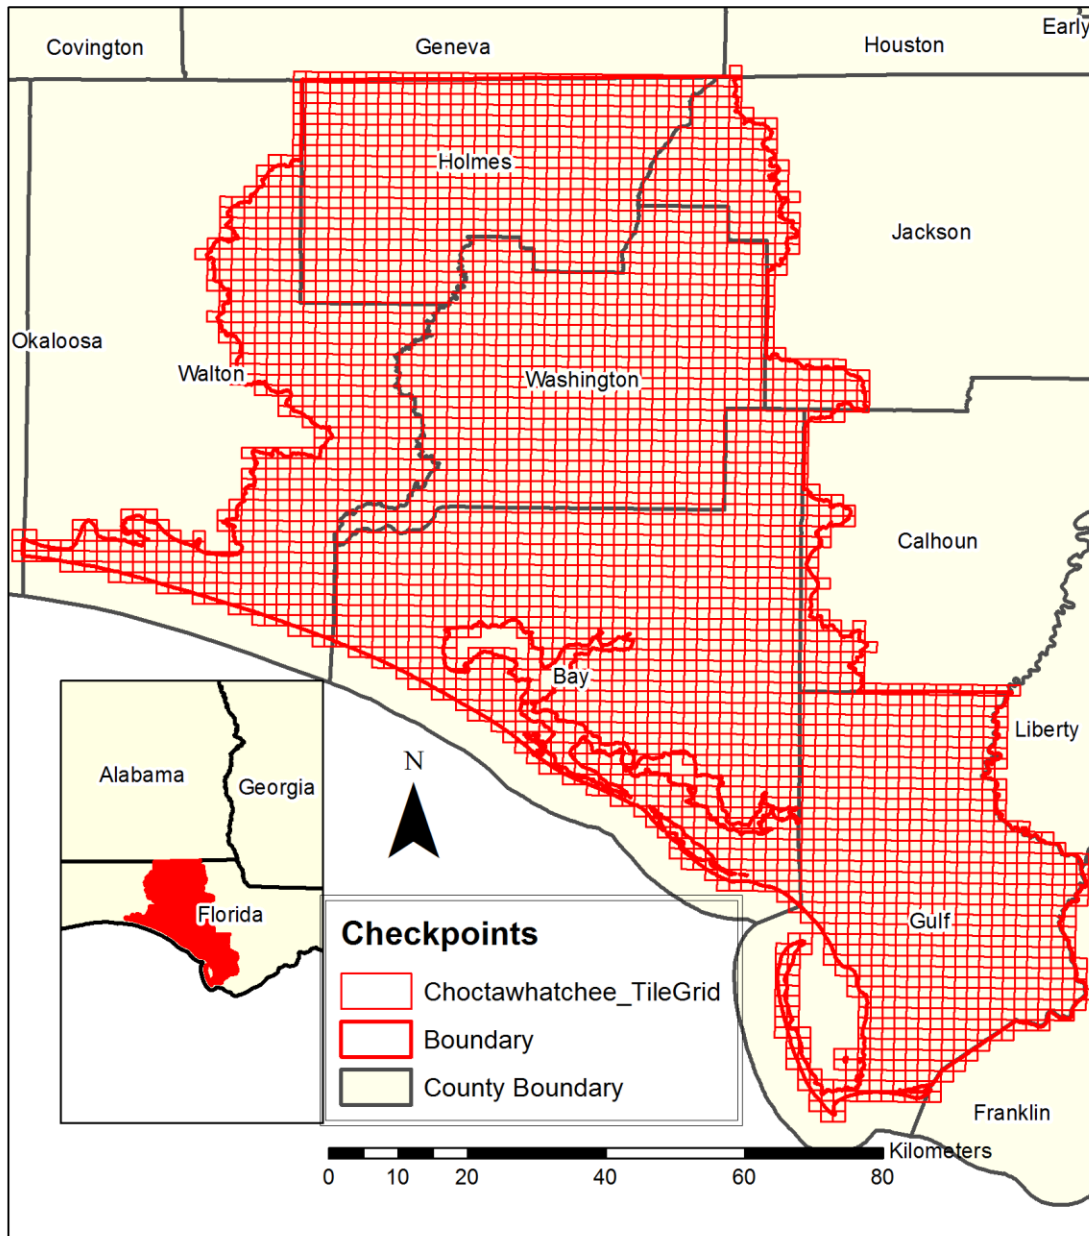


Figure 1 - Project Map

## Lidar Acquisition Report

Dewberry elected to subcontract the lidar acquisition and calibration activities to Airborne Imaging Inc. Airborne Imaging Inc. was responsible for providing lidar acquisition, calibration and delivery of lidar data files to Dewberry.

Dewberry received calibrated swath data from Airborne Imaging Inc. on July 15, 2017.

### LIDAR ACQUISITION DETAILS

Airborne Imaging Inc. planned 117 passes for the project area as a series of parallel flight lines with cross flightlines for the purposes of quality control. The flight plan included zigzag flight line collection as a result of the inherent IMU drift associated with all IMU systems. In order to reduce any margin for error in the flight plan, Airborne Imaging Inc. followed FEMA's Appendix A "guidelines" for flight planning and, at a minimum, includes the following criteria:

- A digital flight line layout using Riegl's flight design software for direct integration into the aircraft flight navigation system.
- Planned flight lines; flight line numbers; and coverage area.
- Lidar coverage extended by a predetermined margin beyond all project borders to ensure necessary over-edge coverage appropriate for specific task order deliverables.
- Local restrictions related to air space and any controlled areas have been investigated so that required permissions can be obtained in a timely manner with respect to schedule. Additionally, Airborne Imaging Inc. will file our flight plans as required by local Air Traffic Control (ATC) prior to each mission.

Airborne Imaging Inc. monitored weather and atmospheric conditions and conducted lidar missions only when no conditions exist below the sensor that will affect the collection of data. These conditions include leaf-off for hardwoods, no snow, rain, fog, smoke, mist and low clouds. Lidar systems are active sensors, not requiring light, thus missions may be conducted during night hours when weather restrictions do not prevent collection. Airborne Imaging Inc. accesses reliable weather sites and indicators (webcams) to establish the highest probability for successful collection in order to position our sensor to maximize successful data acquisition.

Within 72-hours prior to the planned day(s) of acquisition, Airborne Imaging Inc. closely monitored the weather, checking all sources for forecasts at least twice daily. As soon as weather conditions were conducive to acquisition, our aircraft mobilized to the project site to begin data collection. Once on site, the acquisition team took responsibility for weather analysis.

Airborne Imaging lidar sensors are calibrated at a designated site located at Red Deer, Alberta, Canada or St. Hubert, Quebec, Canada and are periodically checked and adjusted to minimize corrections at project sites.

### LIDAR SYSTEM PARAMETERS

Airborne Imaging Inc. operated a Piper PA-31 Navajo (Tail # C-GKSX) outfitted with a Riegl Q-1560 lidar system during the collection of the study area. Table 1 illustrates Airborne Imaging Inc. system parameters for lidar acquisition on this project.



Item	Parameter
System	Riegl LMS-Q1560
Altitude (AGL meters)	2000
Approx. Flight Speed (knots)	150
Scanner Pulse Rate (kHz)	800 kHz (true) 533.3 kHz (effective)
Scan Frequency (hz)	185 Scanlines/s
Pulse Duration of the Scanner (nanoseconds)	3
Pulse Width of the Scanner (m)	0.9
Swath width (m)	2309
Central Wavelength of the Sensor Laser (nanometers)	1064
Did the Sensor Operate with Multiple Pulses in The Air? (yes/no)	Yes
Beam Divergence (milliradians)	0.25
Nominal Swath Width on the Ground (m)	2309
Swath Overlap (%)	30
Total Sensor Scan Angle (degree)	60
Computed Down Track spacing (m) per beam	0.89 per channel
Computed Cross Track Spacing (m) per beam	0.89 per channel
Nominal Pulse Spacing (single swath), (m)	0.7
Nominal Pulse Density (single swath) (ppsm), (m)	2.0
Aggregate NPS (m) (if ANPS was designed to be met through single coverage, ANPS and NPS will be equal)	0.7
Aggregate NPD (m) (if ANPD was designed to be met through single coverage, ANPD and NPD will be equal)	2.0
Maximum Number of Returns per Pulse	4

Table 1: Airborne Imaging Inc. lidar system parameters

## ACQUISITION STATUS REPORT AND FLIGHTLINES

Upon notification to proceed, the flight crew loaded the flight plans and validated the flight parameters. The Acquisition Manager contacted air traffic control and coordinated flight pattern requirements. Lidar acquisition began immediately upon notification that control base stations were in place. During flight operations, the flight crew monitored weather and atmospheric conditions. Lidar missions were flown only when no condition existed below the sensor that would affect the collection of data. The pilot constantly monitored the aircraft course, position, pitch, roll, and yaw of the aircraft. The sensor operator monitored the sensor, the status of PDOPs, and performed the first Q/C review during acquisition. The flight crew constantly reviewed weather and cloud locations. Any flight lines impacted by unfavorable conditions were marked as invalid and re-flown immediately or at an optimal time.

Figure 2 shows the combined trajectory of the flightlines.

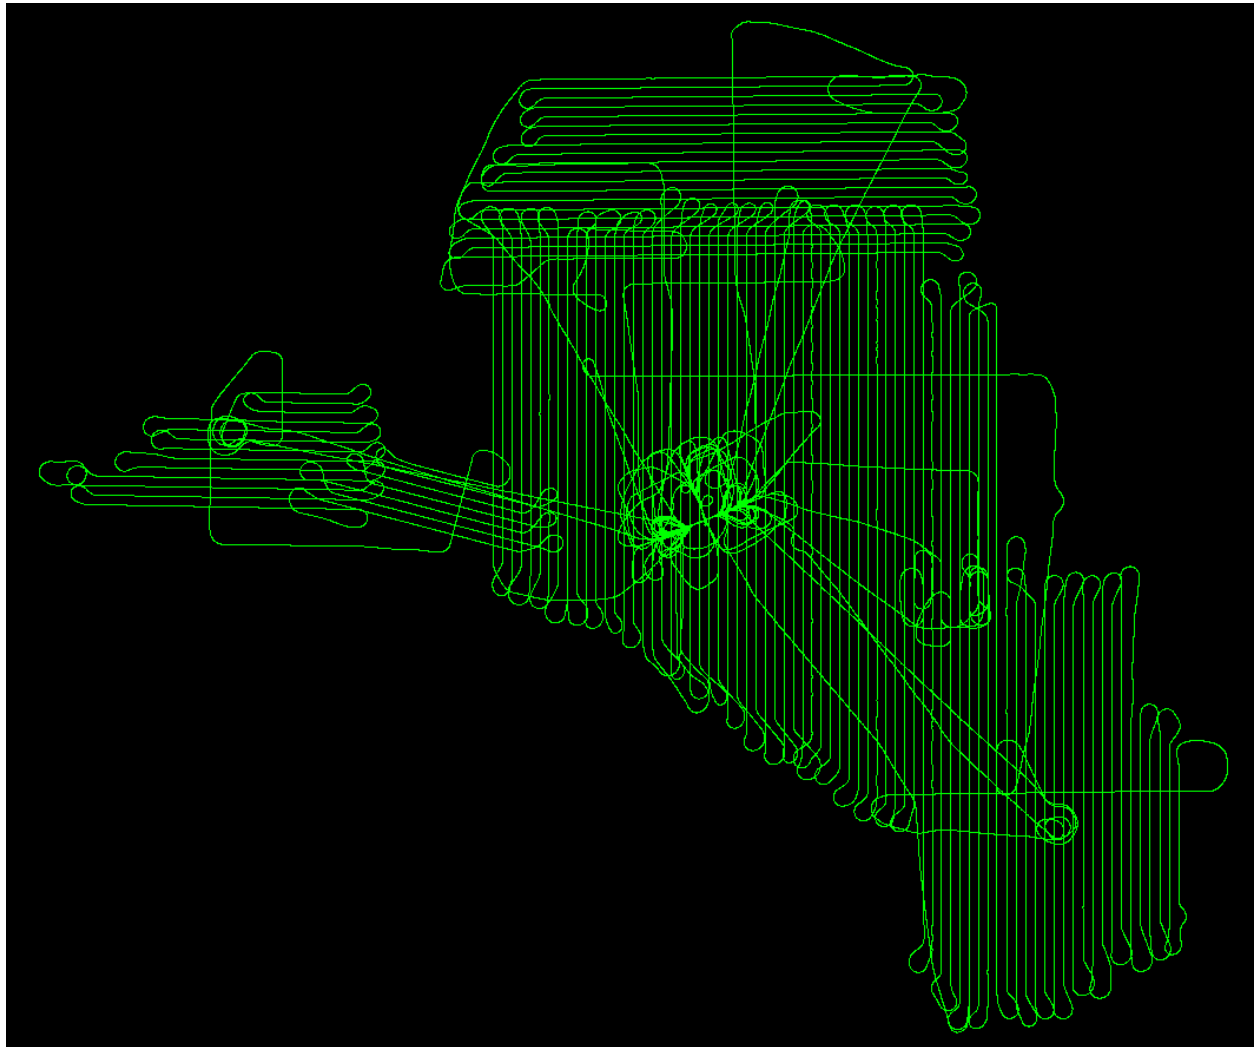


Figure 2: Trajectories as flown by Airborne Imaging, Inc.

### LIDAR CONTROL

Airborne Imaging Inc. conducted the survey which provided the six newly established base stations and seven existing NGS monuments that were used to control the lidar acquisition for the FL Lower Choctawhatchee NFWFMD lidar project area. The coordinates of all used base stations are provided in the table below. All control and calibration points are also provided in shapefile format as part of the final deliverables.

Name	NAD83(2011) UTM 16		Ellipsoid Ht (NAD83(2011), m)	Orthometric Ht (NAVD88 Geoid12B, m)
	Easting X (m)	Northing Y (m)		
ASo886	681913.979	3317375.706	-22.369	5.148
B159	619846.104	3401350.025	-0.571	27.232
B160	672845.360	3309317.449	-21.597	5.797

B161	579293.765	3361938.111	-25.542	1.983
B162	615768.044	3357324.550	-11.587	16.229
B170	619823.783	3401252.405	0.967	28.771
B171	646616.757	3336475.978	-16.914	10.857
BE0841	642162.835	3321970.295	-21.678	5.906
BE2979	618998.107	3355844.172	-23.441	4.385
BE3768	614404.316	3391605.106	2.580	30.388
BG1452	584006.895	3393146.716	36.362	63.923
BG5044	538984.309	3371984.612	-25.041	2.326
TO06	628830.893	3419736.416	31.543	59.275

Table 2 – Base stations used to control lidar acquisition

### AIRBORNE GPS KINEMATIC

Airborne GNSS data was processed using the Applanix POSPac software suite and Novatel's GrafNav software. Flights were flown with a minimum of 6 satellites in view (13° above the horizon) and with PDOP of better than 4. Distances from base stations to aircraft were kept to a maximum of 45 km. For all flights, the GPS data can be classified as excellent, with GPS residuals of 3 cm average or better but not larger than 10 cm being recorded.

GPS processing reports for each mission are included in Appendix C.

### GENERATION AND CALIBRATION OF LASER POINTS (RAW DATA)

The initial step of calibration is to verify availability and status of all needed GPS and Laser data against field notes and compile any data if not complete.

Subsequently the mission points are output using Riegl's RiProcess, initially with default values calibrated from the system. The initial point generation for each mission calibration is verified within Microstation/Terrascan for calibration errors. If a calibration error greater than specification is observed within the mission, the roll, pitch and scanner scale corrections that need to be applied are calculated. The missions with the new calibration values are regenerated and validated internally once again to ensure quality.

Data collected by the lidar unit is reviewed for completeness, acceptable density and to make sure all data is captured without errors or corrupted values. In addition, all GPS, aircraft trajectory, mission information, and ground control files are reviewed and logged into a database.

On a project level, a supplementary coverage check is carried out to ensure no data voids unreported by Field Operations are present.

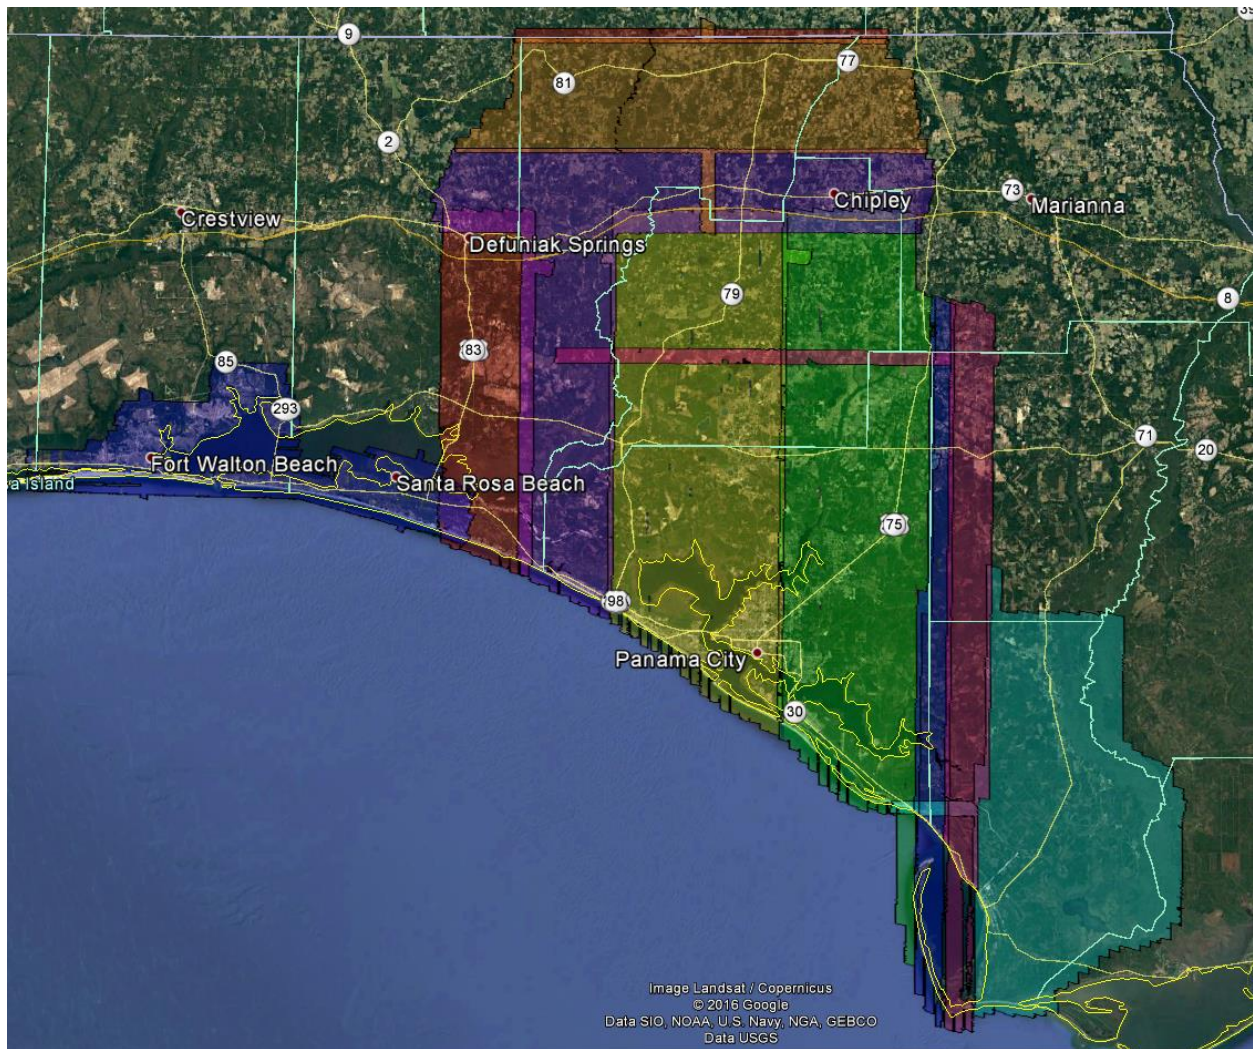


Figure 3 – Lidar swath output showing complete coverage.

## **BORESIGHT AND RELATIVE ACCURACY**

The initial points for each mission calibration are inspected for flight line errors, flight line overlap, slivers or gaps in the data, point data minimums, or issues with the lidar unit or GPS. Roll, pitch and scanner scale are optimized during the calibration process until the relative accuracy is met.

Relative accuracy and internal quality are checked using at least 3 regularly spaced QC blocks in which points from all lines are loaded and inspected. Vertical differences between ground surfaces of each line are displayed. Color scale is adjusted so that errors greater than the specifications are flagged. Cross sections are visually inspected across each block to validate point to point, flight line to flight line and mission to mission agreement.

For this project the specifications used are as follow:

Relative accuracy  $\leq 6$  cm maximum difference within individual swaths and  $\leq 8$  cm RMSDz between adjacent and overlapping swaths.

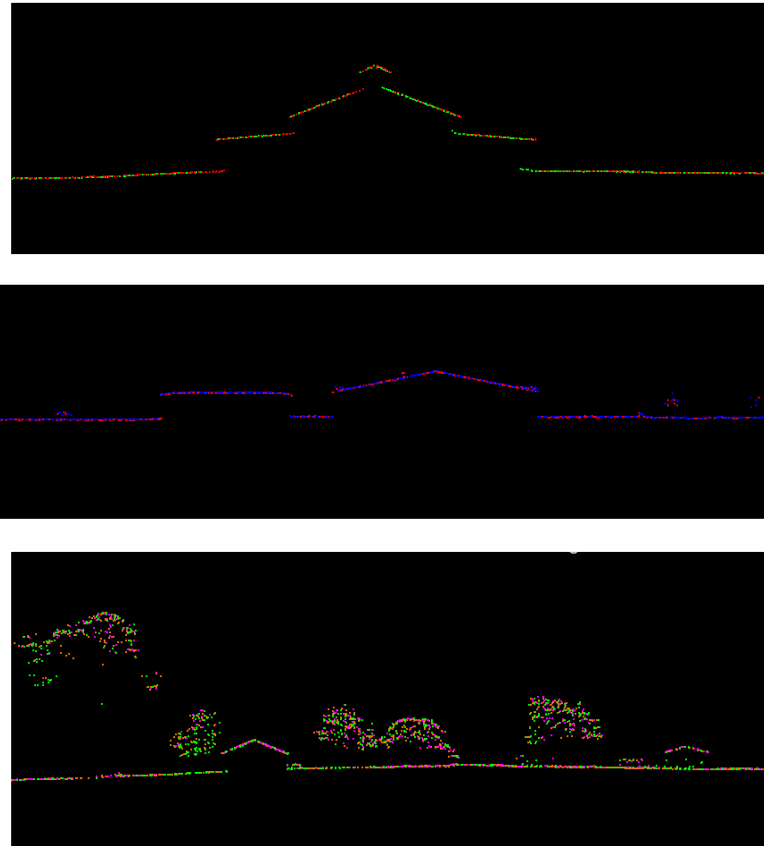


Figure 4 – Profile views showing correct roll and pitch adjustments.

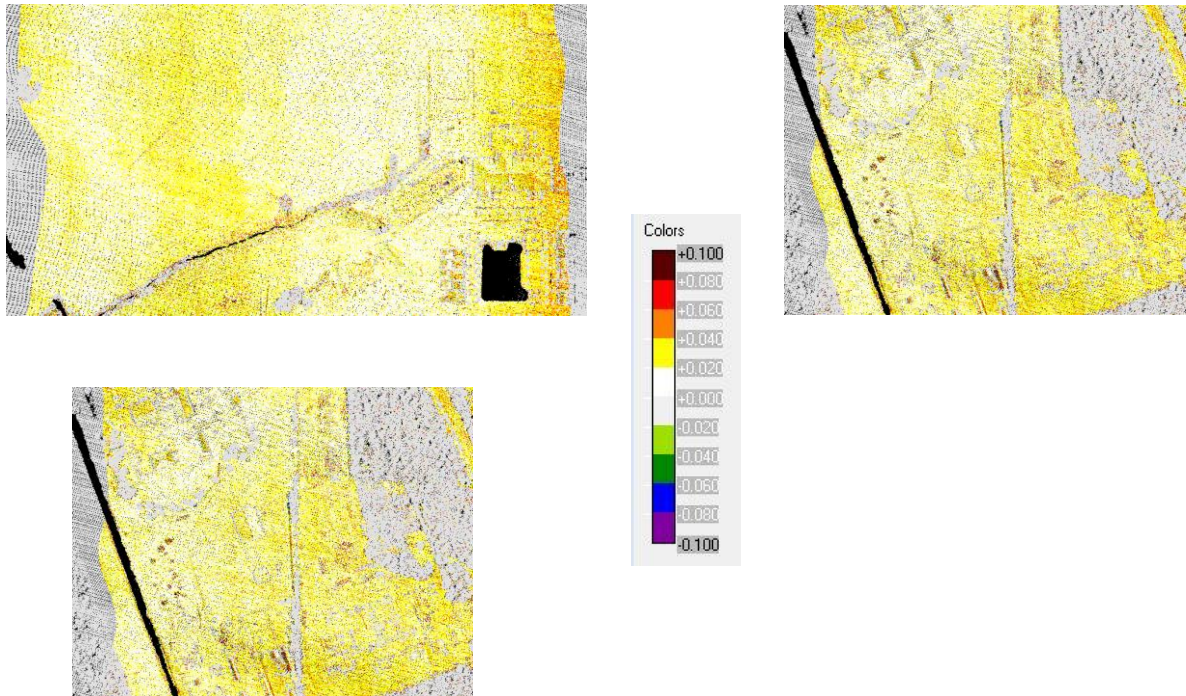


Figure 5 – QC block colored by distance to ensure accuracy at swath edges.

A different set of QC blocks are generated for final review after all transformations have been applied.

### PRELIMINARY VERTICAL ACCURACY ASSESSMENT

A preliminary RMSE<sub>z</sub> error check is performed by Airborne Imaging Inc. at this stage of the project life cycle in the raw lidar dataset against GPS static and kinematic data and compared to RMSE<sub>z</sub> project specifications. The lidar data is examined in non-vegetated, flat areas away from breaks. Lidar ground points for each flight line generated by an automatic classification routine are used.

Prior to delivery to Dewberry, the elevation data was verified internally to ensure it met Non-vegetated Vertical Accuracy (NVA) requirements (RMSE<sub>z</sub> ≤ 10 cm and Accuracy<sub>z</sub> at the 95% confidence level ≤ 19.6 cm) when compared to static and kinematic GPS checkpoints. Below is a summary for the test:

The calibrated FL Lower Choctawhatchee NFWFMD lidar dataset was tested to 0.094 m vertical accuracy at 95% confidence level based on RMSE<sub>z</sub> (0.048 m x 1.9600) when compared to over 14,500 GNSS kinematic check points.

The following are the final statistics for the GPS static checkpoints used by Airborne Imaging Inc. to internally verify vertical accuracy.

100 % of Totals	# of Points	RMSE <sub>z</sub> (m) NVA Spec=0.1 m	NVA at 95% Spec=0.196 m	Mean (m)	Std Dev (m)	Min (m)	Max (m)
Non-Vegetated Terrain	14,525	0.048	0.094	-0.001	0.048	-0.165	0.175

Table 3 - Kinematic GPS Vertical Accuracy Results

Overall the calibrated lidar data products collected by Airborne Imaging Inc. meet or exceed the requirements set out in the Statement of Work. The quality control requirements of Airborne Imaging Inc. quality management program were adhered to throughout the acquisition stage for this project to ensure product quality.

## Lidar Processing & Qualitative Assessment

### INITIAL PROCESSING

Once Dewberry receives the calibrated swath data from the acquisition provider, Dewberry performs several validations on the dataset prior to starting full-scale production on the project. These validations include vertical accuracy of the swath data, inter-swath (between swath) relative accuracy validation, intra-swath (within a single swath) relative accuracy validation, verification of horizontal alignment between swaths, and confirmation of point density and spatial distribution. This initial assessment allows Dewberry to determine if the data are suitable for full-scale production. Addressing issues at this stage allows the data to be corrected while imposing the least disruption possible on the overall production workflow and overall schedule.

### Final Swath Vertical Accuracy Assessment

Once Dewberry received the calibrated swath data from Airborne Imaging, Dewberry tested the vertical accuracy of the non-vegetated terrain swath data prior to additional processing. Dewberry tested the vertical accuracy of the swath data using the one hundred and one non-vegetated (open terrain and urban) independent survey check points. The vertical accuracy is tested by comparing survey checkpoints in non-vegetated terrain to a triangulated irregular network (TIN) that is created from the raw swath points. Only checkpoints in non-vegetated terrain can be tested against raw swath data because the data has not undergone classification techniques to remove vegetation, buildings, and other artifacts from the ground surface. Checkpoints are always compared to interpolated surfaces from the lidar point cloud because it is unlikely that a survey checkpoint will be located at the location of a discrete lidar point. Dewberry typically uses LP360 software to test the swath lidar vertical accuracy, Terrascan software to test the classified lidar vertical accuracy, and Esri ArcMap to test the DEM vertical accuracy so that three different software programs are used to validate the vertical accuracy for each project. Project specifications require a NVA of 19.6 cm based on the  $RMSE_z$  (10 cm) x 1.96. The dataset for the Lower Choctawhatchee NFWFMD Lidar Project satisfies this criteria. This raw lidar swath data set was tested to meet ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014) for a 10 cm  $RMSE_z$  Vertical Accuracy Class. Actual NVA accuracy was found to be  $RMSE_z = 4.7$  cm, equating to +/- 9.3 cm at 95% confidence level. The table below shows all calculated statistics for the raw swath data.

100 % of Totals	# of Points	$RMSE_z$ NVA Spec=0.10 m	NVA –Non-vegetated Vertical Accuracy ( $RMSE_z$ x 1.9600) Spec=0.196 m	Mean (m)	Median (m)	Skew	Std Dev (m)	Min (m)	Max (m)	Kurtosis
NVA	100	0.047	0.093	0.005	0.002	-0.133	0.047	-0.148	0.143	1.023

Table 4: NVA at 95% Confidence Level for Raw Swaths

Only non-vegetated terrain checkpoints are used to test the raw swath data because the raw swath data has not been classified to remove vegetation, structures, and other above ground features from the ground classification.

One checkpoint (NVA99) was removed from the raw swath vertical accuracy testing due to its location outside the project boundary. Table 5, below, provides the coordinates for this checkpoint.

Point ID	NAD83(2011) UTM Zone 16N		NAVD88 (Geoid 12B)	Lidar Z (m)	Delta Z	AbsDeltaZ
	Easting X (m)	Northing Y (m)	Survey Z (m)			
NVA-99	537472.548	3368388.832	5.280	OUTSIDE	N/A	N/A

Table 5: Checkpoint removed from raw swath vertical accuracy testing

### **Inter-Swath (Between Swath) Relative Accuracy**

Dewberry verified inter-swath or between swath relative accuracy of the dataset by creating Delta-Z (DZ) orthos. According to the SOW, USGS Lidar Base Specifications v1.2, and ASPRS Positional Accuracy Standards for Digital Geospatial Data, 10 cm Vertical Accuracy Class or QL2 data must meet inter-swath relative accuracy of 8 cm RMSDz or less with maximum differences less than 16 cm. These measurements are to be taken in non-vegetated and flat open terrain using single or only returns from all classes. Measurements are calculated in the DZ orthos on 1-meter pixels or cell sizes. Areas in the dataset where overlapping flight lines are within 8 cm of each other within each pixel are colored green, areas in the dataset where overlapping flight lines have elevation differences in each pixel between 8 cm to 16 cm are colored yellow, and areas in the dataset where overlapping flight lines have elevation differences in each pixel greater than 16 cm are colored red. Pixels that do not contain points from overlapping flight lines are colored according to their intensity values. Areas of vegetation and steep slopes (slopes with 16 cm or more of valid elevation change across 1 linear meter) are expected to appear yellow or red in the DZ orthos. If the project area is heavily vegetated, Dewberry may also create DZ Orthos from the initial ground classification only, while keeping all other parameters consistent. This allows Dewberry to review the ground classification relative accuracy beneath vegetation and to ensure flight line ridges or other issues do not exist in the final classified data.

Flat, open areas are expected to be green in the DZ orthos. Large or continuous sections of yellow or red pixels can indicate the data was not calibrated correctly or that there were issues during acquisition that could affect the usability of the data, especially when these yellow/red sections follow the flight lines and not the terrain or areas of vegetation. The DZ orthos for FL Lower Choctawhatchee are shown in the figure below; this project meets inter-swath relative accuracy specifications.




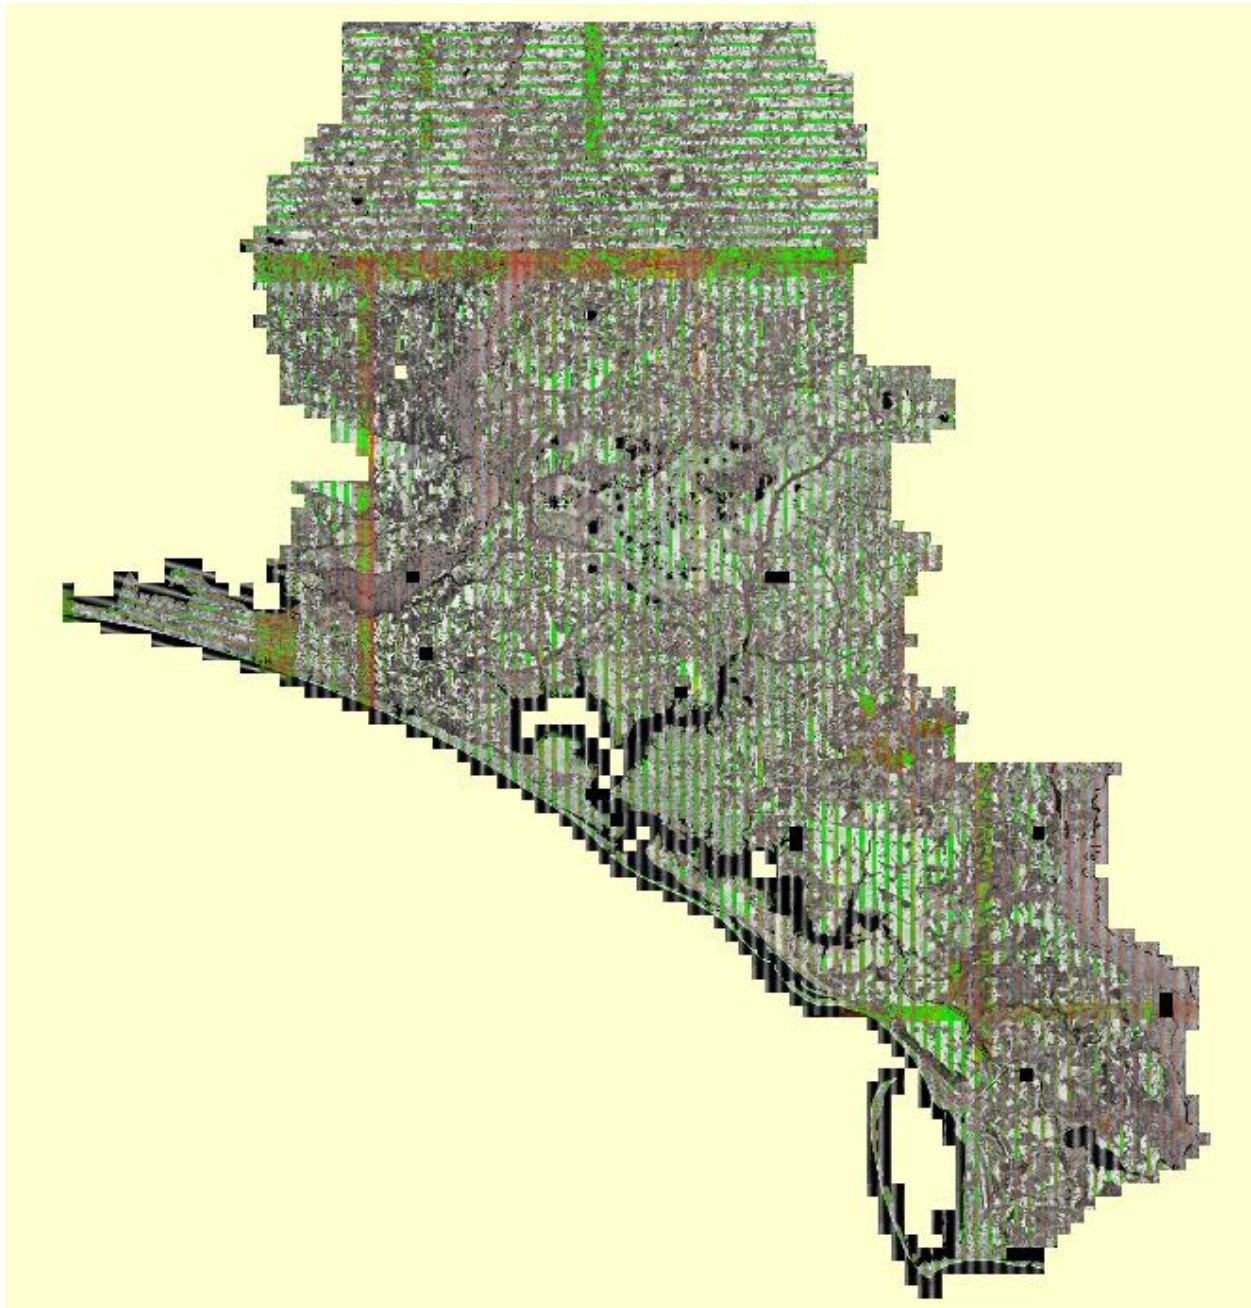


Figure 6– Single return DZ Orthos for the FL Lower Choctawhatchee. Inter-swath relative accuracy passes specifications.

### **Intra-Swath (Within a Single Swath) Relative Accuracy**

Dewberry verifies the intra-swath or within swath relative accuracy by using Quick Terrain Modeler (QTM) scripting and visual reviews. QTM scripting is used to calculate the maximum difference of all points within each 1-meter pixel/cell size of each swath. Dewberry analysts then identify planar surfaces acceptable for repeatability testing and analysts review the QTM results in those areas. According to the SOW, USGS Lidar Base Specifications v1.2, and ASPRS Positional Accuracy Standards for Digital Geospatial Data, 10 cm Vertical Accuracy Class or QL2 data must meet intra-swath relative accuracy of 6 cm maximum difference or less. The image

below shows two examples of the intra-swath relative accuracy of the FL Lower Choctawhatchee lidar Project; this project meets intra-swath relative accuracy specifications.

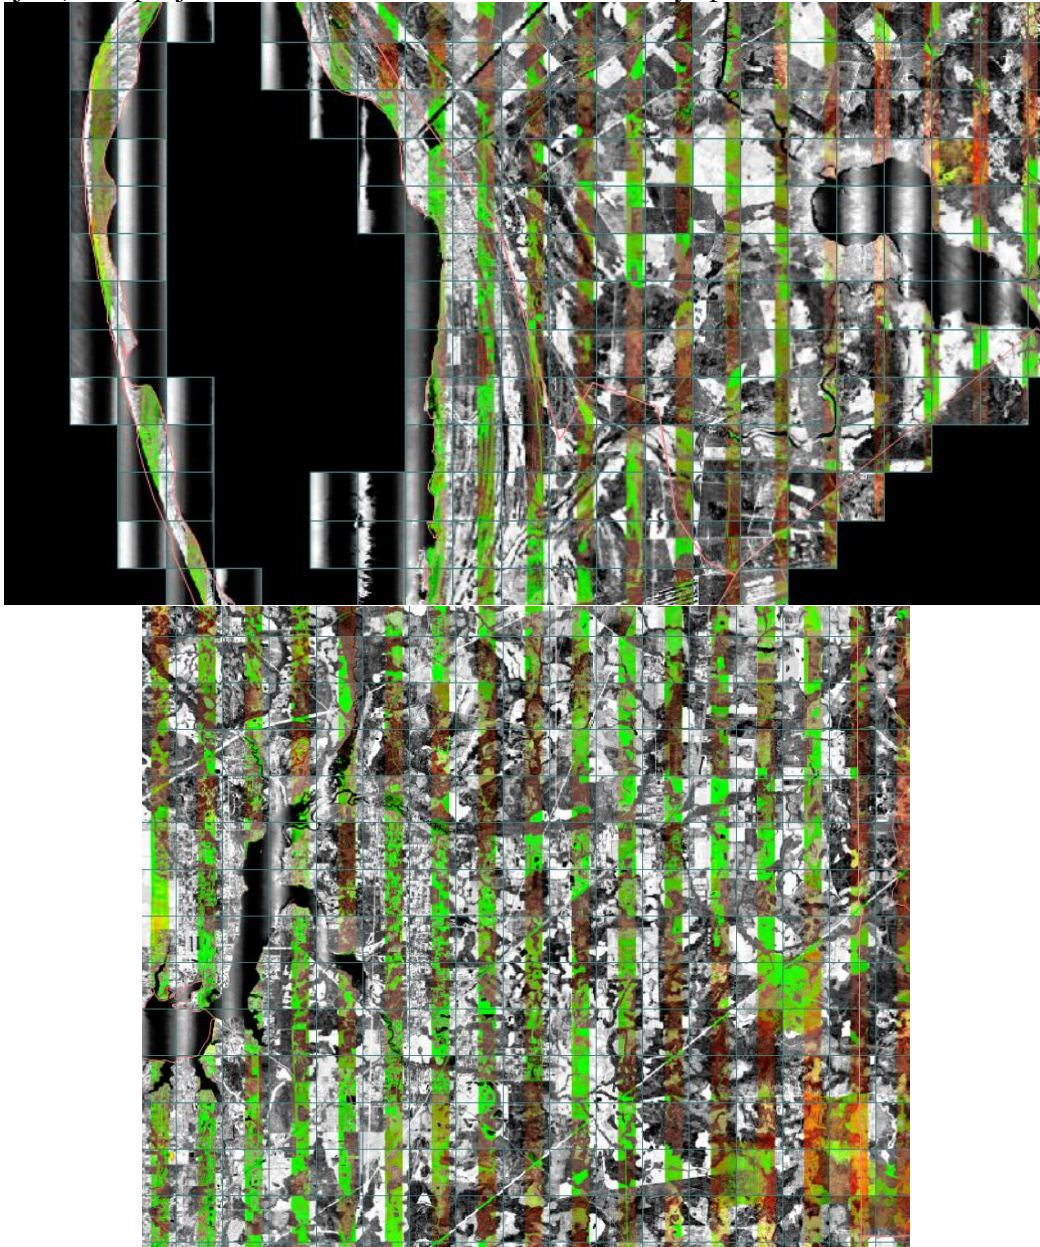


**Figure 7—Intra-swath relative accuracy.** These images show a large portion of the dataset; flat, open areas are colored green as they are within 6 cm whereas sloped and vegetated terrain is colored red because it exceeds 6 cm maximum difference, as expected, due to actual slope/terrain change and vegetation height differences. Intra-swath relative accuracy passes specifications.

### Horizontal Alignment

To ensure horizontal alignment between adjacent or overlapping flight lines, Dewberry uses QTM scripting and visual reviews. QTM scripting is used to create files similar to DZ orthos for each swath but this process highlights planar surfaces, such as roof tops. In particular, horizontal shifts or misalignments between swaths on roof tops and other elevated planar


surfaces are highlighted. Visual reviews of these features, including additional profile verifications, are used to confirm the results of this process. The image below shows an example of the horizontal alignment between swaths for FL Lower Choctawhatchee; no horizontal alignment issues were identified.

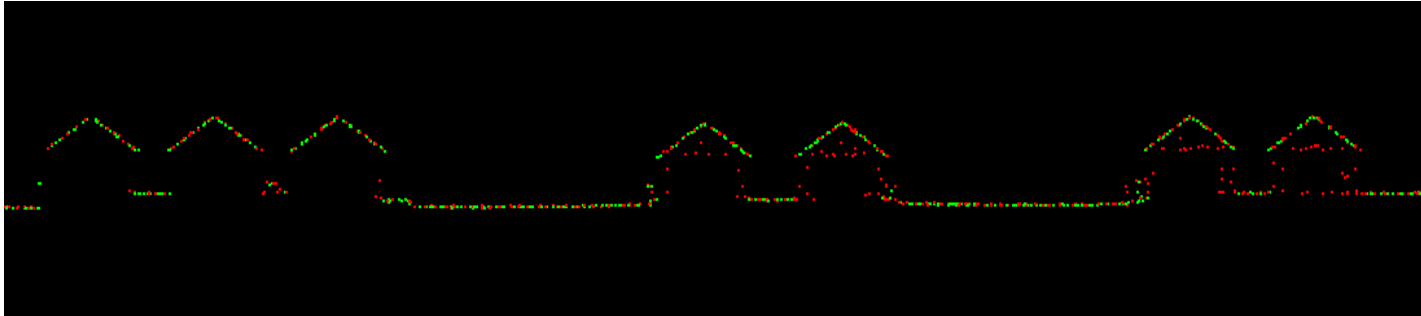

**Figure 8– Horizontal Alignment.** Two separate flight lines differentiated by color (red/green) are shown in this profile. There is no visible offset between these two flight lines. No horizontal alignment issues were identified.


### Point Density and Spatial Distribution

The required Aggregate Nominal Point Spacing (ANPS) for this project is no greater than 0.7 meters, which equates to an Aggregate Nominal Point Density (ANPD) of 2 points per square meter or greater. Density calculations were performed using first return data only located in the geometrically usable center portion (typically ~90%) of each swath. By utilizing statistics, the project area was determined to have an ANPS of 0.4 meters or an ANPD of 4.05 points per square meter which satisfies the project requirements. A visual review of a 1-square meter density grid (figure below) shows that there are some 1-meter cells that do not contain 2 points per square meter (purple areas) due to the irregular spacing of lidar point cloud data. Most 1-square meter cells contain at least 2 points per square meter (green areas) and when density is viewed/analyzed by representative 1-square kilometer areas (to account for the irregular spacing of lidar point clouds), density passes with no issues.

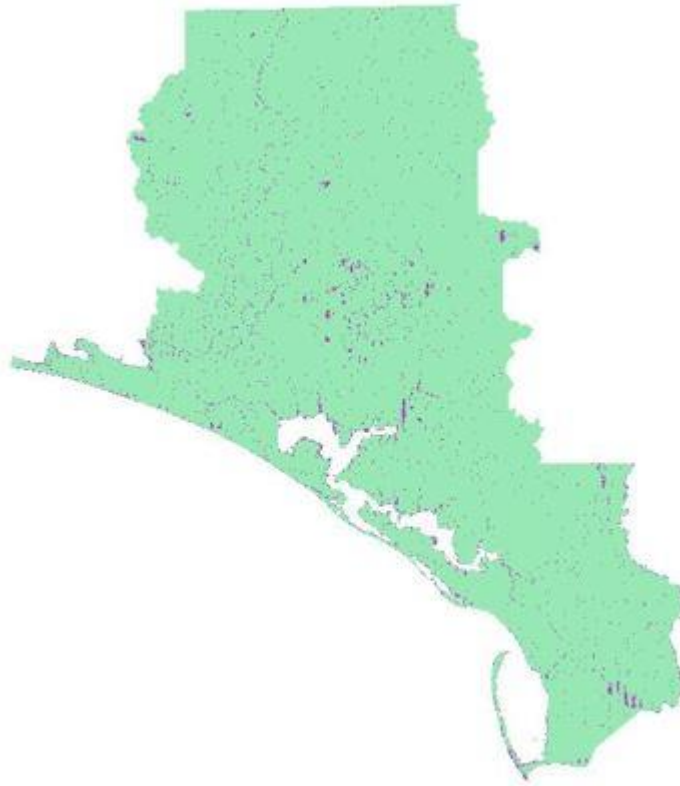

**Figure 9– 1-square meter density grid. There are some 1-meter cells that do not contain 2 points per square meter (purple areas) due to the irregular spacing of lidar point cloud data. Most 1-square meter cells contain at least 2 points per square meter (green areas) showing there are no systematic density issues. When density is viewed/analyzed by representative 1-square kilometer areas, density passes with no issues.**

The spatial distribution of points must be uniform and free of clustering. This specification is tested by creating a grid with cell sizes equal to the design  $NPS^2$ . ArcGIS tools are then used to calculate the number of first return points of each swath within each grid cell. At least 90% of the cells must contain 1 lidar point, excluding acceptable void areas such as water or low NIR reflectivity features, i.e. some asphalt and roof composition materials. This project passes spatial distribution requirements, as shown in the image below.

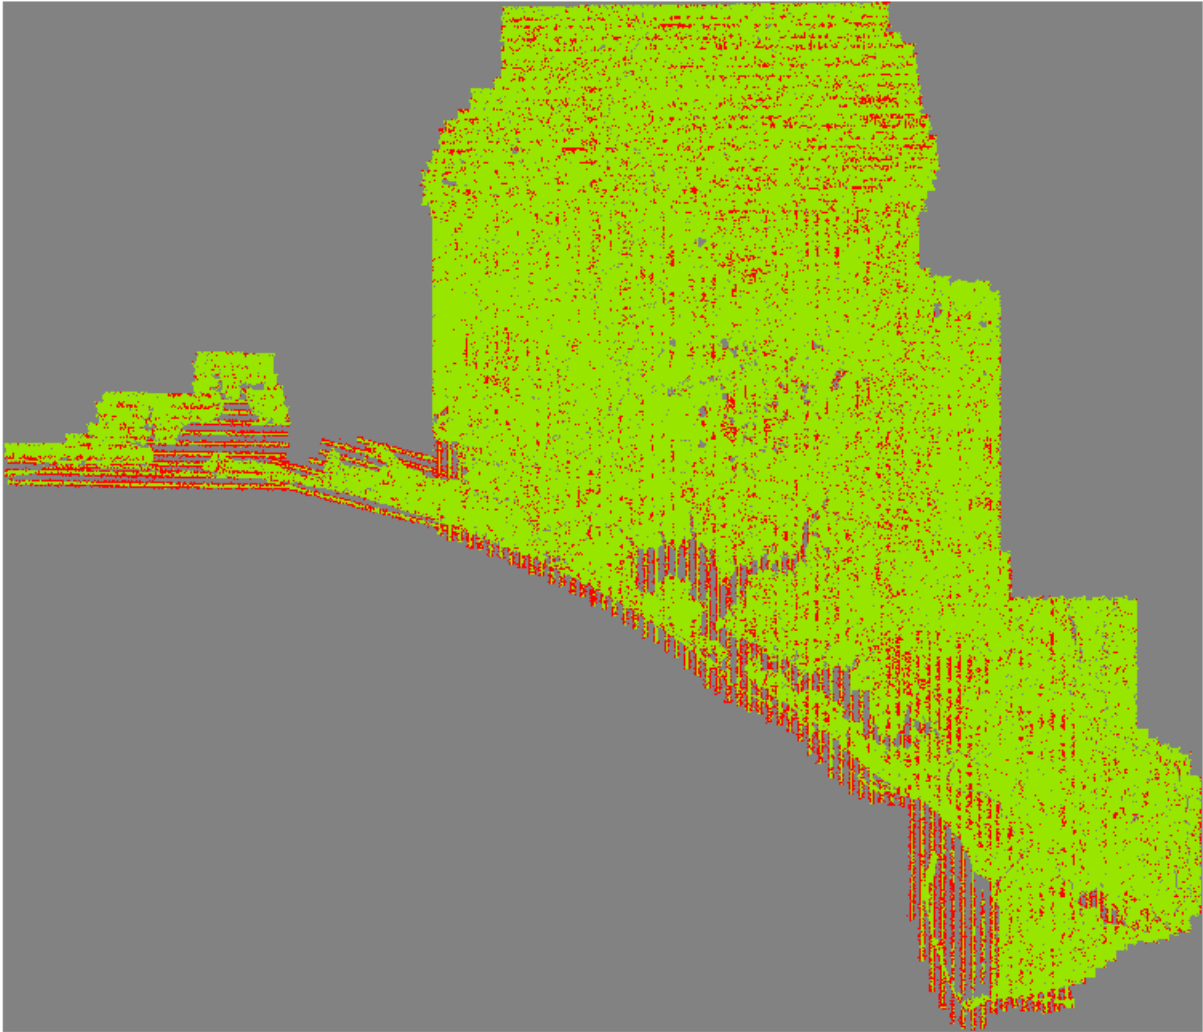

**Figure 10– Spatial Distribution.** All cells (2\*NPS cellsize) containing at least one lidar point are colored green. Cells that do not contain a lidar point, including water bodies which are acceptable NoData area, are colored red. Without removing acceptable NoData areas due to water, 97.5% of cells contain at least one lidar point.

## **DATA CLASSIFICATION AND EDITING**

Once the calibration, absolute swath vertical accuracy, and relative accuracy of the data was confirmed, Dewberry utilized a variety of software suites for data processing. The data was processed using GeoCue and TerraScan software. The initial step is the setup of the GeoCue project, which is done by importing a project defined tile boundary index encompassing the entire project area. The acquired 3D laser point clouds, in LAS binary format, were imported into the GeoCue project and tiled according to the project tile grid. Once tiled, the laser points were classified using a proprietary routine in TerraScan. This routine classifies any obvious low outliers in the dataset to class 7 and high outliers in the dataset to class 18. Points along flight line edges that are geometrically unusable are identified as withheld and classified to a separate class so that they will not be used in the initial ground algorithm. After points that could negatively affect the ground are removed from class 1, the ground layer is extracted from this

remaining point cloud. The ground extraction process encompassed in this routine takes place by building an iterative surface model.

This surface model is generated using three main parameters: building size, iteration angle and iteration distance. The initial model is based on low points being selected by a "roaming window" with the assumption that these are the ground points. The size of this roaming window is determined by the building size parameter. The low points are triangulated and the remaining points are evaluated and subsequently added to the model if they meet the iteration angle and distance constraints. This process is repeated until no additional points are added within iterations. A second critical parameter is the maximum terrain angle constraint, which determines the maximum terrain angle allowed within the classification model.

Each tile was then imported into Terrascan and a surface model was created to examine the ground classification. Dewberry analysts visually reviewed the ground surface model and corrected errors in the ground classification such as vegetation, buildings, and bridges that were present following the initial processing conducted by Dewberry. Dewberry analysts employ 3D visualization techniques to view the point cloud at multiple angles and in profile to ensure that non-ground points are removed from the ground classification. Bridge decks are classified to class 17 using bridge breaklines compiled by Dewberry. After the ground classification corrections were completed, the dataset was processed through a water classification routine that utilizes breaklines compiled by Dewberry to automatically classify hydro features. The water classification routine selects ground points within the breakline polygons and automatically classifies them as class 9, water. During this water classification routine, points that are within 1x NPS or less of the hydrographic features are moved to class 10, an ignored ground due to breakline proximity. Overage points are then identified in Terrascan and GeoCue is used to set the overlap bit for the overage points and the withheld bit is set on the withheld points previously identified in Terrascan before the ground classification routine was performed.

The lidar tiles were classified to the following classification schema:

- Class 1 = Unclassified, used for all other features that do not fit into the Classes 2, 7, 9, 10, 17, or 18, including vegetation, buildings, etc.
- Class 2 = Bare-Earth Ground
- Class 7 = Low Noise
- Class 9 = Water, points located within collected breaklines
- Class 10 = Ignored Ground due to breakline proximity
- Class 17 = Bridge Decks
- Class 18 = High Noise

After manual classification, the LAS tiles were peer reviewed and then underwent a final QA/QC. After the final QA/QC and corrections, all headers, appropriate point data records, and variable length records, including spatial reference information, are updated in GeoCue software and then verified using proprietary Dewberry tools.

## Lidar Qualitative Assessment

Dewberry's qualitative assessment utilizes a combination of statistical analysis and interpretative methodology or visualization to assess the quality of the data for a bare-earth digital terrain model (DTM). This includes creating pseudo image products such as lidar orthos produced from the intensity returns, Triangular Irregular Network (TIN)'s, Digital Elevation Models (DEM) and 3-dimensional models as well as reviewing the actual point cloud data. This process looks for anomalies in the data, areas where man-made structures or vegetation points may not have been classified properly to produce a bare-earth model, and other classification errors. This report will present representative examples where the lidar and post processing had issues as well as examples of where the lidar performed well.

### VISUAL REVIEW


The following sections describe common types of issues identified in lidar data and the results of the visual review for FL Lower Choctawhatchee.

#### Data Voids

The LAS files are used to produce density grids using the commercial software package QT Modeler (QTM) which creates a 3-dimensional data model derived from Class 2 (ground) points in the LAS files. Grid spacing is based on the project density deliverable requirement for unobscured areas. Acceptable voids (areas with no lidar returns in the LAS files) that are present in the majority of lidar projects include voids caused by bodies of water. No unacceptable voids are present in the FL Lower Choctawhatchee lidar project.

#### Artifacts

Artifacts are caused by the misclassification of ground points and usually represent vegetation and/or man-made structures. The artifacts identified are usually low lying structures, such as porches or low vegetation used as landscaping in neighborhoods and other developed areas. These low lying features are extremely difficult for the automated algorithms to detect as non-ground and must be removed manually. The vast majority of these features have been removed but a small number of these features are still in the ground classification. The limited numbers of features remaining in the ground are usually 0.3 meters or less above the actual ground surface, and should not negatively impact the usability of the dataset.

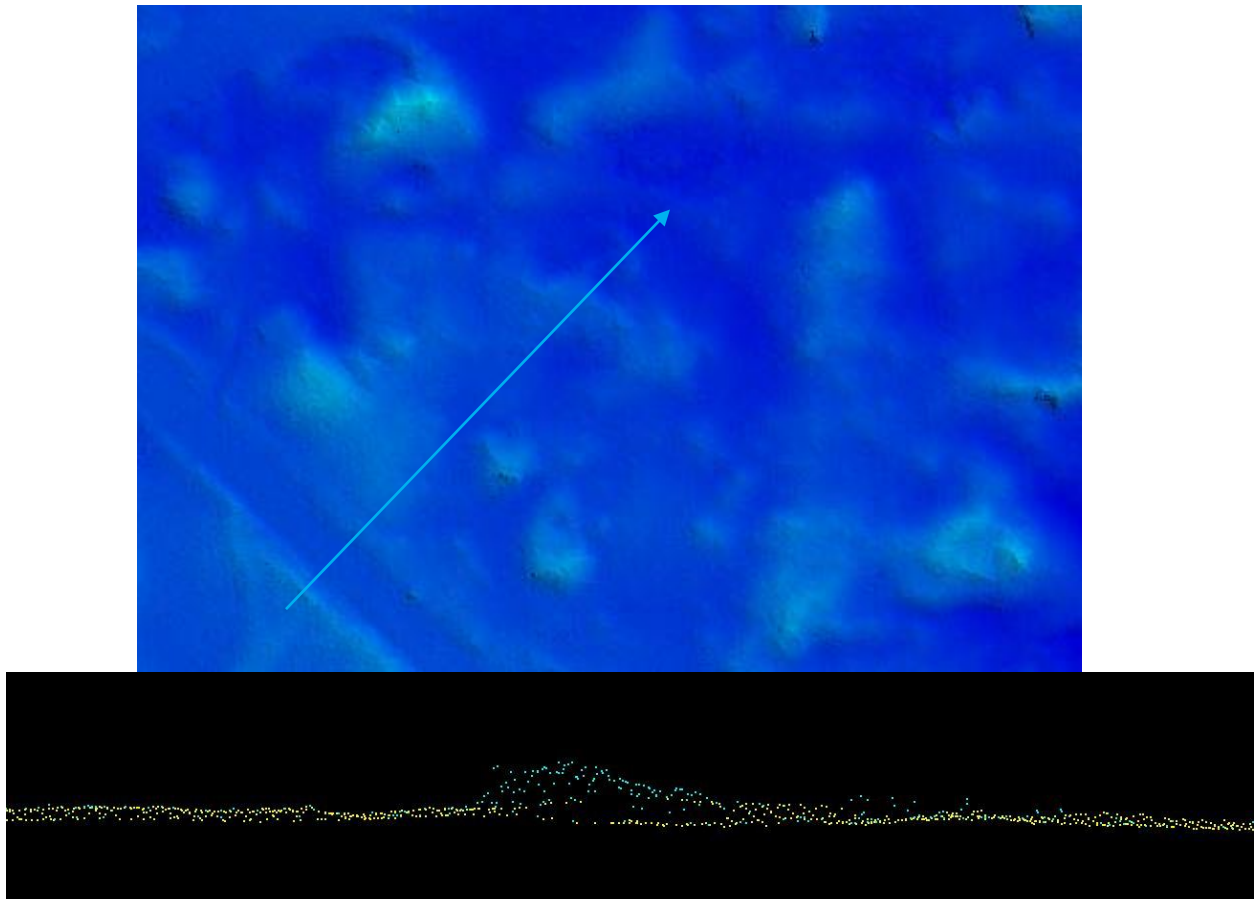

**Figure 11 – Tile number 16REV640585.** Profile with points colored by class (class 1=cyan, class 2=yellow) is shown in the bottom view and a TIN of the surface is shown in the top view. The arrow identifies low vegetation points. A limited number of these small features are still classified as ground but do not impact the usability of the dataset.

### Bridge Removal Artifacts

The DEM surface models are created from TINs or Terrains. TIN and Terrain models create continuous surfaces from the inputs. Because a continuous surface is being created, the TIN or Terrain will use interpolation to continue the surface beneath the bridge where no lidar data was acquired. Locations where bridges were removed will generally contain less detail in the bare-



earth surface because these areas are interpolated

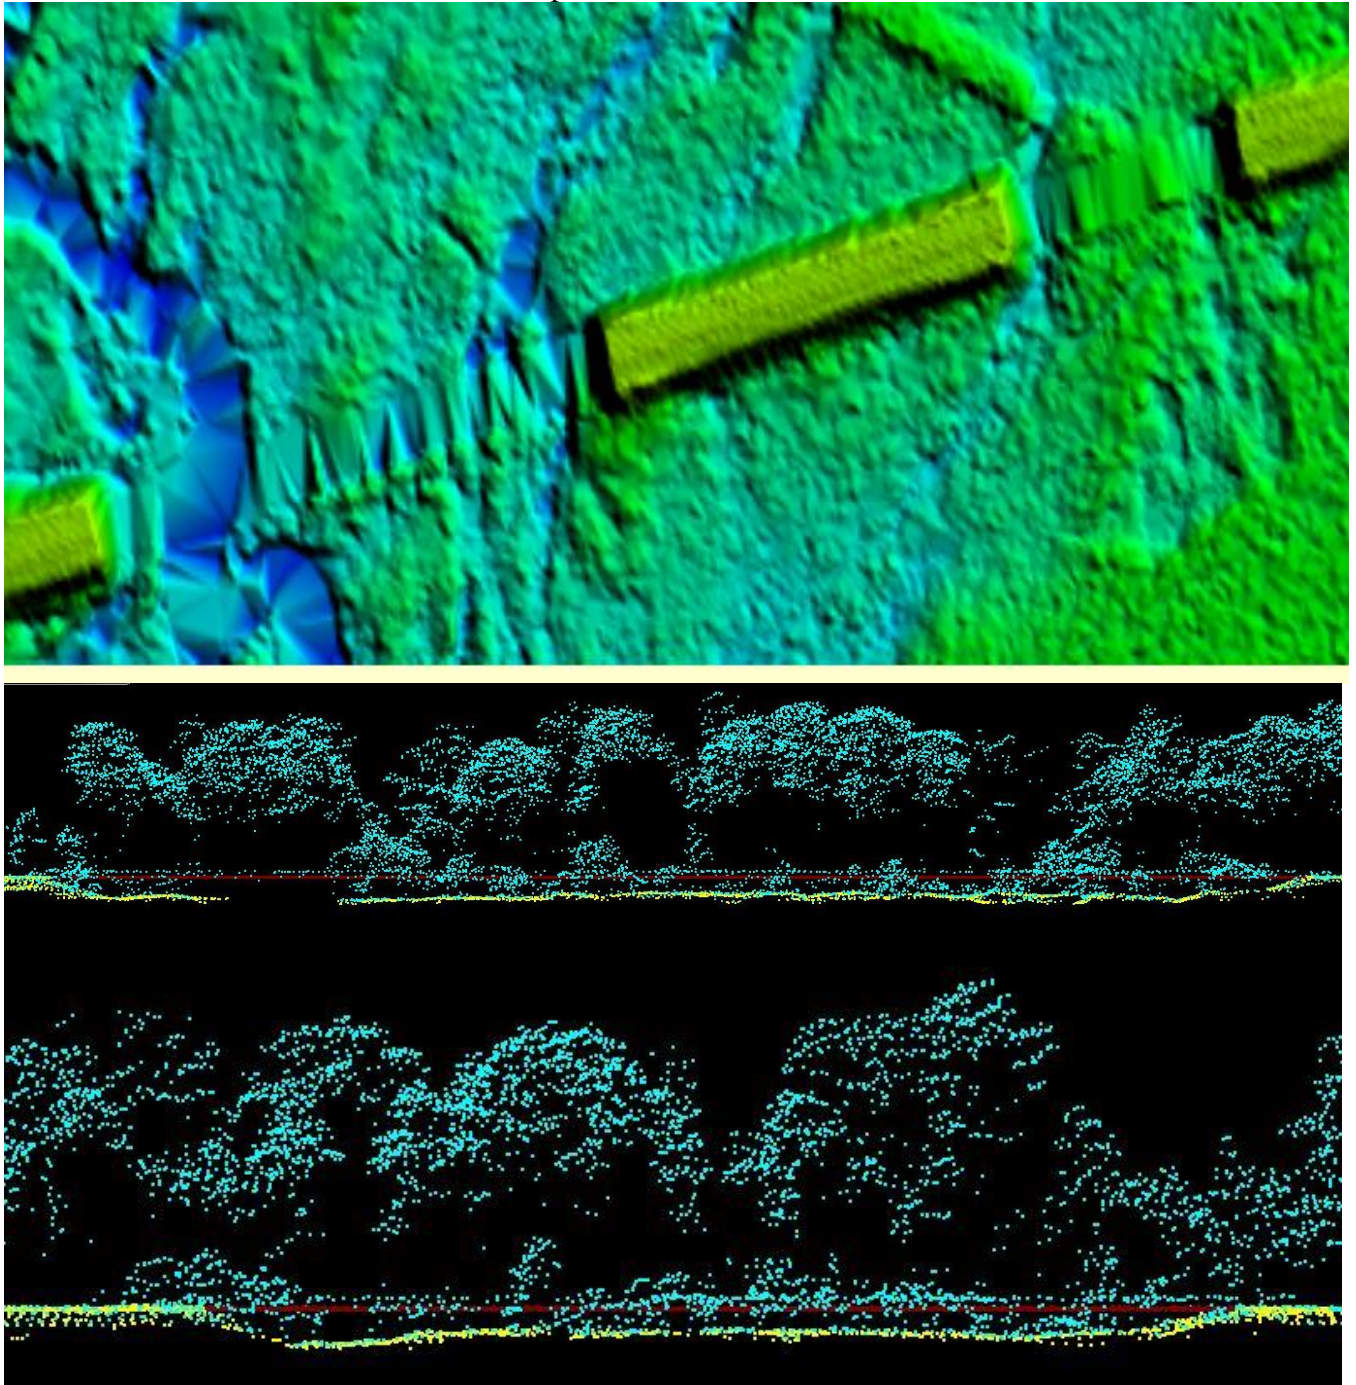


Figure 12 – Tile number 16RFV315005. The DEM in the top view shows an area where two bridges have been removed from ground. The surface model must make a continuous model and in order to do so, points are connected through interpolation. This results in less detail where the surface must be interpolated. The profiles in the bottom views show the lidar points of these particular features colored by class. All bridge points have been removed from ground (yellow) and are classified to bridge deck (brown).

### Culverts and Bridges

Bridges have been removed from the bare earth surface while culverts remain in the bare earth surface. In instances where it is difficult to determine if the feature is a culvert or bridge, such as with some small bridges, Dewberry erred on assuming they would be culverts especially if they are on secondary or tertiary roads. Below is an example of a culvert that has been left in the ground surface.

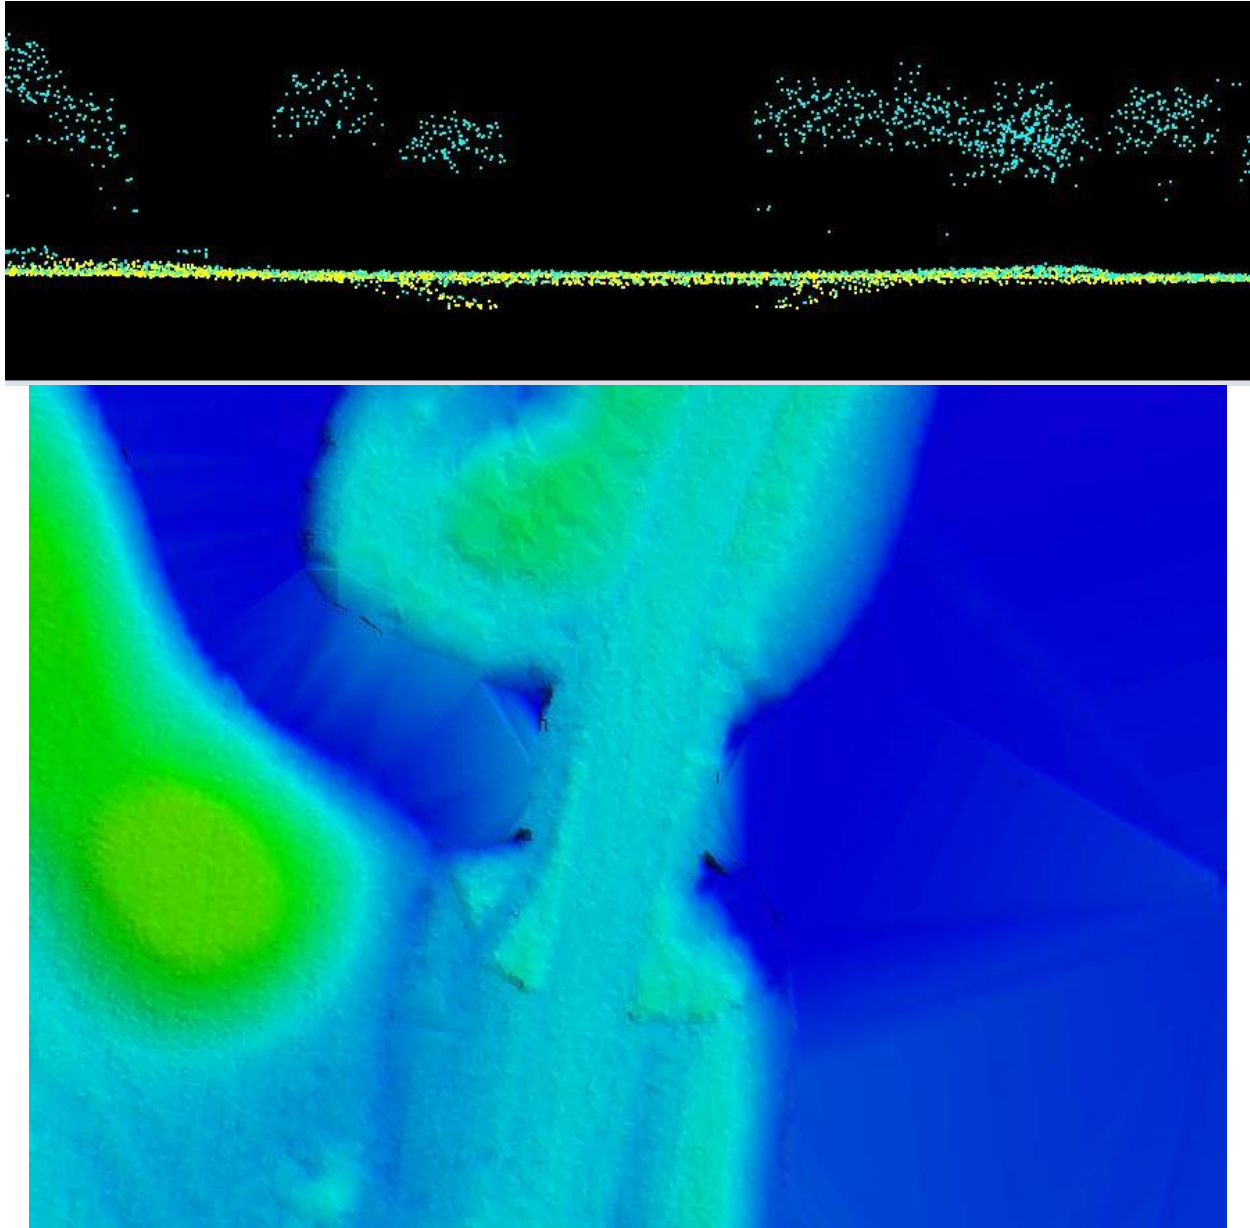


Figure 13– Tile number 16REV640615. Profile with points colored by class (class 1=cyan, class 2=yellow) is shown in the top view and the DEM is shown in the bottom view. This culvert remains in the bare earth surface. Bridges have been removed from the bare earth surface and classified to class 17.

### Interpolation within Resort Areas

Because a continuous surface is being created, the TIN or Terrain will use interpolation to continue the surface beneath large resort area structures which have been removed from the ground classification. Locations where resort area structures were removed will generally contain less detail in the bare-earth surface because these areas are interpolated. In some areas there are also varying ground levels, which can make the interpolation between the different elevations stand out more in the DEMs.

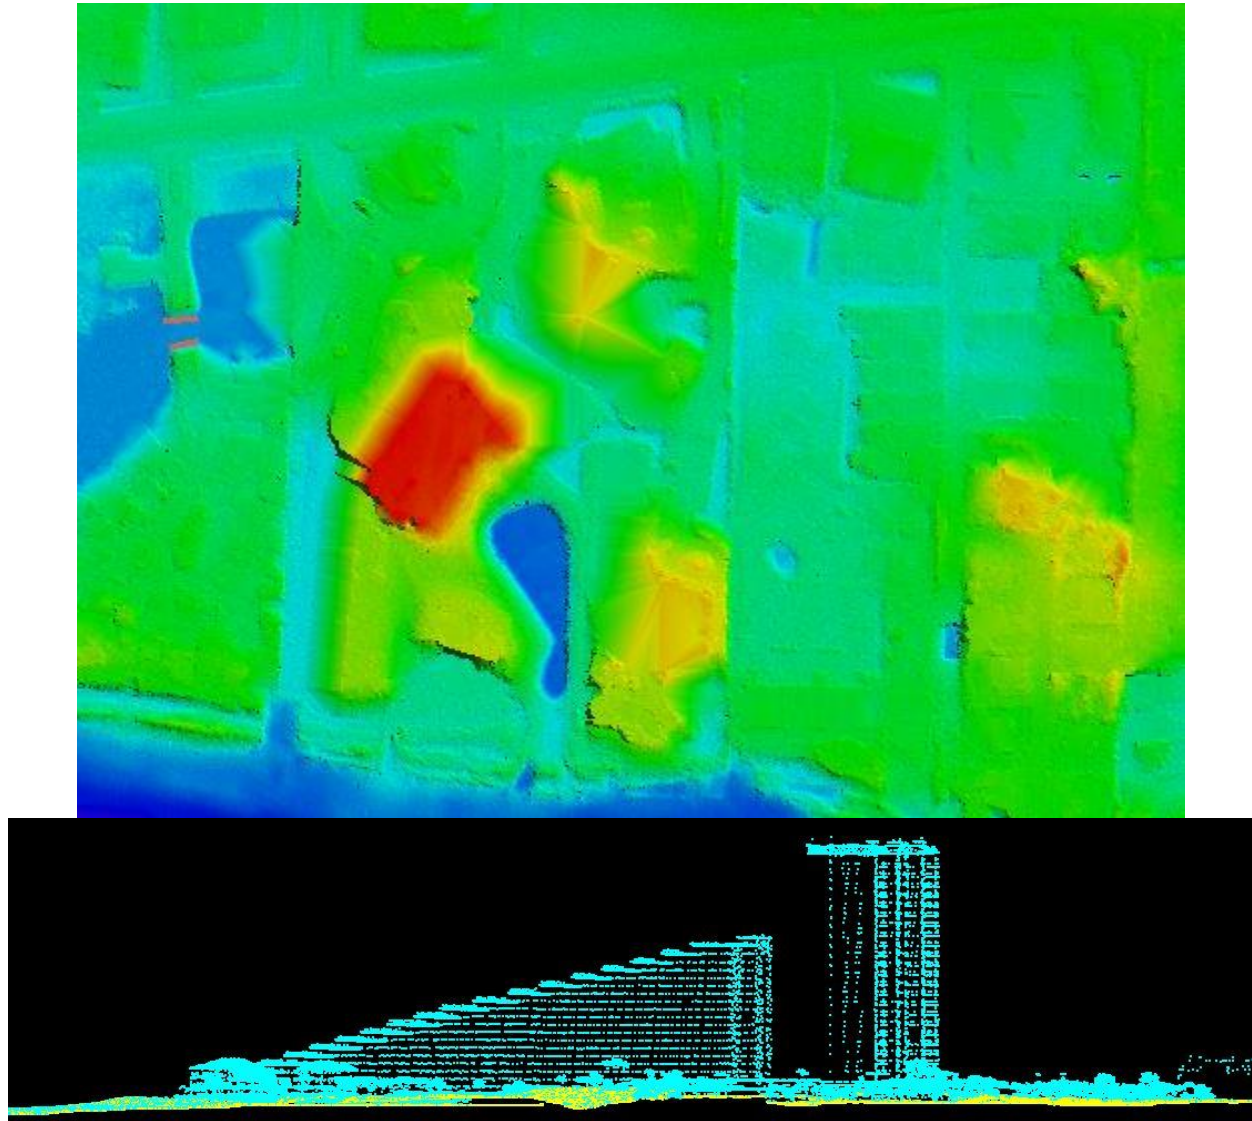


Figure 14 – Tile number 16REV610600. Profile with the points colored by class (class 1=cyan, class 2=yellow) is shown in the bottom view and a DEM of the surface is shown in the top view. Large resort area structures are correctly excluded from the ground classification, resulting in large areas of interpolation in the DEMs.

### Dirt Mounds

Irregularities in the natural ground exist and may be misinterpreted as artifacts that should be removed. Small hills and dirt mounds are present throughout the project area. These features are correctly included in the ground.

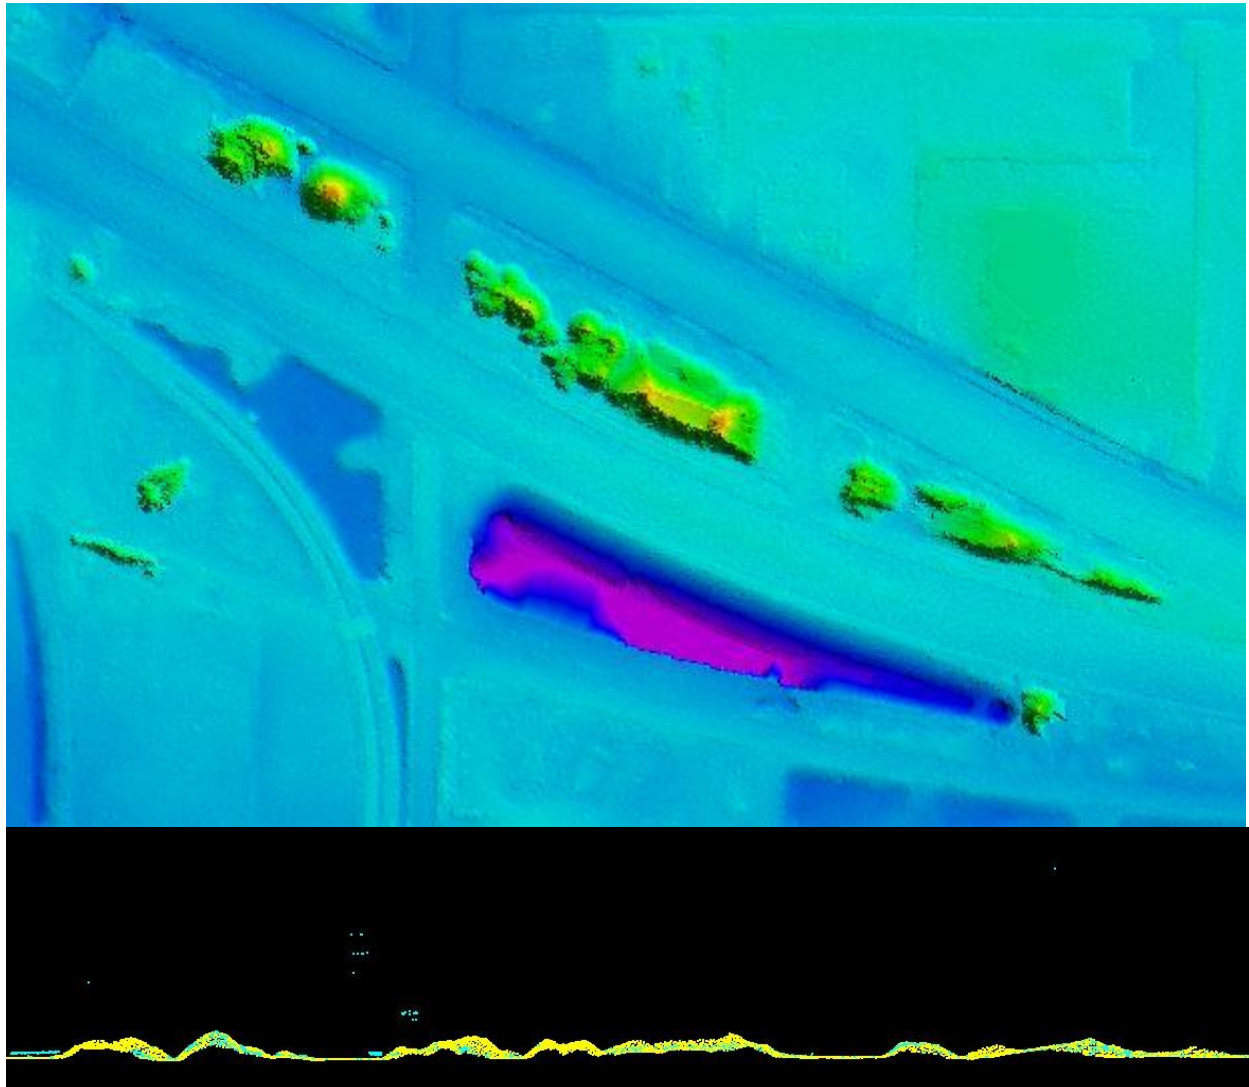


Figure 15 - Tile 16RFU225390. Profile with the points colored by class (class 1=cyan, class 2=yellow) is shown in the bottom view and a DEM of the surface is shown in the top view. These features are correctly included in the ground classification.

## FORMATTING

After the final QA/QC is performed and all corrections have been applied to the dataset, all lidar files are updated to the final format requirements and the final formatting, header information, point data records, and variable length records are verified using Dewberry proprietary tools. The table below lists some of the main lidar header fields that are updated and verified.

Classified Lidar Formatting		
Parameter	Requirement	Pass/Fail
LAS Version	1.4	Pass
Point Data Format	Format 6	Pass
Coordinate Reference System	NAD83 (2011) UTM Zone 16, meters and NAVD88 (Geoid 12B), meters in WKT Format	Pass
Global Encoder Bit	Should be set to 17 for Adjusted GPS Time	Pass
Time Stamp	Adjusted GPS Time (unique timestamps)	Pass
System ID	Should be set to the processing system/software and is set to NIIRS10 for GeoCue software	Pass
Multiple Returns	The sensor shall be able to collect multiple returns per pulse and the return numbers are recorded	Pass
Intensity	16 bit intensity values are recorded for each pulse	Pass
Classification	Required Classes include: Class 1: Unclassified Class 2: Ground Class 7: Low Noise Class 9: Water Class 10: Ignored Ground Class 17: Bridge Decks Class 18: High Noise	Pass
Overlap and Withheld Points	Overlap (Overage) and Withheld points are set to the Overlap and Withheld bits	Pass
Scan Angle	Recorded for each pulse	Pass
XYZ Coordinates	Unique Easting, Northing, and Elevation coordinates are recorded for each pulse	Pass

Previous versions of Riegl software would set the Edge of Flightline flags as 0 for all points collected with Riegl sensors so that minimum and maximum values for this field would be 0 on lidar data collected from Riegl sensors. Newer software versions used to process Riegl data are now retaining the Edge of Flightline information and setting the flag as 1 on the point at the edge of swaths so that lidar data collected and processed with more recent Riegl software have minimum values of 0 and maximum values of 1 for the Edge of Flightline field.

Some datasets, including the Lower Choctawhatchee Lidar Project, have been processed using multiple versions of Riegl software as these projects were in-production when the software was updated. This has resulted in a mix of some lidar tiles having the Edge of Flightline point flagged and some tiles do not. When looking at the LAS statistics, some tiles will show a minimum and maximum of 0 for the Edge of Flightline field whereas some tiles will show a minimum of 0 and a maximum of 1 if the edge points are flagged.

Because Riegl sensors use a rotating mirror system and not an oscillating mirror system, the Scan Direction field continues to show a minimum and maximum of 0 as points do not have either a positive or negative scan direction.

## Derivative Lidar Products

USGS required several derivative lidar products to be created. Each type of derived product is described below.

### LOW CONFIDENCE POLYGONS

Low confidence polygons have been delivered with this dataset. These polygons represent areas where heavy vegetation greatly diminishes penetration of the lidar pulse, resulting in a bare earth surface that is potentially less accurate due to the lack of lidar returns from the ground beneath the vegetation. Low confidence polygons delineate areas where conformance to VVA standards may not be met. The low confidence polygons created for this dataset were delineated according to the criteria and assumptions outlined in the ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014). Low confidence areas are identified using a ground density raster. All areas with a Nominal Ground Point Density less than a specified threshold are identified as low confidence cells in the ground density raster. The low confidence cells are exported to polygons and aggregated into larger shapes. Areas of expected low density in the ground, such as water or where buildings/structures have been removed, are deleted from the aggregated low confidence polygons. The size of all polygons are then calculated and polygons below the minimum size threshold are removed from the final low confidence polygon dataset.

## Lidar Positional Accuracy

### BACKGROUND

Dewberry quantitatively tested the dataset by testing the vertical accuracy of the lidar. The vertical accuracy is tested by comparing the discreet measurement of the survey checkpoints to that of the interpolated value within the three closest lidar points that constitute the vertices of a three-dimensional triangular face of the TIN. Therefore, the end result is that only a small sample of the lidar data is actually tested. However there is an increased level of confidence with lidar data due to the relative accuracy. This relative accuracy in turn is based on how well one lidar point "fits" in comparison to the next contiguous lidar measurement, and is verified as part of the initial processing. If the relative accuracy of a dataset is within specifications and the

dataset passes vertical accuracy requirements at the location of survey checkpoints, the vertical accuracy results can be applied to the whole dataset with high confidence due to the passing relative accuracy. Dewberry typically uses LP360 software to test the swath lidar vertical accuracy, Terrascan software to test the classified lidar vertical accuracy, and Esri ArcMap to test the DEM vertical accuracy so that three different software programs are used to validate the vertical accuracy for each project.

Dewberry also tests the horizontal accuracy of lidar datasets when checkpoints are photo-identifiable in the intensity imagery. Photo-identifiable checkpoints in intensity imagery typically include checkpoints located at the ends of paint stripes on concrete or asphalt surfaces or checkpoints located at 90 degree corners of different reflectivity, e.g. a sidewalk corner adjoining a grass surface. The XY coordinates of checkpoints, as defined in the intensity imagery, are compared to surveyed XY coordinates for each photo-identifiable checkpoint. These differences are used to compute the tested horizontal accuracy of the lidar. As not all projects contain photo-identifiable checkpoints, the horizontal accuracy of the lidar cannot always be tested.

### **SURVEY VERTICAL ACCURACY CHECKPOINTS**

For the vertical accuracy assessment, one hundred seventy nine (179) checkpoints were surveyed for the project and are located within bare earth/open terrain, grass/weeds/crops, and forested/fully grown land cover categories. Please see appendix A to view the survey report which details and validates how the survey was completed for this project.

Checkpoints were evenly distributed throughout the project area so as to cover as many flight lines as possible using the “dispersed method” of placement.

All checkpoints surveyed for vertical accuracy testing purposes are listed in the following table.

Point ID	NAD83(2011) UTM Zone 16		NAVD88 (Geoid 12B)
	Easting X (m)	Northing Y (m)	Elevation (m)
NVA-1	595715.292	3427369.690	53.867
NVA-2	607543.243	3427863.020	31.081
NVA-3	629244.668	3428318.233	73.181
NVA-4	635232.999	3428192.049	53.638
NVA-5	596995.965	3420161.434	41.790
NVA-6	609904.379	3421235.175	23.684
NVA-7	623912.416	3421737.963	31.490
NVA-8	639149.053	3421926.740	50.297
NVA-9	645167.450	3421884.841	49.289
NVA-10	590851.027	3413966.627	77.517
NVA-11	603072.148	3414643.069	53.370
NVA-12	617474.999	3415148.462	22.018
NVA-13	630897.553	3414562.470	53.222
NVA-14	643558.391	3414614.836	40.099

NVA-15	649670.273	3414934.751	39.904
NVA-16	584941.324	3406396.063	80.993
NVA-17	597425.006	3407364.683	59.571
NVA-18	609324.107	3407084.199	19.254
NVA-19	624019.644	3407062.838	40.608
NVA-20	637522.913	3407842.833	22.826
NVA-21	651623.937	3407313.872	43.663
NVA-22	584705.698	3399883.795	67.780
NVA-23	598347.937	3400055.954	26.950
NVA-24	614964.310	3400508.592	18.024
NVA-25	625844.917	3400845.149	28.543
NVA-26	633069.280	3400771.473	18.422
NVA-27	583922.890	3393167.410	63.509
NVA-28	600124.669	3393131.934	65.415
NVA-29	612209.943	3393242.582	21.824
NVA-30	626239.014	3393584.869	14.114
NVA-31	638987.160	3393907.136	45.712
NVA-32	592867.219	3384682.422	58.088
NVA-33	607432.963	3386007.162	10.268
NVA-34	620616.314	3386423.925	16.719
NVA-35	634788.978	3386762.378	41.998
NVA-36	639566.996	3387021.447	36.072
NVA-37	599357.042	3377865.282	41.151
NVA-38	612036.829	3379507.199	32.968
NVA-39	625866.125	3379729.205	23.260
NVA-40	633000.118	3379933.383	40.615
NVA-41	654333.909	3380547.206	70.664
NVA-42	592898.210	3372002.330	17.529
NVA-43	599251.991	3371920.699	12.864
NVA-44	619107.865	3368187.612	27.444
NVA-45	632967.594	3372748.284	33.183
NVA-46	639164.561	3373297.282	28.554
NVA-47	651755.814	3373519.379	52.030
NVA-48	585063.277	3367742.010	4.593
NVA-49	601982.637	3363989.510	5.182
NVA-50	608019.709	3366329.897	13.065
NVA-51	625787.917	3365217.321	25.230
NVA-52	640770.276	3366344.629	30.257
NVA-53	646673.607	3368113.453	36.301
NVA-54	559404.421	3361719.169	4.666
NVA-55	573253.184	3361037.390	4.316
NVA-56	593207.124	3358865.566	10.620
NVA-57	606935.711	3357694.309	18.492



NVA-58	615072.604	3358476.819	16.143
NVA-59	627964.976	3359229.452	20.659
NVA-60	640433.226	3360073.171	20.877
NVA-61	645986.731	3362347.955	35.337
NVA-62	592966.471	3351708.252	10.016
NVA-63	607678.665	3351890.017	6.740
NVA-64	619142.888	3354119.873	2.796
NVA-65	633308.904	3352147.842	5.814
NVA-66	640064.066	3353071.128	14.916
NVA-67	646256.514	3353460.037	20.037
NVA-68	605363.725	3345647.030	10.140
NVA-69	627494.744	3344839.817	2.094
NVA-70	640305.301	3346356.974	15.986
NVA-71	653115.585	3344579.302	21.250
NVA-72	611207.457	3342160.909	9.187
NVA-73	619655.066	3338097.766	5.028
NVA-74	626247.405	3338460.791	10.897
NVA-75	648261.232	3338956.307	15.761
NVA-76	667568.223	3339112.030	16.471
NVA-77	674413.188	3339424.704	8.062
NVA-78	629968.369	3331623.428	4.907
NVA-79	642043.523	3334971.350	4.029
NVA-80	655080.540	3332337.227	10.639
NVA-81	673513.082	3333048.573	14.147
NVA-82	634643.823	3327743.350	9.082
NVA-83	658683.190	3321377.682	2.935
NVA-84	661215.279	3326132.047	5.894
NVA-85	674715.738	3325911.529	10.298
NVA-86	656121.485	3318307.952	2.688
NVA-87	674621.983	3319865.166	6.423
NVA-88	681728.230	3319056.051	6.095
NVA-89	656101.646	3311409.653	6.847
NVA-90	669117.539	3312365.699	5.688
NVA-91	684483.781	3312404.507	3.213
NVA-92	660596.619	3304715.530	3.497
NVA-93	668881.340	3304021.342	4.387
NVA-94	684720.667	3305862.353	3.064
NVA-95	655150.809	3291553.313	2.656
NVA-96	664760.459	3298074.108	1.850
NVA-97	664125.003	3288627.278	1.469
NVA-98	675190.505	3291301.240	2.696
NVA-99	537472.548	3368388.832	5.280
NVA-100	660172.986	3385533.646	80.355

NVA-101	660877.932	3332544.763	12.817
VVA01	600285.155	3427213.411	51.634
VVA02	613329.949	3426900.294	31.972
VVA03	620191.585	3428424.993	57.329
VVA04	641382.308	3429413.219	51.258
VVA05	602380.242	3421393.381	44.820
VVA06	617435.430	3420784.946	44.846
VVA07	632789.410	3421796.772	51.920
VVA08	597724.220	3413664.743	87.036
VVA09	610573.034	3413967.274	24.845
VVA10	623955.984	3414981.020	32.056
VVA11	637883.876	3415096.481	29.962
VVA12	589016.075	3406534.860	49.928
VVA13	604058.561	3407147.470	30.301
VVA14	616963.963	3407386.397	29.230
VVA15	630675.176	3407473.863	22.588
VVA16	644347.246	3407701.116	32.664
VVA17	591362.671	3399596.327	76.073
VVA18	604301.238	3400251.974	20.301
VVA19	621219.073	3400503.553	25.800
VVA20	638798.681	3400366.584	39.349
VVA21	592141.220	3392023.334	66.423
VVA22	604262.723	3392193.044	12.572
VVA23	620330.081	3393530.219	14.437
VVA24	632915.161	3393914.987	26.389
VVA25	646926.065	3393957.087	53.204
VVA26	598682.635	3384729.649	55.399
VVA27	614233.150	3385997.612	12.529
VVA28	627037.877	3387482.315	24.985
VVA29	646612.256	3387611.841	46.696
VVA30	604767.664	3378505.127	8.976
VVA31	619324.837	3382148.074	60.267
VVA32	639988.912	3380652.933	53.463
VVA33	648892.776	3382102.425	72.128
VVA34	587245.808	3372282.058	16.270
VVA35	609680.274	3372216.049	28.145
VVA36	626074.047	3372977.905	40.797
VVA37	646272.343	3373118.920	51.229
VVA38	593016.977	3366315.613	8.228
VVA39	614596.409	3365957.828	27.207
VVA40	620153.805	3368169.799	27.641
VVA41	632043.118	3366783.301	25.046
VVA42	651666.027	3368085.252	46.791

VVA43	566842.341	3361490.117	3.348
VVA44	579460.145	3359303.680	7.287
VVA45	585070.736	3356330.230	11.608
VVA46	600350.942	3358592.002	14.276
VVA47	621510.979	3358605.935	12.549
VVA48	633835.767	3358536.107	12.538
VVA49	652240.795	3360098.492	27.309
VVA50	599727.926	3350702.483	5.892
VVA51	613591.177	3351908.575	2.046
VVA52	626384.167	3351459.100	5.007
VVA53	654002.497	3353544.124	23.400
VVA54	615970.946	3344417.370	1.256
VVA55	633750.389	3344987.988	10.686
VVA56	647066.202	3343692.593	18.988
VVA57	634069.344	3339189.489	10.001
VVA58	642028.884	3338475.646	14.001
VVA59	655028.109	3338954.863	13.549
VVA60	660554.400	3339015.153	16.785
VVA61	647773.698	3331981.611	9.530
VVA62	658801.753	3348210.028	23.994
VVA63	666961.010	3332586.272	11.494
VVA64	639309.378	3324368.893	7.040
VVA65	647620.538	3323957.524	2.394
VVA66	667226.544	3326610.347	9.043
VVA67	647280.380	3317513.717	5.749
VVA68	661545.818	3319253.969	3.545
VVA69	668095.920	3319272.261	5.602
VVA70	662839.361	3311246.740	5.915
VVA71	675397.135	3311916.668	4.348
VVA72	653926.133	3296474.957	0.575
VVA73	678081.343	3305565.997	1.705
VVA74	669491.740	3294716.878	1.603
VVA75	674993.028	3297670.209	0.579
VVA76	658631.727	3284081.090	1.279
VVA77	671315.404	3286314.663	1.554

Table 6: FL Lower Choctawhatchee NFWFMD Lidar surveyed accuracy checkpoints

Two checkpoints (NVA 99, VVA 78) were removed from the vertical accuracy testing for the classified lidar due to the fact that they fall outside the Choctawhatchee boundary.

Point ID	NAD83(2011) UTM Zone 16N	NAVD88 (Geoid 12B)	Lidar Z (m)	Delta Z	AbsDeltaZ
----------	--------------------------	--------------------	-------------	---------	-----------

	Easting X (m)	Northing Y (m)	Survey Z (m)			
VVA78	554471.321	3373862.977	8.966	OUTSIDE	N/A	N/A
NVA99	537472.548	3368388.832	5.280	OUTSIDE	N/A	N/A

Table 7: Checkpoints removed from vertical accuracy testing due to their location outside of the project boundary.

The figure below shows the location of the QA/QC checkpoints used to test the positional accuracy of the dataset.

## FL Lower Choctawhatchee NFWMD Lidar Project

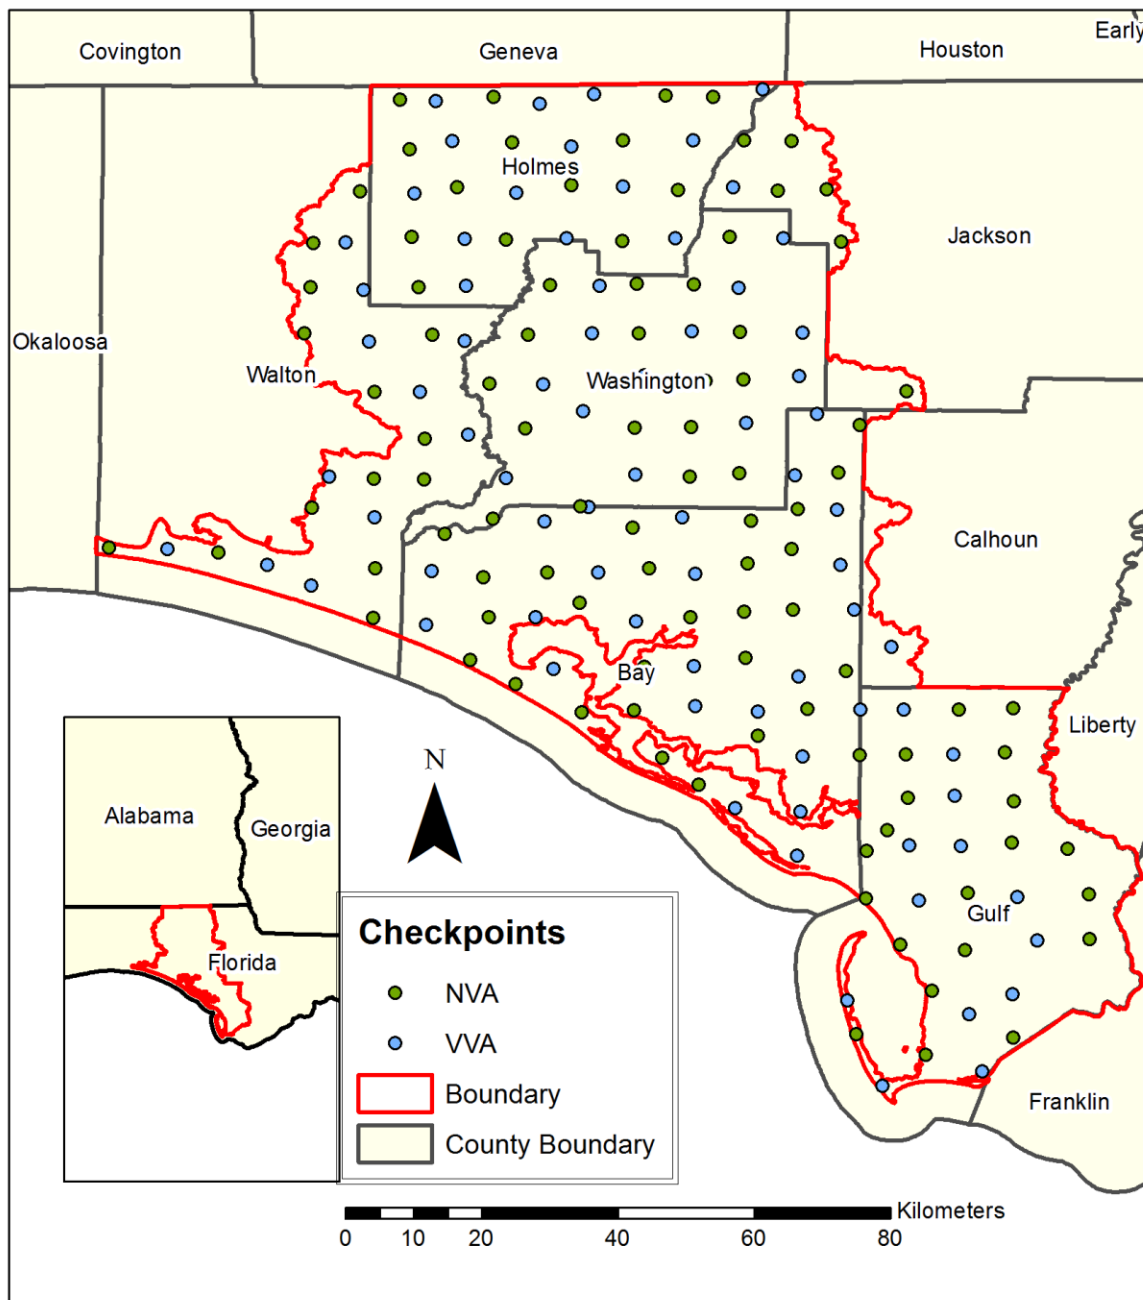


Figure 16 – Location of QA/QC Checkpoints

## VERTICAL ACCURACY TEST PROCEDURES

**NVA** (Non-vegetated Vertical Accuracy) is determined with check points located only in non-vegetated terrain, including open terrain (grass, dirt, sand, and/or rocks) and urban areas, where there is a very high probability that the lidar sensor will have detected the bare-earth ground surface and where random errors are expected to follow a normal error distribution. The NVA determines how well the calibrated lidar sensor performed. With a normal error distribution, the vertical accuracy at the 95% confidence level is computed as the vertical root mean square error ( $RMSE_z$ ) of the checkpoints  $\times 1.9600$ . For the FL Lower Choctawhatchee NFWFMD lidar project, vertical accuracy must be 19.6 cm or less based on an  $RMSE_z$  of 10 cm  $\times 1.9600$ .

**VVA** (Vegetated Vertical Accuracy) is determined with all checkpoints in vegetated land cover categories, including tall grass, weeds, crops, brush and low trees, and fully forested areas, where there is a possibility that the lidar sensor and post-processing may yield elevation errors that do not follow a normal error distribution. VVA at the 95% confidence level equals the 95<sup>th</sup> percentile error for all checkpoints in all vegetated land cover categories combined. The FL Lower Choctawhatchee NFWFMD lidar project VVA standard is 29.4 cm based on the 95<sup>th</sup> percentile. The VVA is accompanied by a listing of the 5% outliers that are larger than the 95<sup>th</sup> percentile used to compute the VVA; these are always the largest outliers that may depart from a normal error distribution. Here,  $Accuracy_z$  differs from VVA because  $Accuracy_z$  assumes elevation errors follow a normal error distribution where RMSE procedures are valid, whereas VVA assumes lidar errors may not follow a normal error distribution in vegetated categories, making the RMSE process invalid.

The relevant testing criteria are summarized in Table 8.

Quantitative Criteria	Measure of Acceptability
Non-Vegetated Vertical Accuracy (NVA) in open terrain and urban land cover categories using $RMSE_z \times 1.9600$	19.6 cm (based on $RMSE_z$ (10 cm) $\times 1.9600$ )
Vegetated Vertical Accuracy (VVA) in all vegetated land cover categories combined at the 95% confidence level	29.4 cm (based on combined 95 <sup>th</sup> percentile)

**Table 8 – Acceptance Criteria**

The primary QA/QC vertical accuracy testing steps used by Dewberry are summarized as follows:

1. Dewberry’s team surveyed QA/QC vertical checkpoints in accordance with the project’s specifications.
2. Next, Dewberry interpolated the bare-earth lidar DTM to provide the z-value for every checkpoint.
3. Dewberry then computed the associated z-value differences between the interpolated z-value from the lidar data and the ground truth survey checkpoints and computed NVA, VVA, and other statistics.
4. The data were analyzed by Dewberry to assess the accuracy of the data. The review process examined the various accuracy parameters as defined by the scope of work. The overall descriptive statistics of each dataset were computed to assess any trends or anomalies. This report provides tables, graphs and figures to summarize and illustrate data quality.

## VERTICAL ACCURACY RESULTS

The table below summarizes the tested vertical accuracy resulting from a comparison of the surveyed checkpoints to the elevation values present within the fully classified lidar LAS files.

Land Cover Category	# of Points	NVA – Non-vegetated Vertical Accuracy (RMSE <sub>z</sub> x 1.9600) Spec=19.6 cm	VVA – Vegetated Vertical Accuracy (95th Percentile) Spec=29.4 cm
NVA	100	9.9	
VVA	77		14.3

Table 9 – Tested NVA and VVA

This lidar dataset was tested to meet ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014) for a 10 cm RMSE<sub>z</sub> Vertical Accuracy Class. Actual NVA accuracy was found to be RMSE<sub>z</sub> =5.1 cm, equating to +/- 9.9 cm at 95% confidence level. Actual VVA accuracy was found to be +/- 14.3 cm at the 95th percentile.

The figure below illustrates the magnitude of the differences between the QA/QC checkpoints and lidar data. This shows that the majority of lidar elevations were within +/- 8 cm of the checkpoints elevations, but there were some outliers where lidar and checkpoint elevations differed by up to +20 cm.

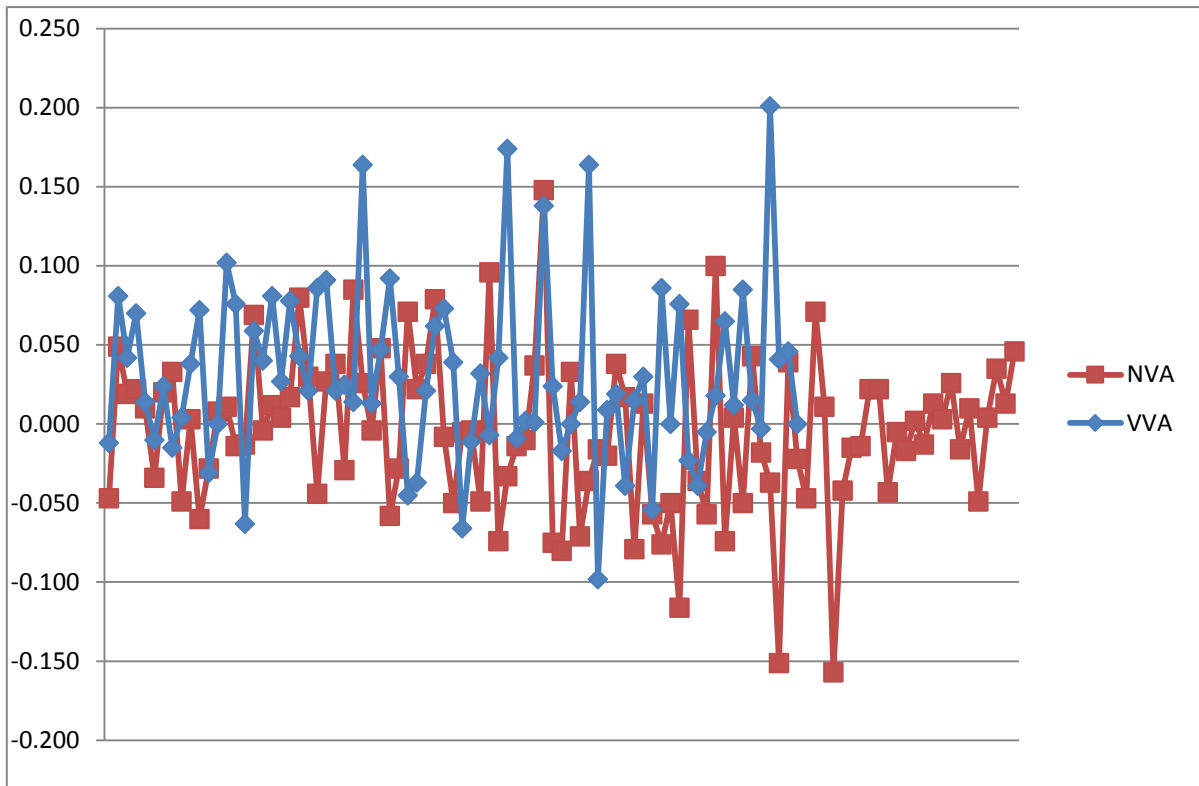


Figure 17 – Magnitude of elevation discrepancies per land cover category

Table 10 lists the 5% outliers that are larger than the VVA 95<sup>th</sup> percentile.

Point ID	NAD83(2011) UTM Zone 16		NAVD88 (Geoid 12B)	Lidar Z (m)	Delta Z	AbsDeltaZ
	Easting X (m)	Northing Y (m)	Survey Z (m)			
VVA30	604767.664	3378505.127	8.976	9.140	0.164	0.164
VVA46	600350.942	3358592.002	14.276	14.450	0.174	0.174
VVA55	633750.389	3344987.988	10.686	10.850	0.164	0.164
VVA75	674993.028	3297670.209	0.579	0.780	0.201	0.201

Table 10 – 5% Outliers

Table 11 provides overall descriptive statistics.

100 % of Totals	# of Points	RMSEz (m) NVA Spec=0.1 m	Mean (m)	Median (m)	Skew	Std Dev (m)	Kurtosis	Min (m)	Max (m)
NVA	100	0.051	-0.005	-0.004	-0.109	0.051	1.012	-0.157	0.148
VVA	77	N/A	0.031	0.024	0.678	0.055	1.142	-0.098	0.201



Table 11 – Overall Descriptive Statistics

The figure below illustrates a histogram of the associated elevation discrepancies between the QA/QC checkpoints and elevations interpolated from the lidar triangulated irregular network (TIN). The frequency shows the number of discrepancies within each band of elevation differences. Although the discrepancies vary between a low of -0.15 meters and a high of +0.2 meters, the histogram shows that the majority of the discrepancies are skewed on the positive side. The vast majority of points are within the ranges of -0.075 meters to +0.075 meters.

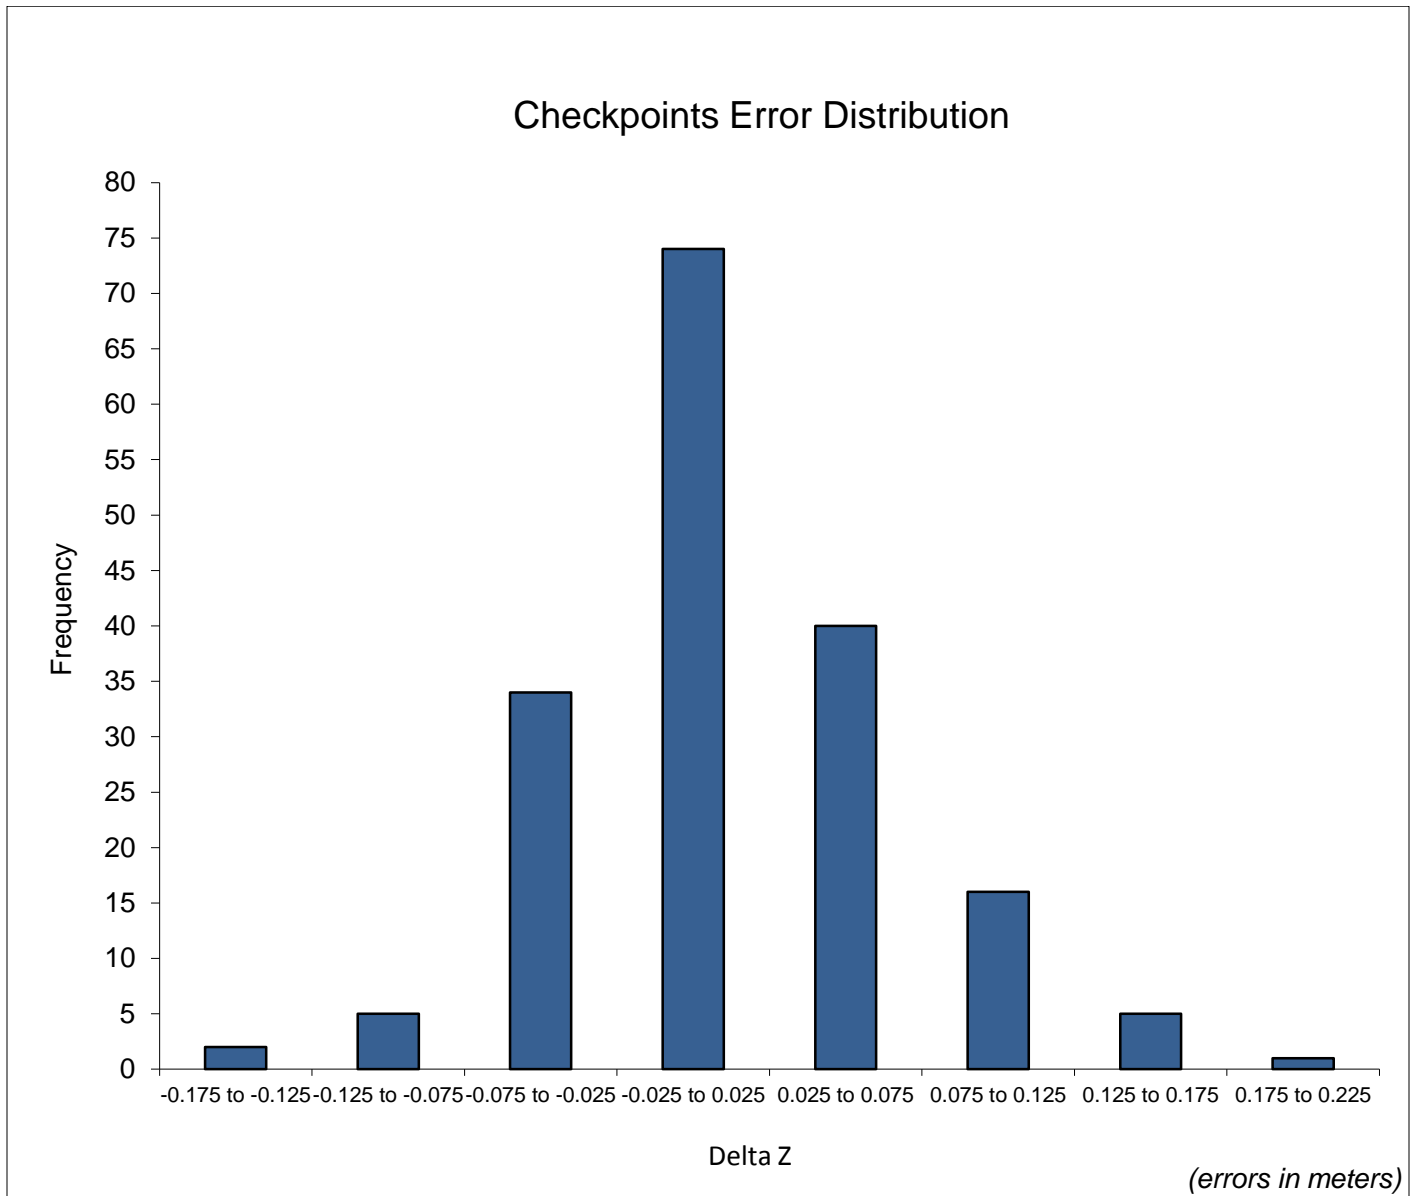


Figure 18 – Histogram of Elevation Discrepancies with errors in meters

**Based on the vertical accuracy testing conducted by Dewberry, the lidar dataset for the USGS FL Lower Choctawhatchee NFWFMD Lidar Project satisfies the project’s pre-defined vertical accuracy criteria.**

## HORIZONTAL ACCURACY TEST PROCEDURES

Horizontal accuracy testing requires well-defined checkpoints that can be identified in the dataset. Elevation datasets, including lidar datasets, do not always contain well-defined checkpoints suitable for horizontal accuracy assessment. However, the ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014) recommends at least half of the NVA vertical check points should be located at the ends of paint stripes or other point features visible on the lidar intensity image, allowing them to double as horizontal check points.

Dewberry reviews all NVA checkpoints to determine which, if any, of these checkpoints are located on photo-identifiable features in the intensity imagery. This subset of checkpoints are then used for horizontal accuracy testing.

The primary QA/QC horizontal accuracy testing steps used by Dewberry are summarized as follows:

1. Dewberry’s team surveyed QA/QC vertical checkpoints in accordance with the project’s specifications and tried to locate half of the NVA checkpoints on features photo-identifiable in the intensity imagery.
2. Next, Dewberry identified the well-defined features in the intensity imagery.
3. Dewberry then computed the associated xy-value differences between the coordinates of the well-defined feature in the lidar intensity imagery and the ground truth survey checkpoints.
4. The data were analyzed by Dewberry to assess the accuracy of the data. Horizontal accuracy was assessed using NSSDA methodology where horizontal accuracy is calculated at the 95% confidence level. This report provides the results of the horizontal accuracy testing.

## HORIZONTAL ACCURACY RESULTS

Twenty two checkpoints were determined to be photo-identifiable in the intensity imagery and were used to test the horizontal accuracy of the lidar dataset. As twenty two (22) checkpoints were photo-identifiable, the results are statistically significant enough to report as a final tested value, so the results of the testing are shown in the Table below.

Using NSSDA methodology (endorsed by the ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014)), horizontal accuracy at the 95% confidence level (called ACCURACY<sub>r</sub>) is computed by the formula  $RMSE_r * 1.7308$  or  $RMSE_{xy} * 2.448$ .

No horizontal accuracy requirements or thresholds were provided for this project. However, lidar datasets are generally calibrated by methods designed to ensure a horizontal accuracy of 1 meter or less at the 95% confidence level.

# of Points	RMSE <sub>x</sub> (Target=41 cm)	RMSE <sub>y</sub> (Target=41 cm)	RMSE <sub>r</sub> (Target=58 cm)	ACCURACY <sub>r</sub> (RMSE <sub>r</sub> x 1.7308) Target=100 cm
22	30.5	24.9	39.4	68.1

Table 12-Tested horizontal accuracy at the 95% confidence level

Twenty-two (22) checkpoints were used for horizontal accuracy testing. This data set was tested to meet ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014) for a 41 cm RMSE<sub>x</sub>/RMSE<sub>y</sub> Horizontal Accuracy Class which equates to Positional Horizontal Accuracy = +/- 1 meter at a 95% confidence level. Actual positional accuracy of this dataset was found to be RMSE<sub>x</sub> = 30.5 cm and RMSE<sub>y</sub> = 24.9 cm which equates to +/- 68.1 cm at 95% confidence level.

## **Breakline Production & Qualitative Assessment Report**

### **BREAKLINE PRODUCTION METHODOLOGY**

Dewberry used GeoCue software to develop lidar stereo models of the project area so the lidar derived data could be viewed in 3-D stereo using Socet Set softcopy photogrammetric software. Using lidargrammetry procedures with lidar intensity imagery, Dewberry used the stereo models to stereo-compile the three types of hydrographic breaklines in accordance with the project's Data Dictionary.

All drainage breaklines are monotonically enforced to show downhill flow. Water bodies are at a constant elevation where the lowest elevation of the water body has been applied to the entire water body.

### **BREAKLINE QUALITATIVE ASSESSMENT**

Dewberry completed breakline qualitative assessments according to a defined workflow. The following workflow diagram represents the steps taken by Dewberry to provide a thorough qualitative assessment of the breakline data.

Completeness and horizontal placement is verified through visual reviews against lidar intensity imagery. Automated checks are applied on all breakline features to validate topology, including the 3D connectivity of features, enforced monotonicity on linear hydrographic breaklines, and flatness on water bodies.

The next step is to compare the elevation of the breakline vertices against the ground elevation extracted from the ESRI Terrain built from the lidar ground points, keeping in mind that a discrepancy is expected because of the hydro-enforcement applied to the breaklines and because of the interpolated imagery used to acquire the breaklines. A given tolerance is used to validate if the elevations differ too much from the lidar.

After all corrections and edits to the breakline features, the breaklines are imported into the final GDB and verified for correct formatting.

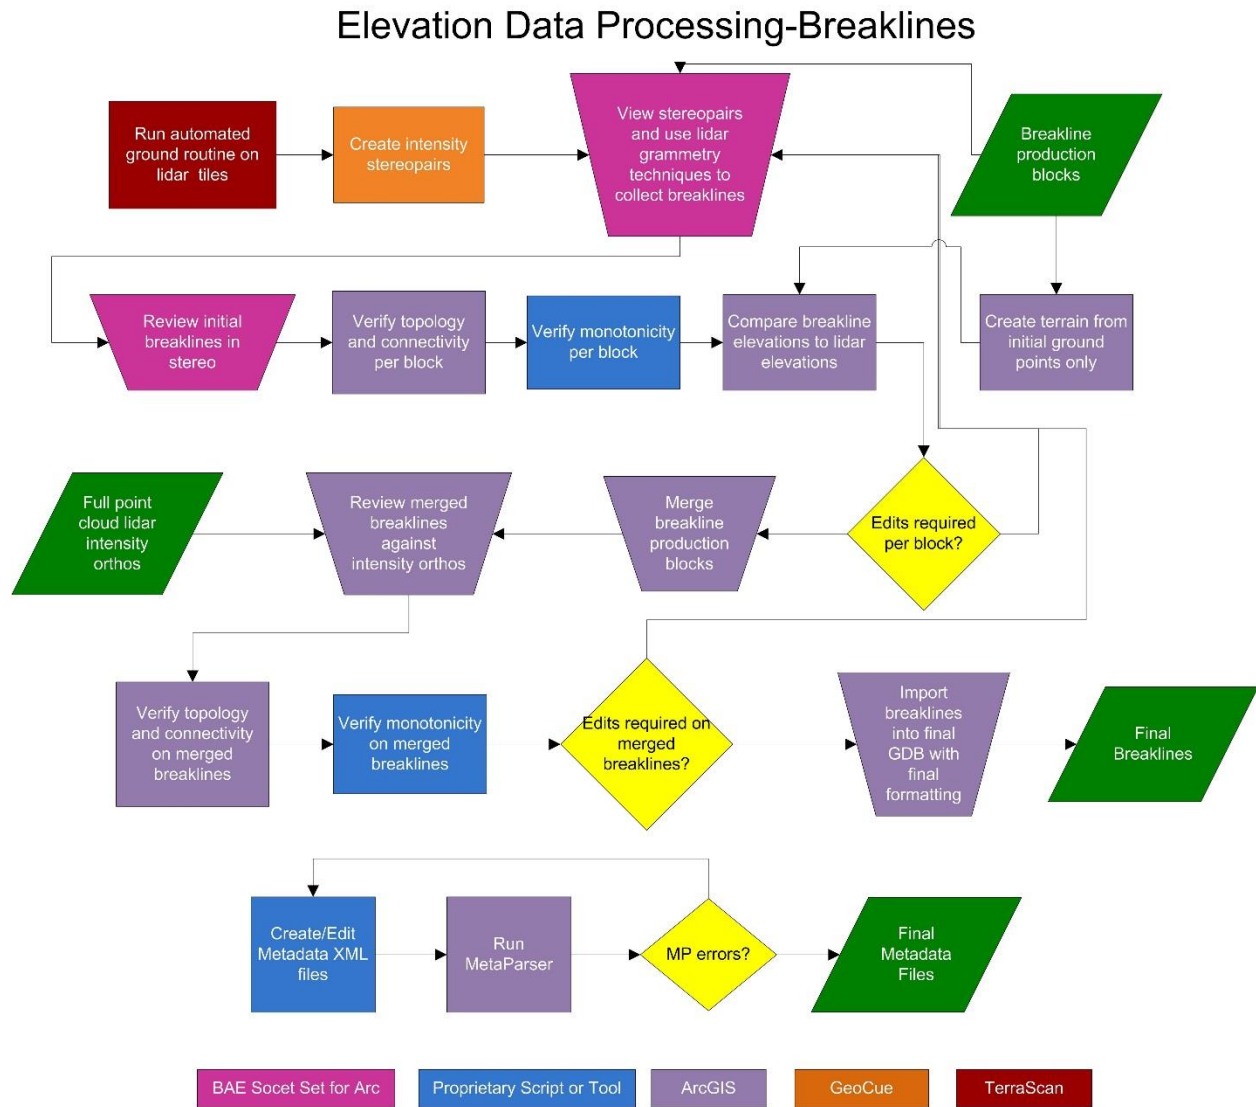


Figure 19 - Breakline QA/QC workflow

## BREAKLINE CHECKLIST

The following table represents a portion of the high-level steps in Dewberry’s Production and QA/QC checklist that were performed for this project.

Pass/Fail	Validation Step
Pass	Use lidar-derived data, which may include intensity imagery, stereo pairs, bare earth ground models, density models, slope models, and terrains, to collect breaklines according to project specifications.
Pass	In areas of heavy vegetation or where the exact shoreline is hard to delineate, it is better to err on placing the breakline <i>slightly</i> inside or seaward of the shoreline (breakline can be inside shoreline by 1x-2x NPS).

Pass	After each producer finishes breakline collection for a block, each producer must perform a completeness check, breakline variance check, and all automated checks on their block before calling that block complete and ready for the final merge and QC
Pass	After breaklines are completed for production blocks, all production blocks should be merged together and completeness and automated checks should be performed on the final, merged GDB. Ensure correct snapping-horizontal (x,y) and vertical (z)-between all production blocks.
Pass	Check entire dataset for missing features that were not captured, but should be to meet baseline specifications or for consistency. Features should be collected consistently across tile bounds. Check that the horizontal placement of breaklines is correct. Breaklines should be compared to full point cloud intensity imagery and terrains
Pass	Breaklines are correctly edge-matched to adjoining datasets in completion, coding, and horizontal placement.
Pass	Using a terrain created from lidar ground (all ground including 2, 8, and 10) and water points (class 9), compare breakline Z values to interpolated lidar elevations.
Pass	Perform all Topology and Data Integrity Checks
Pass	Perform hydro-flattening and hydro-enforcement checks including monotonicity and flatness from bank to bank on linear hydrographic features and flatness of water bodies. Tidal waters should preserve as much ground as possible and can include variations or be non-monotonic.

Table 13-A subset of the high-level steps from Dewberry's Production and QA/QC checklist performed for this project.

## DATA DICTIONARY

The following data dictionary was used for this project.

### Horizontal and Vertical Datum

The horizontal datum shall be North American Datum of 1983 (2011), Units in Meters. The vertical datum shall be referenced to the North American Vertical Datum of 1988 (NAVD 88), Units in Meters. Geoid12B shall be used to convert ellipsoidal heights to orthometric heights.

### Coordinate System and Projection

All data shall be projected to UTM Zone 16, Horizontal Units in Meters and Vertical Units in Meters.

### Inland Streams and Rivers

**Feature Dataset:** BREAKLINES  
**Feature Type:** Polygon  
**Contains Z Values:** Yes  
**XY Resolution:** Accept Default Setting  
**XY Tolerance:** 0.003

**Feature Class:** STREAMS\_AND\_RIVERS  
**Contains M Values:** No  
**Annotation Subclass:** None  
**Z Resolution:** Accept Default Setting  
**Z Tolerance:** 0.001

### Description

This polygon feature class will depict linear hydrographic features with a width greater than 100 feet.

### Table Definition

Field Name	Data Type	Allow Null Values	Default Value	Domain	Precision	Scale	Length	Responsibility
OBJECTID	Object ID							Assigned by Software

SHAPE	Geometry						Assigned by Software
SHAPE_LENGTH	Double	Yes		0	0		Calculated by Software
SHAPE_AREA	Double	Yes		0	0		Calculated by Software

### Feature Definition

Description	Definition	Capture Rules
Streams and Rivers	Linear hydrographic features such as streams, rivers, canals, etc. with an average width greater than 100 feet. In the case of embankments, if the feature forms a natural dual line channel, then capture it consistent with the capture rules. Other natural or manmade embankments will not qualify for this project.	<p>Capture features showing dual line (one on each side of the feature). Average width shall be greater than 100 feet to show as a double line. Each vertex placed should maintain vertical integrity. Generally both banks shall be collected to show consistent downhill flow. There are exceptions to this rule where a small branch or offshoot of the stream or river is present.</p> <p>The banks of the stream must be captured at the same elevation to ensure flatness of the water feature. If the elevation of the banks appears to be different see the task manager or PM for further guidance.</p> <p>Breaklines must be captured at or just below the elevations of the immediately surrounding terrain. Under no circumstances should a feature be elevated above the surrounding lidar points. Acceptable variance in the negative direction will be defined for each project individually.</p> <p>These instructions are only for docks or piers that follow the coastline or water's edge, not for docks or piers that extend perpendicular from the land into the water. If it can be reasonably determined where the edge of water most probably falls, beneath the dock or pier, then the edge of water will be collected at the elevation of the water where it can be directly measured. If there is a clearly-indicated headwall or bulkhead adjacent to the dock or pier and it is evident that the waterline is most probably adjacent to the headwall or bulkhead, then the water line will follow the headwall or bulkhead at the elevation of the water where it can be directly measured. If there is no clear indication of the location of the water's edge beneath the dock or pier, then the edge of water will follow the outer edge of the dock or pier as it is adjacent to the water, at the measured elevation of the water.</p> <p>Every effort should be made to avoid breaking a stream or river into segments.</p> <p>Dual line features shall break at road crossings (culverts). In areas where a bridge is present the dual line feature shall continue through the bridge.</p> <p>Islands: The double line stream shall be captured around an island if the island is greater than 1 acre. In this case a segmented polygon shall be used around the island in order to allow for the island feature to remain as a "hole" in the feature.</p>

### Inland Ponds and Lakes

**Feature Dataset:** BREAKLINES  
**Feature Type:** Polygon  
**Contains Z Values:** Yes  
**XY Resolution:** Accept Default Setting  
**XY Tolerance:** 0.003

**Feature Class:** PONDS\_AND\_LAKES  
**Contains M Values:** No  
**Annotation Subclass:** None  
**Z Resolution:** Accept Default Setting  
**Z Tolerance:** 0.001

### Description

This polygon feature class will depict closed water body features that are at a constant elevation.

### Table Definition

Field Name	Data Type	Allow Null Values	Default Value	Domain	Precision	Scale	Length	Responsibility
OBJECTID	Object ID							Assigned by Software
SHAPE	Geometry							Assigned by Software
SHAPE_LENGTH	Double	Yes			0	0		Calculated by Software
SHAPE_AREA	Double	Yes			0	0		Calculated by Software

### Feature Definition

Description	Definition	Capture Rules
Ponds and Lakes	<p>Land/Water boundaries of constant elevation water bodies such as lakes, reservoirs, ponds, etc. Features shall be defined as closed polygons and contain an elevation value that reflects the best estimate of the water elevation at the time of data capture. Water body features will be captured for features 2 acres in size or greater.</p> <p>“Donuts” will exist where there are islands within a closed water body feature.</p>	<p>Water bodies shall be captured as closed polygons with the water feature to the right. <u>The compiler shall take care to ensure that the z-value remains consistent for all vertices placed on the water body.</u></p> <p>Breaklines must be captured at or just below the elevations of the immediately surrounding terrain. Under no circumstances should a feature be elevated above the surrounding lidar points. Acceptable variance in the negative direction will be defined for each project individually.</p> <p>An Island within a Closed Water Body Feature that is 1 acre in size or greater will also have a “donut polygon” compiled.</p> <p>These instructions are only for docks or piers that follow the coastline or water’s edge, not for docks or piers that extend perpendicular from the land into the water. If it can be reasonably determined where the edge of water most probably falls, beneath the dock or pier, then the edge of water will be collected at the elevation of the water where it can be directly measured. If there is a clearly-indicated headwall or bulkhead adjacent to the dock or pier and it is evident that the waterline is most probably adjacent to the headwall or bulkhead, then the water line will follow the headwall or bulkhead at the elevation of the water where it can be directly measured.</p>

		If there is no clear indication of the location of the water's edge beneath the dock or pier, then the edge of water will follow the outer edge of the dock or pier as it is adjacent to the water, at the measured elevation of the water.
--	--	---

### Tidal Waters

**Feature Dataset:** BREAKLINES  
**Feature Type:** Polygon  
**Contains Z Values:** Yes  
**XY Resolution:** Accept Default Setting  
**XY Tolerance:** 0.003

**Feature Class:** TIDAL\_WATERS  
**Contains M Values:** No  
**Annotation Subclass:** None  
**Z Resolution:** Accept Default Setting  
**Z Tolerance:** 0.001

### Description

This polygon feature class will outline the land / water interface at the time of lidar acquisition.

### Table Definition

Field Name	Data Type	Allow Null Values	Default Value	Domain	Precision	Scale	Length	Responsibility
OBJECTID	Object ID							Assigned by Software
SHAPE	Geometry							Assigned by Software
SHAPE_LENGTH	Double	Yes			0	0		Calculated by Software
SHAPE_AREA	Double	Yes			0	0		Calculated by Software

### Feature Definition

Description	Definition	Capture Rules
TIDAL_WATERS	The coastal breakline will delineate the land water interface using lidar data as reference. In flight line boundary areas with tidal variation the coastal shoreline may show stair stepping as no feathering is allowed. Stair stepping is allowed to show as much ground as the collected data permits.	<p>The feature shall be extracted at the apparent land/water interface, as determined by the lidar intensity data, to the extent of the tile boundaries. Differences caused by tidal variation are acceptable and breaklines delineated should reflect that change with no feathering.</p> <p>Breaklines must be captured at or just below the elevations of the immediately surrounding terrain. Under no circumstances should a feature be elevated above the surrounding lidar points. Acceptable variance in the negative direction will be defined for each project individually.</p> <p>If it can be reasonably determined where the edge of water most probably falls, beneath the dock or pier, then the edge of water will be collected at the elevation of the water where it can be directly measured. If there is a clearly-indicated headwall or bulkhead adjacent to the dock or pier and it is evident that the waterline is most probably adjacent to the headwall or bulkhead, then the water line will follow the headwall or bulkhead at the elevation of the water where it can be directly measured. If there is no clear indication of the location of the water's edge beneath the dock or pier, then the edge of water will follow the outer edge of the dock</p>



		<p>or pier as it is adjacent to the water, at the measured elevation of the water.</p> <p>Breaklines shall snap and merge seamlessly with linear hydrographic features.</p>
--	--	---

### Beneath Bridge Breaklines

**Feature Dataset:** BREAKLINES  
**Feature Type:** Polyline  
**Contains Z Values:** Yes  
**XY Resolution:** Accept Default Setting  
**XY Tolerance:** 0.003

**Feature Class:** Bridge\_Saddle\_Breaklines  
**Contains M Values:** No  
**Annotation Subclass:** None  
**Z Resolution:** Accept Default Setting  
**Z Tolerance:** 0.001

### Description

This polyline feature class is used to enforce terrain beneath bridge decks where ground data may not have been acquired. Enforcing the terrain beneath bridge decks prevents bridge saddles.

### Table Definition

Field Name	Data Type	Allow Null Values	Default Value	Domain	Precision	Scale	Length	Responsibility
OBJECTID	Object ID							Assigned by Software
SHAPE	Geometry							Assigned by Software
SHAPE_LENGTH	Double	Yes			0	0		Calculated by Software

### Feature Definition

Description	Definition	Capture Rules
Bridge Breaklines	<p>Bridge Breaklines should be used where necessary to enforce terrain beneath bridge decks and to prevent bridge saddles in the bare earth DEMs.</p>	<p>Bridge breaklines should be collected beneath bridges where bridge saddles exist or are likely to exist in the bare earth DEMs.</p> <p>Bridge breaklines should be collected perpendicular to the bridge deck so that the endpoints are on either side of the bridge deck. Typically two bridge breaklines are collected per bridge deck, one at either end of the bridge deck to enforce the terrain under the full bridge deck.</p> <p>The endpoints of the bridge breaklines will match the elevation of the ground at their xy position to enforce the ground/bare earth elevations beneath the bridge deck and prevent bridge saddles from forming.</p>

## DEM Production & Qualitative Assessment

### DEM PRODUCTION METHODOLOGY

Dewberry utilized ESRI software and Global Mapper for the DEM production and QC process. ArcGIS software is used to generate the products and the QC is performed in both ArcGIS and Global Mapper. The figure below shows the entire process necessary for bare earth DEM production, starting from the lidar swath processing.

The final bare-earth lidar points are used to create a terrain. The final 3D breaklines collected for the project are also enforced in the terrain. The terrain is then converted to raster format using linear interpolation. For most projects, a single terrain/DEM can be created for the whole project. For very large projects, multiple terrains/DEMs may be created. The DEM(s) is reviewed for any issues requiring corrections, including remaining lidar mis-classifications, erroneous breakline elevations, poor hydro-flattening or hydro-enforcement, and processing artifacts. After corrections are applied, the DEM(s) is then split into individual tiles following the project tiling scheme. The tiles are verified for final formatting and then loaded into Global Mapper to ensure no missing or corrupt tiles and to ensure seamlessness across tile boundaries.



Figure 20 -DEM Production Workflow

## DEM QUALITATIVE ASSESSMENT

Dewberry performed a comprehensive qualitative assessment of the bare earth DEM deliverables to ensure that all tiled DEM products were delivered with the proper extents, were free of processing artifacts, and contained the proper referencing information. This process was performed in ArcGIS software with the use of a tool set Dewberry has developed to verify that the raster extents match those of the tile grid and contain the correct projection information. The DEM data was reviewed at a scale of 1:5000 to review for artifacts caused by the DEM generation process and to review the hydro-flattened features. To perform this review Dewberry creates HillShade models and overlays a partially transparent colored elevation model to review for these issues. All corrections are completed using Dewberry's proprietary correction workflow. Upon completion of the corrections, the DEM data is loaded into Global Mapper for its second review and to verify corrections. Once the DEMs are tiled out, the final tiles are again loaded into Global Mapper to ensure coverage, extents, and that the final tiles are seamless.

The images below show an example of a bare earth DEM.


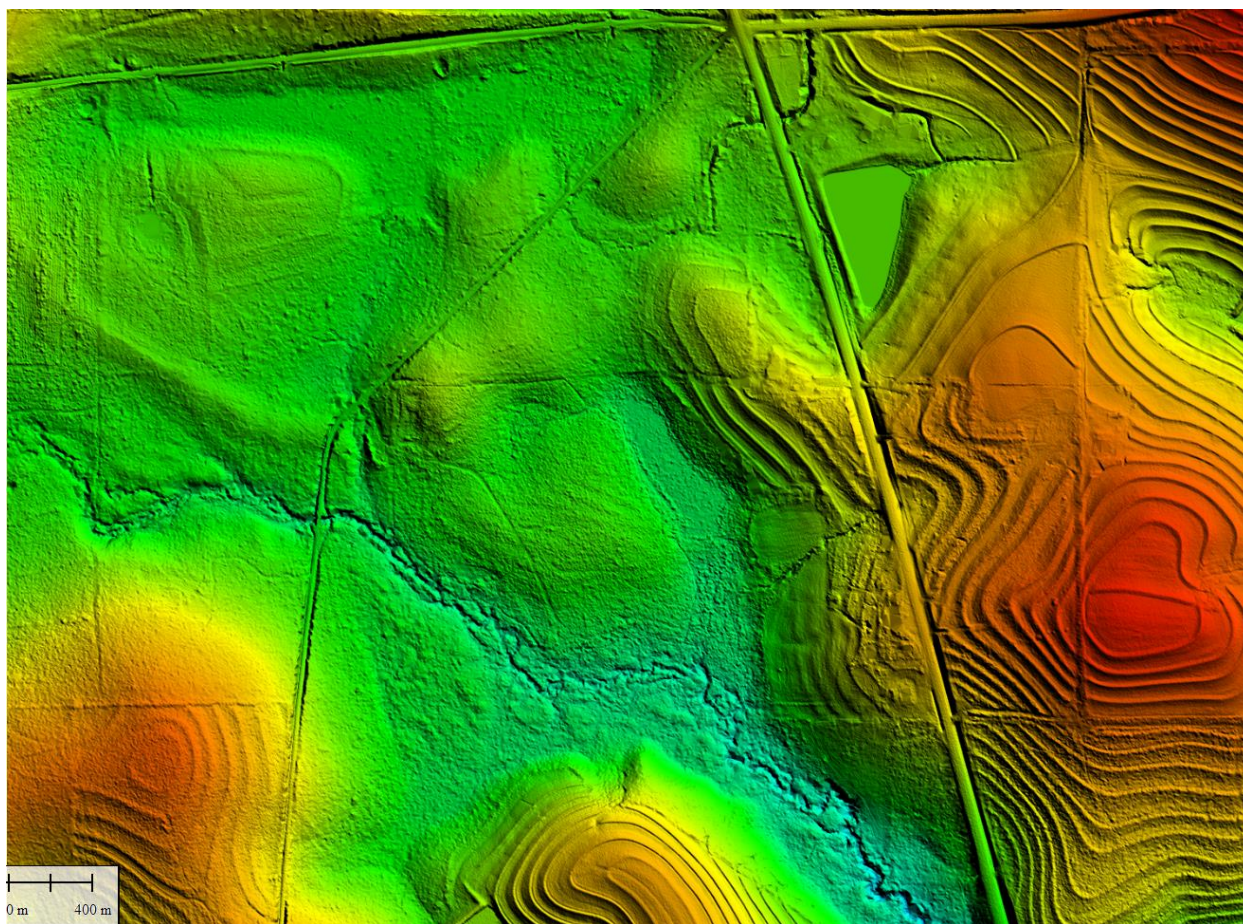


Figure 21 - Tiles 16REV985200 and 16REV985185. Example Bare earth DEM

When some bridges are removed from the ground surface, the distance from bridge abutment to bridge abutment is small enough that the DEM interpolates across the entire bridge opening, forming 'bridge saddles.' Dewberry collected 3D bridge breaklines in locations where bridge

saddles were present and enforced these breaklines in the final DEM creation to help mitigate the bridge saddle artifacts. The image below on the left shows a bridge saddle while the image below on the right shows the same bridge after bridge breaklines have been enforced.

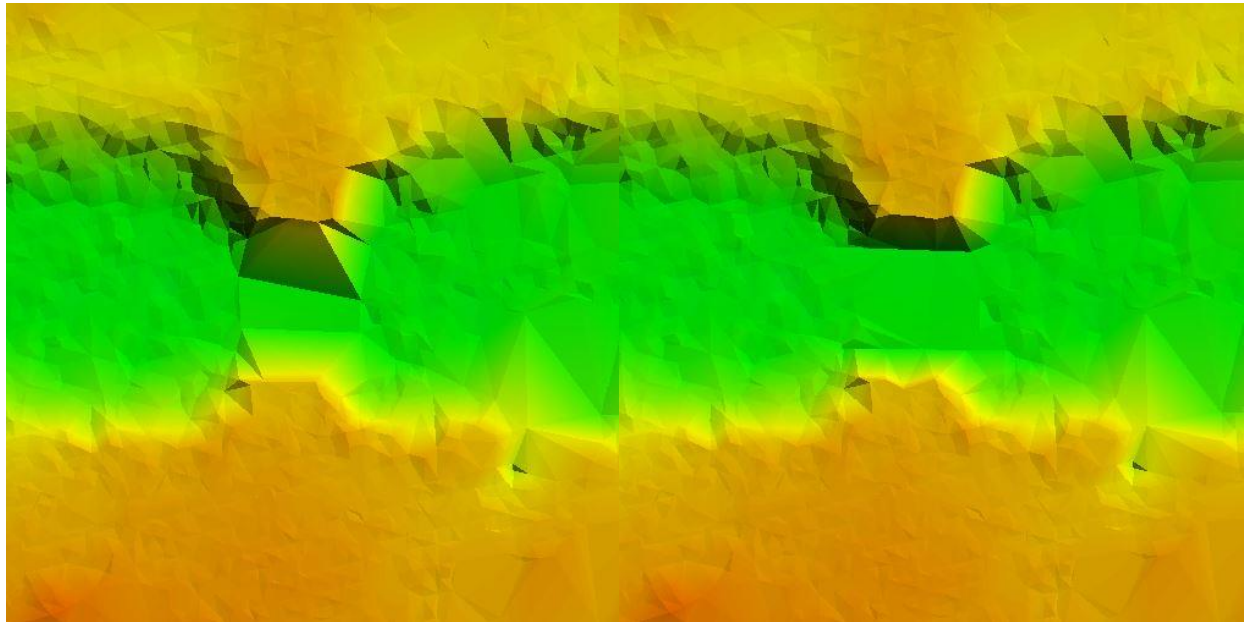

**Figure 22** The DEM on the left shows a bridge saddle artifact while the DEM on the right shows the same location after bridge breaklines have been enforced.

### DEM VERTICAL ACCURACY RESULTS

The same 177 checkpoints that were used to test the vertical accuracy of the lidar were used to validate the vertical accuracy of the final DEM products as well. Accuracy results may vary between the source lidar and final DEM deliverable. DEMs are created by averaging several lidar points within each pixel which may result in slightly different elevation values at each survey checkpoint when compared to the source LAS, which does not average several lidar points together but may interpolate (linearly) between two or three points to derive an elevation value. The vertical accuracy of the DEM is tested by extracting the elevation of the pixel that contains the x/y coordinates of the checkpoint and comparing these DEM elevations to the surveyed elevations. Dewberry typically uses LP360 software to test the swath lidar vertical accuracy, Terrascan software to test the classified lidar vertical accuracy, and Esri ArcMap to test the DEM vertical accuracy so that three different software programs are used to validate the vertical accuracy for each project.

This DEM dataset was tested to meet ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014) for a 10 cm RMSE<sub>z</sub> Vertical Accuracy Class. Actual NVA accuracy was found to be RMSE<sub>z</sub> = 4.7 cm, equating to +/- 9.3 cm at 95% confidence level. Actual VVA accuracy was found to be +/- 14 cm at the 95th percentile.

Table 15 lists the 5% outliers that are larger than the VVA 95<sup>th</sup> percentile.

Point ID	NAD83(2011) UTM Zone 16	NAVD88 (Geoid 12B)	DEM Z (m)	Delta Z	AbsDeltaZ
----------	-------------------------	--------------------	-----------	---------	-----------

	Easting X (m)	Northing Y (m)	Survey Z (m)			
VVA-30	464901.182	170914.709	8.976	9.167	0.191	0.191
VVA-46	460046.241	151099.019	14.276	14.493	0.217	0.217
VVA-50	459249.880	143223.290	5.892	6.036	0.144	0.144
VVA-75	533345.626	88551.247	0.579	0.738	0.159	0.159

Table 15 – 5% Outliers

Table 16 provides overall descriptive statistics.

100 % of Totals	# of Points	RMSEz (m) NVA Spec=0.1 m	Mean (m)	Median (m)	Skew	Std Dev (m)	Kurtosis	Min (m)	Max (m)
NVA	100	0.047	-0.004	-0.005	-0.007	0.047	1.438	-0.161	0.147
VVA	77	N/A	0.038	0.034	0.572	0.055	1.211	-0.099	0.217

Table 16 – Overall Descriptive Statistics

**Based on the vertical accuracy testing conducted by Dewberry, the DEM dataset for the FL Lower Choctawhatchee NFWFMD Lidar Project satisfies the project’s pre-defined vertical accuracy criteria.**

### DEM CHECKLIST

The following table represents a portion of the high-level steps in Dewberry’s bare earth DEM Production and QA/QC checklist that were performed for this project.

Pass/Fail	Validation Step
Pass	Masspoints (LAS to multipoint) are created from ground points only (class 2 and class 8 if model key points created, but no class 10 ignored ground points or class 9 water points)
Pass	Create a terrain for each production block using the final bare earth lidar points and final breaklines.
Pass	Convert terrains to rasters using project specifications for grid type, formatting, and cell size
Pass	Create hillshades for all DEMs
Pass	Manually review bare-earth DEMs in ArcMap with hillshades to check for issues
Pass	DEM should be hydro-flattened or hydro-enforced as required by project specifications
Pass	DEM should be seamless across tile boundaries
Pass	Water should be flowing downhill without excessive water artifacts present
Pass	Water features should NOT be floating above surrounding
Pass	Bridges should NOT be present in bare-earth DEMs.
Pass	Any remaining bridge saddles where below bridge breaklines were not used need to be fixed by adding below bridge breaklines and re-processing.
Pass	All qualitative issues present in the DEMs as a result of lidar processing and editing issues must be marked for corrections in the lidar. These DEMs will need to be recreated after the lidar has been

	corrected.
Pass	Calculate DEM Vertical Accuracy including NVA, VVA, and other statistics
Pass	Split the DEMs into tiles according to the project tiling scheme
Pass	Verify all properties of the tiled DEMs, including coordinate reference system information, cell size, cell extents, and that compression has not been applied to the tiled DEMs
Pass	Load all tiled DEMs into Global Mapper to verify complete coverage to the (buffered) project boundary and that no tiles are corrupt.

**Table 17-A subset of the high-level steps from Dewberry’s bare earth DEM Production and QA/QC checklist performed for this project.**

## Appendix A: Survey Report

### 1. Introduction

#### 1.1 *Project Summary*

Dewberry|Preble-Rish is under subcontract to Dewberry Consultants, LLC, to provide a minimum of 101 Non-vegetated Vertical Accuracy (NVA – total number actually surveyed = 101), and 78 Vegetated Vertical Accuracy (VVA – total number actually surveyed = 78) check points for USGS in the State of Florida. A minimum of half (51) of the NVA points shall also be horizontal accuracy check points (total number actually surveyed = 51). Under the above referenced USGS Task Order, Dewberry|Preble-Rish was tasked to complete the quality assurance of high resolution lidar-derived elevation products. As part of this work, Dewberry|Preble-Rish staff completed checkpoint surveys that will be used to evaluate vertical accuracy on the bare-earth terrain derived from the lidar.

Existing NGS Control Points were recovered and surveyed to verify the accuracy of the RTK/GPS survey equipment with the results shown in Section 2.4 and Appendix 1 of this report.

As an internal QA/QC procedure, and to verify that the lidar check points meet the 95% confidence level, 52 of the NVA check points, and 40 of the VVA check points were re-surveyed and are shown in Section 5 of this report. For check points that were surveyed twice, an average of the two observations was computed to generate final coordinates and elevations.

Final horizontal coordinates are referenced to the Florida State Plane Coordinate System, NAD83, North Zone, Meters. Final vertical elevations are referenced to NAVD88 in Meters using Geoid model 2012B (Geoid12B).

#### 1.2 *Points of Contact*

Questions regarding the technical aspects of this report should be addressed to:

##### **Dewberry|Preble-Rish**

Frederick C. Rankin, P.S.M.  
Professional Surveyor & Mapper  
203 Aberdeen Parkway  
Panama City, Florida 32405  
(850) 522-0644 office  
(850) 522-1011 fax

### 2. Project Details

#### 2.1 *Survey Equipment*



In performing the GPS observations, Spectra Precision Epoch 80 GNSS RTK GPS receiver/antenna attached to a 6.56 foot (2 meter) fixed height pole was used, together with a Spectra Precision Ranger Data Collector equipped with SurveyPro Software (version 5.5.2), to collect GPS raw data for the field surveys.

## **2.2 *Survey Point Detail***

101 Non-vegetated Check Points, and 78 Vegetated Check Points were distributed throughout the project area.

A sketch was made for each location and a nail was set at the point where possible, unless said point was already located at a photo identifiable point. The lidar Check Point locations are detailed on the “Ground Control Point Documentation Report”, which is delivered via electronic transfer, see appendix 5a on sheet 2.

## **2.3 *Network Design***

The GPS survey performed by Dewberry|Preble-Rish was tied to the Florida Permanent Reference Network (FPRN), a Real Time Network (RTN) managed by the Florida Department of Transportation. The FPRN consists of a series of approximately 100 continuously operating dual-frequency reference stations (CORS) located throughout Florida, which are tied to the National Geodetic Survey’s National CORS network. Each CORS site provides Global Positioning System (GPS) carrier phase and code range measurements in support of 3-dimensional positioning activities through Florida and surrounding states. All of the reference stations have been linked together, creating a Virtual Reference Station System (VRS).

## **2.4 *Field Survey Procedures and Analysis***

Dewberry|Preble-Rish field surveyors used Spectra Precision Epoch 80 GNSS RTK GPS systems, which is a geodetic quality dual frequency GPS receiver, to collect data at each check point location.

A total of six (6) existing NGS monuments were located as an additional QA/QC procedure, for the purpose of verifying the accuracy of the VRS network. All NGS monuments used are published in the NSRS database, and represent the primary project control for this survey. Field GPS observations are detailed in the “Project Network Control Monument Report”, see appendix 1 on sheets 7-8.

A total of 52 of the NVA check point locations, and 40 of the VVA check point locations were occupied twice. All re-observations matched the initially derived station positions within the allowable tolerance of  $\pm 5$ cm or within the 95% confidence level. Each occupation utilized

the VRS network, was occupied for approximately three (3) minutes in duration, and measured to 180 epochs. Field GPS observations are detailed in the “Ground Control Point Documentation Report”, and delivered via electronic transfer, see appendix 5a on sheet 2.

## **2.5    *Adjustment***

The survey data was collected using Virtual Reference Stations (VRS) methodology within a Virtual Reference System (VRS).

The system is designed to provide a true Network RTK performance, the RTK software enables high-accuracy positioning in real time across a geographic region. The RTK software package uses real-time data streams from the GPS system user and generates correction models for high-accuracy RTK GPS corrections throughout the network. Therefore, corrections were applied to the points as they were being collected, thus negating the need for a post process adjustment.

## **2.6    *Data Processing Procedures***

After field data is collected the information is downloaded from the data collectors into the office software. Text files are created that show the point number, northing, easting, elevation, and description (PNEZD format) for each point surveyed. Points are then entered into a Microsoft Excell spreadsheet, which contains formulas for calculating differences between published and field survey data, as well as, comparing differences between points surveyed multiple times. This data is used to confirm point accuracy and precision.

After review of the point data, an “ASCII” or “txt” file (PNEZD format) is created, which is the industry standard. Point files are loaded into our CADD program (AutoCAD Civil 3D) to make a visual check of the point data (Pt. #, Coordinates, Elev. and Description). For check points that were surveyed twice, an average of the two observations was computed to generate final northings, eastings, and elevations. The data can now be imported into the final product.

## Appendix B: Complete List of Delivered Tiles

16REU000915	16REU000945	16REU805945	16REU805990	16REU820915	16REU820930
16REU820945	16REU820960	16REU820975	16REU820990	16REU835900	16REU835915
16REU835930	16REU835945	16REU835960	16REU835975	16REU835990	16REU850900
16REU850915	16REU850930	16REU850945	16REU850960	16REU850975	16REU850990
16REU865900	16REU865915	16REU865930	16REU865945	16REU865960	16REU865975
16REU865990	16REU880900	16REU880915	16REU880930	16REU880945	16REU880960
16REU880975	16REU880990	16REU895900	16REU895915	16REU895930	16REU895945
16REU895960	16REU895975	16REU895990	16REU910900	16REU910915	16REU910930
16REU910945	16REU910960	16REU910975	16REU910990	16REU925900	16REU925915
16REU925930	16REU925945	16REU925960	16REU925975	16REU925990	16REU940900
16REU940915	16REU940930	16REU940945	16REU940960	16REU940975	16REU940990
16REU955900	16REU955915	16REU955930	16REU955945	16REU955960	16REU955975
16REU955990	16REU970900	16REU970915	16REU970930	16REU970945	16REU970960
16REU970975	16REU970990	16REU985900	16REU985915	16REU985930	16REU985945
16REU985960	16REU985975	16REU985990	16REV000005	16REV000020	16REV000065
16REV000110	16REV000155	16REV000170	16REV000185	16REV000215	16REV000230
16REV000245	16REV000260	16REV000275	16REV805005	16REV805020	16REV805035
16REV805050	16REV820005	16REV820020	16REV820035	16REV820050	16REV820065
16REV820080	16REV820095	16REV835005	16REV835020	16REV835035	16REV835050
16REV835065	16REV835080	16REV835095	16REV835110	16REV850005	16REV850020
16REV850035	16REV850050	16REV850065	16REV850080	16REV850095	16REV850110
16REV850125	16REV865005	16REV865020	16REV865035	16REV865050	16REV865065
16REV865080	16REV865095	16REV865110	16REV865125	16REV865140	16REV865155
16REV880005	16REV880020	16REV880035	16REV880050	16REV880065	16REV880080
16REV880095	16REV880110	16REV880125	16REV880140	16REV880155	16REV895005
16REV895020	16REV895035	16REV895050	16REV895065	16REV895080	16REV895095
16REV895110	16REV895125	16REV895140	16REV895155	16REV895170	16REV910005
16REV910020	16REV910035	16REV910050	16REV910065	16REV910080	16REV910095
16REV910110	16REV910125	16REV910140	16REV910155	16REV910170	16REV910185
16REV910200	16REV910215	16REV910230	16REV910245	16REV910260	16REV910275
16REV910290	16REV925005	16REV925020	16REV925035	16REV925050	16REV925065
16REV925080	16REV925095	16REV925110	16REV925125	16REV925140	16REV925155
16REV925170	16REV925185	16REV925200	16REV925215	16REV925230	16REV925245
16REV925260	16REV925275	16REV925290	16REV940005	16REV940020	16REV940035
16REV940050	16REV940065	16REV940080	16REV940095	16REV940110	16REV940125
16REV940140	16REV940155	16REV940170	16REV940185	16REV940200	16REV940215
16REV940230	16REV940245	16REV940260	16REV940275	16REV940290	16REV955005
16REV955020	16REV955035	16REV955050	16REV955065	16REV955080	16REV955095
16REV955110	16REV955125	16REV955140	16REV955155	16REV955170	16REV955185
16REV955200	16REV955215	16REV955230	16REV955245	16REV955260	16REV955275
16REV955290	16REV970005	16REV970020	16REV970035	16REV970050	16REV970065
16REV970080	16REV970095	16REV970110	16REV970125	16REV970140	16REV970155
16REV970170	16REV970185	16REV970200	16REV970215	16REV970230	16REV970245
16REV970260	16REV970275	16REV970290	16REV985005	16REV985020	16REV985035
16REV985050	16REV985065	16REV985080	16REV985095	16REV985110	16REV985125
16REV985140	16REV985155	16REV985170	16REV985185	16REV985200	16REV985215
16REV985230	16REV985245	16REV985260	16REV985275	16REV985290	16RFT525000
16RFT525940	16RFT525955	16RFT525970	16RFT525985	16RFT540880	16RFT540895
16RFT540910	16RFT540925	16RFT540940	16RFT540955	16RFT540970	16RFT555850
16RFT555865	16RFT555880	16RFT555895	16RFT555910	16RFT555925	16RFT570820
16RFT570835	16RFT570850	16RFT570865	16RFT585805	16RFT585820	16RFT585835
16RFT600805	16RFT600820	16RFT600835	16RFT600850	16RFT600880	16RFT600895
16RFT615835	16RFT615850	16RFT615865	16RFT615895	16RFT615985	16RFT630835

16RFT630850	16RFT630865	16RFT630880	16RFT630895	16RFT630910	16RFT630925
16RFT630940	16RFT630955	16RFT630970	16RFT630985	16RFT645835	16RFT645850
16RFT645865	16RFT645880	16RFT645895	16RFT645910	16RFT645925	16RFT645940
16RFT645955	16RFT645970	16RFT645985	16RFT660835	16RFT660850	16RFT660865
16RFT660880	16RFT660895	16RFT660910	16RFT660925	16RFT660940	16RFT660955
16RFT660970	16RFT660985	16RFT675835	16RFT675850	16RFT675865	16RFT675880
16RFT675895	16RFT675910	16RFT675925	16RFT675940	16RFT675955	16RFT675970
16RFT675985	16RFT690835	16RFT690850	16RFT690865	16RFT690880	16RFT690895
16RFT690910	16RFT690925	16RFT690940	16RFT690955	16RFT690970	16RFT690985
16RFT705835	16RFT705850	16RFT705865	16RFT705880	16RFT705895	16RFT705910
16RFT705925	16RFT705940	16RFT705955	16RFT705970	16RFT705985	16RFT720835
16RFT720850	16RFT720865	16RFT720880	16RFT720895	16RFT720910	16RFT720925
16RFT720940	16RFT720955	16RFT720970	16RFT720985	16RFT735880	16RFT735895
16RFT735910	16RFT735925	16RFT735940	16RFT735955	16RFT735970	16RFT735985
16RFT750880	16RFT750895	16RFT750910	16RFT750925	16RFT750940	16RFT750955
16RFT750970	16RFT750985	16RFT765895	16RFT765910	16RFT765925	16RFT765940
16RFT765955	16RFT765970	16RFT765985	16RFT780910	16RFT780925	16RFT780940
16RFT780955	16RFT780970	16RFT780985	16RFT795000	16RFT795925	16RFT795940
16RFT795955	16RFT795970	16RFT795985	16RFT810940	16RFT810955	16RFT810970
16RFT810985	16RFT825940	16RFT825955	16RFT825970	16RFT825985	16RFT840940
16RFT840955	16RFT840970	16RFT840985	16RFT855940	16RFT855955	16RFT855970
16RFT855985	16RFT870955	16RFT870970	16RFT870985	16RFT885000	16RFT885955
16RFT885970	16RFT885985	16RFT900970	16RFT900985	16RFU000900	16RFU000930
16RFU000960	16RFU000975	16RFU000990	16RFU015900	16RFU015915	16RFU015930
16RFU015945	16RFU015960	16RFU015975	16RFU015990	16RFU030900	16RFU030915
16RFU030930	16RFU030945	16RFU030960	16RFU030975	16RFU030990	16RFU045435
16RFU045450	16RFU045465	16RFU045480	16RFU045495	16RFU045510	16RFU045525
16RFU045540	16RFU045555	16RFU045570	16RFU045585	16RFU045600	16RFU045615
16RFU045630	16RFU045645	16RFU045660	16RFU045675	16RFU045690	16RFU045705
16RFU045720	16RFU045735	16RFU045750	16RFU045765	16RFU045780	16RFU045795
16RFU045810	16RFU045825	16RFU045840	16RFU045855	16RFU045870	16RFU045885
16RFU045900	16RFU045915	16RFU045930	16RFU045945	16RFU045960	16RFU045975
16RFU045990	16RFU060420	16RFU060435	16RFU060450	16RFU060465	16RFU060480
16RFU060495	16RFU060510	16RFU060525	16RFU060540	16RFU060555	16RFU060570
16RFU060585	16RFU060600	16RFU060615	16RFU060630	16RFU060645	16RFU060660
16RFU060675	16RFU060690	16RFU060705	16RFU060720	16RFU060735	16RFU060750
16RFU060765	16RFU060780	16RFU060795	16RFU060810	16RFU060825	16RFU060840
16RFU060855	16RFU060870	16RFU060885	16RFU060900	16RFU060915	16RFU060930
16RFU060945	16RFU060960	16RFU060975	16RFU060990	16RFU075420	16RFU075435
16RFU075450	16RFU075465	16RFU075480	16RFU075495	16RFU075510	16RFU075525
16RFU075540	16RFU075555	16RFU075570	16RFU075585	16RFU075600	16RFU075615
16RFU075630	16RFU075645	16RFU075660	16RFU075675	16RFU075690	16RFU075705
16RFU075720	16RFU075735	16RFU075750	16RFU075765	16RFU075780	16RFU075795
16RFU075810	16RFU075825	16RFU075840	16RFU075855	16RFU075870	16RFU075885
16RFU075900	16RFU075915	16RFU075930	16RFU075945	16RFU075960	16RFU075975
16RFU075990	16RFU090405	16RFU090420	16RFU090435	16RFU090450	16RFU090465
16RFU090480	16RFU090495	16RFU090510	16RFU090525	16RFU090540	16RFU090555
16RFU090570	16RFU090585	16RFU090600	16RFU090615	16RFU090630	16RFU090645
16RFU090660	16RFU090675	16RFU090690	16RFU090705	16RFU090720	16RFU090735
16RFU090750	16RFU090765	16RFU090780	16RFU090795	16RFU090810	16RFU090825
16RFU090840	16RFU090855	16RFU090870	16RFU090885	16RFU090900	16RFU090915
16RFU090930	16RFU090945	16RFU090960	16RFU090975	16RFU090990	16RFU105405
16RFU105420	16RFU105435	16RFU105450	16RFU105465	16RFU105480	16RFU105495
16RFU105510	16RFU105525	16RFU105540	16RFU105555	16RFU105570	16RFU105585
16RFU105600	16RFU105615	16RFU105630	16RFU105645	16RFU105660	16RFU105675

16RFU105690	16RFU105705	16RFU105720	16RFU105735	16RFU105750	16RFU105765
16RFU105780	16RFU105795	16RFU105810	16RFU105825	16RFU105840	16RFU105855
16RFU105870	16RFU105885	16RFU105900	16RFU105915	16RFU105930	16RFU105945
16RFU105960	16RFU105975	16RFU105990	16RFU120390	16RFU120405	16RFU120420
16RFU120435	16RFU120450	16RFU120495	16RFU120510	16RFU120525	16RFU120540
16RFU120555	16RFU120570	16RFU120585	16RFU120600	16RFU120615	16RFU120630
16RFU120645	16RFU120660	16RFU120675	16RFU120690	16RFU120705	16RFU120720
16RFU120735	16RFU120750	16RFU120765	16RFU120780	16RFU120795	16RFU120810
16RFU120825	16RFU120840	16RFU120855	16RFU120870	16RFU120885	16RFU120900
16RFU120915	16RFU120930	16RFU120945	16RFU120960	16RFU120975	16RFU120990
16RFU135375	16RFU135390	16RFU135405	16RFU135420	16RFU135435	16RFU135450
16RFU135465	16RFU135510	16RFU135525	16RFU135540	16RFU135555	16RFU135570
16RFU135585	16RFU135600	16RFU135615	16RFU135630	16RFU135645	16RFU135660
16RFU135675	16RFU135690	16RFU135705	16RFU135720	16RFU135735	16RFU135750
16RFU135765	16RFU135780	16RFU135795	16RFU135810	16RFU135825	16RFU135840
16RFU135855	16RFU135870	16RFU135885	16RFU135900	16RFU135915	16RFU135930
16RFU135945	16RFU135960	16RFU135975	16RFU135990	16RFU150375	16RFU150390
16RFU150405	16RFU150420	16RFU150435	16RFU150450	16RFU150465	16RFU150510
16RFU150525	16RFU150540	16RFU150555	16RFU150570	16RFU150585	16RFU150600
16RFU150615	16RFU150630	16RFU150645	16RFU150660	16RFU150675	16RFU150690
16RFU150705	16RFU150720	16RFU150735	16RFU150750	16RFU150765	16RFU150780
16RFU150795	16RFU150810	16RFU150825	16RFU150840	16RFU150855	16RFU150870
16RFU150885	16RFU150900	16RFU150915	16RFU150930	16RFU150945	16RFU150960
16RFU150975	16RFU150990	16REU820645	16RFU165360	16REU820660	16REU835630
16RFU165375	16REU835645	16RFU165390	16REU835660	16RFU165405	16REU835675
16RFU165420	16REU835855	16RFU165435	16RFU165450	16RFU165465	16RFU165510
16REU835870	16RFU165525	16RFU165540	16REU835885	16REU850630	16RFU165555
16RFU165570	16REU850645	16RFU165585	16REU850660	16RFU165600	16REU850675
16RFU165615	16RFU165630	16REU850690	16RFU165645	16REU850705	16RFU165660
16REU850720	16RFU165675	16RFU165690	16REU850750	16RFU165705	16REU850855
16RFU165720	16RFU165735	16REU850870	16RFU165750	16REU850885	16RFU165765
16REU865630	16RFU165780	16REU865645	16RFU165795	16REU865660	16RFU165810
16RFU165825	16REU865675	16RFU165840	16REU865690	16RFU165855	16REU865705
16RFU165870	16RFU165885	16REU865720	16RFU165900	16REU865735	16RFU165915
16REU865750	16RFU165930	16RFU165945	16REU865855	16RFU165960	16REU865870
16RFU165975	16REU865885	16RFU165990	16RFU180345	16RFU180360	16REU880615
16RFU180375	16RFU180390	16REU880630	16RFU180405	16RFU180420	16RFU180435
16REU880645	16RFU180450	16RFU180465	16RFU180510	16RFU180525	16RFU180540
16REU880660	16RFU180555	16RFU180570	16REU880675	16RFU180585	16RFU180600
16REU880690	16RFU180615	16RFU180630	16REU880705	16RFU180645	16RFU180660
16REU880720	16RFU180675	16REU880735	16RFU180690	16REU880750	16RFU180705
16RFU180720	16REU880840	16RFU180735	16REU880855	16RFU180750	16RFU180765
16REU880870	16RFU180780	16REU880885	16RFU180795	16RFU180810	16REU895600
16RFU180825	16RFU180840	16REU895615	16RFU180855	16REU895630	16RFU180870
16RFU180885	16REU895645	16RFU180900	16REU895660	16RFU180915	16RFU180930
16REU895675	16RFU180945	16RFU180960	16REU895690	16RFU180975	16RFU180990
16RFU195330	16REU895705	16RFU195345	16RFU195360	16RFU195375	16REU895720
16RFU195390	16RFU195405	16RFU195420	16RFU195435	16REU895735	16RFU195495
16RFU195510	16REU895750	16RFU195525	16REU895825	16RFU195540	16REU895840
16RFU195555	16REU895855	16REU895870	16RFU195570	16REU895885	16REU910585
16RFU195585	16REU910600	16REU910615	16REU910630	16REU910645	16RFU195600
16REU910660	16REU910675	16RFU195615	16REU910690	16REU910705	16REU910720
16RFU195630	16REU910735	16REU910750	16RFU195645	16REU910810	16REU910825
16RFU195660	16REU910840	16REU910855	16RFU195675	16REU910870	16REU910885
16RFU195690	16RFU195705	16REU925585	16REU925600	16RFU195720	16REU925615

16REU925630	16REU925645	16REU925660	16RFU195735	16REU925675	16REU925690
16REU925705	16RFU195750	16REU925720	16REU925735	16REU925750	16REU925795
16REU925810	16RFU195765	16REU925825	16REU925840	16REU925855	16RFU195780
16REU925870	16REU925885	16REU940585	16RFU195795	16REU940600	16REU940615
16REU940630	16REU940645	16RFU195810	16REU940660	16REU940675	16REU940690
16REU940705	16RFU195825	16REU940720	16REU940735	16REU940750	16REU940765
16RFU195840	16REU940795	16REU940810	16REU940825	16RFU195855	16REU940840
16REU940855	16RFU195870	16REU940870	16REU940885	16REU955585	16RFU195885
16REU955600	16REU955615	16REU955630	16REU955645	16RFU195900	16REU955660
16REU955675	16REU955690	16REU955705	16REU955720	16REU955735	16RFU195915
16REU955750	16REU955765	16REU955780	16REU955795	16REU955810	16REU955825
16RFU195930	16REU955840	16REU955855	16REU955870	16REU955885	16RFU195945
16REU970480	16REU970495	16REU970510	16RFU195960	16REU970525	16REU970540
16REU970555	16REU970570	16REU970585	16RFU195975	16REU970600	16REU970615
16REU970630	16REU970645	16REU970660	16RFU195990	16REU970675	16RFU210315
16REU970690	16REU970705	16RFU210330	16REU970720	16REU970735	16RFU210345
16REU970750	16REU970765	16REU970780	16REU970795	16RFU210360	16REU970810
16RFU210375	16REU970825	16RFU210390	16REU970840	16RFU210420	16RFU210435
16REU970855	16REU970870	16RFU210480	16REU970885	16REU985465	16REU985480
16RFU210495	16REU985495	16REU985510	16REU985525	16RFU210510	16REU985540
16REU985555	16REU985570	16RFU210525	16REU985585	16REU985600	16REU985615
16RFU210540	16REU985630	16REU985645	16REU985660	16RFU210555	16REU985675
16REU985690	16REU985705	16REU985720	16REU985735	16REU985750	16REU985765
16RFU210570	16REU985780	16REU985795	16REU985810	16REU985825	16REU985840
16RFU210585	16REU985855	16REU985870	16REU985885	16RFU210600	16RFU210615
16RFU210630	16RFU210645	16RFU210660	16RFU210675	16RFU210690	16RFU210705
16RFU210720	16RFU210735	16RFU210750	16RFU210765	16RFU210780	16RFU210795
16RFU210810	16RFU210825	16RFU210840	16RFU210855	16RFU210870	16RFU210885
16RFU210900	16RFU210915	16RFU210930	16RFU210945	16RFU210960	16RFU210975
16RFU210990	16RFU225300	16RFU225315	16RFU225330	16RFU225345	16RFU225360
16RFU225375	16RFU225390	16RFU225405	16RFU225450	16RFU225465	16RFU225480
16RFU225495	16RFU225510	16RFU225525	16RFU225540	16RFU225555	16RFU225570
16RFU225585	16RFU225600	16RFU225615	16RFU225630	16RFU225645	16RFU225660
16RFU225675	16RFU225690	16RFU225705	16RFU225720	16RFU225735	16RFU225750
16RFU225765	16RFU225780	16RFU225795	16RFU225810	16RFU225825	16RFU225840
16RFU225855	16RFU225870	16RFU225885	16RFU225900	16RFU225915	16RFU225930
16RFU225945	16RFU225960	16RFU225975	16RFU225990	16RFU240300	16RFU240315
16RFU240345	16RFU240360	16RFU240375	16RFU240390	16RFU240405	16RFU240420
16RFU240435	16RFU240450	16RFU240465	16RFU240480	16RFU240495	16RFU240510
16RFU240525	16RFU240540	16RFU240555	16RFU240570	16RFU240585	16RFU240600
16RFU240615	16RFU240630	16RFU240645	16RFU240660	16RFU240675	16RFU240690
16RFU240705	16RFU240720	16RFU240735	16RFU240750	16RFU240765	16RFU240780
16RFU240795	16RFU240810	16RFU240825	16RFU240840	16RFU240855	16RFU240870
16RFU240885	16RFU240900	16RFU240915	16RFU240930	16RFU240945	16RFU240960
16RFU240975	16RFU240990	16RFU255285	16RFU255300	16RFU255315	16RFU255330
16RFU255375	16RFU255390	16RFU255405	16RFU255420	16RFU255435	16RFU255450
16RFU255465	16RFU255480	16RFU255495	16RFU255510	16RFU255525	16RFU255540
16RFU255555	16RFU255570	16RFU255585	16RFU255600	16RFU255615	16RFU255630
16RFU255645	16RFU255660	16RFU255675	16RFU255690	16RFU255705	16RFU255720
16RFU255735	16RFU255750	16RFU255765	16RFU255780	16RFU255795	16RFU255810
16RFU255825	16RFU255840	16RFU255855	16RFU255870	16RFU255885	16RFU255900
16RFU255915	16RFU255930	16RFU255945	16RFU255960	16RFU255975	16RFU255990
16RFU270285	16RFU270300	16RFU270315	16RFU270330	16RFU270345	16RFU270360
16RFU270375	16RFU270390	16RFU270405	16RFU270420	16RFU270435	16RFU270450
16RFU270465	16RFU270480	16RFU270495	16RFU270510	16RFU270525	16RFU270540

16RFU270555	16RFU270570	16RFU270585	16RFU270600	16RFU270615	16RFU270630
16RFU270645	16RFU270660	16RFU270675	16RFU270690	16RFU270705	16RFU270720
16RFU270735	16RFU270750	16RFU270765	16RFU270780	16RFU270795	16RFU270810
16RFU270825	16RFU270840	16RFU270855	16RFU270870	16RFU270885	16RFU270900
16RFU270915	16RFU270930	16RFU270945	16RFU270960	16RFU270975	16RFU270990
16RFU285270	16RFU285285	16RFU285300	16RFU285315	16RFU285330	16RFU285345
16RFU285360	16RFU285375	16RFU285390	16RFU285405	16RFU285420	16RFU285435
16RFU285450	16RFU285465	16RFU285480	16RFU285495	16RFU285510	16RFU285525
16RFU285540	16RFU285555	16RFU285570	16RFU285585	16RFU285600	16RFU285615
16RFU285630	16RFU285645	16RFU285660	16RFU285675	16RFU285690	16RFU285705
16RFU285720	16RFU285735	16RFU285750	16RFU285765	16RFU285780	16RFU285795
16RFU285810	16RFU285825	16RFU285840	16RFU285855	16RFU285870	16RFU285885
16RFU285900	16RFU285915	16RFU285930	16RFU285945	16RFU285960	16RFU285975
16RFU285990	16RFU300270	16RFU300285	16RFU300300	16RFU300315	16RFU300330
16RFU300345	16RFU300360	16RFU300375	16RFU300390	16RFU300405	16RFU300420
16RFU300435	16RFU300450	16RFU300465	16RFU300480	16RFU300495	16RFU300510
16RFU300525	16RFU300540	16RFU300555	16RFU300570	16RFU300585	16RFU300600
16RFU300615	16RFU300630	16RFU300645	16RFU300660	16RFU300675	16RFU300690
16RFU300705	16RFU300720	16RFU300735	16RFU300750	16RFU300765	16RFU300780
16RFU300795	16RFU300810	16RFU300825	16RFU300840	16RFU300855	16RFU300870
16RFU300885	16RFU300900	16RFU300915	16RFU300930	16RFU300945	16RFU300960
16RFU300975	16RFU300990	16RFU315255	16RFU315270	16RFU315285	16RFU315300
16RFU315315	16RFU315330	16RFU315345	16RFU315360	16RFU315375	16RFU315390
16RFU315405	16RFU315420	16RFU315435	16RFU315450	16RFU315465	16RFU315480
16RFU315495	16RFU315510	16RFU315525	16RFU315540	16RFU315555	16RFU315570
16RFU315585	16RFU315600	16RFU315615	16RFU315630	16RFU315645	16RFU315660
16RFU315675	16RFU315690	16RFU315705	16RFU315720	16RFU315735	16RFU315750
16RFU315765	16RFU315780	16RFU315795	16RFU315810	16RFU315825	16RFU315840
16RFU315855	16RFU315870	16RFU315885	16RFU315900	16RFU315915	16RFU315930
16RFU315945	16RFU315960	16RFU315975	16RFU315990	16RFU330255	16RFU330270
16RFU330285	16RFU330300	16RFU330315	16RFU330330	16RFU330345	16RFU330360
16RFU330375	16RFU330390	16RFU330405	16RFU330420	16RFU330435	16RFU330450
16RFU330465	16RFU330480	16RFU330495	16RFU330510	16RFU330525	16RFU330540
16RFU330555	16RFU330570	16RFU330585	16RFU330600	16RFU330615	16RFU330630
16RFU330645	16RFU330660	16RFU330675	16RFU330690	16RFU330705	16RFU330720
16RFU330735	16RFU330750	16RFU330765	16RFU330780	16RFU330795	16RFU330810
16RFU330825	16RFU330840	16RFU330855	16RFU330870	16RFU330885	16RFU330900
16RFU330915	16RFU330930	16RFU330945	16RFU330960	16RFU330975	16RFU330990
16RFU345240	16RFU345255	16RFU345270	16RFU345285	16RFU345300	16RFU345315
16RFU345330	16RFU345345	16RFU345360	16RFU345375	16RFU345390	16RFU345405
16RFU345420	16RFU345435	16RFU345450	16RFU345465	16RFU345480	16RFU345495
16RFU345510	16RFU345525	16RFU345540	16RFU345555	16RFU345570	16RFU345585
16RFU345600	16RFU345615	16RFU345630	16RFU345645	16RFU345660	16RFU345675
16RFU345690	16RFU345705	16RFU345720	16RFU345735	16RFU345750	16RFU345765
16RFU345780	16RFU345795	16RFU345810	16RFU345825	16RFU345840	16RFU345855
16RFU345870	16RFU345885	16RFU345900	16RFU345915	16RFU345930	16RFU345945
16RFU345960	16RFU345975	16RFU345990	16RFU360225	16RFU360240	16RFU360255
16RFU360270	16RFU360285	16RFU360300	16RFU360315	16RFU360330	16RFU360345
16RFU360360	16RFU360375	16RFU360390	16RFU360405	16RFU360420	16RFU360435
16RFU360450	16RFU360465	16RFU360480	16RFU360495	16RFU360510	16RFU360525
16RFU360540	16RFU360555	16RFU360570	16RFU360585	16RFU360600	16RFU360615
16RFU360630	16RFU360645	16RFU360660	16RFU360675	16RFU360690	16RFU360705
16RFU360720	16RFU360735	16RFU360750	16RFU360765	16RFU360780	16RFU360795
16RFU360810	16RFU360825	16RFU360840	16RFU360855	16RFU360870	16RFU360885
16RFU360900	16RFU360915	16RFU360930	16RFU360945	16RFU360960	16RFU360975

16RFU360990	16RFU375210	16RFU375225	16RFU375240	16RFU375255	16RFU375270
16RFU375285	16RFU375300	16RFU375315	16RFU375330	16RFU375345	16RFU375360
16RFU375375	16RFU375390	16RFU375405	16RFU375420	16RFU375435	16RFU375450
16RFU375465	16RFU375480	16RFU375495	16RFU375510	16RFU375525	16RFU375540
16RFU375555	16RFU375570	16RFU375585	16RFU375600	16RFU375615	16RFU375630
16RFU375645	16RFU375660	16RFU375675	16RFU375690	16RFU375705	16RFU375720
16RFU375735	16RFU375750	16RFU375765	16RFU375780	16RFU375795	16RFU375810
16RFU375825	16RFU375840	16RFU375855	16RFU000465	16RFU000480	16RFU000510
16RFU000525	16RFU375870	16RFU000555	16RFU000570	16RFU000600	16RFU000645
16RFU375885	16RFU000660	16RFU000675	16RFU000705	16RFU375900	16RFU000720
16RFU000735	16RFU000750	16RFU000765	16RFU375915	16RFU000795	16RFU000810
16RFU000825	16RFU015450	16RFU015465	16RFU375930	16RFU015480	16RFU015495
16RFU015510	16RFU375945	16RFU015525	16RFU015540	16RFU015555	16RFU015570
16RFU375960	16RFU015585	16RFU015600	16RFU015615	16RFU015630	16RFU375975
16RFU015645	16RFU015660	16RFU015675	16RFU375990	16RFU015690	16RFU390180
16RFU015705	16RFU390195	16RFU390210	16RFU015720	16RFU390225	16RFU015735
16RFU015750	16RFU390240	16RFU015765	16RFU390255	16RFU015780	16RFU015795
16RFU390270	16RFU015810	16RFU390285	16RFU015825	16RFU015840	16RFU390330
16RFU015855	16RFU015870	16RFU015885	16RFU030450	16RFU030465	16RFU030480
16RFU390345	16RFU030495	16RFU030510	16RFU030525	16RFU030540	16RFU390360
16RFU030555	16RFU030570	16RFU030585	16RFU030600	16RFU030615	16RFU390375
16RFU030630	16RFU030645	16RFU030660	16RFU030675	16RFU390390	16RFU030690
16RFU030705	16RFU030720	16RFU390405	16RFU030735	16RFU030750	16RFU030765
16RFU030780	16RFU390420	16RFU030795	16RFU030810	16RFU030825	16RFU030840
16RFU030855	16RFU390435	16RFU030870	16RFU030885	16RFU390450	16RFU390465
16RFU390480	16RFU390495	16RFU390510	16RFU390525	16RFU390540	16RFU390555
16RFU390570	16RFU390585	16RFU390600	16RFU390615	16RFU390630	16RFU390645
16RFU390660	16RFU390675	16RFU390690	16RFU390705	16RFU390720	16RFU390735
16RFU390750	16RFU390765	16RFU390780	16RFU390795	16RFU390810	16RFU390825
16RFU390840	16RFU390855	16RFU390870	16RFU390885	16RFU390900	16RFU390915
16RFU390930	16RFU390945	16RFU390960	16RFU390975	16RFU390990	16RFU405180
16RFU405195	16RFU405210	16RFU405225	16RFU405240	16RFU405255	16RFU405270
16RFU405285	16RFU405315	16RFU405330	16RFU405345	16RFU405360	16RFU405375
16RFU405390	16RFU405405	16RFU405420	16RFU405435	16RFU405450	16RFU405465
16RFU405480	16RFU405495	16RFU405510	16RFU405525	16RFU405540	16RFU405555
16RFU405570	16RFU405585	16RFU405600	16RFU405615	16RFU405630	16RFU405645
16RFU405660	16RFU405675	16RFU405690	16RFU405705	16RFU405720	16RFU405735
16RFU405750	16RFU405765	16RFU405780	16RFU405795	16RFU405810	16RFU405825
16RFU405840	16RFU405855	16RFU405870	16RFU405885	16RFU405900	16RFU405915
16RFU405930	16RFU405945	16RFU405960	16RFU405975	16RFU405990	16RFU420165
16RFU420180	16RFU420195	16RFU420210	16RFU420225	16RFU420240	16RFU420255
16RFU420270	16RFU420300	16RFU420315	16RFU420330	16RFU420345	16RFU420360
16RFU420375	16RFU420390	16RFU420405	16RFU420420	16RFU420435	16RFU420450
16RFU420465	16RFU420480	16RFU420495	16RFU420510	16RFU420525	16RFU420540
16RFU420555	16RFU420570	16RFU420585	16RFU420600	16RFU420615	16RFU420630
16RFU420645	16RFU420660	16RFU420675	16RFU420690	16RFU420705	16RFU420720
16RFU420735	16RFU420750	16RFU420765	16RFU420780	16RFU420795	16RFU420810
16RFU420825	16RFU420840	16RFU420855	16RFU420870	16RFU420885	16RFU420900
16RFU420915	16RFU420930	16RFU420945	16RFU420960	16RFU420975	16RFU420990
16RFU435150	16RFU435165	16RFU435180	16RFU435195	16RFU435210	16RFU435225
16RFU435240	16RFU435285	16RFU435300	16RFU435315	16RFU435330	16RFU435345
16RFU435360	16RFU435375	16RFU435390	16RFU435405	16RFU435420	16RFU435435
16RFU435450	16RFU435465	16RFU435480	16RFU435495	16RFU435510	16RFU435525
16RFU435540	16RFU435555	16RFU435570	16RFU435585	16RFU435600	16RFU435615
16RFU435630	16RFU435645	16RFU435660	16RFU435675	16RFU435690	16RFU435705



16RFU435720	16RFU435735	16RFU435750	16RFU435765	16RFU435780	16RFU435795
16RFU435810	16RFU435825	16RFU435840	16RFU435855	16RFU435870	16RFU435885
16RFU435900	16RFU435915	16RFU435930	16RFU435945	16RFU435960	16RFU435975
16RFU435990	16RFU450150	16RFU450165	16RFU450180	16RFU450195	16RFU450210
16RFU450225	16RFU450240	16RFU450255	16RFU450270	16RFU450285	16RFU450300
16RFU450315	16RFU450330	16RFU450345	16RFU450360	16RFU450375	16RFU450390
16RFU450405	16RFU450420	16RFU450435	16RFU450450	16RFU450465	16RFU450480
16RFU450495	16RFU450510	16RFU450525	16RFU450540	16RFU450555	16RFU450570
16RFU450585	16RFU450600	16RFU450615	16RFU450630	16RFU450645	16RFU450660
16RFU450675	16RFU450690	16RFU450705	16RFU450720	16RFU450735	16RFU450750
16RFU450765	16RFU450780	16RFU450795	16RFU450810	16RFU450825	16RFU450840
16RFU450855	16RFU450870	16RFU450885	16RFU450900	16RFU450915	16RFU450930
16RFU450945	16RFU450960	16RFU450975	16RFU450990	16RFU465135	16RFU465150
16RFU465165	16RFU465180	16RFU465195	16RFU465210	16RFU465225	16RFU465240
16RFU465255	16RFU465270	16RFU465285	16RFU465300	16RFU465315	16RFU465330
16RFU465345	16RFU465360	16RFU465375	16RFU465390	16RFU465405	16RFU465420
16RFU465435	16RFU465450	16RFU465465	16RFU465480	16RFU465495	16RFU465510
16RFU465525	16RFU465540	16RFU465555	16RFU465570	16RFU465585	16RFU465600
16RFU465615	16RFU465630	16RFU465645	16RFU465660	16RFU465675	16RFU465690
16RFU465705	16RFU465720	16RFU465735	16RFU465750	16RFU465765	16RFU465780
16RFU465795	16RFU465810	16RFU465825	16RFU465840	16RFU465855	16RFU465870
16RFU465885	16RFU465900	16RFU465915	16RFU465930	16RFU465945	16RFU465960
16RFU465975	16RFU465990	16RFU480135	16RFU480150	16RFU480165	16RFU480180
16RFU480195	16RFU480210	16RFU480225	16RFU480240	16RFU480255	16RFU480270
16RFU480285	16RFU480300	16RFU480315	16RFU480330	16RFU480345	16RFU480360
16RFU480375	16RFU480390	16RFU480405	16RFU480420	16RFU480435	16RFU480450
16RFU480465	16RFU480480	16RFU480495	16RFU480510	16RFU480525	16RFU480540
16RFU480555	16RFU480570	16RFU480585	16RFU480600	16RFU480615	16RFU480630
16RFU480645	16RFU480660	16RFU480675	16RFU480690	16RFU480705	16RFU480720
16RFU480735	16RFU480750	16RFU480765	16RFU480780	16RFU480795	16RFU480810
16RFU480825	16RFU480840	16RFU480855	16RFU480870	16RFU480885	16RFU480900
16RFU480915	16RFU480930	16RFU480945	16RFU480960	16RFU480975	16RFU480990
16RFU495135	16RFU495150	16RFU495165	16RFU495180	16RFU495195	16RFU495210
16RFU495225	16RFU495240	16RFU495255	16RFU495270	16RFU495285	16RFU495300
16RFU495315	16RFU495330	16RFU495345	16RFU495360	16RFU495375	16RFU495390
16RFU495405	16RFU495420	16RFU495435	16RFU495450	16RFU495465	16RFU495480
16RFU495495	16RFU495510	16RFU495525	16RFU495540	16RFU495555	16RFU495570
16RFU495585	16RFU495600	16RFU495615	16RFU495630	16RFU495645	16RFU495660
16RFU495675	16RFU495690	16RFU495705	16RFU495720	16RFU495735	16RFU495750
16RFU495765	16RFU495780	16RFU495795	16RFU495810	16RFU495825	16RFU495840
16RFU495855	16RFU495870	16RFU495885	16RFU495900	16RFU495915	16RFU495930
16RFU495945	16RFU495960	16RFU495975	16RFU495990	16RFU510135	16RFU510150
16RFU510165	16RFU510180	16RFU510195	16RFU510210	16RFU510225	16RFU510240
16RFU510255	16RFU510270	16RFU510285	16RFU510300	16RFU510315	16RFU510330
16RFU510345	16RFU510360	16RFU510375	16RFU510390	16RFU510405	16RFU510420
16RFU510435	16RFU510450	16RFU510465	16RFU510480	16RFU510495	16RFU510510
16RFU510525	16RFU510540	16RFU510555	16RFU510570	16RFU510585	16RFU510600
16RFU510615	16RFU510630	16RFU510645	16RFU510660	16RFU510675	16RFU510690
16RFU510705	16RFU510720	16RFU510735	16RFU510750	16RFU510765	16RFU510780
16RFU510795	16RFU510810	16RFU510825	16RFU510840	16RFU510855	16RFU510870
16RFU510885	16RFU510900	16RFU525015	16RFU525030	16RFU525045	16RFU525120
16RFU525135	16RFU525150	16RFU525165	16RFU525180	16RFU525195	16RFU525210
16RFU525225	16RFU525240	16RFU525255	16RFU525270	16RFU525285	16RFU525300
16RFU525315	16RFU525330	16RFU525345	16RFU525360	16RFU525375	16RFU525390
16RFU525405	16RFU525420	16RFU525435	16RFU525450	16RFU525465	16RFU525480

16RFU525495	16RFU525510	16RFU525525	16RFU525540	16RFU525555	16RFU525570
16RFU525585	16RFU525600	16RFU525615	16RFU525630	16RFU525645	16RFU525660
16RFU525675	16RFU525690	16RFU525705	16RFU525720	16RFU525735	16RFU525750
16RFU525765	16RFU525780	16RFU525795	16RFU525810	16RFU525825	16RFU525840
16RFU525855	16RFU525870	16RFU525885	16RFU540015	16RFU540030	16RFU540045
16RFU540060	16RFU540105	16RFU540120	16RFU540135	16RFU540150	16RFU540165
16RFU540180	16RFU540195	16RFU540210	16RFU540225	16RFU540240	16RFU540255
16RFU540270	16RFU540285	16RFU540300	16RFU540315	16RFU540330	16RFU540345
16RFU540360	16RFU540375	16RFU540390	16RFU540405	16RFU540420	16RFU540435
16RFU540450	16RFU540465	16RFU540480	16RFU540495	16RFU540510	16RFU540525
16RFU540540	16RFU540555	16RFU540570	16RFU540585	16RFU540600	16RFU540615
16RFU540630	16RFU540645	16RFU540660	16RFU540675	16RFU540690	16RFU540705
16RFU540720	16RFU540735	16RFU540750	16RFU540765	16RFU540780	16RFU540795
16RFU540810	16RFU540825	16RFU540840	16RFU540855	16RFU540870	16RFU540885
16RFU555045	16RFU555060	16RFU555090	16RFU555105	16RFU555120	16RFU555135
16RFU555150	16RFU555165	16RFU555180	16RFU555195	16RFU555210	16RFU555225
16RFU555240	16RFU555255	16RFU555270	16RFU555285	16RFU555300	16RFU555315
16RFU555330	16RFU555345	16RFU555360	16RFU555375	16RFU555390	16RFU555405
16RFU555420	16RFU555435	16RFU555450	16RFU555465	16RFU555480	16RFU555495
16RFU555510	16RFU555525	16RFU555540	16RFU555555	16RFU555570	16RFU555585
16RFU555600	16RFU555615	16RFU555630	16RFU555645	16RFU555660	16RFU555675
16RFU555690	16RFU555705	16RFU555810	16RFU555825	16RFU555840	16RFU555855
16RFU555870	16RFU555885	16RFU570075	16RFU570090	16RFU570105	16RFU570120
16RFU570135	16RFU570150	16RFU570165	16RFU570180	16RFU570195	16RFU570210
16RFU570225	16RFU570240	16RFU570255	16RFU570270	16RFU570285	16RFU570300
16RFU570315	16RFU570330	16RFU570345	16RFU570360	16RFU570375	16RFU570390
16RFU570405	16RFU570420	16RFU570435	16RFU570450	16RFU570465	16RFU570480
16RFU570495	16RFU570510	16RFU570525	16RFU570645	16RFU570660	16RFU570675
16RFU570690	16RFU570810	16RFU570825	16RFU570840	16RFU570855	16RFU570870
16RFU570885	16RFU585030	16RFU585045	16RFU585060	16RFU585075	16RFU585090
16RFU585105	16RFU585120	16RFU585135	16RFU585150	16RFU585165	16RFU585180
16RFU585195	16RFU585210	16RFU585225	16RFU585240	16RFU585255	16RFU585270
16RFU585285	16RFU585300	16RFU585315	16RFU585330	16RFU585345	16RFU585360
16RFU585375	16RFU585390	16RFU585405	16RFU585420	16RFU585435	16RFU585450
16RFU585465	16RFU585480	16RFU585495	16RFU585510	16RFU585630	16RFU585660
16RFU585675	16RFU585690	16RFU585825	16RFU585840	16RFU585855	16RFU585870
16RFU585885	16RFU600015	16RFU600030	16RFU600045	16RFU600060	16RFU600075
16RFU600090	16RFU600105	16RFU600120	16RFU600135	16RFU600150	16RFU600165
16RFU600180	16RFU600195	16RFU600210	16RFU600225	16RFU600240	16RFU600255
16RFU600270	16RFU600285	16RFU600300	16RFU600315	16RFU600330	16RFU600345
16RFU600360	16RFU600375	16RFU600390	16RFU600405	16RFU600420	16RFU600435
16RFU600450	16RFU600465	16RFU600480	16RFU600495	16RFU600510	16RFU600660
16RFU600675	16RFU600825	16RFU600840	16RFU600855	16RFU600870	16RFU615000
16RFU615015	16RFU615030	16RFU615045	16RFU615060	16RFU615075	16RFU615090
16RFU615105	16RFU615120	16RFU615135	16RFU615150	16RFU615165	16RFU615180
16RFU615195	16RFU615210	16RFU615225	16RFU615240	16RFU615255	16RFU615270
16RFU615285	16RFU615300	16RFU615315	16RFU615330	16RFU615345	16RFU615360
16RFU615375	16RFU615390	16RFU615405	16RFU615420	16RFU615435	16RFU615450
16RFU615465	16RFU615480	16RFU615495	16RFU615825	16RFU615840	16RFU615855
16RFU615870	16RFU630000	16RFU630015	16RFU630030	16RFU630045	16RFU630060
16RFU630075	16RFU630090	16RFU630105	16RFU630120	16RFU630135	16RFU630150
16RFU630165	16RFU630180	16RFU630195	16RFU630210	16RFU630225	16RFU630240
16RFU630255	16RFU630270	16RFU630285	16RFU630300	16RFU630315	16RFU630330
16RFU630345	16RFU630360	16RFU630375	16RFU630390	16RFU630405	16RFU630420
16RFU630480	16RFU645000	16RFU645015	16RFU645030	16REU000615	16RFU645045

16REU000630 16REU000840 16RFU645060 16REU000855 16RFU645075 16REU000870  
16RFU645090 16REU000885 16RFU645105 16RFU645120 16RFU645135 16RFU645150  
16RFU645165 16RFU645180 16RFU645195 16RFU645210 16RFU645225 16RFU645240  
16RFU645255 16RFU645270 16RFU645285 16RFU645300 16RFU645315 16RFU645330  
16RFU645345 16RFU645360 16RFU645375 16RFU645390 16RFU645405 16RFU645420  
16RFU660000 16RFU660015 16RFU660030 16RFU660045 16RFU660060 16RFU660075  
16RFU660090 16RFU660105 16RFU660120 16RFU660135 16RFU660150 16RFU660165  
16RFU660180 16RFU660195 16RFU660210 16RFU660225 16RFU660240 16RFU660255  
16RFU660270 16RFU660285 16RFU660300 16RFU660315 16RFU660330 16RFU660345  
16RFU660360 16RFU660375 16RFU660390 16RFU660405 16RFU660420 16RFU675000  
16RFU675015 16RFU675030 16RFU675045 16RFU675060 16RFU675075 16RFU675090  
16RFU675105 16RFU675120 16RFU675135 16RFU675150 16RFU675165 16RFU675180  
16RFU675195 16RFU675210 16RFU675225 16RFU675240 16RFU675255 16RFU675270  
16RFU675285 16RFU675300 16RFU675315 16RFU675330 16RFU675345 16RFU675360  
16RFU675375 16RFU675390 16RFU675405 16RFU675420 16RFU690000 16RFU690015  
16RFU690030 16RFU690045 16RFU690060 16RFU690075 16RFU690090 16RFU690105  
16RFU690120 16RFU690135 16RFU690150 16RFU690165 16RFU690180 16RFU690195  
16RFU690210 16RFU690225 16RFU690240 16RFU690255 16RFU690270 16RFU690285  
16RFU690300 16RFU690315 16RFU690330 16RFU690345 16RFU690360 16RFU690375  
16RFU690390 16RFU690405 16RFU690420 16RFU705000 16RFU705015 16RFU705030  
16RFU705045 16RFU705060 16RFU705075 16RFU705090 16RFU705105 16RFU705120  
16RFU705135 16RFU705150 16RFU705165 16RFU705180 16RFU705195 16RFU705210  
16RFU705225 16RFU705240 16RFU705255 16RFU705270 16RFU705285 16RFU705300  
16RFU705315 16RFU705330 16RFU705345 16RFU705360 16RFU705375 16RFU705390  
16RFU705405 16RFU705420 16RFU720000 16RFU720015 16RFU720030 16RFU720045  
16RFU720060 16RFU720075 16RFU720090 16RFU720105 16RFU720120 16RFU720135  
16RFU720150 16RFU720165 16RFU720180 16RFU720195 16RFU720210 16RFU720225  
16RFU720240 16RFU720255 16RFU720270 16RFU720285 16RFU720300 16RFU720315  
16RFU720330 16RFU720345 16RFU720360 16RFU720375 16RFU720390 16RFU720405  
16RFU720420 16RFU735000 16RFU735015 16RFU735030 16RFU735045 16RFU735060  
16RFU735075 16RFU735090 16RFU735105 16RFU735120 16RFU735135 16RFU735150  
16RFU735165 16RFU735180 16RFU735195 16RFU735210 16RFU735225 16RFU735240  
16RFU735255 16RFU735270 16RFU735285 16RFU735300 16RFU735315 16RFU735330  
16RFU735345 16RFU735360 16RFU735375 16RFU735390 16RFU735405 16RFU735420  
16RFU750000 16RFU750015 16RFU750030 16RFU750045 16RFU750060 16RFU750075  
16RFU750090 16RFU750105 16RFU750120 16RFU750135 16RFU750150 16RFU750165  
16RFU750180 16RFU750195 16RFU750210 16RFU750225 16RFU750240 16RFU750255  
16RFU750270 16RFU750285 16RFU750300 16RFU750315 16RFU750330 16RFU750345  
16RFU750360 16RFU750375 16RFU750390 16RFU750405 16RFU750420 16RFU765000  
16RFU765015 16RFU765030 16RFU765045 16RFU765060 16RFU765075 16RFU765090  
16RFU765105 16RFU765120 16RFU765135 16RFU765150 16RFU765165 16RFU765180  
16RFU765195 16RFU765210 16RFU765225 16RFU765240 16RFU765255 16RFU765270  
16RFU765285 16RFU765300 16RFU765315 16RFU765330 16RFU765345 16RFU765360  
16RFU765375 16RFU765390 16RFU765405 16RFU765420 16RFU780000 16RFU780015  
16RFU780030 16RFU780045 16RFU780060 16RFU780075 16RFU780090 16RFU780105  
16RFU780120 16RFU780135 16RFU780150 16RFU780165 16RFU780180 16RFU780195  
16RFU780210 16RFU780225 16RFU780240 16RFU780255 16RFU780270 16RFU780285  
16RFU780300 16RFU780315 16RFU780330 16RFU780345 16RFU780360 16RFU780375  
16RFU780390 16RFU780405 16RFU780420 16RFU795015 16RFU795030 16RFU795045  
16RFU795060 16RFU795075 16RFU795090 16RFU795105 16RFU795120 16RFU795135  
16RFU795150 16RFU795165 16RFU795180 16RFU795195 16RFU795210 16RFU795225  
16RFU795240 16RFU795255 16RFU795270 16RFU795285 16RFU795315 16RFU795330  
16RFU795345 16RFU795360 16RFU795375 16RFU795390 16RFU795405 16RFU795420  
16RFU810000 16RFU810015 16RFU810030 16RFU810045 16RFU810060 16RFU810075  
16RFU810090 16RFU810105 16RFU810120 16RFU810135 16RFU810150 16RFU810165

16RFU810180 16RFU810195 16RFU810210 16RFU810225 16RFU810420 16RFU825000  
16RFU825015 16RFU825030 16RFU825045 16RFU825060 16RFU825075 16RFU825090  
16RFU825105 16RFU825120 16RFU825135 16RFU825150 16RFU825165 16RFU825180  
16RFU825195 16RFU825210 16RFU825225 16RFU840000 16RFU840015 16RFU840030  
16RFU840045 16RFU840060 16RFU840075 16RFU840090 16RFU840105 16RFU840120  
16RFU840135 16RFU840150 16RFU840165 16RFU840180 16RFU840195 16RFU840210  
16RFU855000 16RFU855015 16RFU855030 16RFU855045 16RFU855060 16RFU855075  
16RFU855090 16RFU855105 16RFU855120 16RFU855135 16RFU855150 16RFU855165  
16RFU855180 16RFU855195 16RFU855210 16RFU870000 16RFU870015 16RFU870030  
16RFU870045 16RFU870060 16RFU870075 16RFU870090 16RFU870105 16RFU870120  
16RFU870135 16RFU870150 16RFU870165 16RFU870180 16RFU870195 16RFU885015  
16RFU885030 16RFU885045 16RFU885060 16RFU885075 16RFU885105 16RFU885120  
16RFU885135 16RFU885150 16RFU885165 16RFU885180 16RFU900000 16RFU900015  
16RFU900030 16RFU900120 16RFU900135 16RFU900150 16RFU900165 16RFU900180  
16RFV000035 16RFV000050 16RFV000080 16RFV000095 16RFV000125 16RFV000140  
16RFV000200 16RFV000290 16RFV015005 16RFV015020 16RFV015035 16RFV015050  
16RFV015065 16RFV015080 16RFV015095 16RFV015110 16RFV015125 16RFV015140  
16RFV015155 16RFV015170 16RFV015185 16RFV015200 16RFV015215 16RFV015230  
16RFV015245 16RFV015260 16RFV015275 16RFV015290 16RFV030005 16RFV030020  
16RFV030035 16RFV030050 16RFV030065 16RFV030080 16RFV030095 16RFV030110  
16RFV030125 16RFV030140 16RFV030155 16RFV030170 16RFV030185 16RFV030200  
16RFV030215 16RFV030230 16RFV030245 16RFV030260 16RFV030275 16RFV030290  
16RFV045005 16RFV045020 16RFV045035 16RFV045050 16RFV045065 16RFV045080  
16RFV045095 16RFV045110 16RFV045125 16RFV045140 16RFV045155 16RFV045170  
16RFV045185 16RFV045200 16RFV045215 16RFV045230 16RFV045245 16RFV045260  
16RFV045275 16RFV045290 16RFV060005 16RFV060020 16RFV060035 16RFV060050  
16RFV060065 16RFV060080 16RFV060095 16RFV060110 16RFV060125 16RFV060140  
16RFV060155 16RFV060170 16RFV060185 16RFV060200 16RFV060215 16RFV060230  
16RFV060245 16RFV060260 16RFV060275 16RFV060290 16RFV075005 16RFV075020  
16RFV075035 16RFV075050 16RFV075065 16RFV075080 16RFV075095 16RFV075110  
16RFV075125 16RFV075140 16RFV075155 16RFV075170 16RFV075185 16RFV075200  
16RFV075215 16RFV075230 16RFV075245 16RFV075260 16RFV075275 16RFV075290  
16RFV090005 16RFV090020 16RFV090035 16RFV090050 16RFV090065 16RFV090080  
16RFV090095 16RFV090110 16RFV090125 16RFV090140 16RFV090155 16RFV090170  
16RFV090185 16RFV090200 16RFV090215 16RFV090230 16RFV090245 16RFV090260  
16RFV090275 16RFV090290 16RFV105005 16RFV105020 16RFV105035 16RFV105050  
16RFV105065 16RFV105080 16RFV105095 16RFV105110 16RFV105125 16RFV105140  
16RFV105155 16RFV105170 16RFV105185 16RFV105200 16RFV105215 16RFV105230  
16RFV105245 16RFV105260 16RFV105275 16RFV105290 16RFV120005 16RFV120020  
16RFV120035 16RFV120050 16RFV120065 16RFV120080 16RFV120095 16RFV120110  
16RFV120125 16RFV120140 16RFV120155 16RFV120170 16RFV120185 16RFV120200  
16RFV120215 16RFV120230 16RFV120245 16RFV120260 16RFV120275 16RFV120290  
16RFV135005 16RFV135020 16RFV135035 16RFV135050 16RFV135065 16RFV135080  
16RFV135095 16RFV135110 16RFV135125 16RFV135140 16RFV135155 16RFV135170  
16RFV135185 16RFV135200 16RFV135215 16RFV135230 16RFV135245 16RFV135260  
16RFV135275 16RFV135290 16RFV150005 16RFV150020 16RFV150035 16RFV150050  
16RFV150065 16RFV150080 16RFV150095 16RFV150110 16RFV150125 16RFV150140  
16RFV150155 16RFV150170 16RFV150185 16RFV150200 16RFV150215 16RFV150230  
16RFV150245 16RFV150260 16RFV150275 16RFV150290 16RFV165005 16RFV165020  
16RFV165035 16RFV165050 16RFV165065 16RFV165080 16RFV165095 16RFV165110  
16RFV165125 16RFV165140 16RFV165155 16RFV165170 16RFV165185 16RFV165200  
16RFV180005 16RFV180020 16RFV180035 16RFV180050 16RFV180065 16RFV180080  
16RFV180095 16RFV180110 16RFV180125 16RFV180140 16RFV180155 16RFV180170  
16RFV180185 16RFV180200 16RFV180215 16RFV180230 16RFV180245 16RFV180260  
16RFV180275 16RFV180290 16RFV195005 16RFV195020 16RFV195035 16RFV195050

16RFV195065 16RFV195080 16RFV195095 16RFV195110 16RFV195125 16RFV195140  
16RFV195155 16RFV195170 16RFV195185 16RFV195200 16RFV195215 16RFV195230  
16RFV195245 16RFV195260 16RFV195275 16RFV195290 16RFV210005 16RFV210020  
16RFV210035 16RFV210050 16RFV210065 16RFV210080 16RFV210095 16RFV210110  
16RFV210125 16RFV210140 16RFV210155 16RFV210170 16RFV210185 16RFV210200  
16RFV210215 16RFV210230 16RFV210245 16RFV210260 16RFV210275 16RFV210290  
16RFV225005 16RFV225020 16RFV225035 16RFV225050 16RFV225065 16RFV225080  
16RFV225095 16RFV225110 16RFV225125 16RFV225140 16RFV225155 16RFV225170  
16RFV225185 16RFV225200 16RFV225215 16RFV225230 16RFV225245 16RFV225260  
16RFV225275 16RFV225290 16RFV240005 16RFV240020 16RFV240035 16RFV240050  
16RFV240065 16RFV240080 16RFV240095 16RFV240110 16RFV240125 16RFV240140  
16RFV240155 16RFV240170 16RFV240185 16RFV240200 16RFV240215 16RFV240230  
16RFV240245 16RFV240260 16RFV240275 16RFV240290 16RFV255005 16RFV255020  
16RFV255035 16RFV255050 16RFV255065 16RFV255080 16RFV255095 16RFV255110  
16RFV255125 16RFV255140 16RFV255155 16RFV255170 16RFV255185 16RFV255200  
16RFV255215 16RFV255230 16RFV255245 16RFV255260 16RFV255275 16RFV255290  
16RFV270005 16RFV270020 16RFV270035 16RFV270050 16RFV270065 16RFV270080  
16RFV270095 16RFV270110 16RFV270125 16RFV270140 16RFV270155 16RFV270170  
16RFV270185 16RFV270200 16RFV270215 16RFV270230 16RFV270245 16RFV270260  
16RFV270275 16RFV270290 16RFV285005 16RFV285020 16RFV285035 16RFV285050  
16RFV285065 16RFV285080 16RFV285095 16RFV285110 16RFV285125 16RFV285140  
16RFV285155 16RFV285170 16RFV285185 16RFV285200 16RFV285215 16RFV285230  
16RFV285245 16RFV285260 16RFV285275 16RFV285290 16RFV300005 16RFV300020  
16RFV300035 16RFV300050 16RFV300065 16RFV300080 16RFV300095 16RFV300110  
16RFV300125 16RFV300140 16RFV300155 16RFV300170 16RFV300185 16RFV300200  
16RFV300215 16RFV300230 16RFV300245 16RFV300260 16RFV300275 16RFV300290  
16RFV315005 16RFV315020 16RFV315035 16RFV315050 16RFV315065 16RFV315080  
16RFV315095 16RFV315110 16RFV315125 16RFV315140 16RFV315155 16RFV315170  
16RFV315185 16RFV315200 16RFV315215 16RFV315230 16RFV315245 16RFV315260  
16RFV315275 16RFV315290 16RFV330005 16RFV330020 16RFV330035 16RFV330050  
16RFV330065 16RFV330080 16RFV330095 16RFV330110 16RFV330125 16RFV330140  
16RFV330155 16RFV330170 16RFV330185 16RFV330200 16RFV330215 16RFV330230  
16RFV330245 16RFV330260 16RFV330275 16RFV330290 16RFV345005 16RFV345020  
16RFV345035 16RFV345050 16RFV345065 16RFV345080 16RFV345095 16RFV345110  
16RFV345125 16RFV345140 16RFV345155 16RFV345170 16RFV345185 16RFV345200  
16RFV345215 16RFV345230 16RFV345245 16RFV345260 16RFV345275 16RFV345290  
16RFV360005 16RFV360020 16RFV360035 16RFV360050 16RFV360065 16RFV360080  
16RFV360095 16RFV360110 16RFV360125 16RFV360140 16RFV360155 16RFV360170  
16RFV360185 16RFV360200 16RFV360215 16RFV360230 16RFV360245 16RFV360260  
16RFV360275 16RFV360290 16RFV375005 16RFV375020 16RFV375035 16RFV375050  
16RFV375065 16RFV375080 16RFV375095 16RFV375110 16RFV375125 16RFV375140  
16RFV375155 16RFV375170 16RFV375185 16RFV375200 16RFV375215 16RFV375230  
16RFV375245 16RFV375260 16RFV375275 16RFV375290 16RFV390005 16RFV390020  
16RFV390035 16RFV390050 16RFV390065 16RFV390080 16RFV390095 16RFV390110  
16RFV390125 16RFV390140 16RFV390155 16RFV390170 16RFV390185 16RFV390200  
16RFV390215 16RFV390230 16RFV390245 16RFV390260 16RFV390275 16RFV390290  
16RFV405005 16RFV405020 16RFV405035 16RFV405050 16RFV405065 16RFV405080  
16RFV405095 16RFV405110 16RFV405125 16RFV405140 16RFV405155 16RFV405170  
16RFV405185 16RFV405200 16RFV405215 16RFV405230 16RFV405245 16RFV405260  
16RFV405275 16RFV405290 16RFV420005 16RFV420020 16RFV420035 16RFV420050  
16RFV420065 16RFV420080 16RFV420095 16RFV420110 16RFV420125 16RFV420140  
16RFV420155 16RFV420170 16RFV420185 16RFV420200 16RFV420215 16RFV420230  
16RFV420245 16RFV420260 16RFV420275 16RFV420290 16RFV435005 16RFV435020  
16RFV435035 16RFV435050 16RFV435065 16RFV435080 16RFV435095 16RFV435110  
16RFV435125 16RFV435140 16RFV435155 16RFV435170 16RFV435185 16RFV435200


16RFV435215 16RFV435230 16RFV435245 16RFV435260 16RFV435275 16RFV435290  
16RFV450005 16RFV450020 16RFV450035 16RFV450050 16RFV450065 16RFV450080  
16RFV450095 16RFV450110 16RFV450125 16RFV450140 16RFV450155 16RFV450170  
16RFV450185 16RFV450200 16RFV450215 16RFV450230 16RFV450245 16RFV450260  
16RFV450275 16RFV450290 16RFV465005 16RFV465020 16RFV465035 16RFV465050  
16RFV465065 16RFV465080 16RFV465095 16RFV465110 16RFV465125 16RFV465140  
16RFV465155 16RFV465170 16RFV465185 16RFV465200 16RFV465215 16RFV465230  
16RFV465245 16RFV480005 16RFV480020 16RFV480035 16RFV480050 16RFV480065  
16RFV480080 16RFV480095 16RFV480110 16RFV480125 16RFV480140 16RFV480155  
16RFV480170 16RFV480185 16RFV480200 16RFV480215 16RFV480230 16RFV495005  
16RFV495020 16RFV495035 16RFV495050 16RFV495065 16RFV495080 16RFV495095  
16RFV495110 16RFV495125 16RFV495140 16RFV495155 16RFV495170 16RFV495185  
16RFV495200 16RFV495215 16RFV495230 16RFV510020 16RFV510035 16RFV510050  
16RFV510065 16RFV510080 16RFV510095 16RFV510110 16RFV510125 16RFV510140  
16RFV510155 16RFV510170 16RFV525050 16RFV525065 16RFV525080 16RFV525095  
16RFV165215 16RFV165230 16RFV165245 16RFV165260 16RFV165275 16RFV165290  
16REU000495 16REU000540 16REU000585 16REU000690 16REU000780 16REU865840  
16REU940780 16RFT525925 16RFT540985 16RFT585850 16RFT615880 16RFT735865  
16RFT915985 16RFU405165 16RFU540000 16RFU570570 16RFU585810 16RFU885090  
16RFV525125 16REU895810 16REV790035 16REV820110 16REV880170 16RFT810925  
16RFU135495 16RFU195450 16RFU210465 16RFU255360 16RFU420285 16RFU435255  
16RFU435270 16RFU450135 16REU580600 16REU580615 16REU580630 16REU595600  
16REU595615 16REU610600 16REU610615 16REU625585 16REU625600 16REU625615  
16REU640585 16REU640600 16REU640615 16REU640630 16REU640645 16REU655585  
16REU655600 16REU655615 16REU655630 16REU655645 16REU670585 16REU670600  
16REU670615 16REU670630 16REU685570 16REU685585 16REU685600 16REU685615  
16REU685630 16REU700570 16REU700585 16REU700600 16REU700615 16REU700630  
16REU700645 16REU700660 16REU715570 16REU715585 16REU715600 16REU715615  
16REU715630 16REU715645 16REU715660 16REU730570 16REU730585 16REU730615  
16REU730630 16REU730645 16REU730660 16REU745555 16REU745570 16REU745585  
16REU745600 16REU745615 16REU745630 16REU745645 16REU760555 16REU760570  
16REU760585 16REU760600 16REU760615 16REU760630 16REU775555 16REU775570  
16REU775585 16REU775600 16REU775615 16REU790540 16REU790555 16REU790570  
16REU790585 16REU790600 16REU790615 16REU790630 16REU805540 16REU805555  
16REU805570 16REU805585 16REU805600 16REU820540 16REU820555 16REU820570  
16REU820585 16REU820600 16REU835525 16REU835540 16REU835555 16REU835570  
16REU835585 16REU835600 16REU835615 16REU850525 16REU850540 16REU850555  
16REU850570 16REU850585 16REU850600 16REU850615 16REU865510 16REU865525  
16REU865540 16REU865555 16REU865570 16REU865585 16REU865600 16REU865615  
16REU880510 16REU880525 16REU880540 16REU880555 16REU880570 16REU880585  
16REU880600 16REU895510 16REU895525 16REU895540 16REU895555 16REU895570  
16REU895585 16REU910495 16REU910510 16REU910525 16REU910540 16REU910555  
16REU910570 16REU925495 16REU925510 16REU925525 16REU925540 16REU925555  
16REU925570 16REU940495 16REU940510 16REU940525 16REU940540 16REU940555  
16REU940570 16REU955480 16REU955495 16REU955510 16REU955525 16REU955540  
16REU955555 16REU955570 16REU730600 16REU565600 16REU565615 16REU565630  
16REU940480

## **Appendix C: GPS Processing**


### **MISSION 1 – 5417099A GNSS PROCESSING**


### GPS Combined - Map


Geographic, DMS

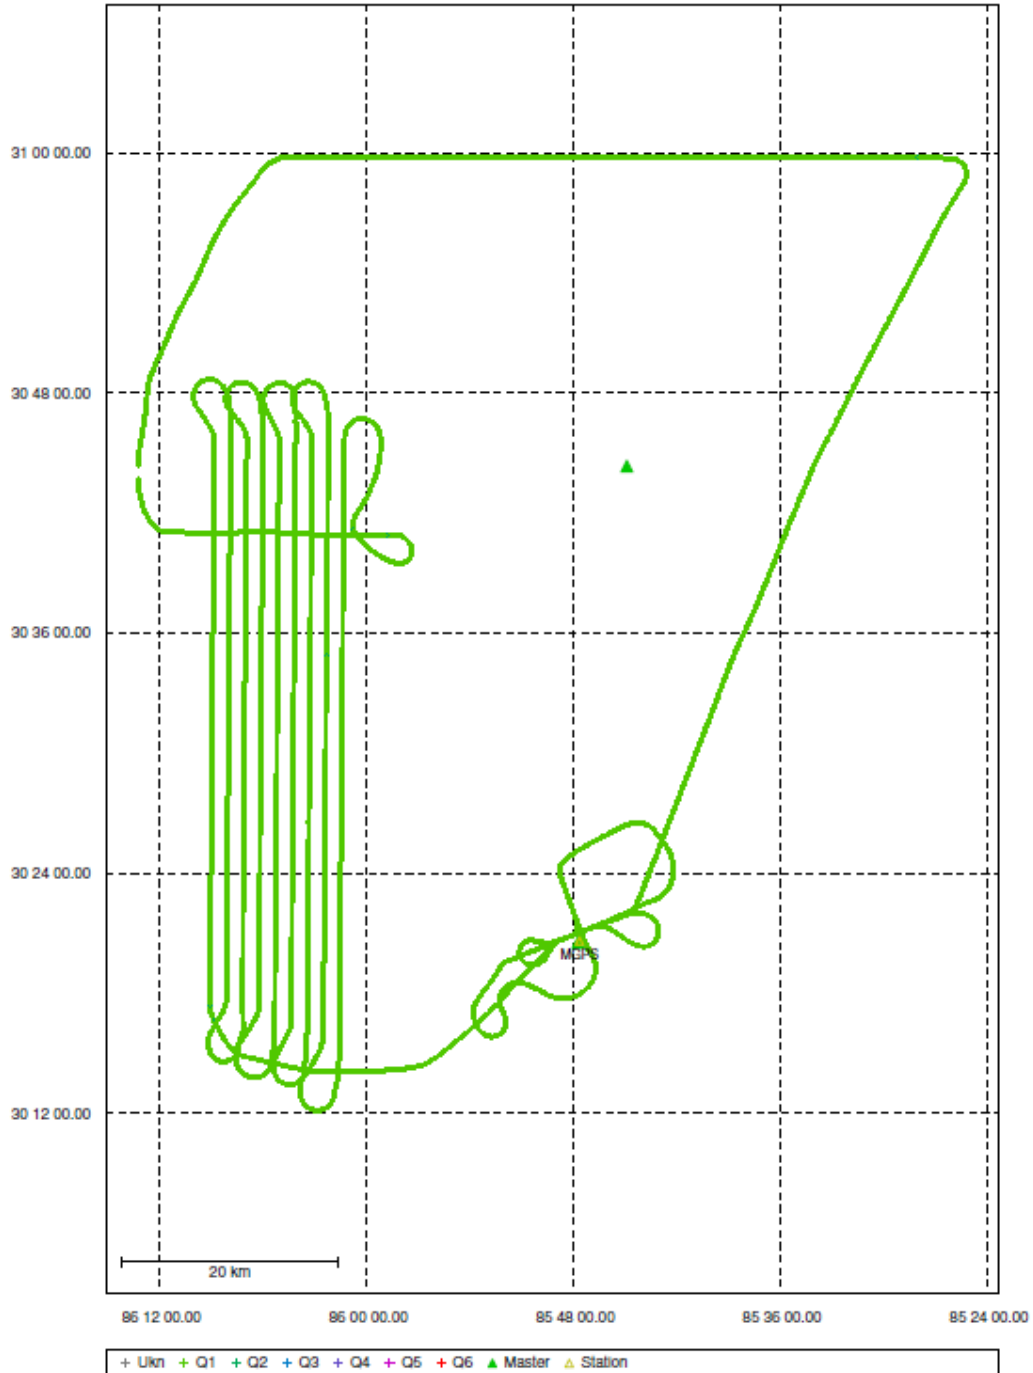



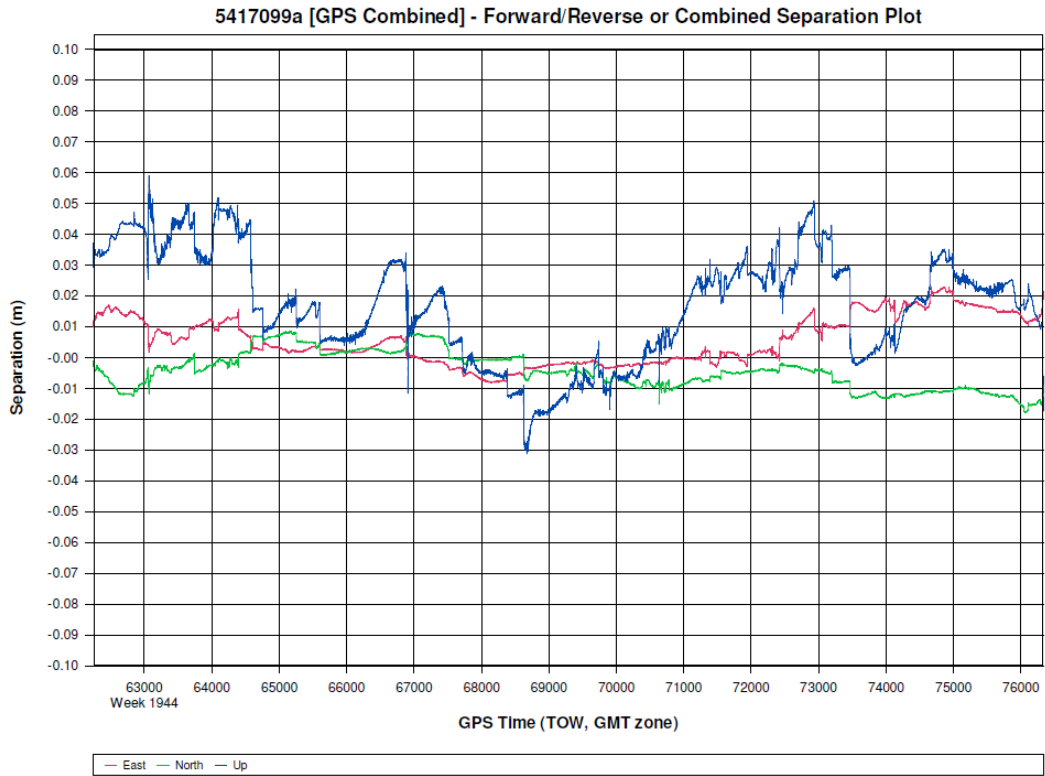

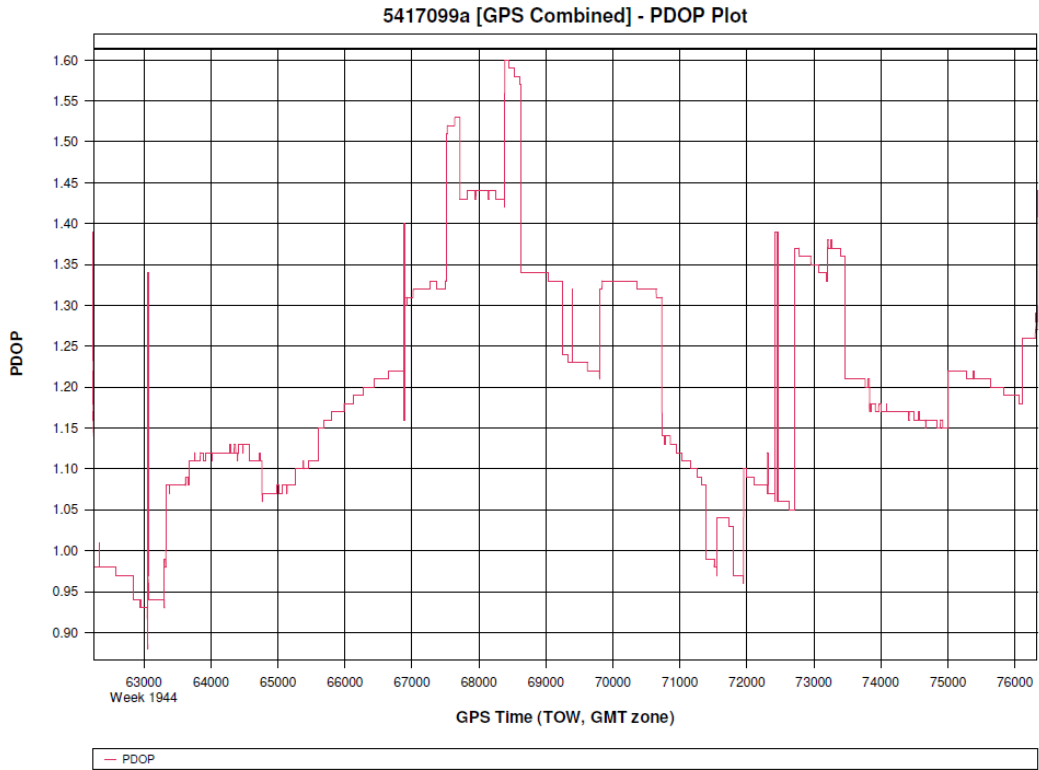

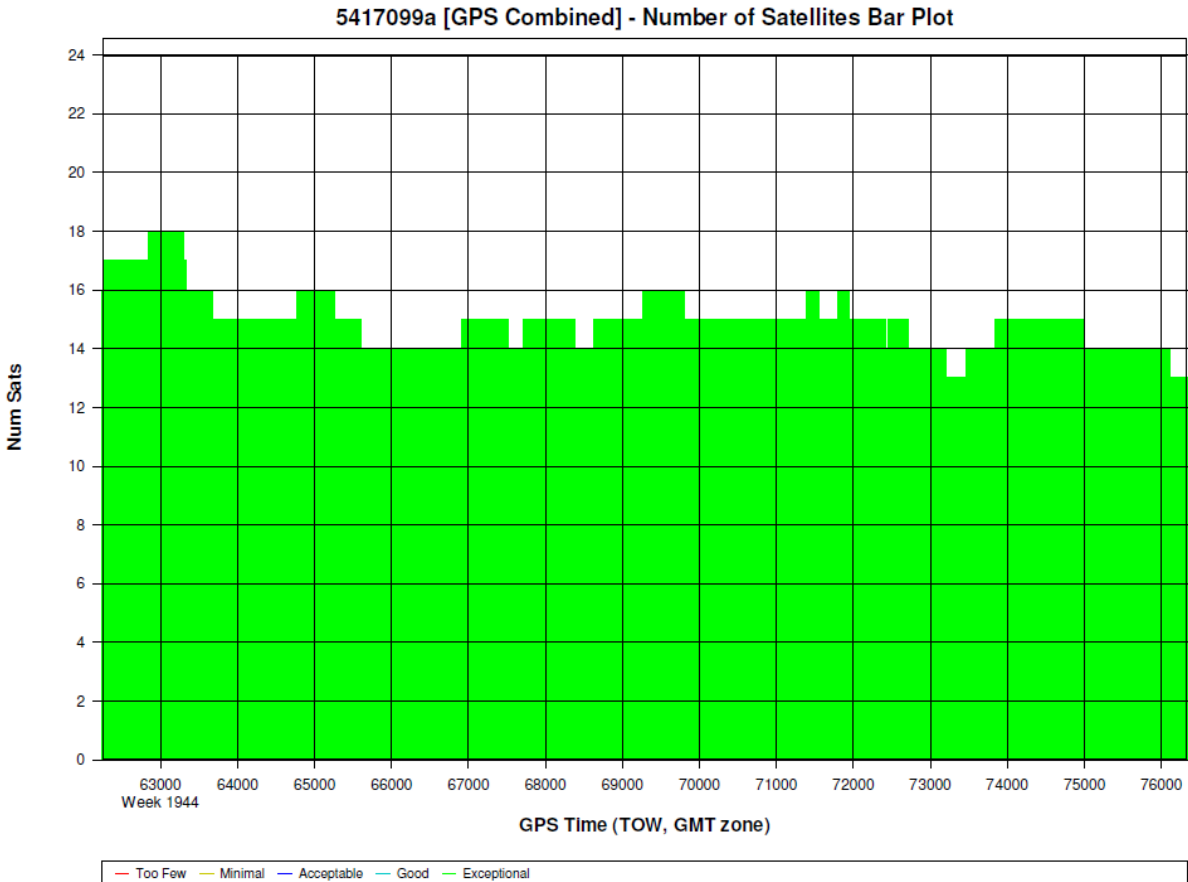

Processing Summary Information

Program: GrafNav  
 Version: 8.50.4320  
 Project: F:\Projects\3123\_ChoctawacheeWalton\LiDAR\5417099a\05\_INS-GPS\_PROC\01\_POS\5417099a\5417099a\GNSS\5417099a.gnv  
 Solution Type: Combined

Number of Epochs:

Total in GPB file: 14104  
 No processed position: 0  
 Missing Fwd or Rev: 5  
 With bad C/A code: 0  
 With bad L1 Phase: 0

Measurement RMS Values:

L1 Phase: 0.0185 (m)  
 C/A Code: 0.78 (m)  
 L1 Doppler: 0.037 (m/s)

Fwd/Rev Separation RMS Values:

East: 0.010 (m)

North: 0.007 (m)  
Height: 0.024 (m)

Fwd/Rev Sep. RMS for dual FWD/REV fixes (14099 occurrences):

East: 0.010 (m)  
North: 0.007 (m)  
Height: 0.024 (m)

Quality Number Percentages:

Q 1: 99.9 %  
Q 2: 0.1 %  
Q 3: 0.0 %  
Q 4: 0.0 %  
Q 5: 0.0 %  
Q 6: 0.0 %

Position Standard Deviation Percentages:

0.00 - 0.10 m: 100.0 %  
0.10 - 0.30 m: 0.0 %  
0.30 - 1.00 m: 0.0 %  
1.00 - 5.00 m: 0.0 %  
5.00 m + over: 0.0 %



Percentages of epochs with DD\_DOP over 10.00:



DOP over Tol: 0.0 %



Baseline Distances:



Maximum: 60.048 (km)  
Minimum: 0.213 (km)  
Average: 33.575 (km)  
First Epoch: 21.483 (km)  
Last Epoch: 0.213 (km)

### MISSION 1 – 5417099A SENSOR ERRORS

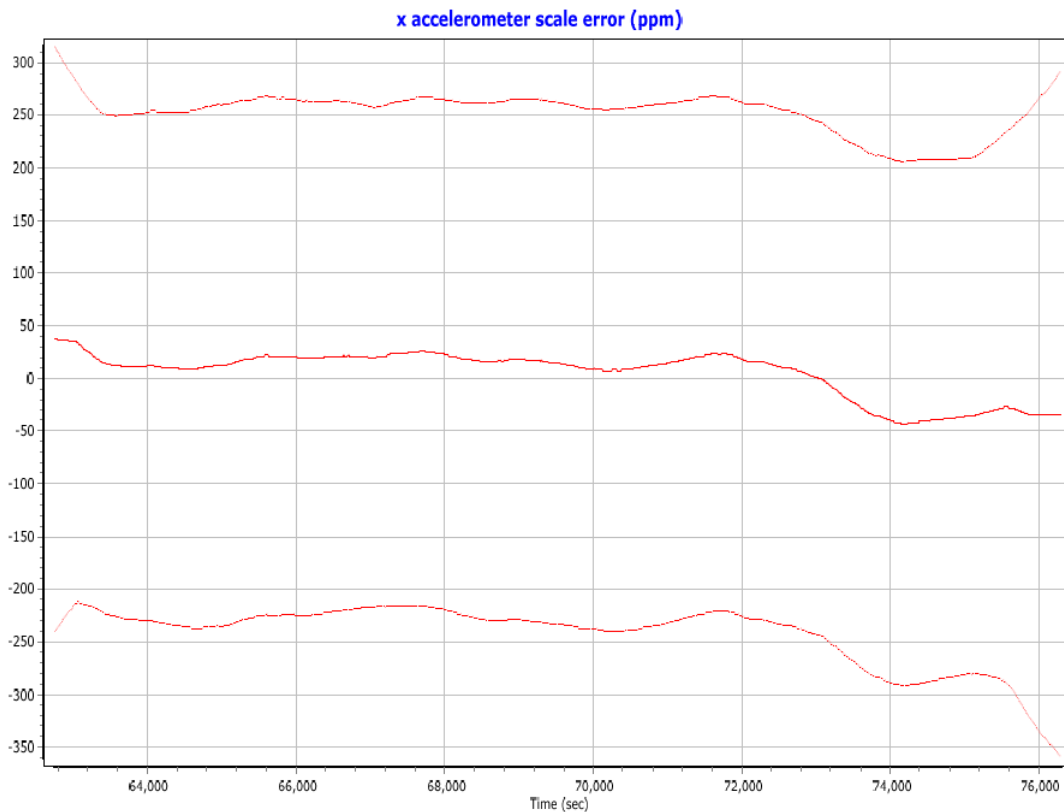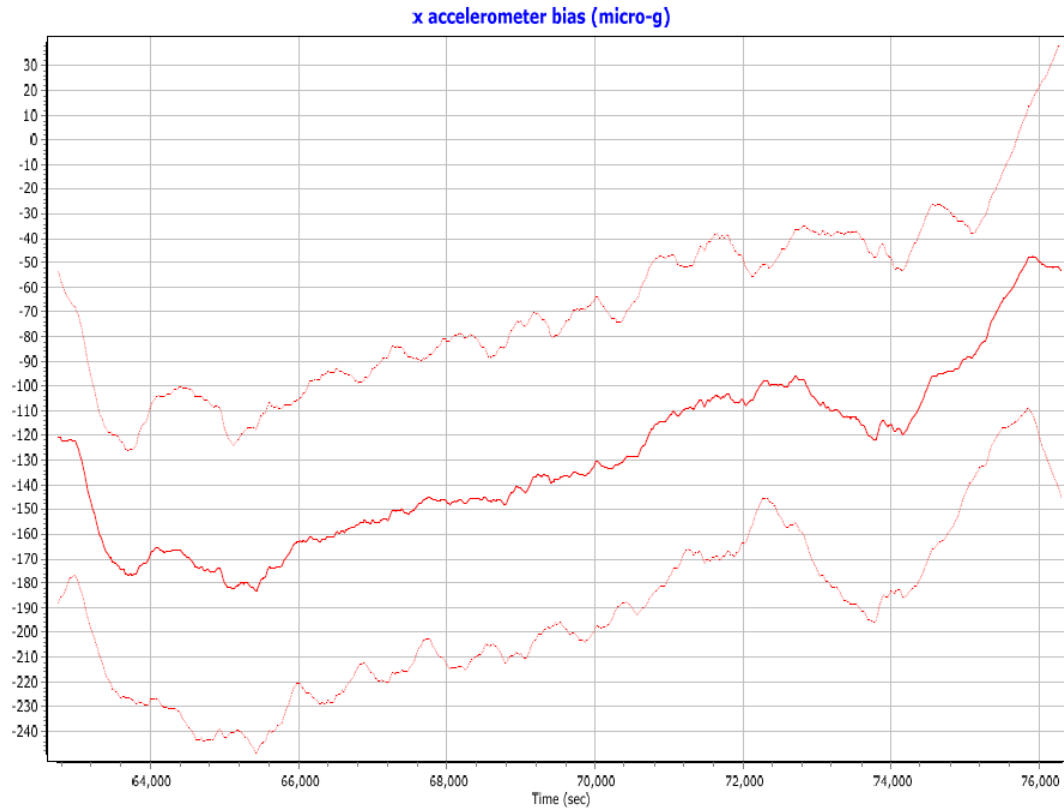

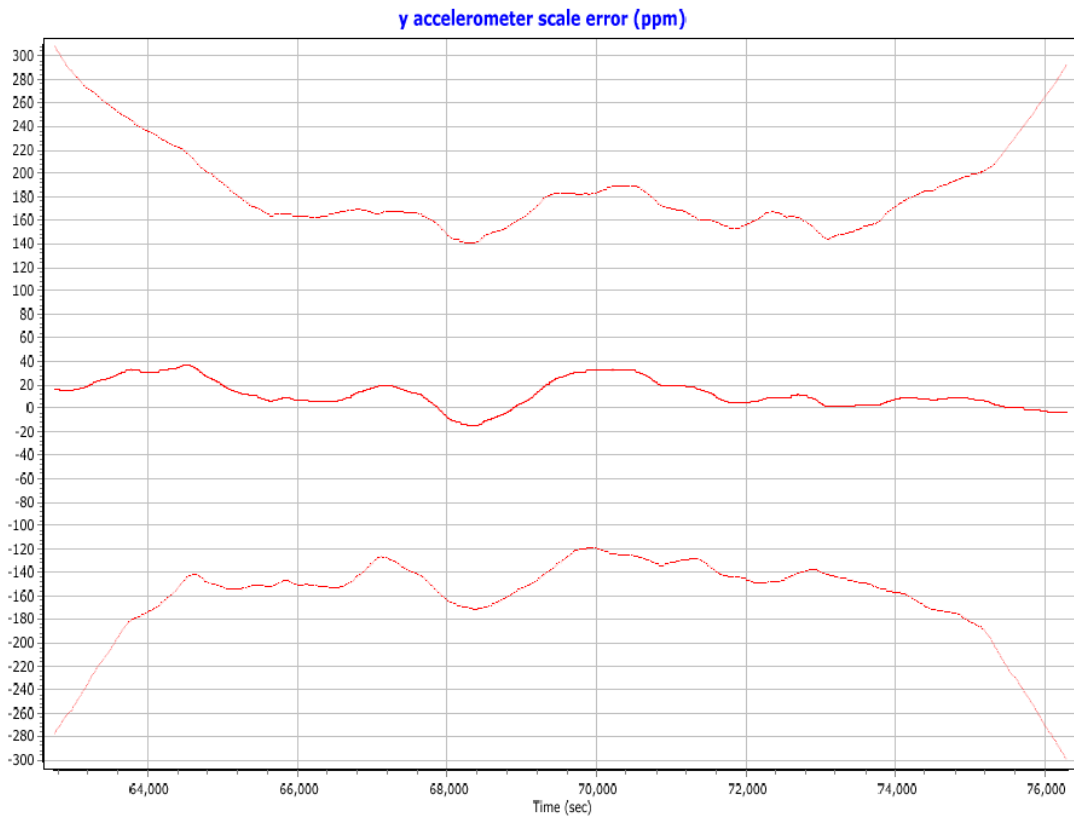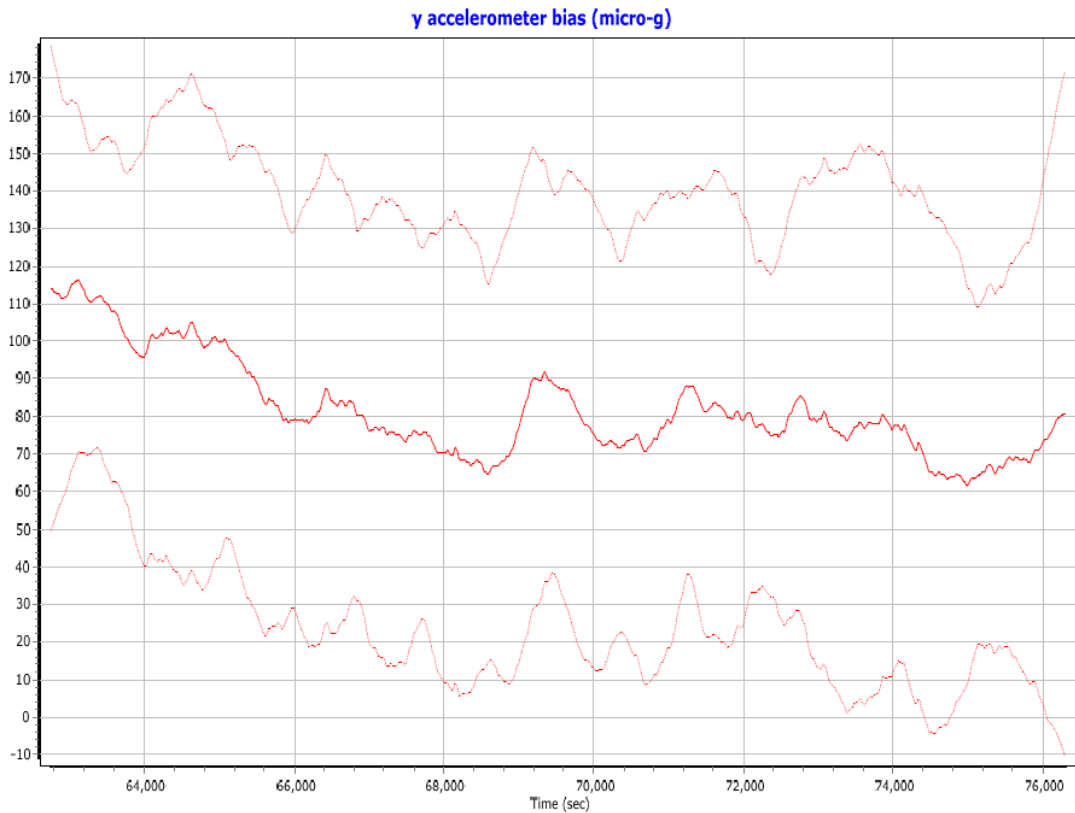

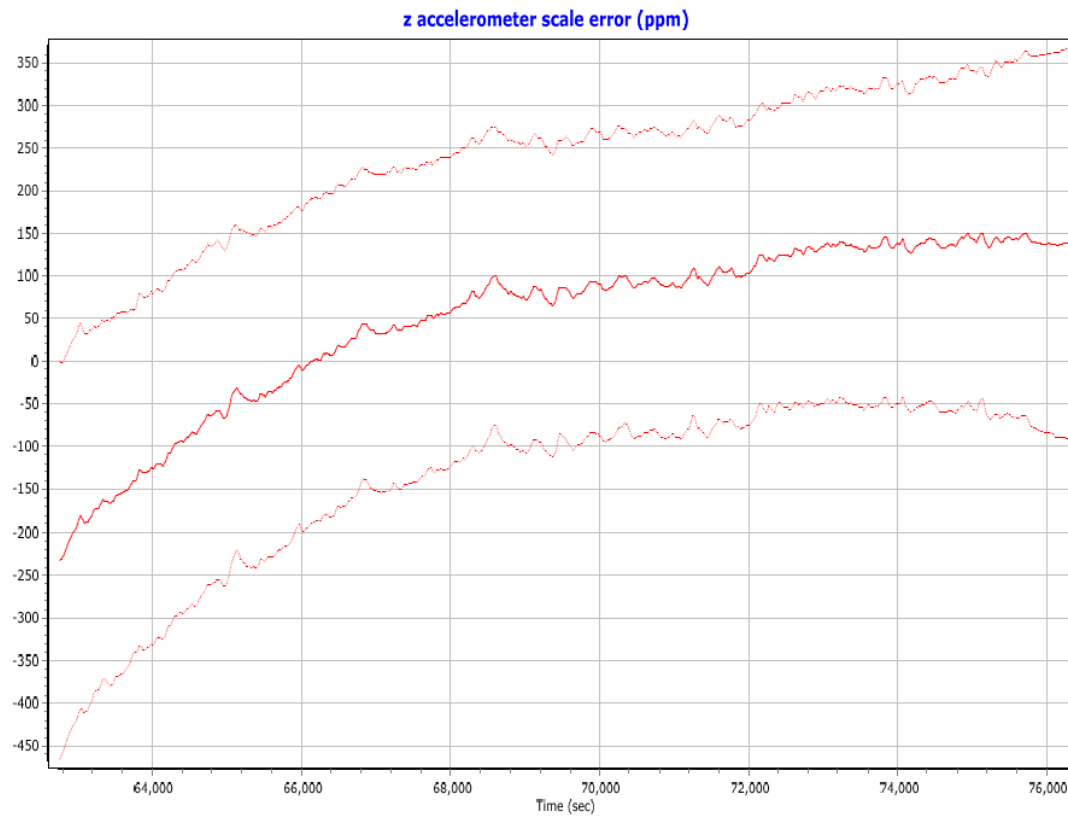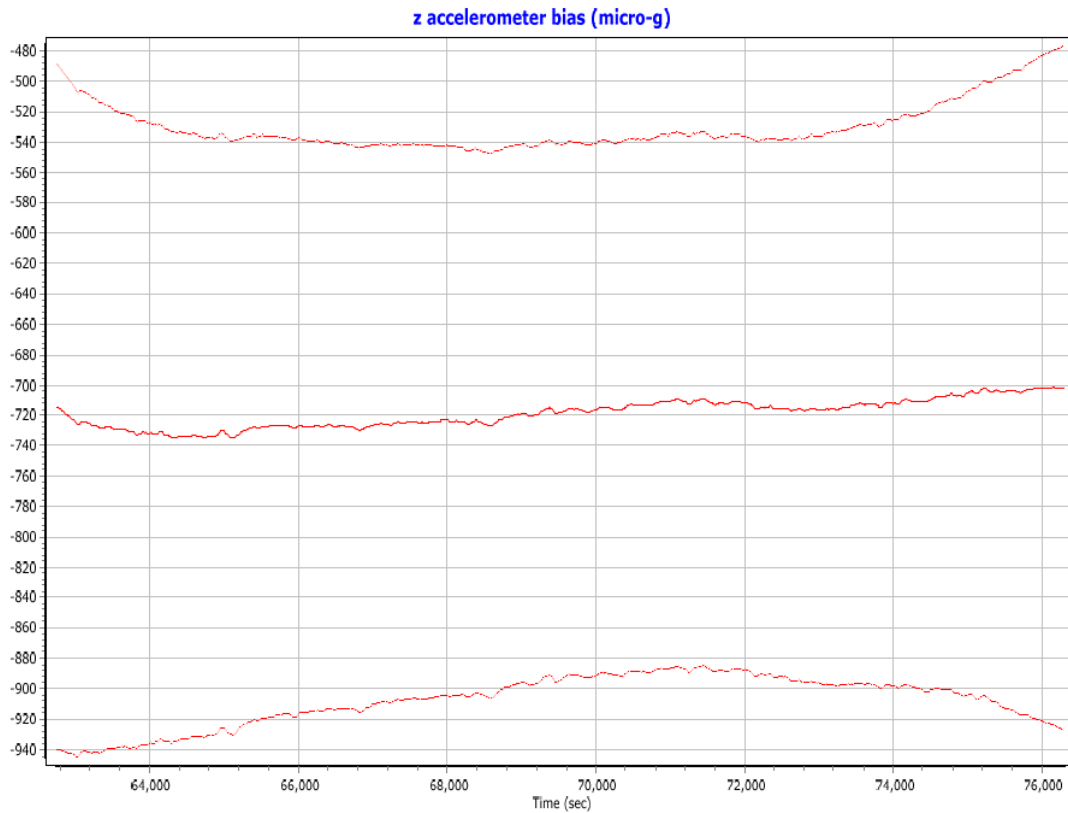

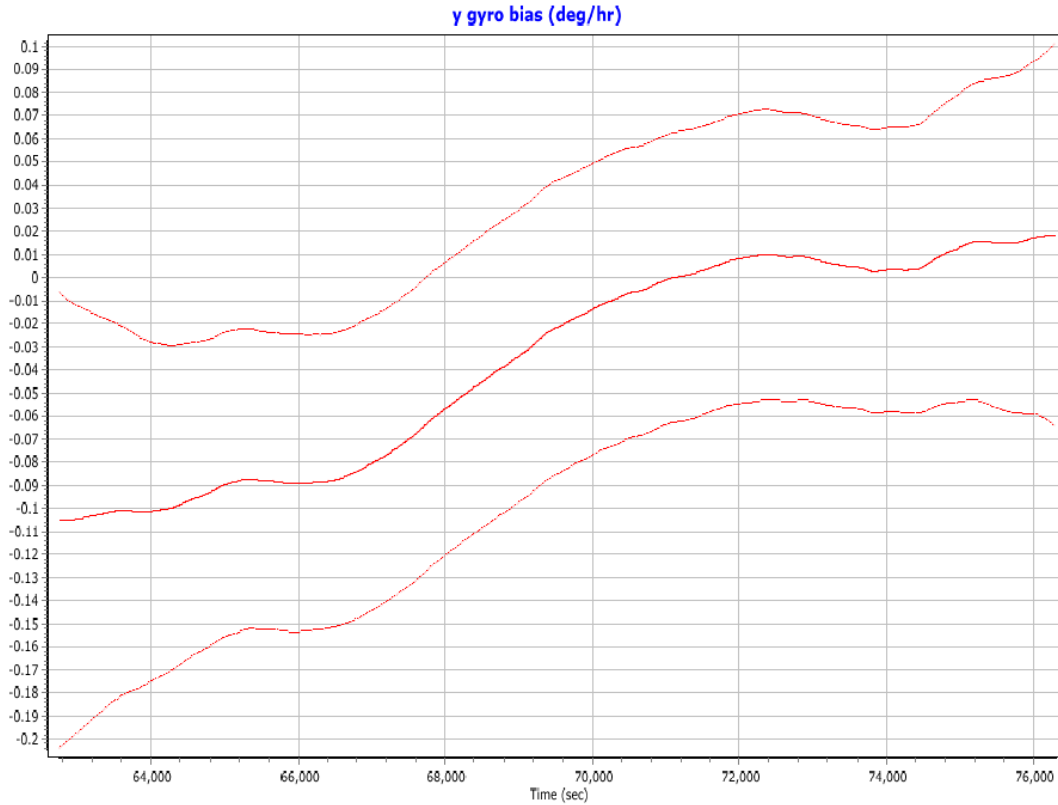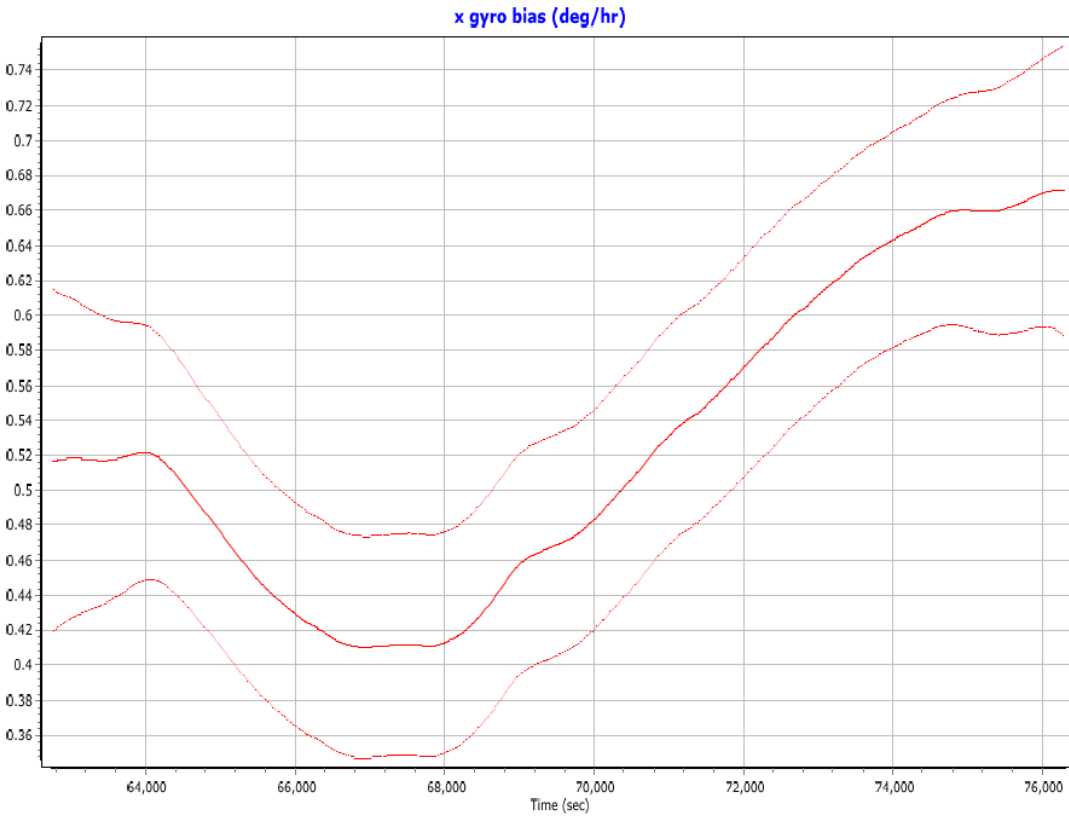






## MISSION 2 – 5417122A GNSS PROCESSING


Project: 5417122a

GrafNav v8.50.4320

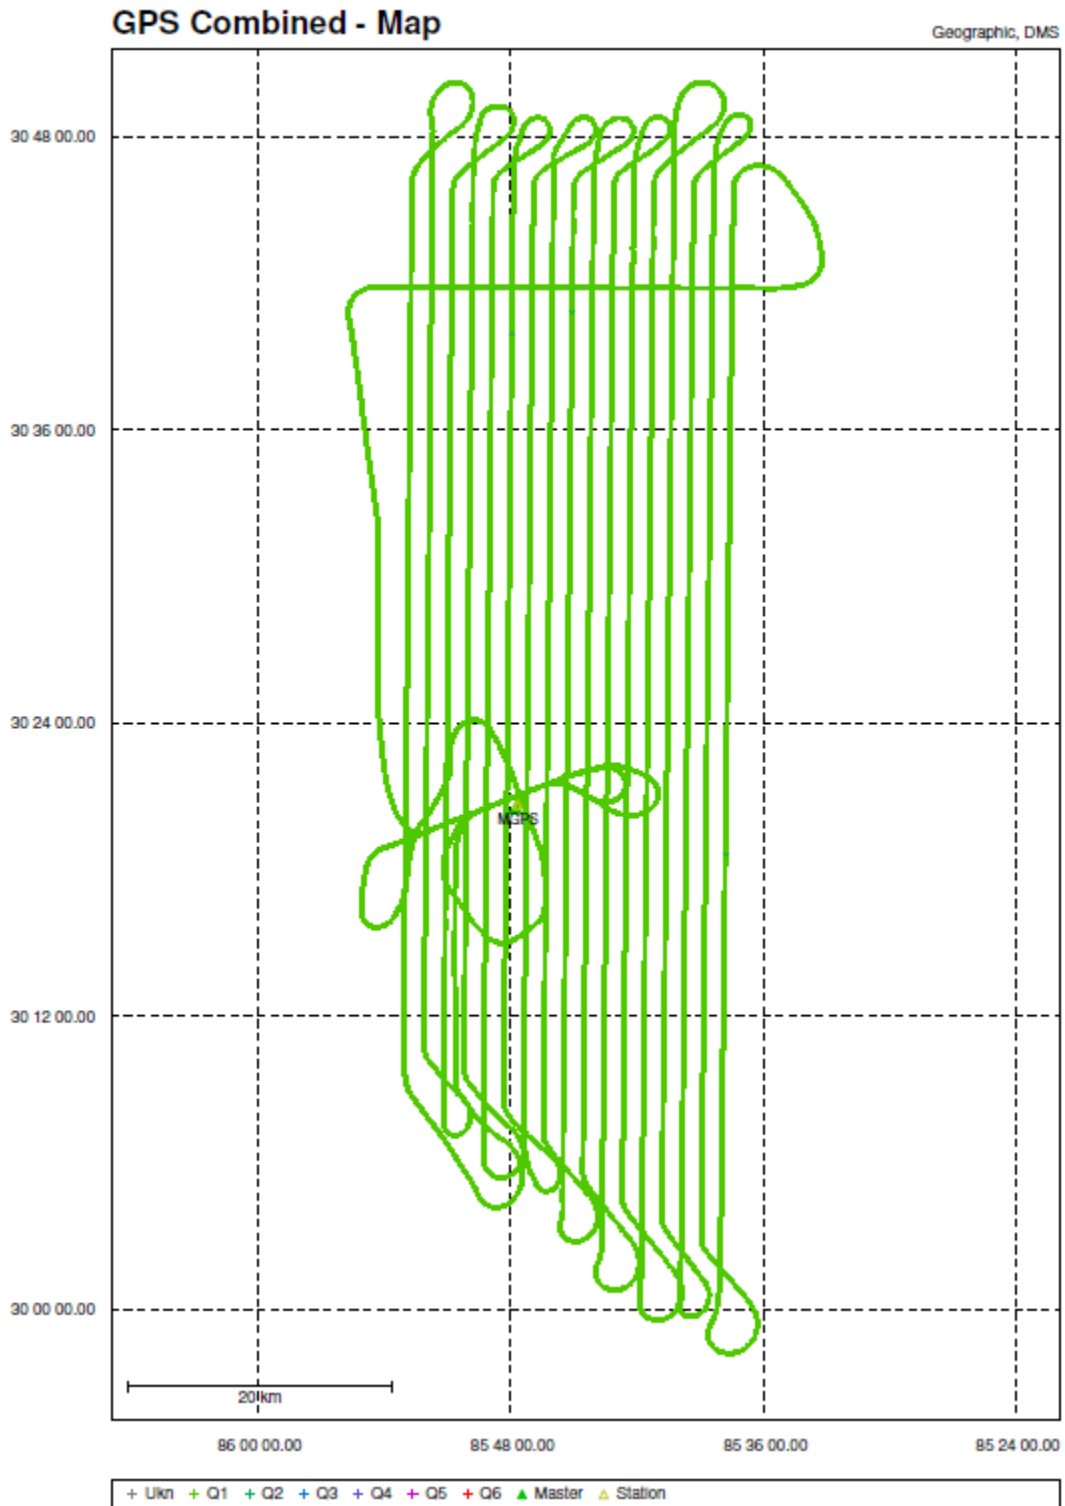

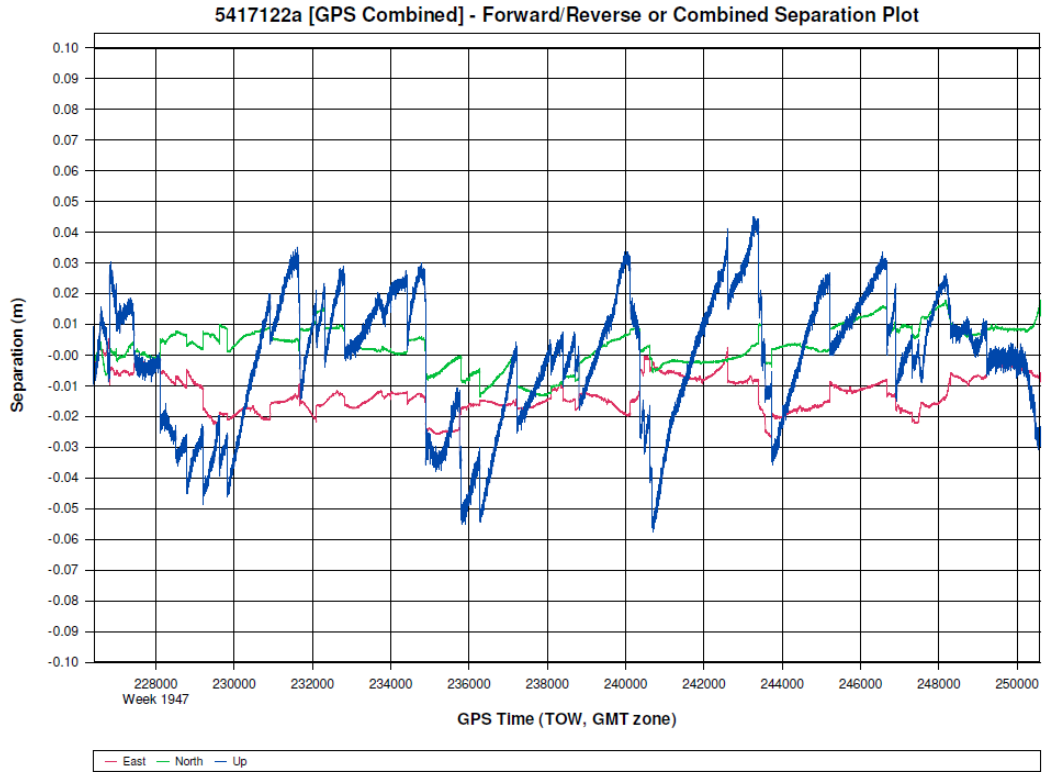

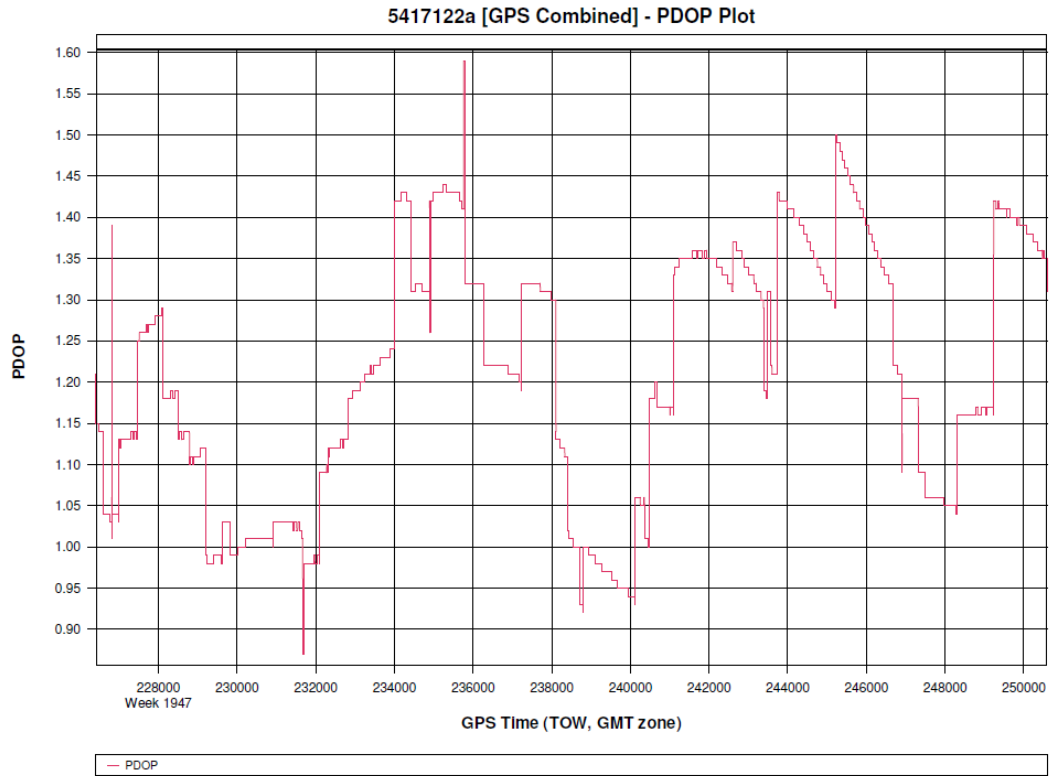

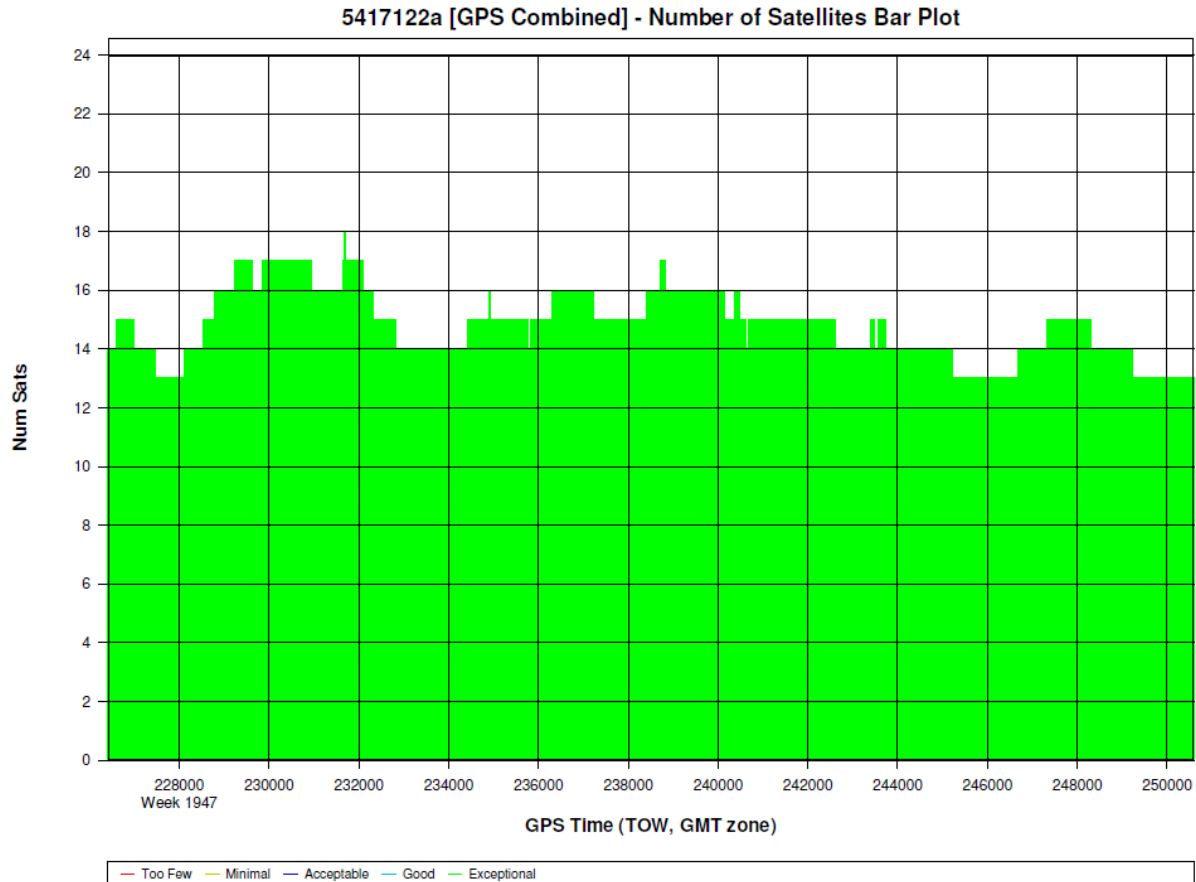

Program: GrafNav  
Version: 8.50.4320  
Project: F:\Projects\3123\_ChoctawacheeWalton\LiDAR\5417122a\05\_INS-GPS\_PROC\01\_POS\5417122a\5417122a\GNSS\5417122a.gnv

Solution Type: Combined

Number of Epochs:  
Total in GPB file: 24210  
No processed position: 0  
Missing Fwd or Rev: 5  
With bad C/A code: 0  
With bad L1 Phase: 0

Measurement RMS Values:  
L1 Phase: 0.0210 (m)  
C/A Code: 0.74 (m)  
L1 Doppler: 0.806 (m/s)

Fwd/Rev Separation RMS Values:

East: 0.014 (m)  
North: 0.007 (m)  
Height: 0.021 (m)

Fwd/Rev Sep. RMS for dual FWD/REV fixes (24205 occurrences):

East: 0.014 (m)  
North: 0.007 (m)  
Height: 0.021 (m)

Quality Number Percentages:

Q 1: 100.0 %  
Q 2: 0.0 %  
Q 3: 0.0 %  
Q 4: 0.0 %  
Q 5: 0.0 %  
Q 6: 0.0 %

Position Standard Deviation Percentages:

0.00 - 0.10 m: 100.0 %  
0.10 - 0.30 m: 0.0 %  
0.30 - 1.00 m: 0.0 %  
1.00 - 5.00 m: 0.0 %  
5.00 m + over: 0.0 %



Percentages of epochs with DD\_DOP over 10.00:



DOP over Tol: 0.0 %



Baseline Distances:

Maximum: 56.740 (km)  
Minimum: 0.257 (km)  
Average: 23.396 (km)  
First Epoch: 0.327 (km)  
Last Epoch: 0.263 (km)



## **MISSION 2 – 5417122A SENSOR ERRORS**

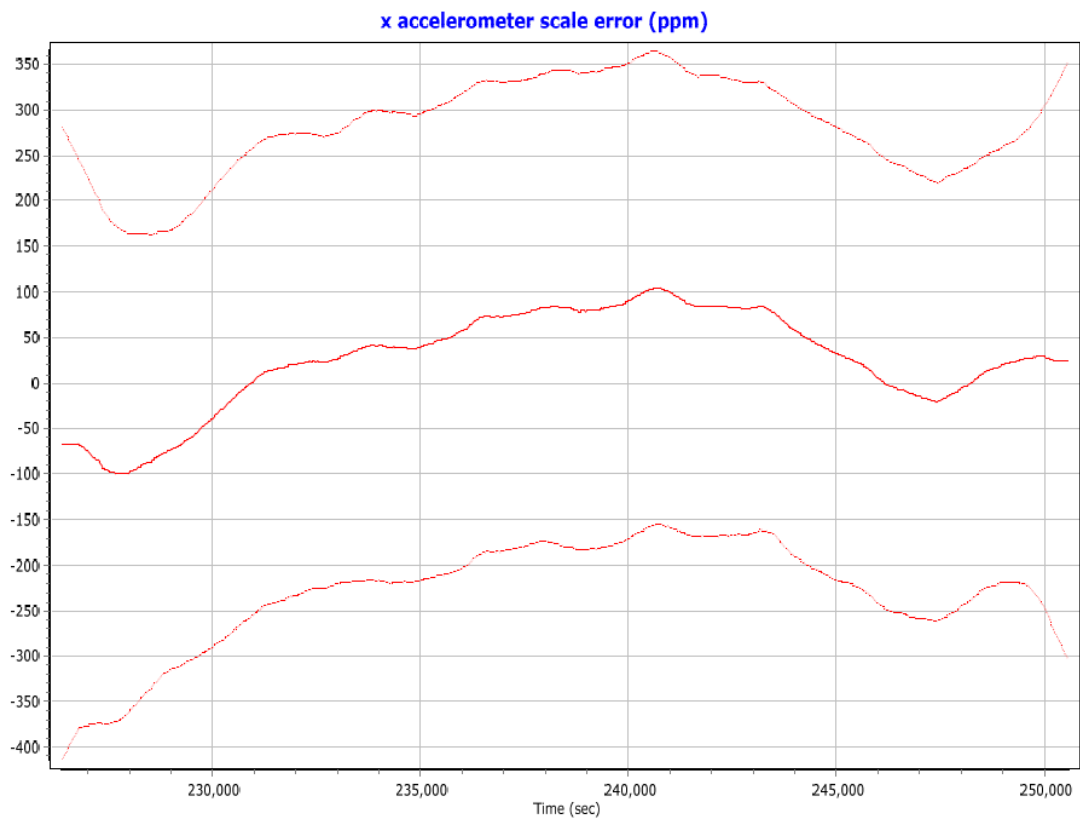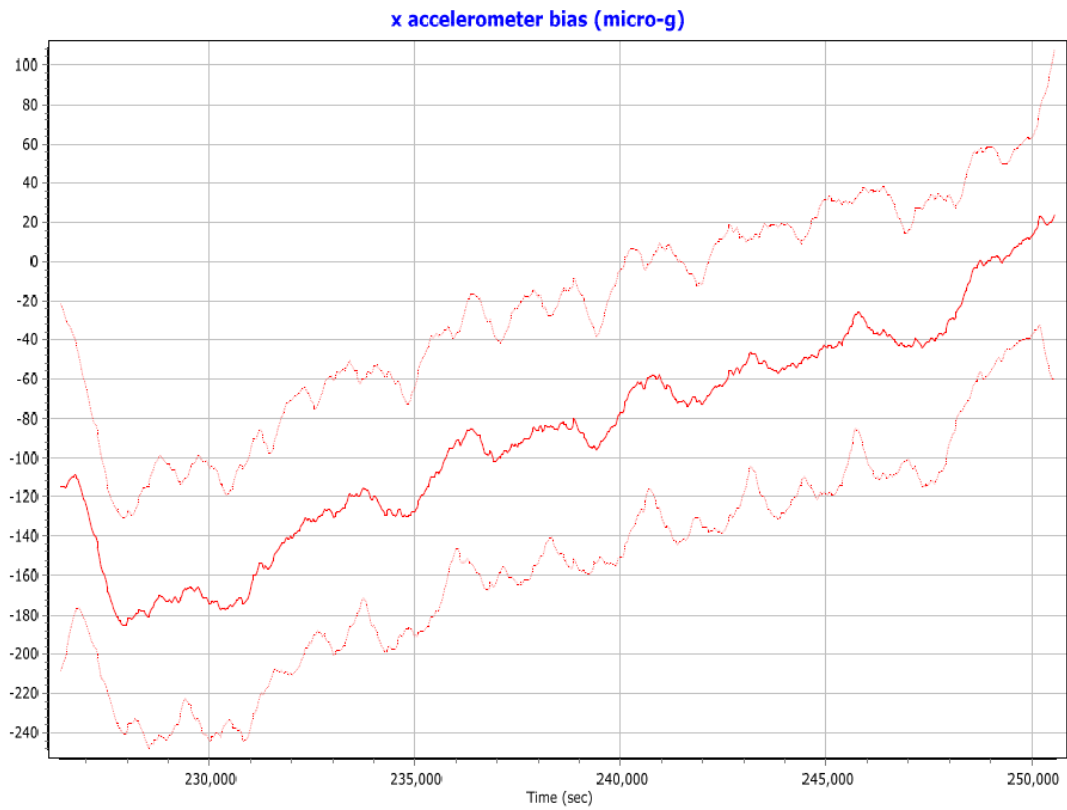


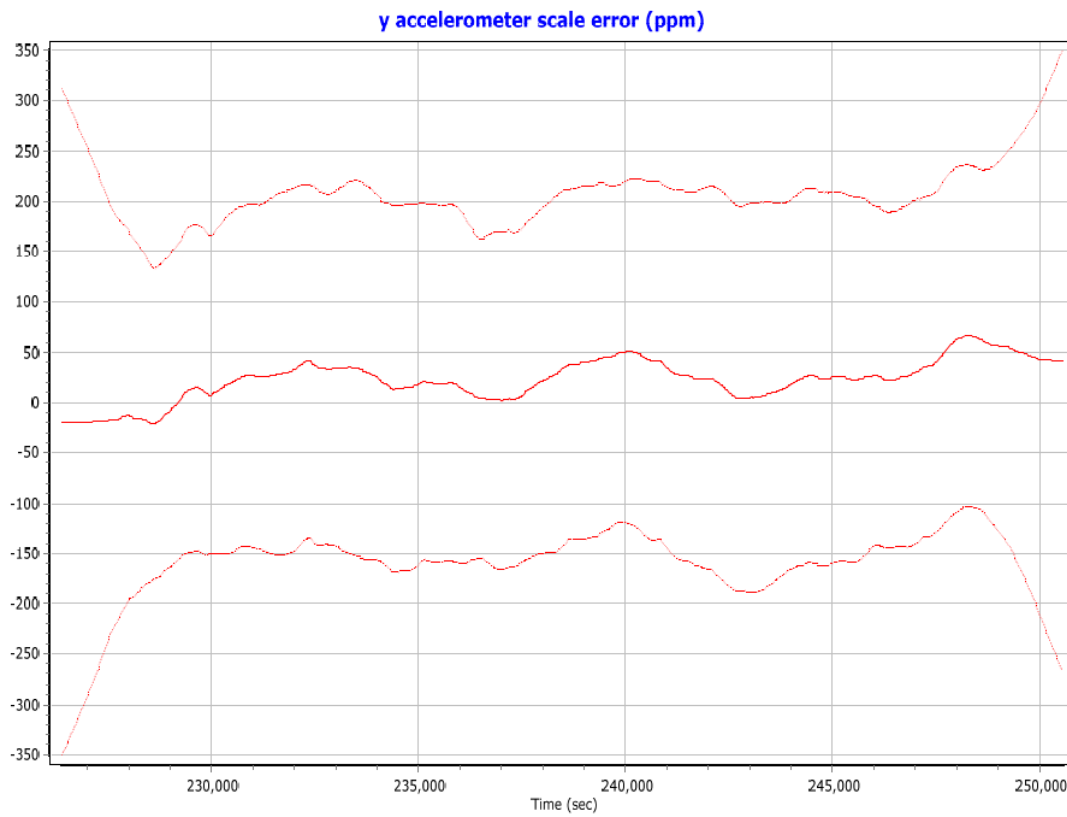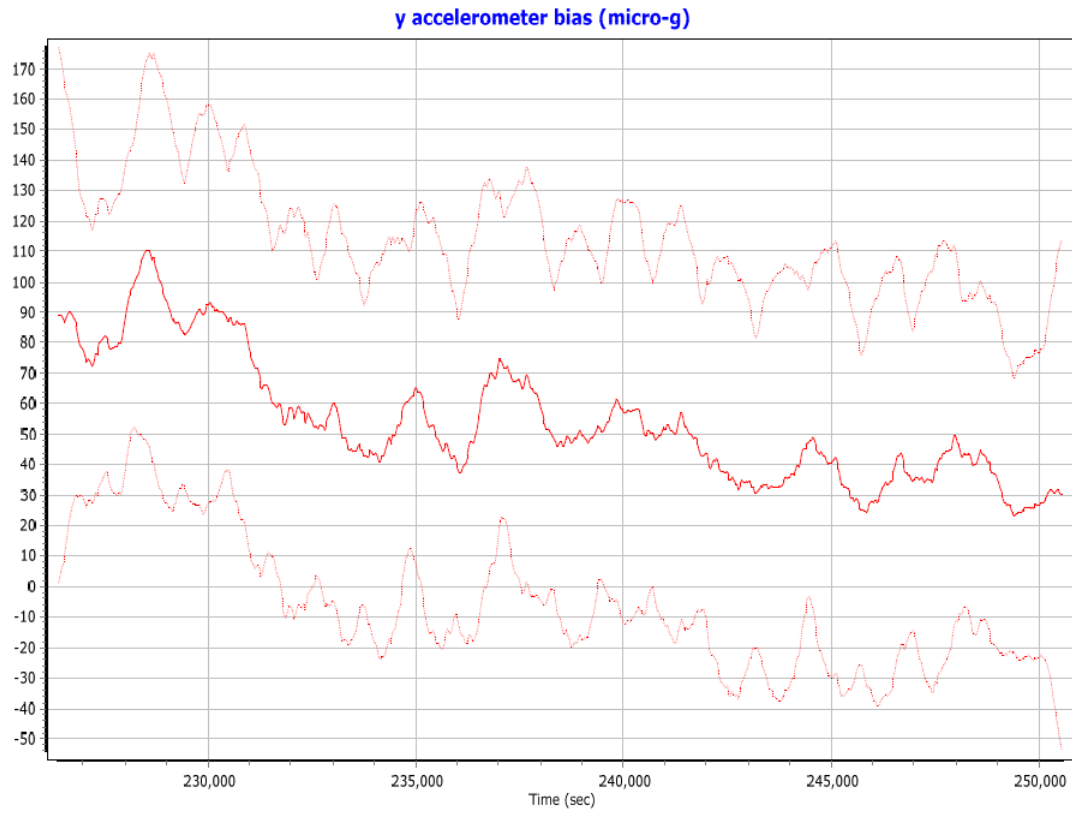

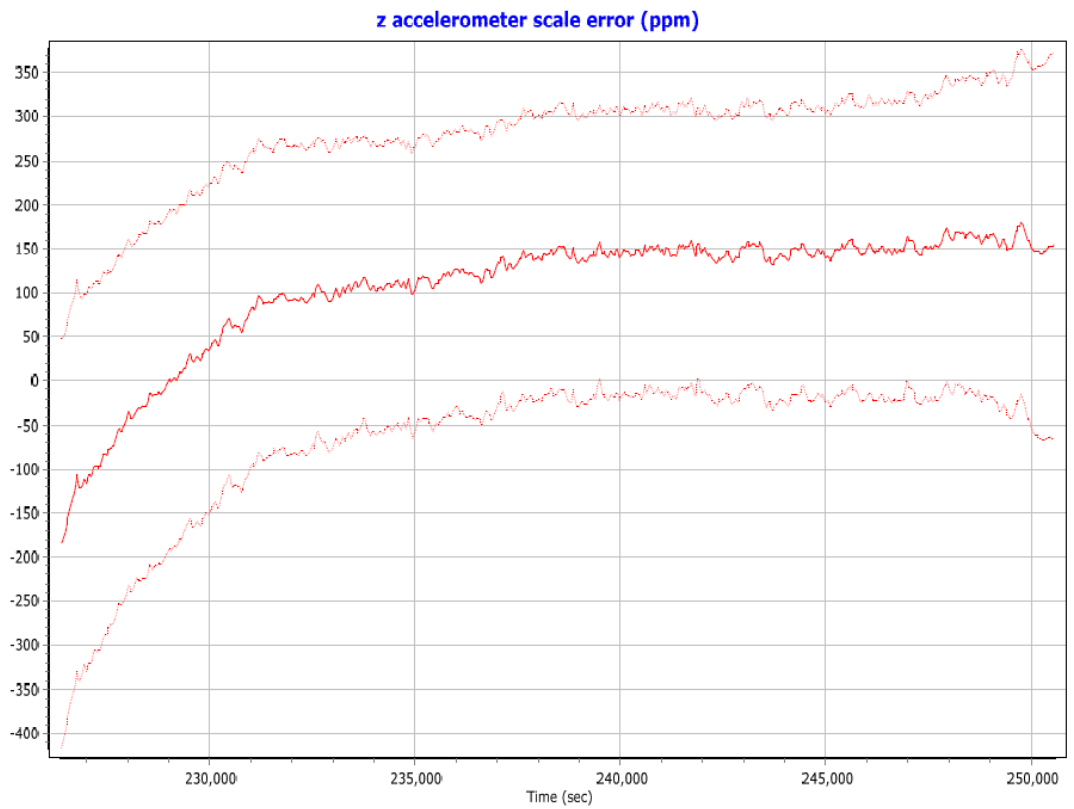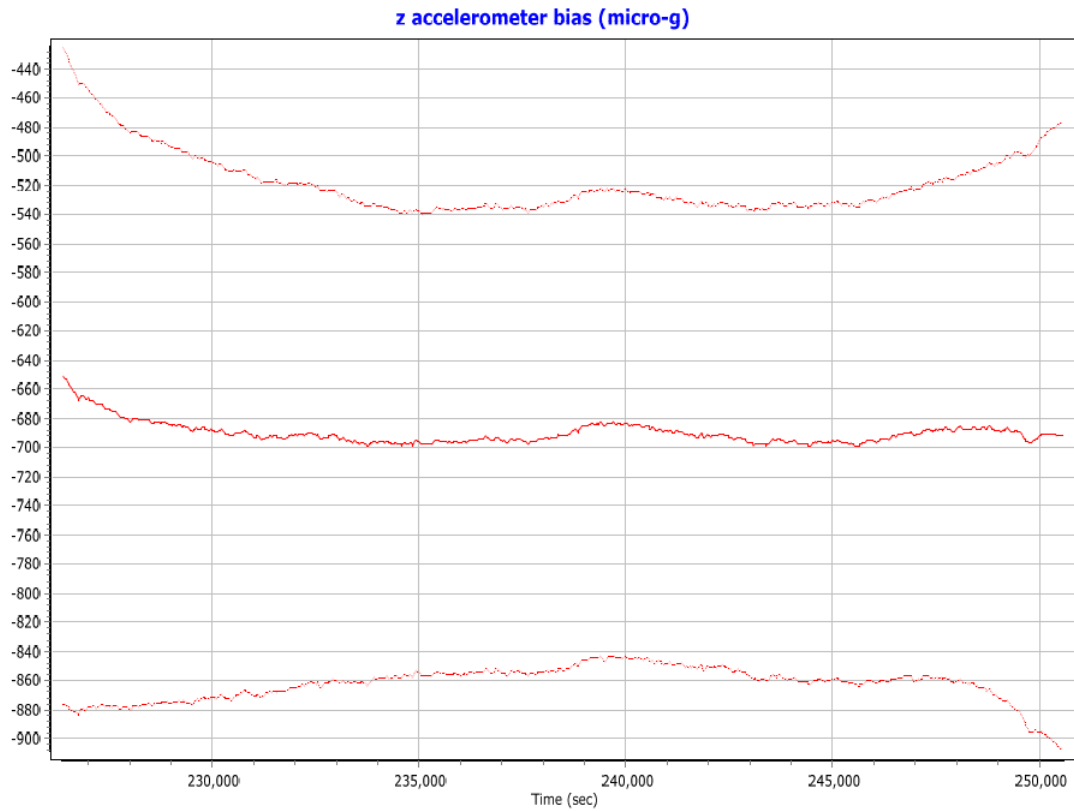





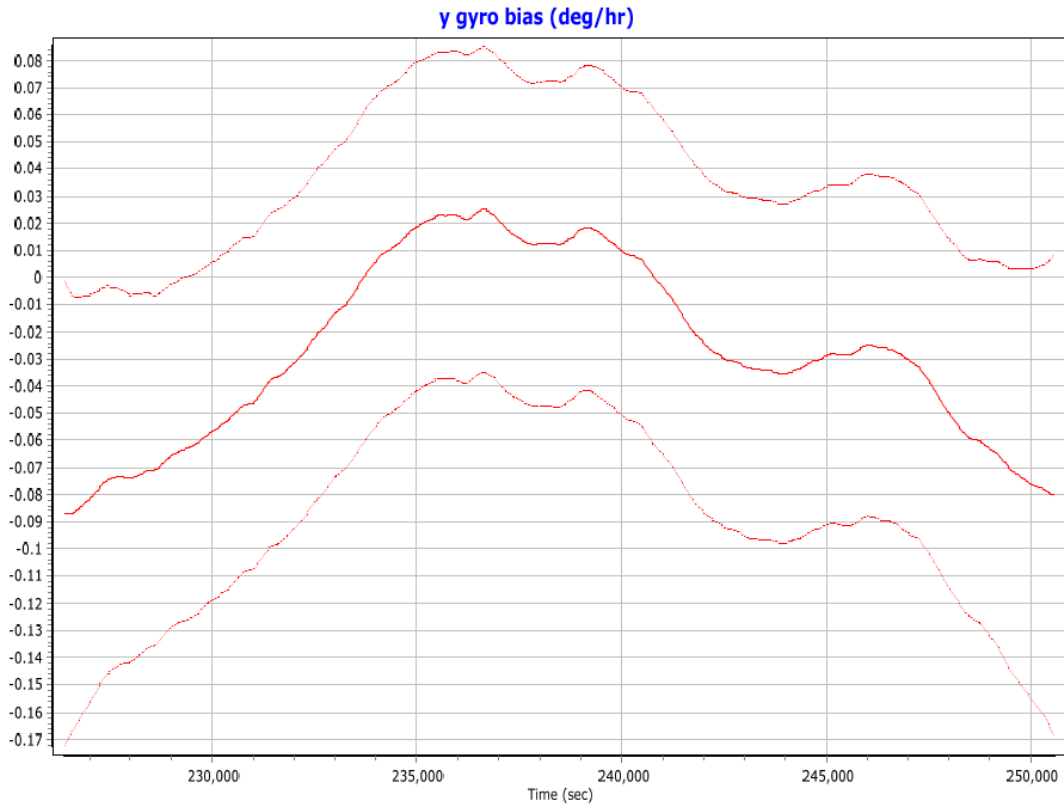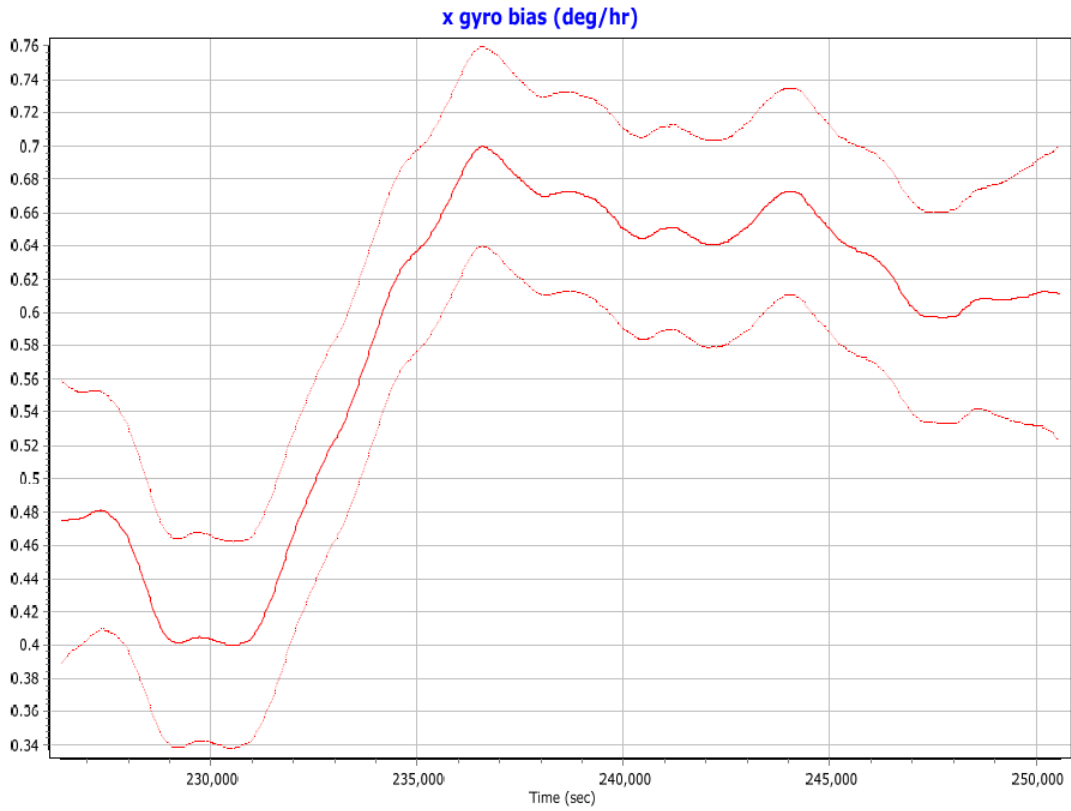


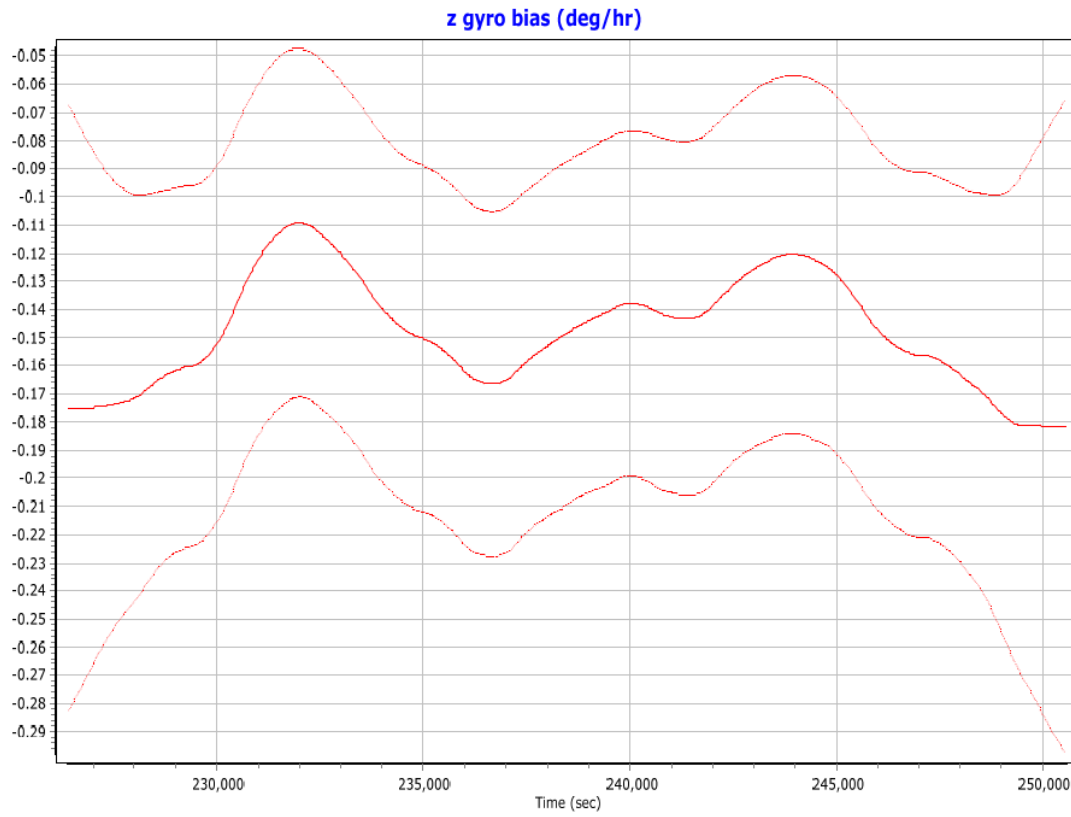


**MISSION 3 – 5417123A GNSS PROCESSING**

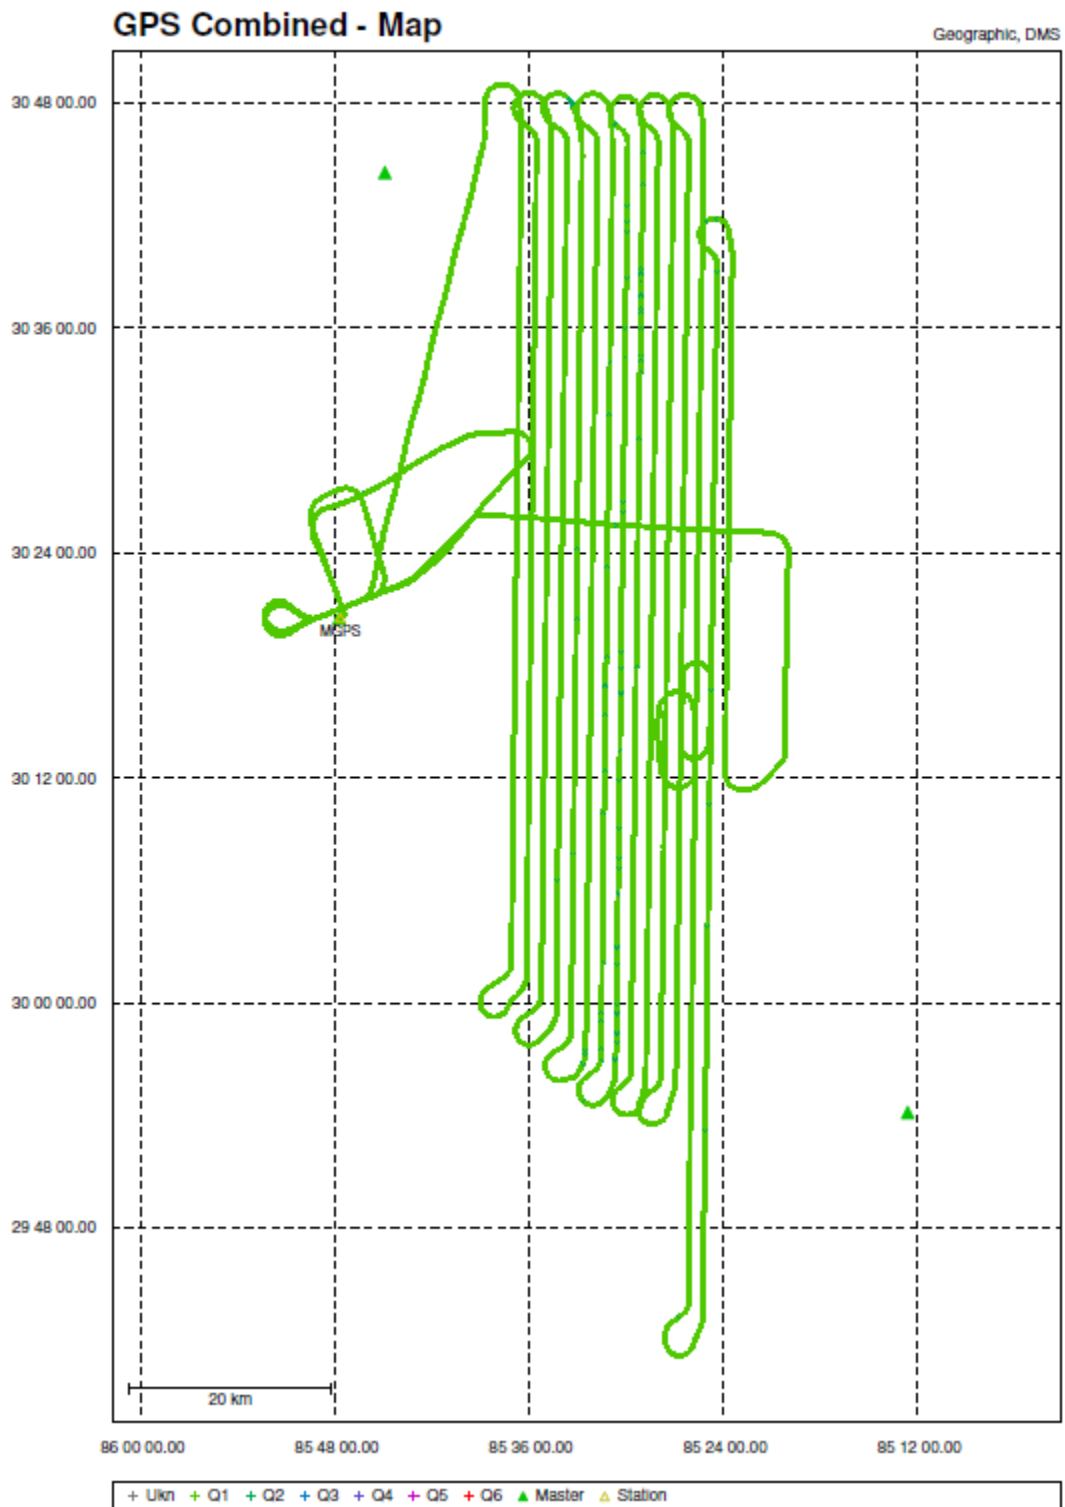

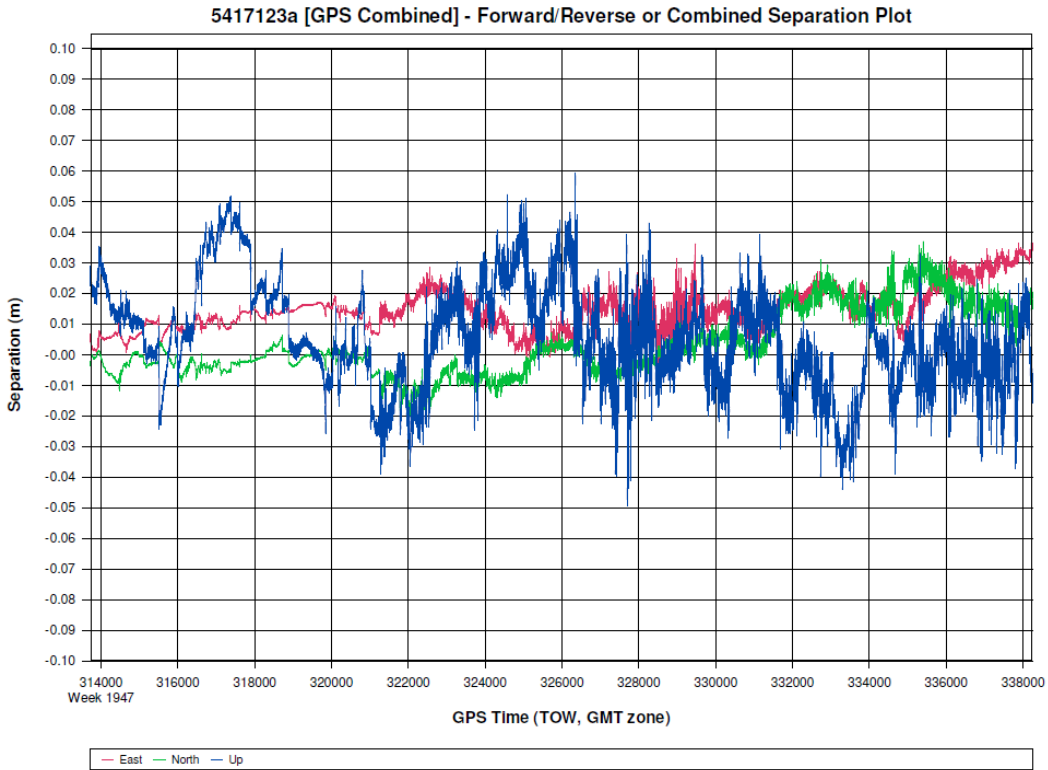

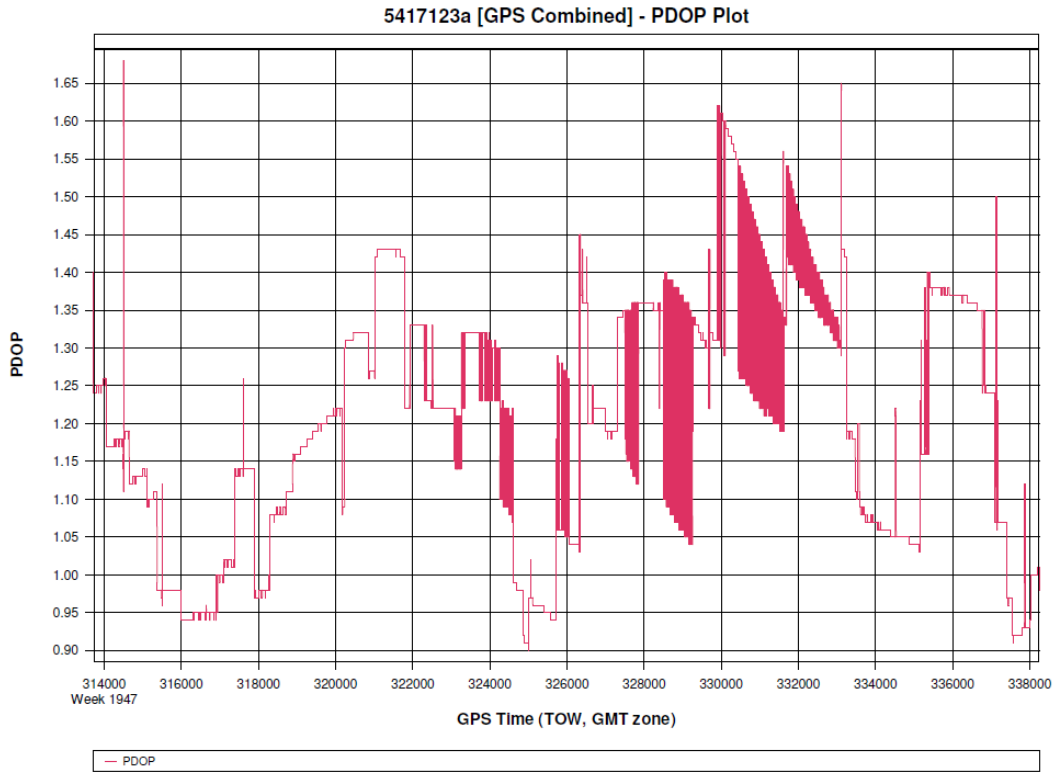

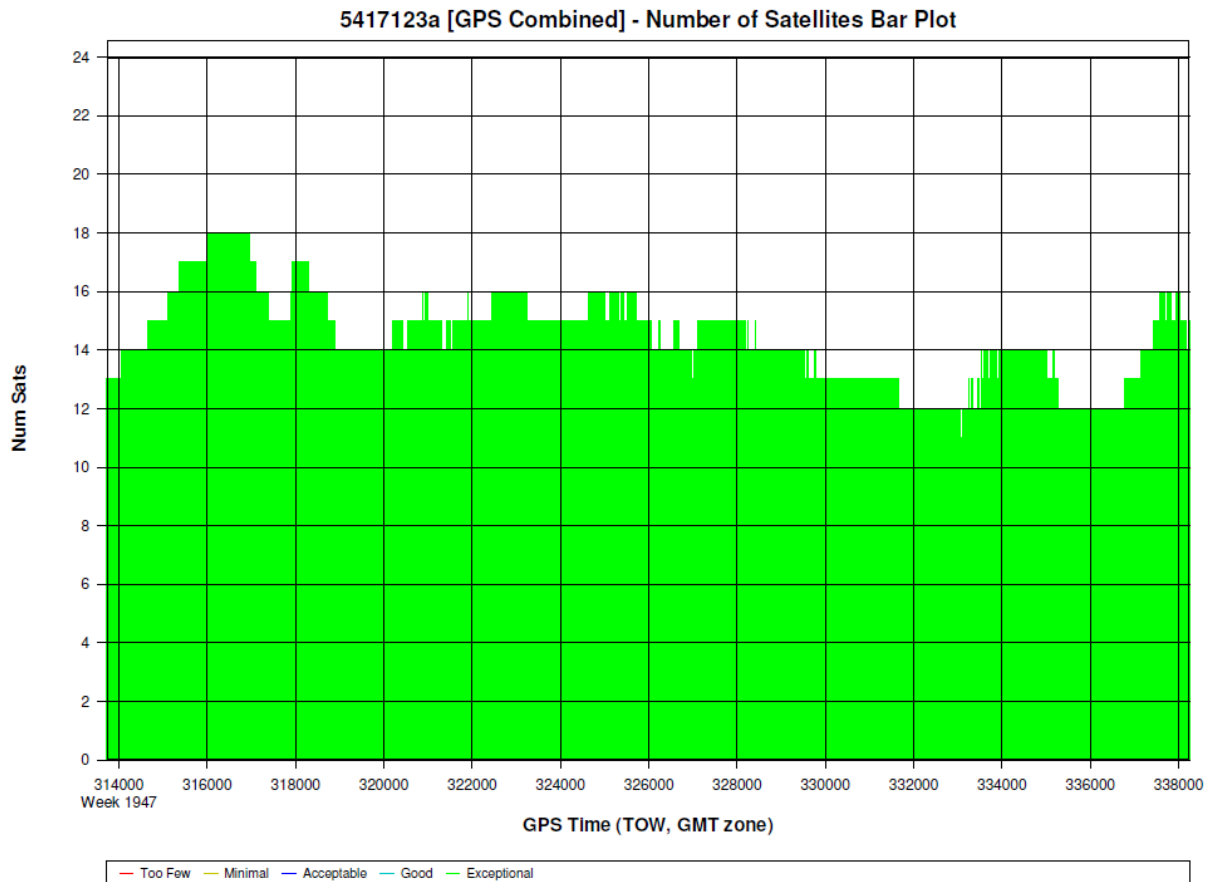

Processing Summary Information

Program: GrafNav  
 Version: 8.50.4320  
 Project: F:\Projects\3123\_ChoctawacheeWalton\LiDAR\5417123a\05\_INS-GPS\_PROC\01\_POS\5417123a\5417123a\GNSS\5417123a.gnv  
 Solution Type: Combined

Number of Epochs:

Total in GPB file:	24546
No processed position:	0
Missing Fwd or Rev:	5
With bad C/A code:	0
With bad L1 Phase:	0

Measurement RMS Values:

L1 Phase:	0.0209 (m)
C/A Code:	0.84 (m)
L1 Doppler:	0.719 (m/s)

Fwd/Rev Separation RMS Values:

East:	0.016 (m)
-------	-----------

North: 0.011 (m)  
Height: 0.018 (m)

Fwd/Rev Sep. RMS for dual FWD/REV fixes (24541 occurrences):

East: 0.016 (m)  
North: 0.011 (m)  
Height: 0.018 (m)

Quality Number Percentages:

Q 1: 99.1 %  
Q 2: 0.9 %  
Q 3: 0.0 %  
Q 4: 0.0 %  
Q 5: 0.0 %  
Q 6: 0.0 %

Position Standard Deviation Percentages:

0.00 - 0.10 m: 100.0 %  
0.10 - 0.30 m: 0.0 %  
0.30 - 1.00 m: 0.0 %  
1.00 - 5.00 m: 0.0 %  
5.00 m + over: 0.0 %



Percentages of epochs with DD\_DOP over 10.00:

DOP over Tol: 0.0 %



Baseline Distances:



Maximum: 76.349 (km)  
Minimum: 4.701 (km)  
Average: 28.586 (km)  
First Epoch: 21.732 (km)  
Last Epoch: 17.061 (km)



## **MISSION 3 – 5417123A SENSOR ERRORS**

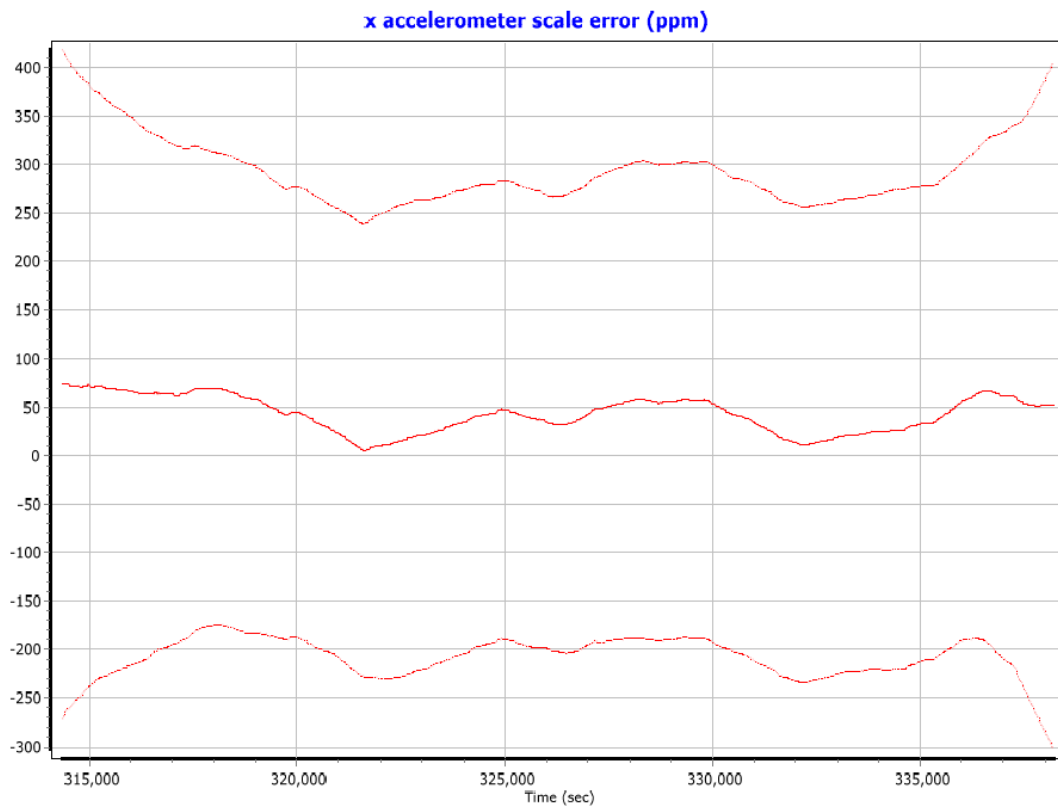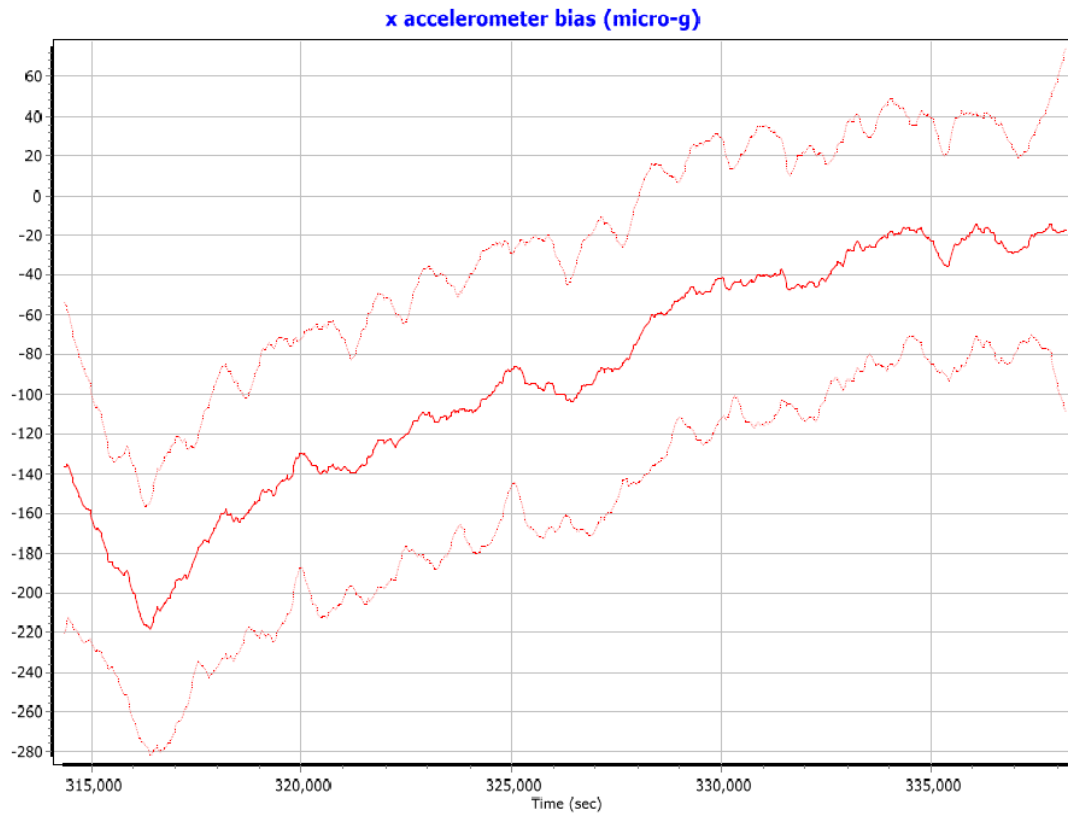




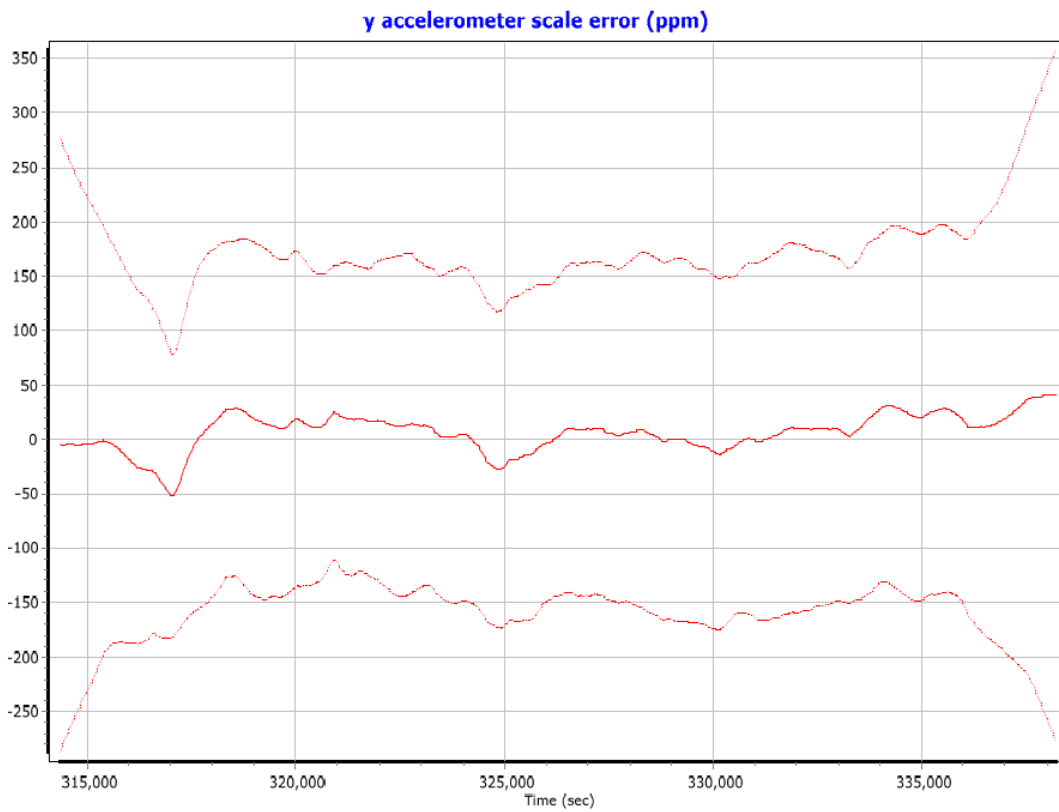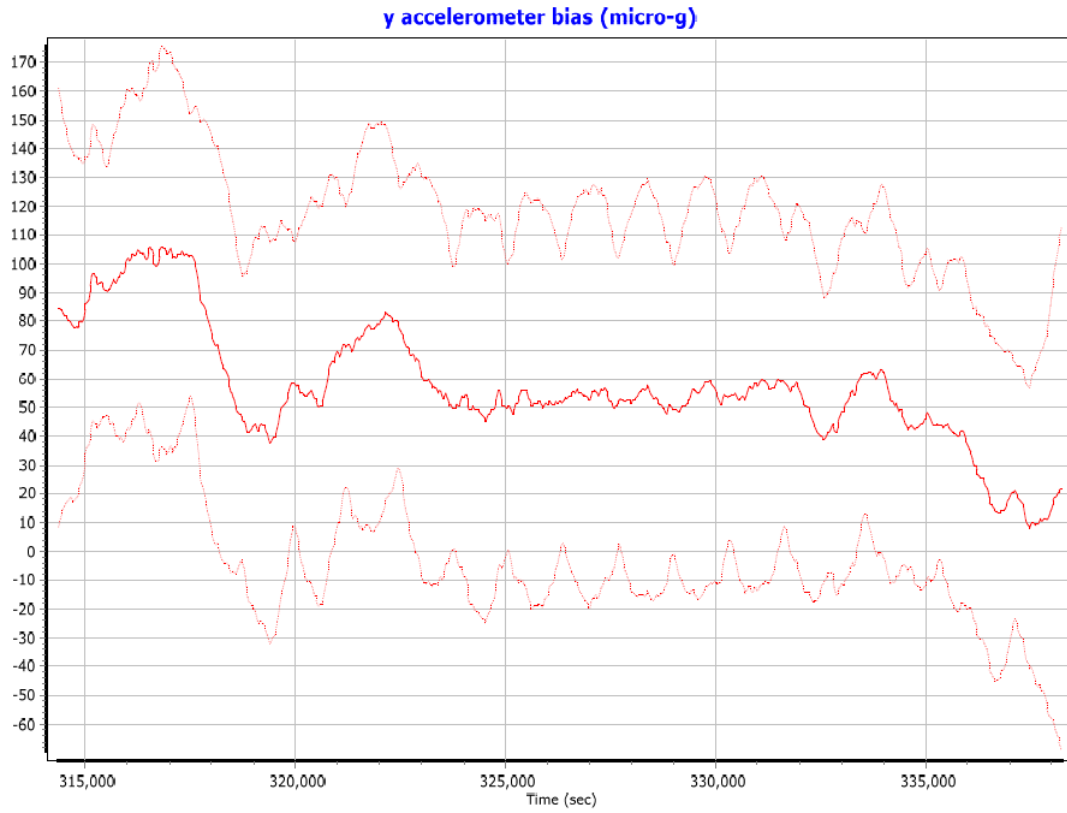


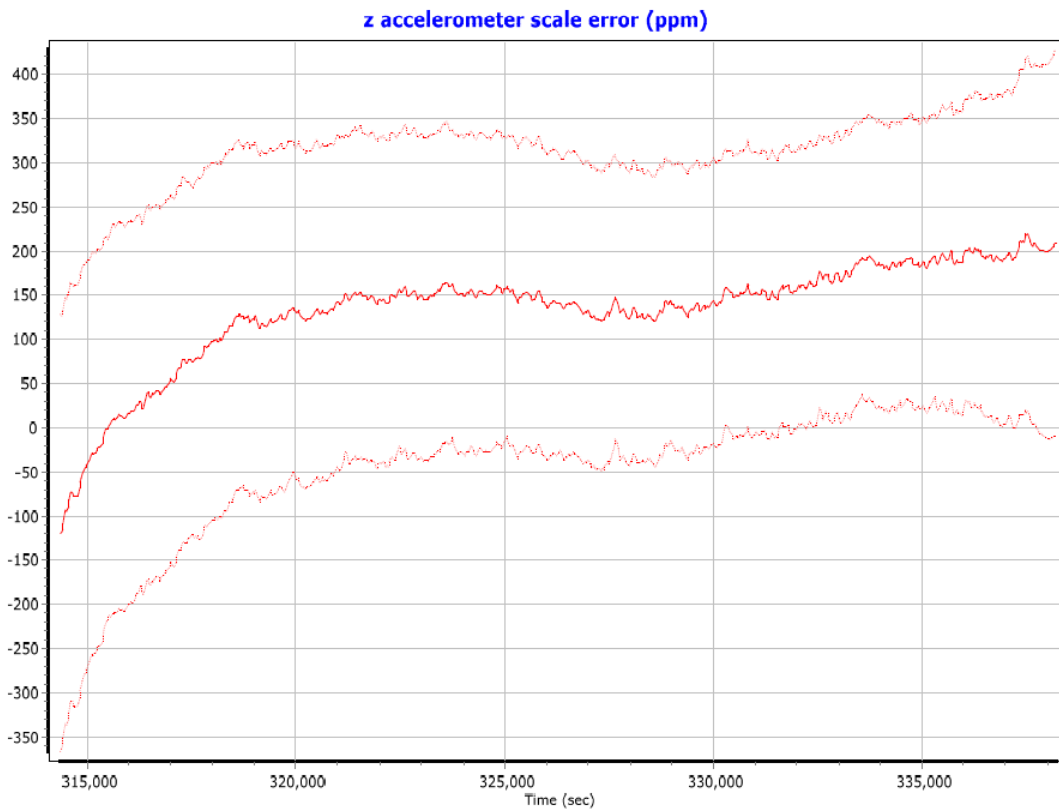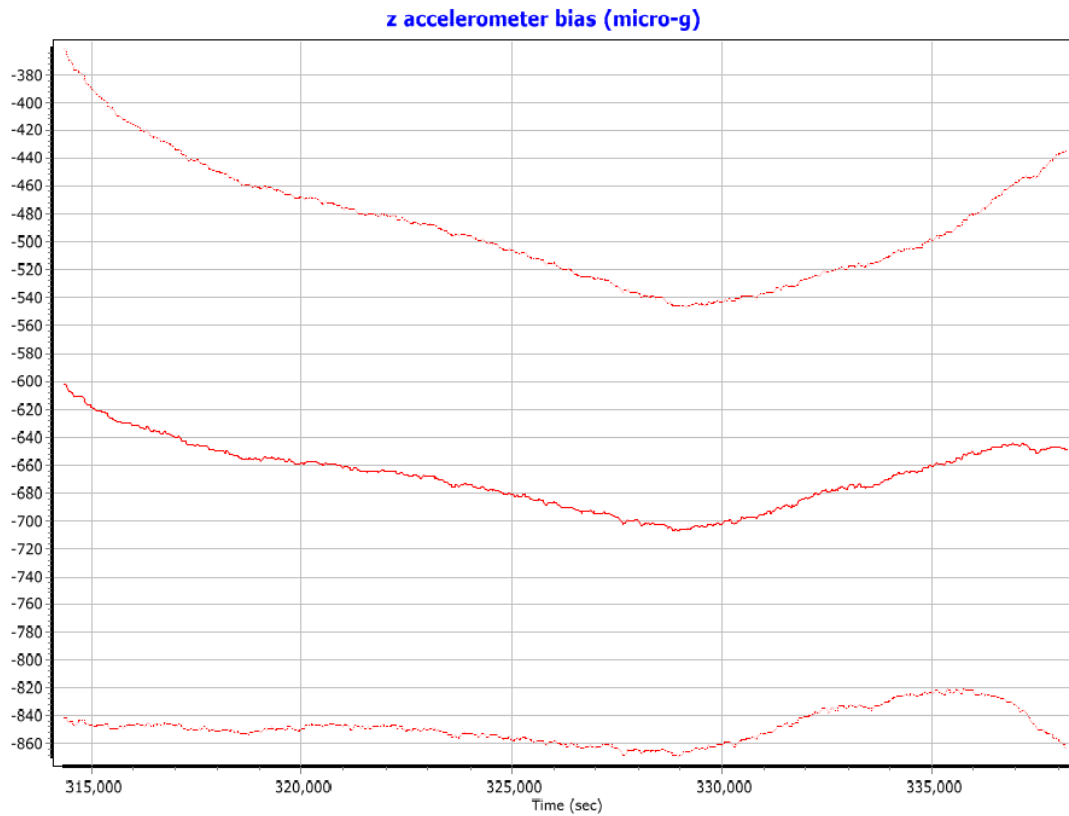


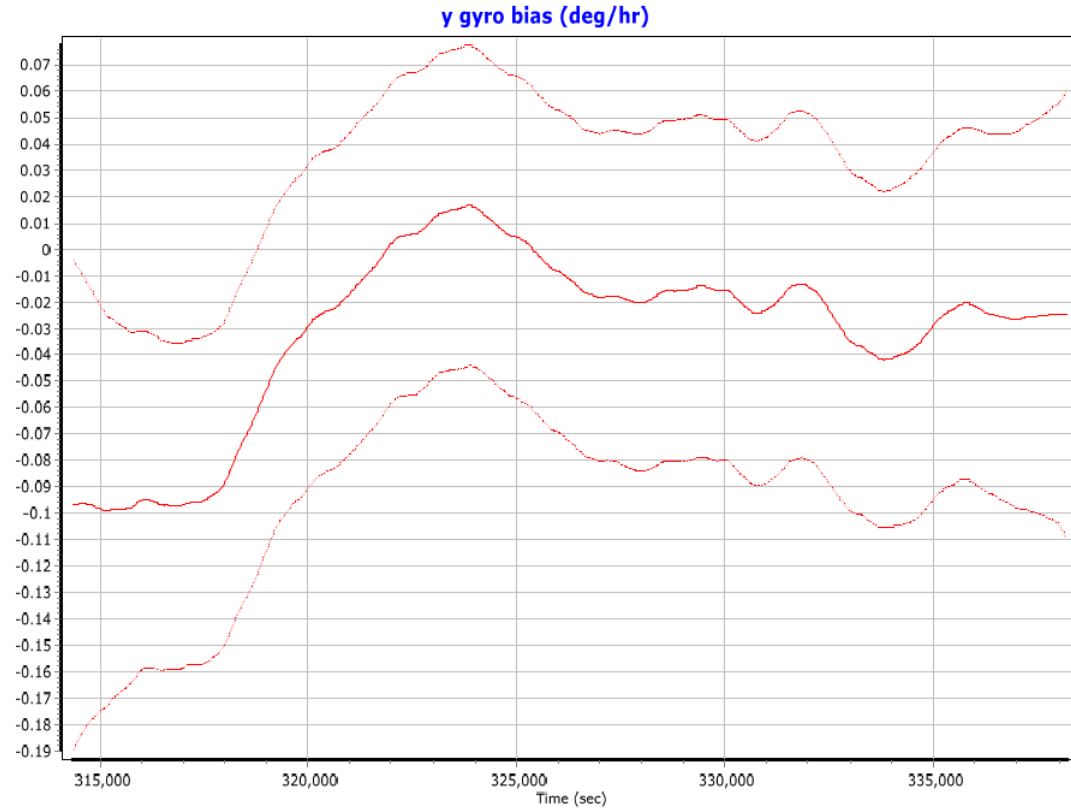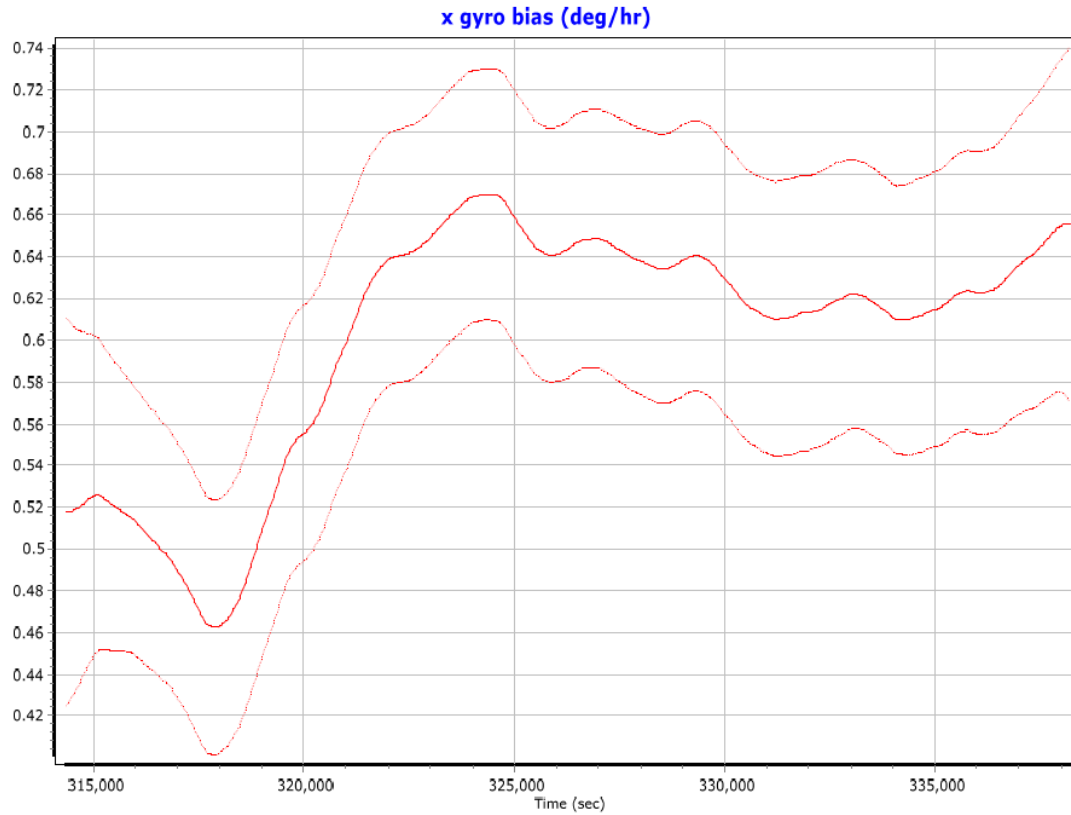


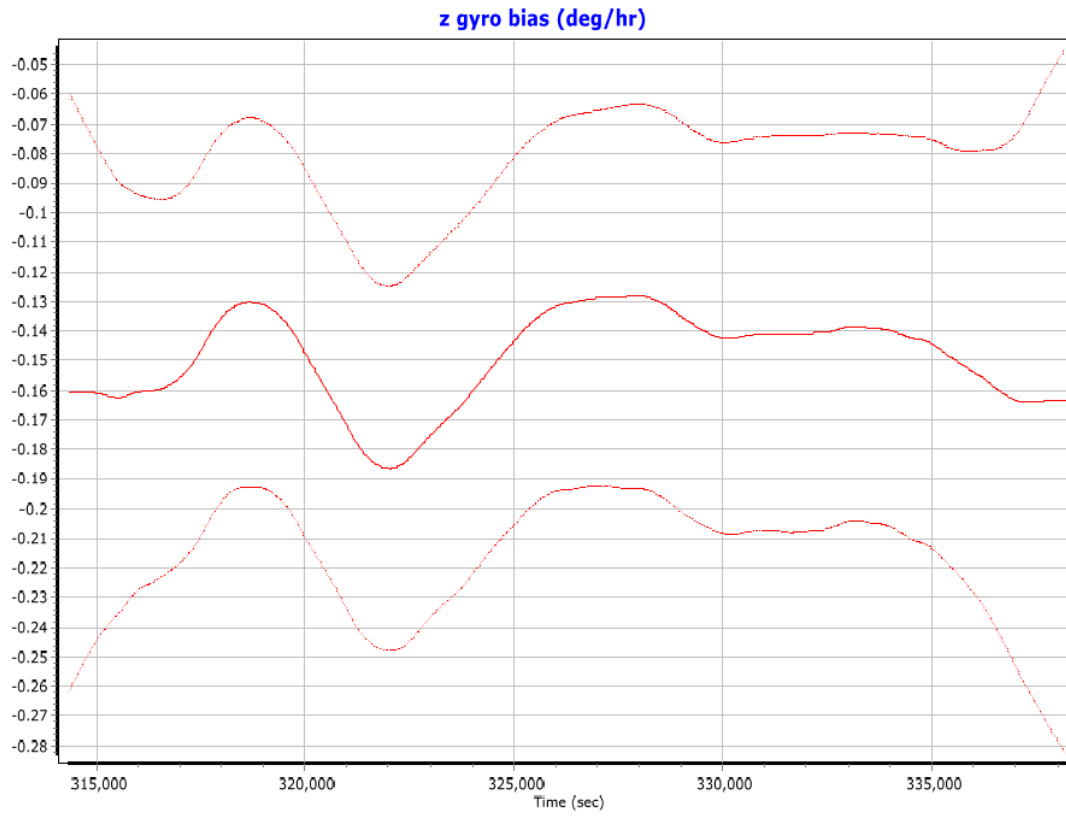


**MISSION 4 – 5417123B GNSS PROCESSING**

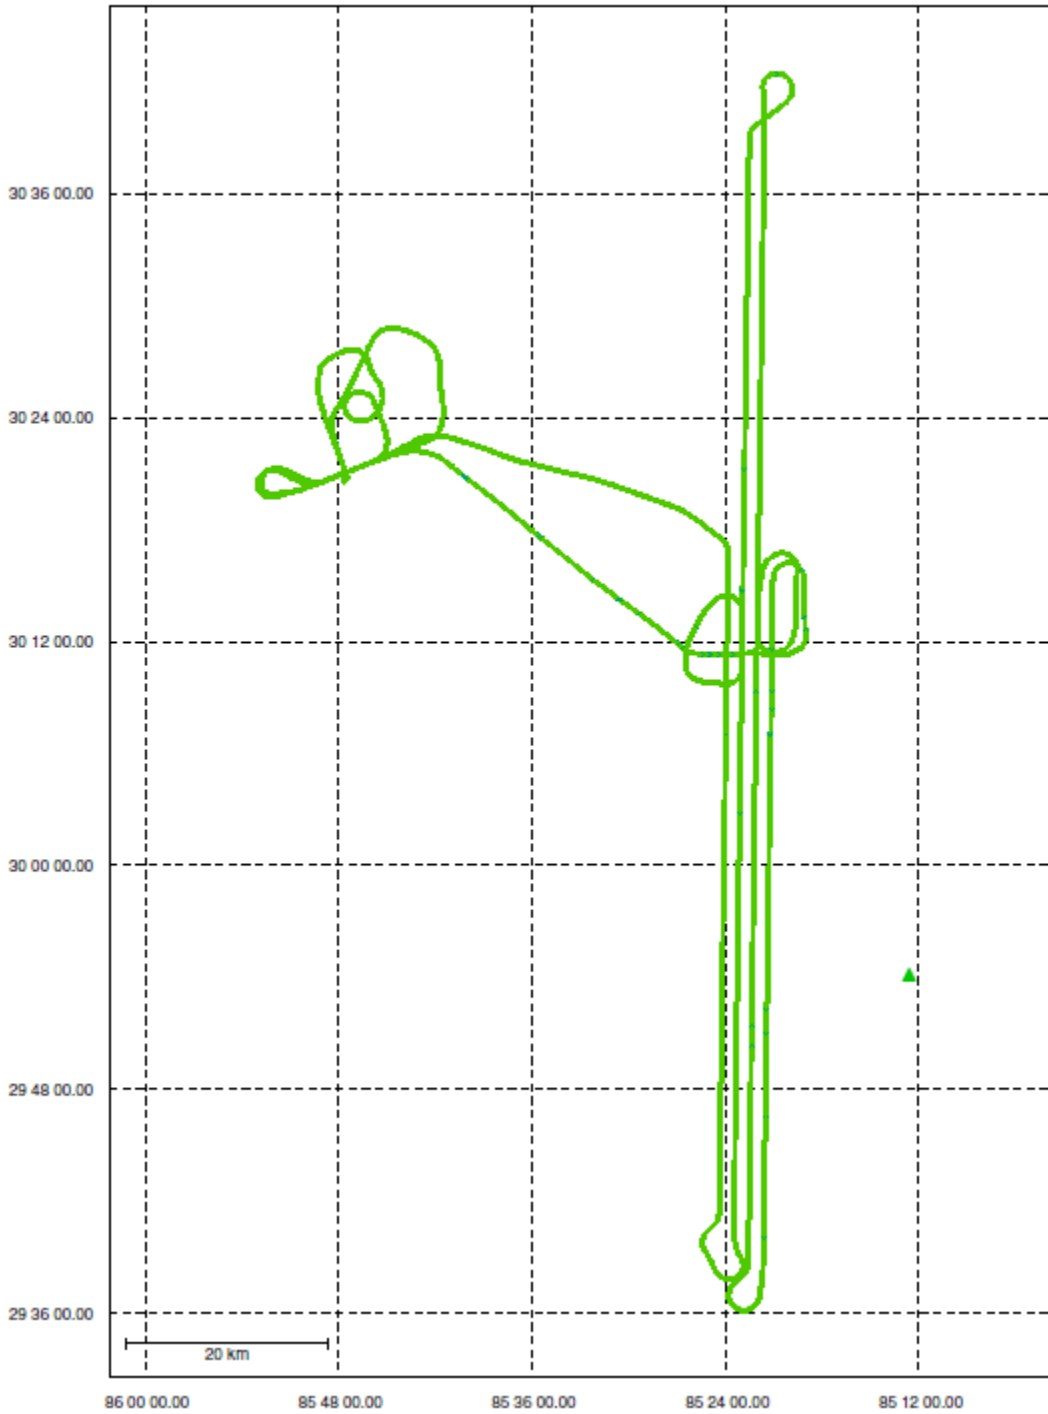

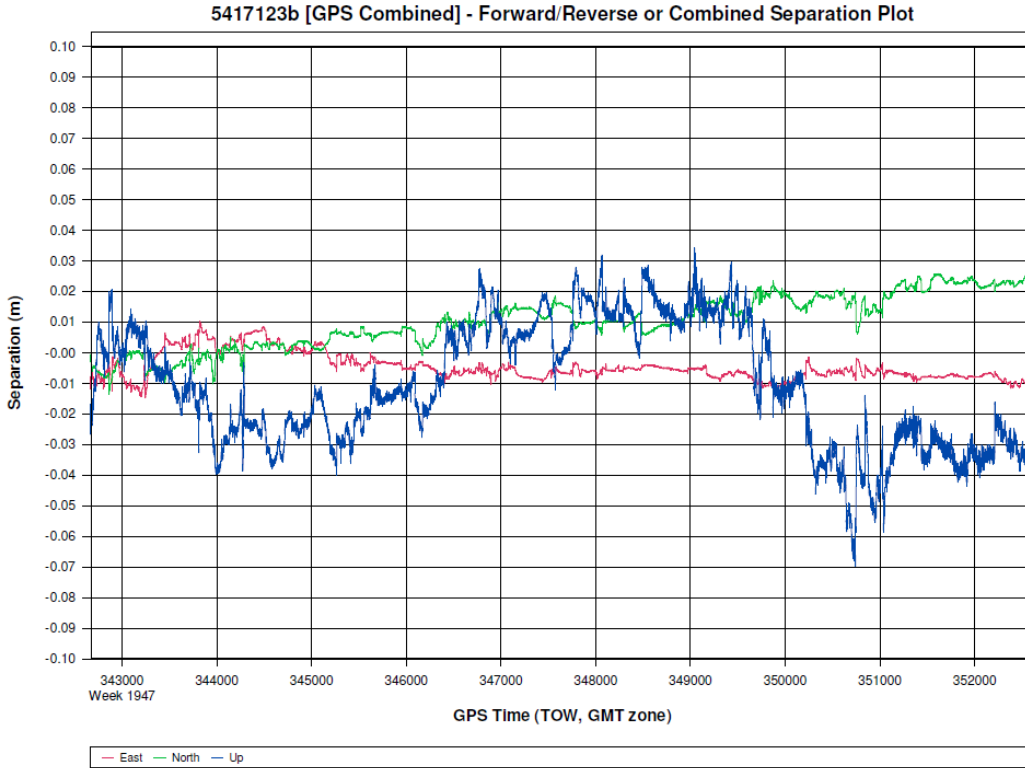

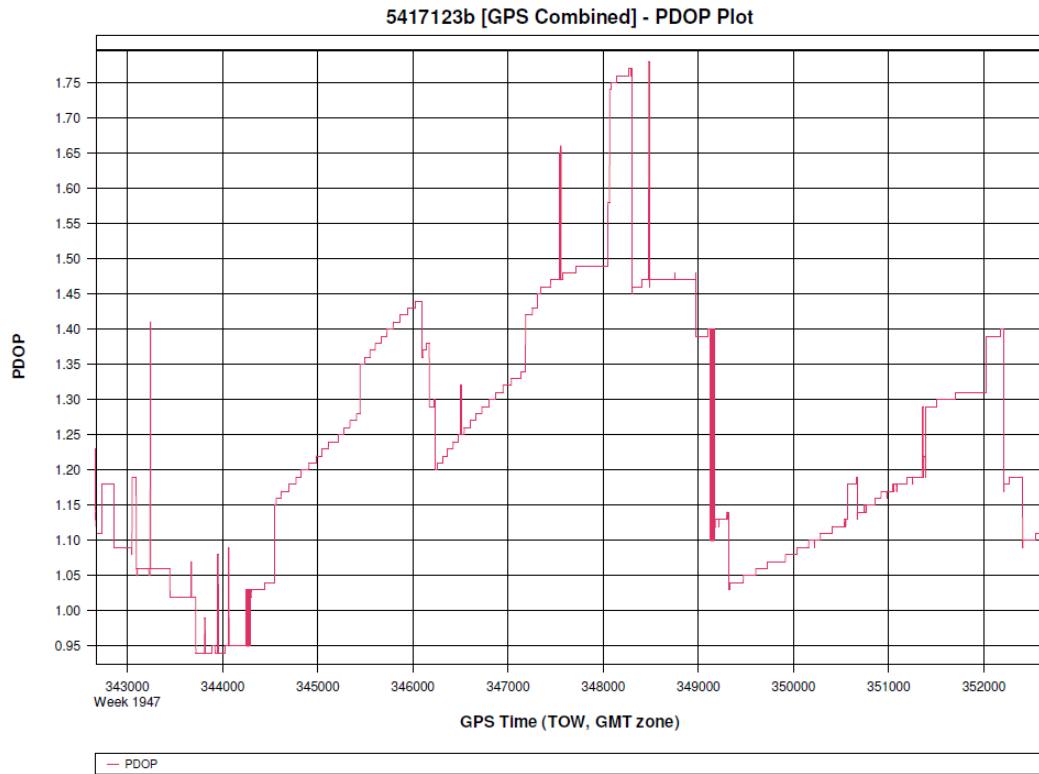

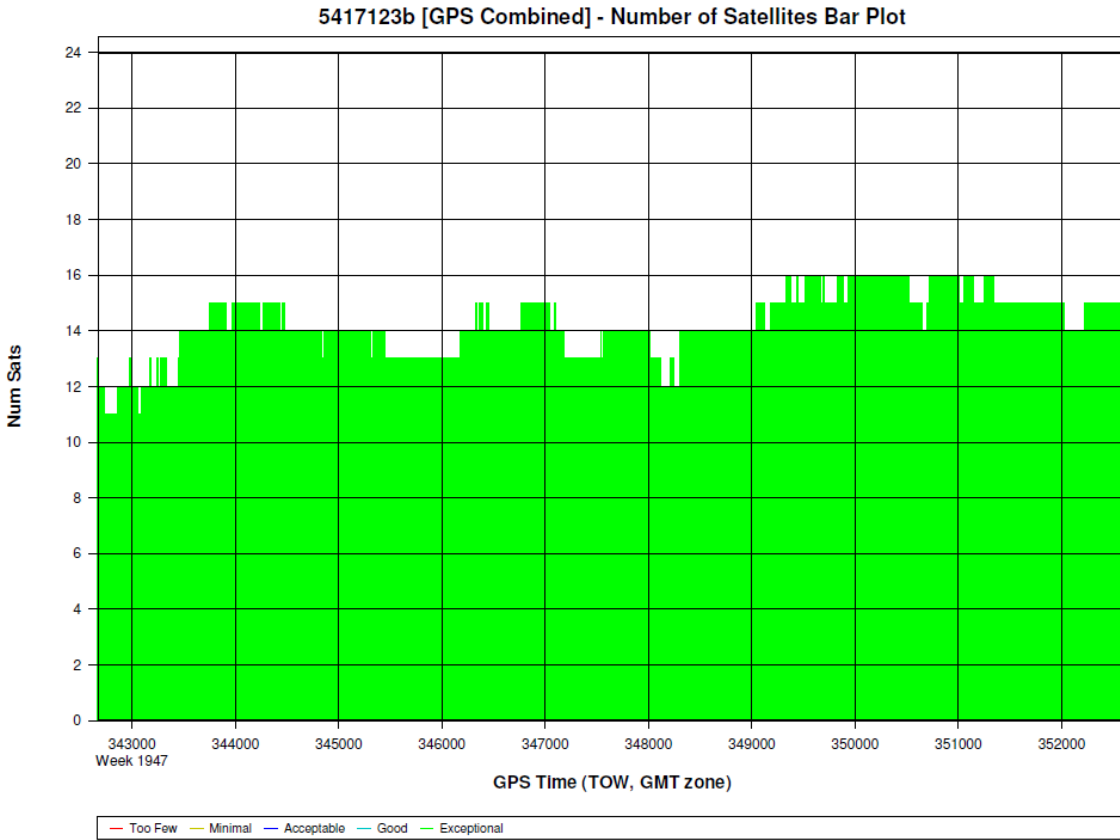

Processing Summary Information

Program: GrafNav  
Version: 8.50.4320  
Project: F:\Projects\3123\_ChoctawacheeWalton\LiDAR\5417123b\05\_INS-GPS\_PROC\01\_POS\5417123b\5417123b\GNSS\5417123b.gnv  
Solution Type: Combined

Number of Epochs:

Total in GPB file: 9977  
No processed position: 0  
Missing Fwd or Rev: 5  
With bad C/A code: 0  
With bad L1 Phase: 0

Measurement RMS Values:

L1 Phase: 0.0209 (m)  
C/A Code: 1.01 (m)  
L1 Doppler: 0.775 (m/s)

Fwd/Rev Separation RMS Values:

East: 0.007 (m)  
North: 0.013 (m)  
Height: 0.023 (m)



Fwd/Rev Sep. RMS for dual FWD/REV fixes (9972 occurrences):

East: 0.007 (m)  
North: 0.013 (m)  
Height: 0.023 (m)

Quality Number Percentages:

Q 1: 98.7 %  
Q 2: 1.3 %  
Q 3: 0.0 %  
Q 4: 0.0 %  
Q 5: 0.0 %  
Q 6: 0.0 %

Position Standard Deviation Percentages:

0.00 - 0.10 m: 100.0 %  
0.10 - 0.30 m: 0.0 %  
0.30 - 1.00 m: 0.0 %  
1.00 - 5.00 m: 0.0 %  
5.00 m + over: 0.0 %



Percentages of epochs with DD\_DOP over 10.00:



DOP over Tol: 0.0 %



Baseline Distances:



Maximum: 90.847 (km)  
Minimum: 2.628 (km)  
Average: 33.138 (km)  
First Epoch: 15.534 (km)  
Last Epoch: 16.451 (km)


## **MISSION 4 – 5417123B SENSOR ERRORS**

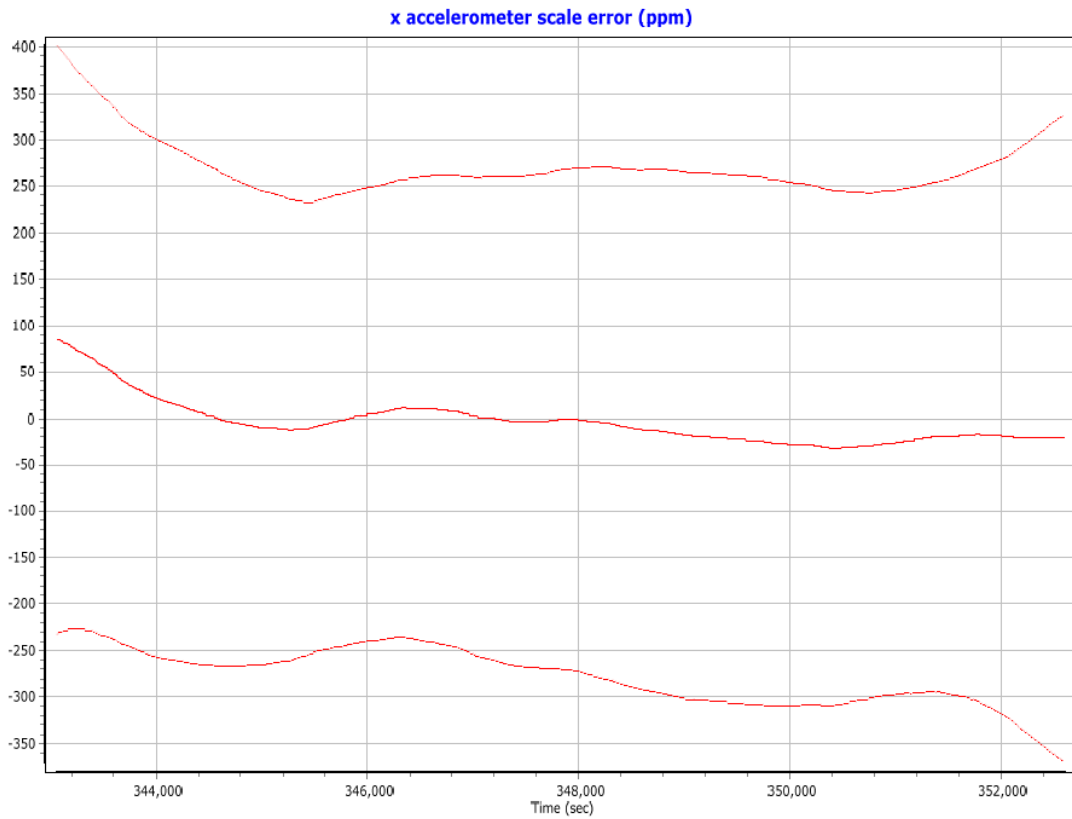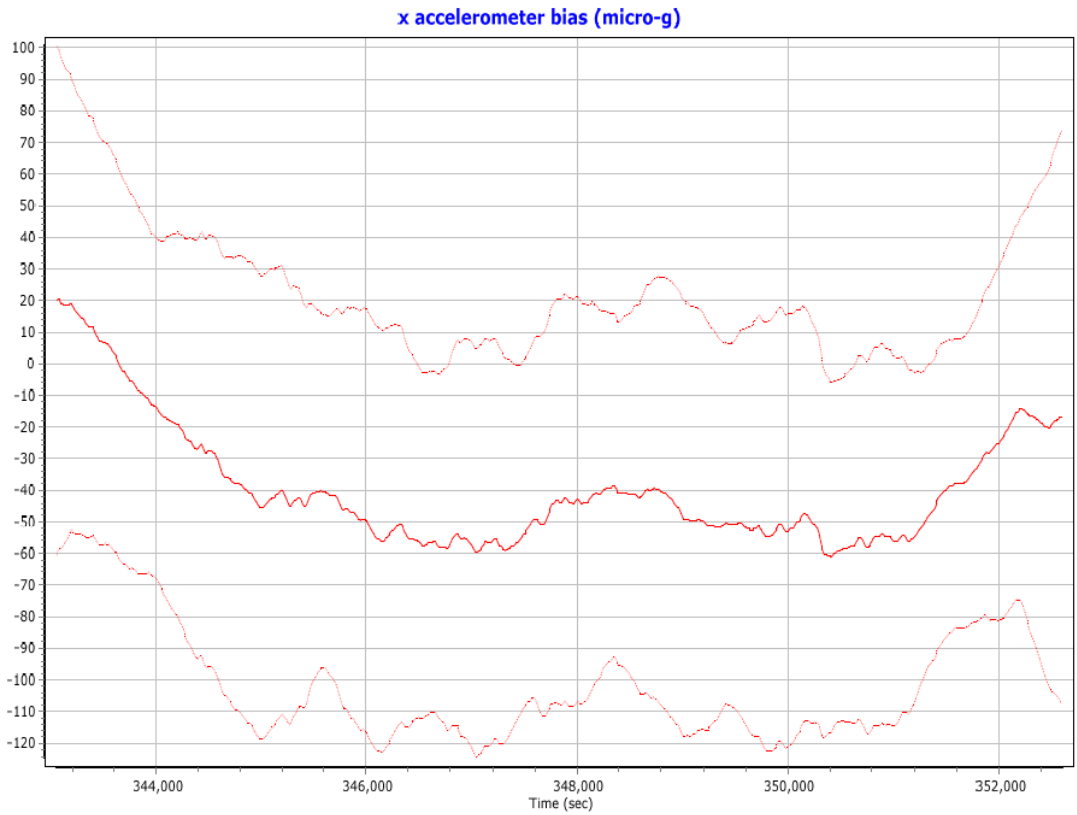

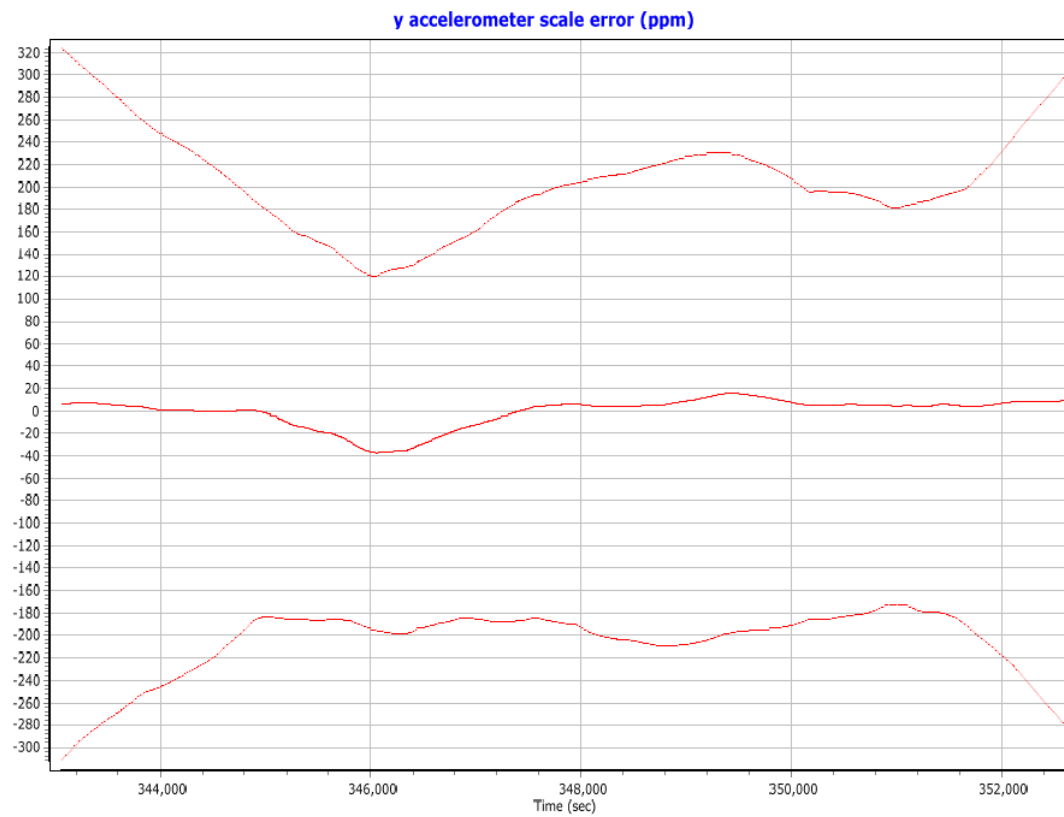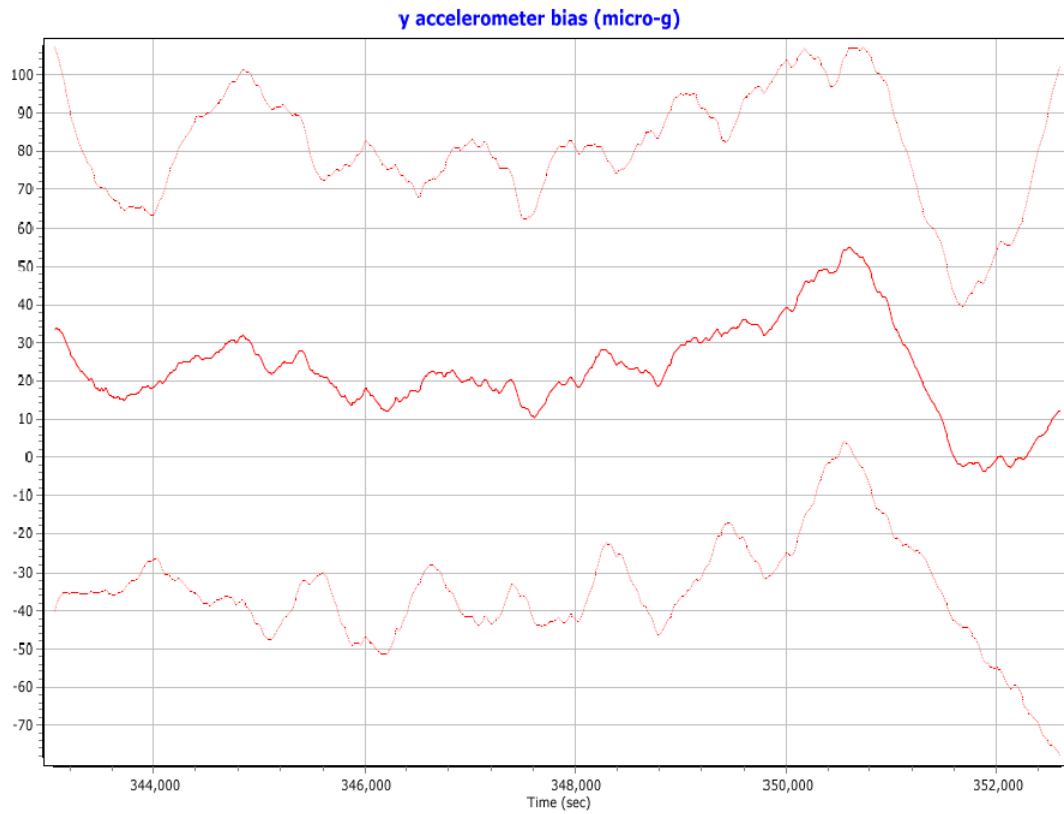

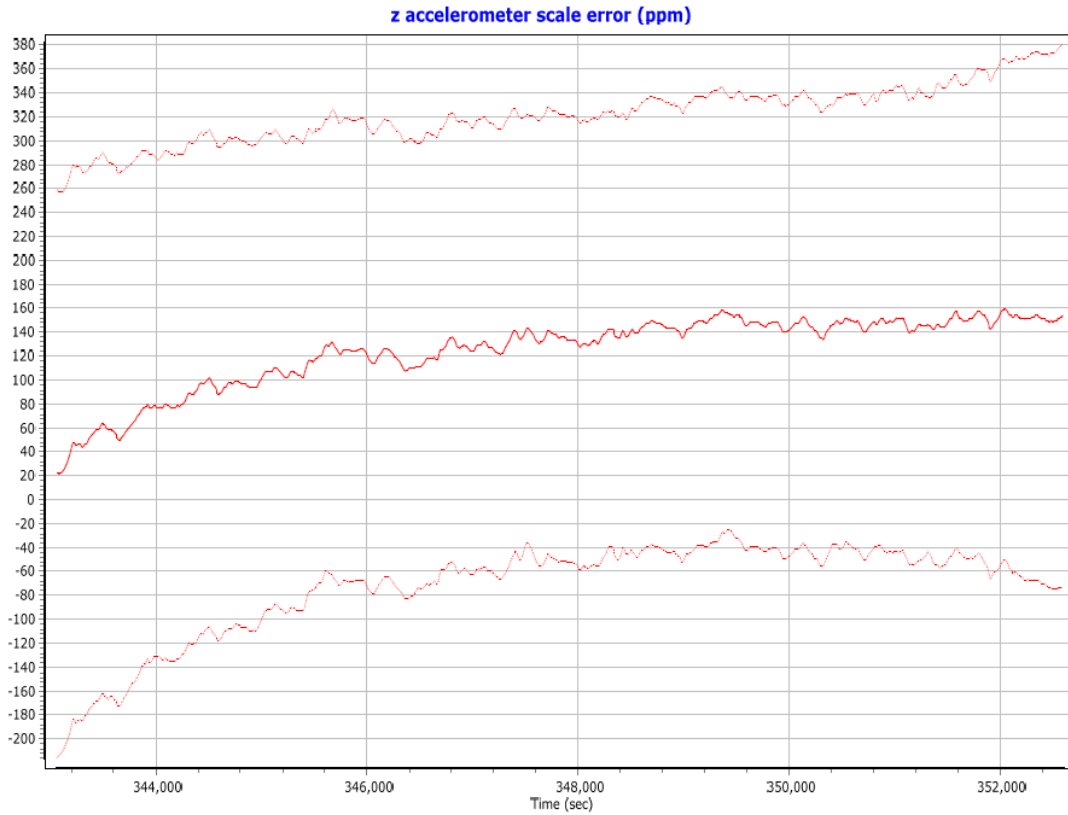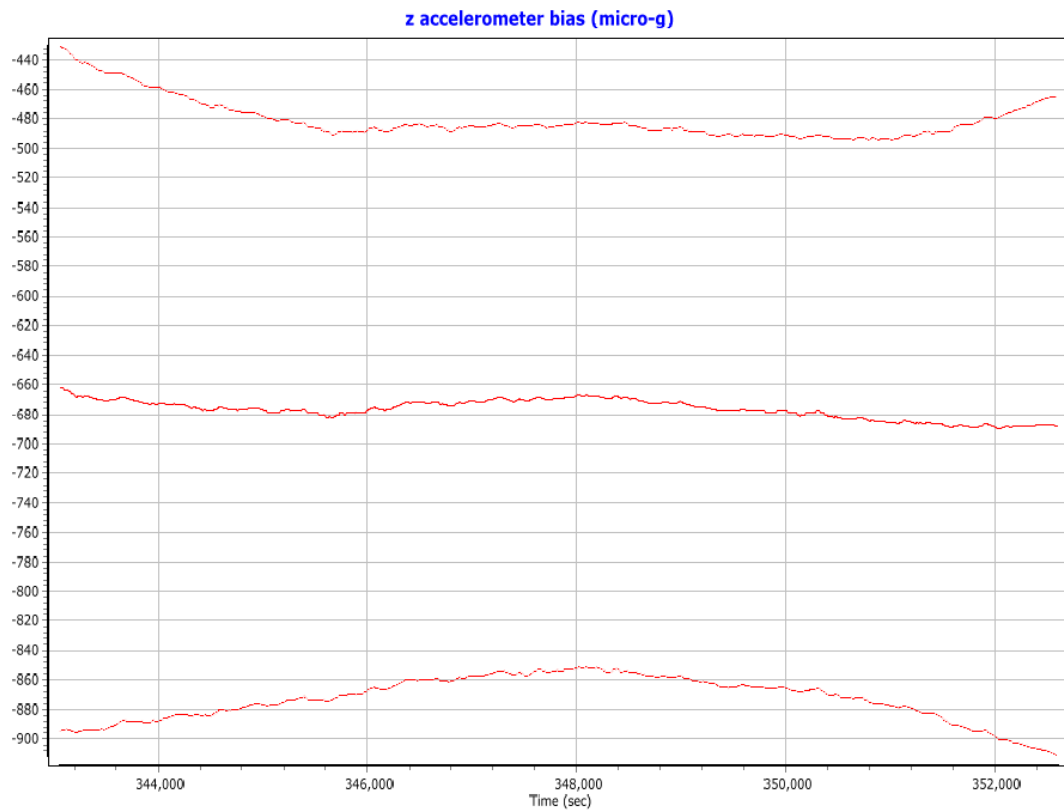

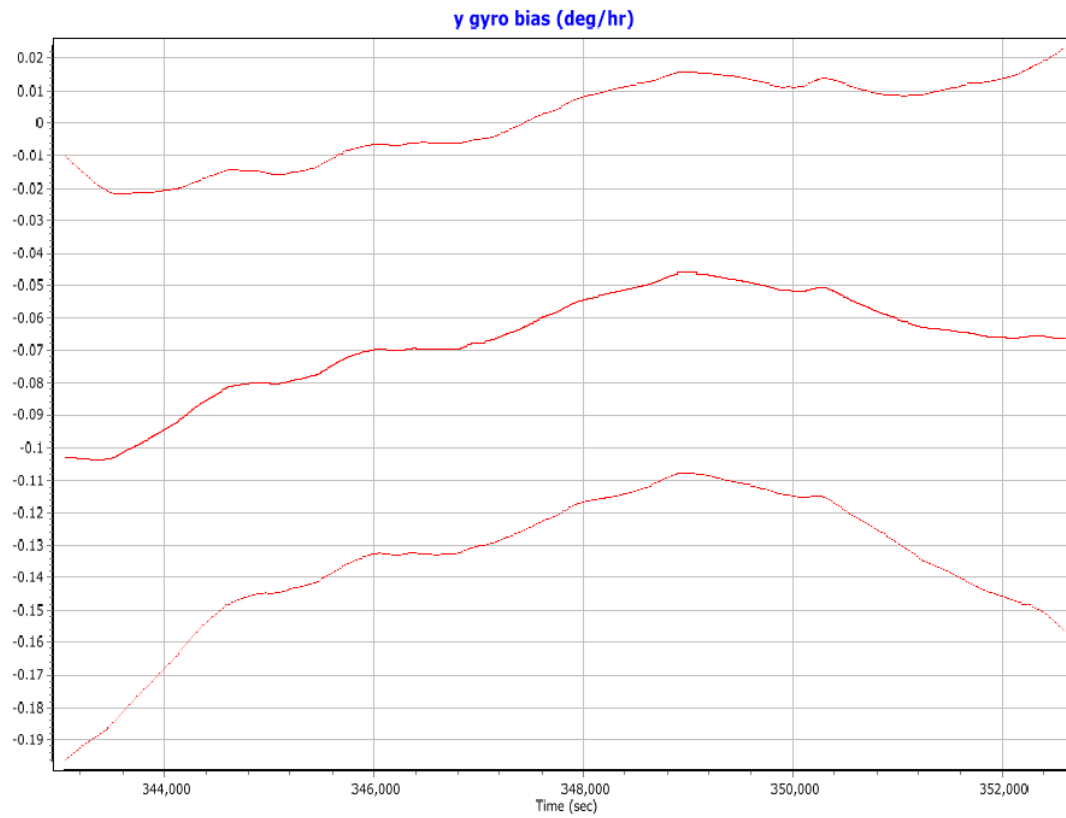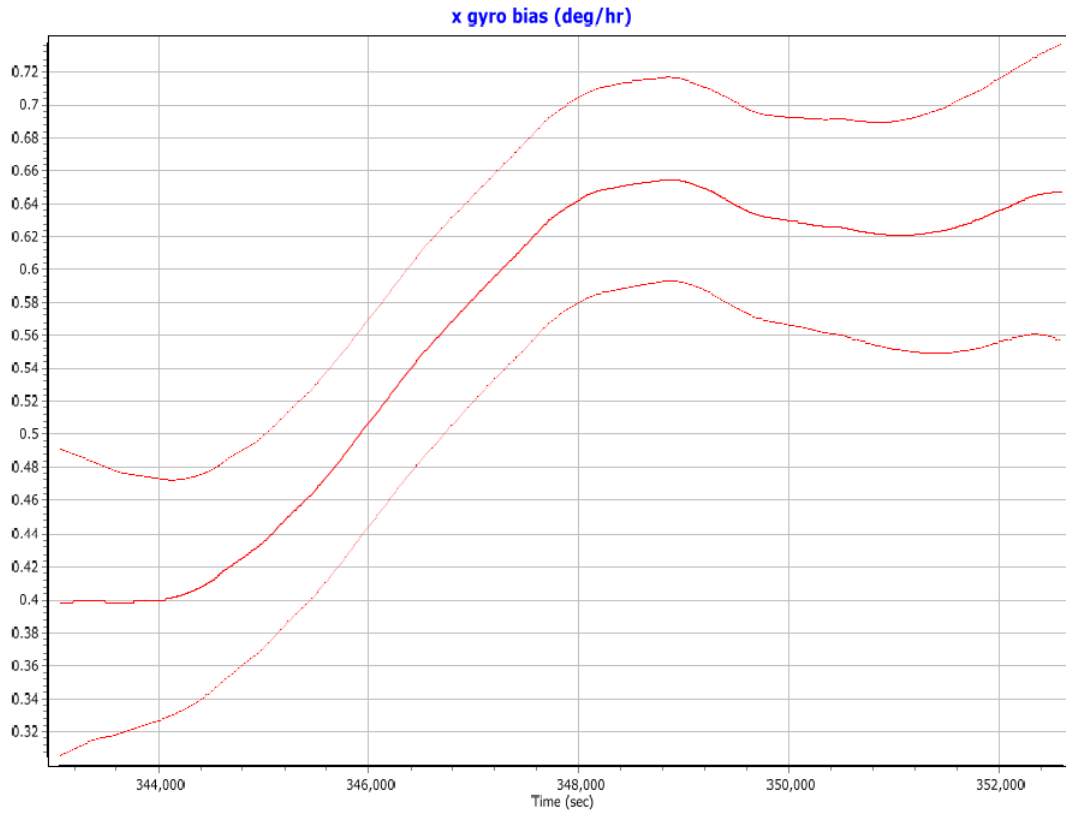


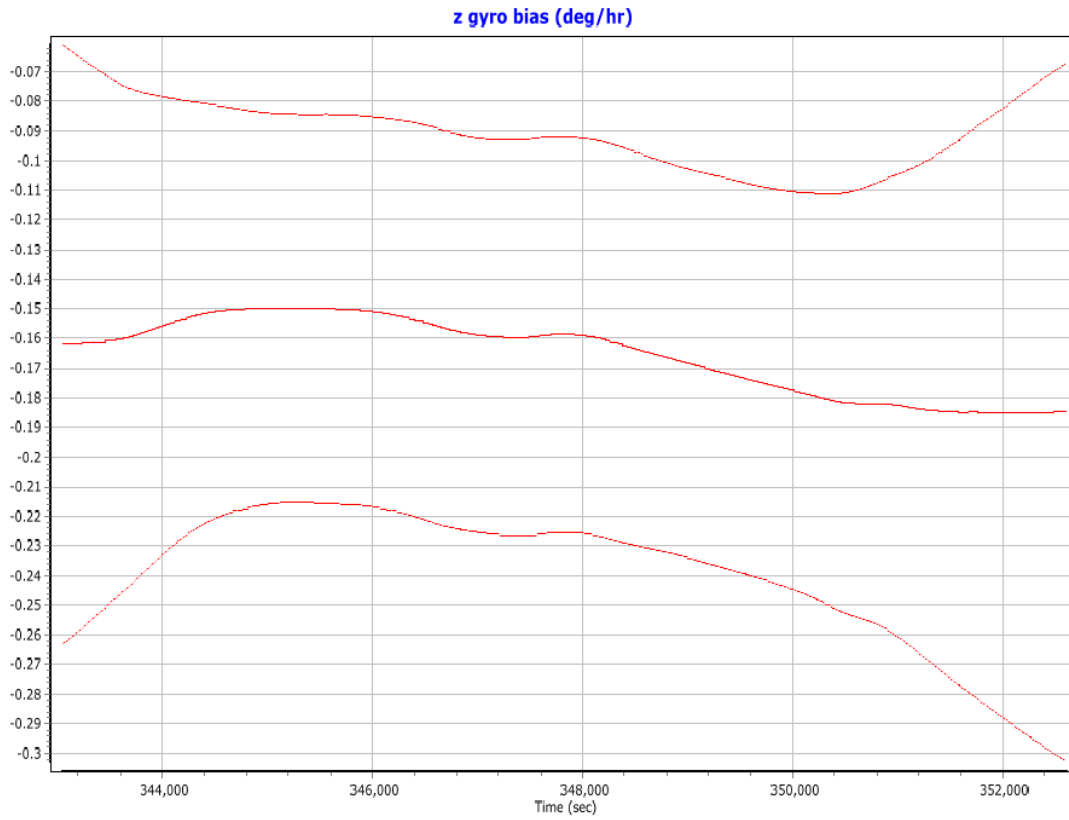


Mission 5 – 5417126a GNSS Processing


Project: 5417126a


GrafNav v8.50.4320

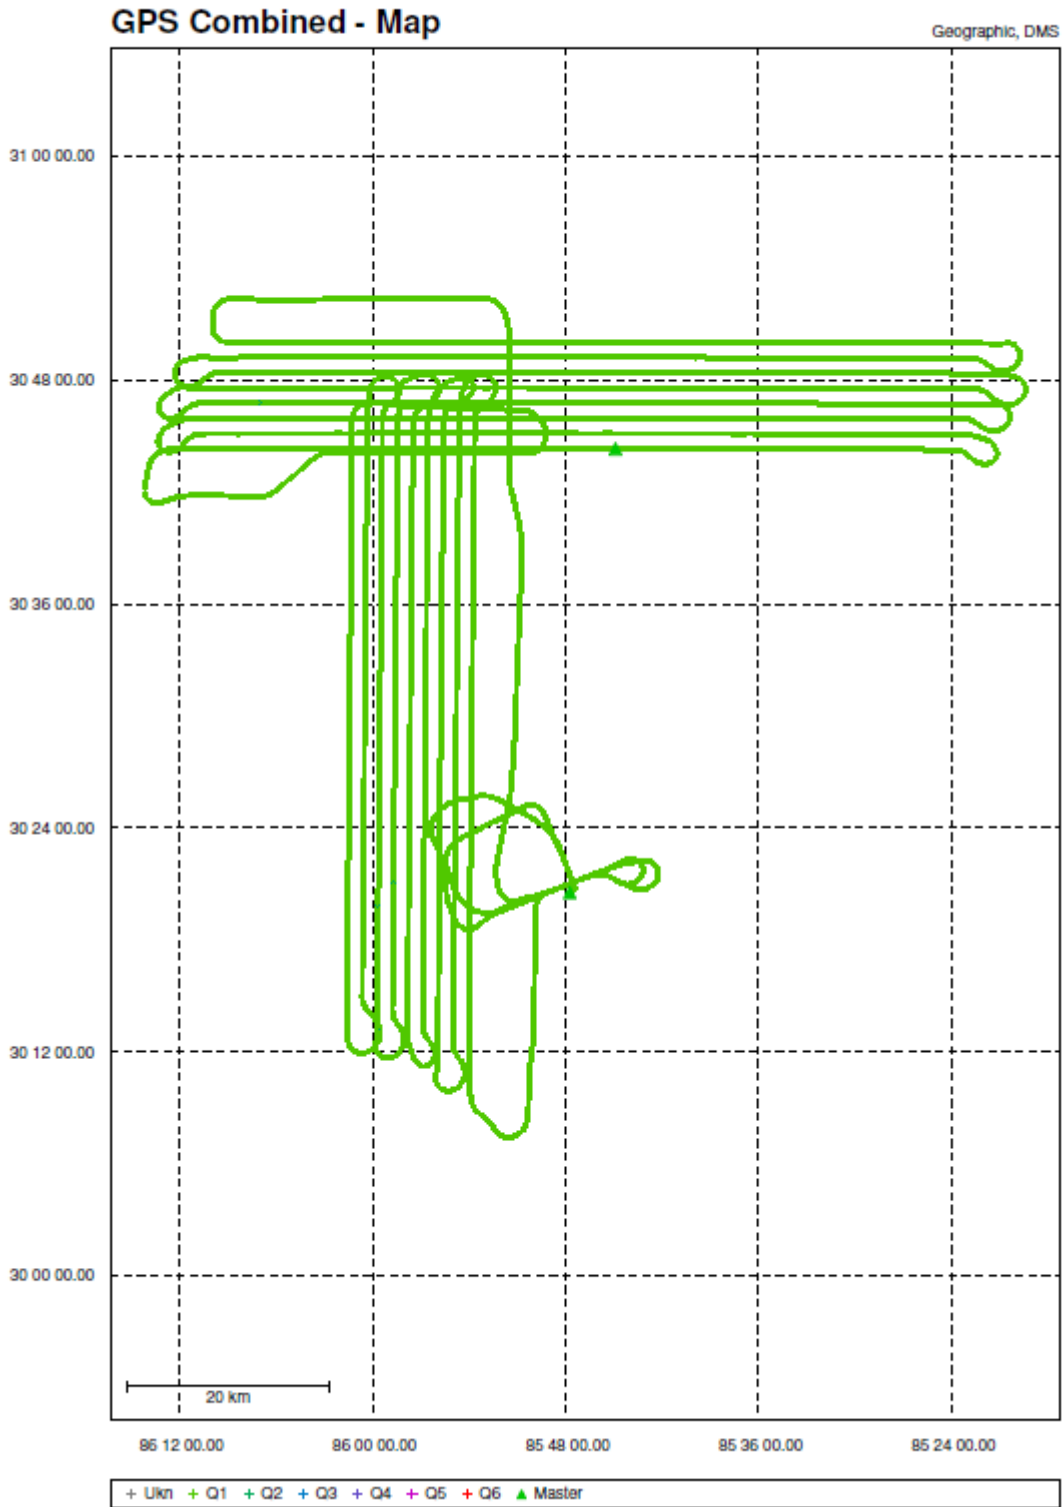

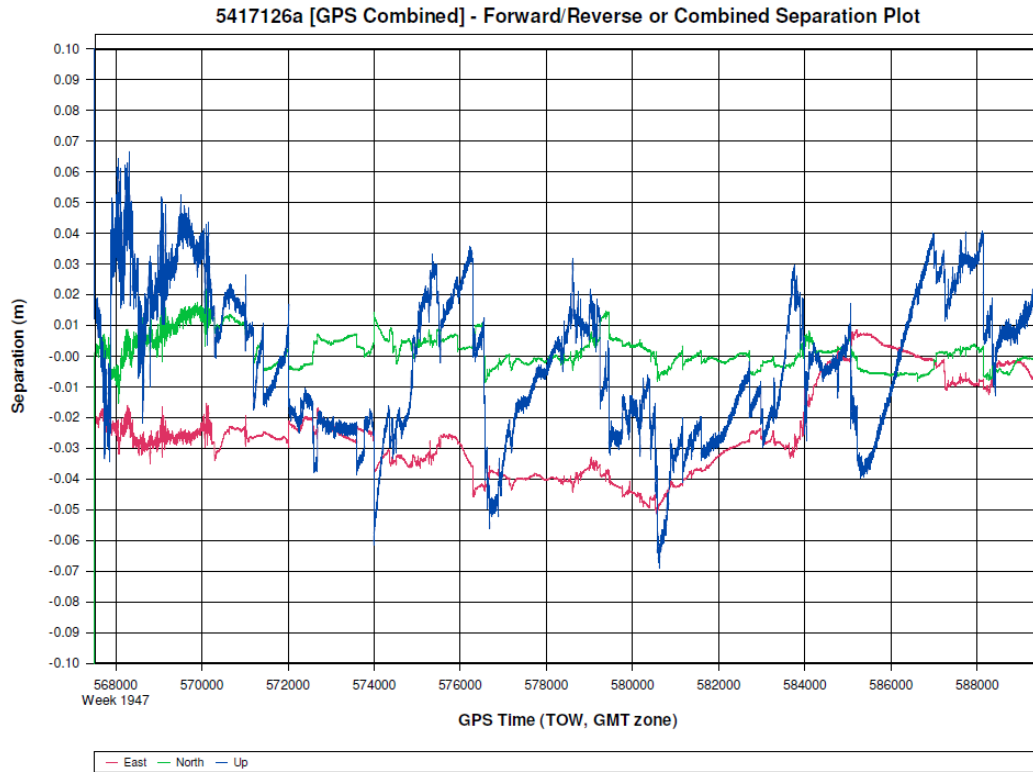



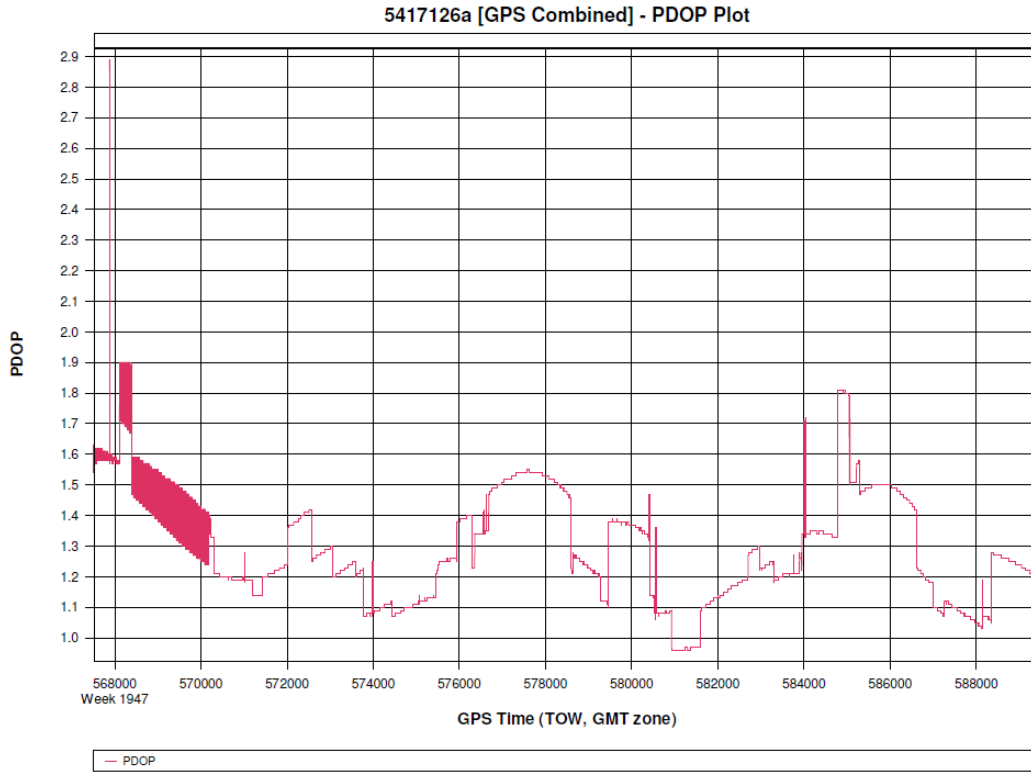

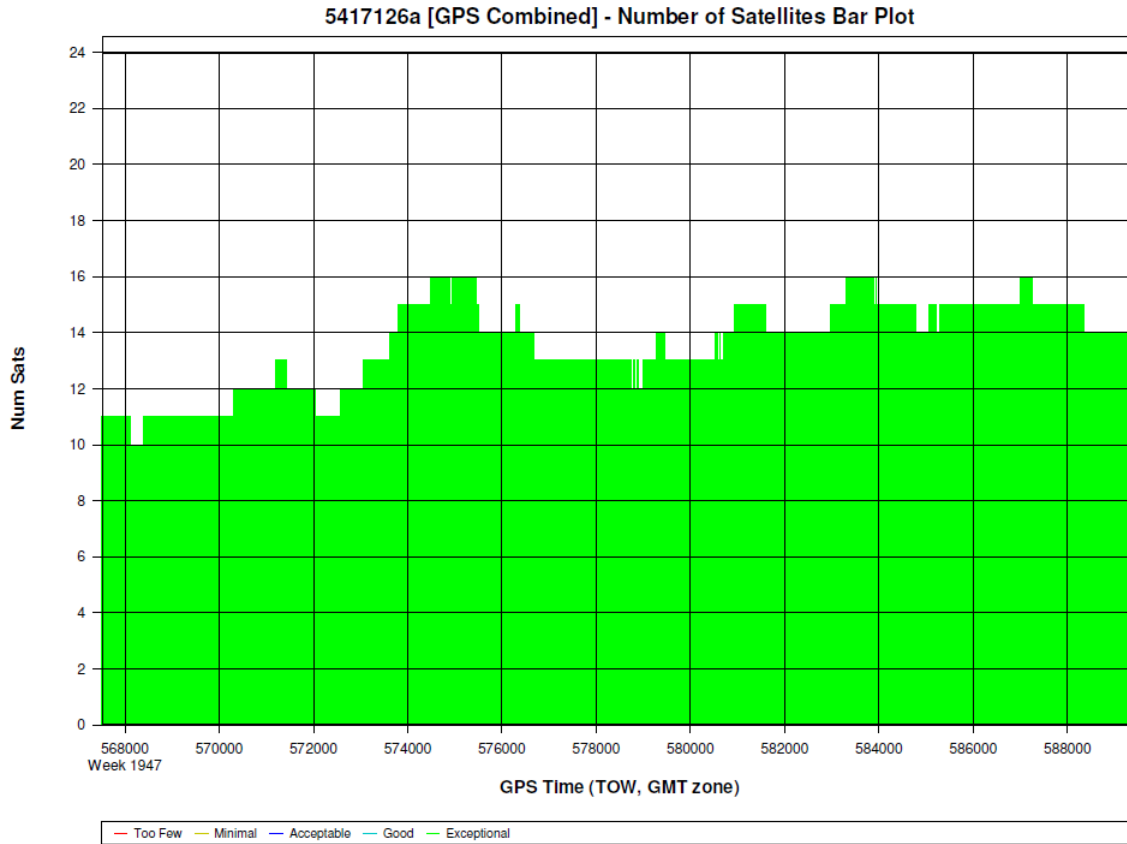

Processing Summary Information

Program: GrafNav

Version: 8.50.4320

Project: F:\Projects\3123\_ChoctawacheeWalton\LIDAR\5417126a\05\_INS-GPS\_PROC\01\_POS\5417126a\5417126a\GNSS\5417126a.gnv

Solution Type: Combined

Number of Epochs:

Total in GPB file:	22399
No processed position:	400
Missing Fwd or Rev:	3
With bad C/A code:	0
With bad L1 Phase:	0

Measurement RMS Values:

L1 Phase:	0.0209 (m)
C/A Code:	0.77 (m)
L1 Doppler:	0.782 (m/s)

Fwd/Rev Separation RMS Values:

East: 0.028 (m)  
North: 0.006 (m)  
Height: 0.024 (m)

Fwd/Rev Sep. RMS for dual FWD/REV fixes (21995 occurances):

East: 0.028 (m)  
North: 0.006 (m)  
Height: 0.023 (m)

Quality Number Percentages:

Q 1: 99.9 %  
Q 2: 0.1 %  
Q 3: 0.0 %  
Q 4: 0.0 %  
Q 5: 0.0 %  
Q 6: 0.0 %

Position Standard Deviation Percentages:

0.00 - 0.10 m: 100.0 %  
0.10 - 0.30 m: 0.0 %  
0.30 - 1.00 m: 0.0 %  
1.00 - 5.00 m: 0.0 %  
5.00 m + over: 0.0 %

Percentages of epochs with DD\_DOP over 10.00:


DOP over Tol: 0.0 %

Baseline Distances:


Maximum: 52.944 (km)  
Minimum: 7.649 (km)  
Average: 30.511 (km)  
First Epoch: 22.009 (km)  
Last Epoch: 21.782 (km)



### MISSION 5 – 5417126A SENSOR ERRORS



x accelerometer bias (micro-g)


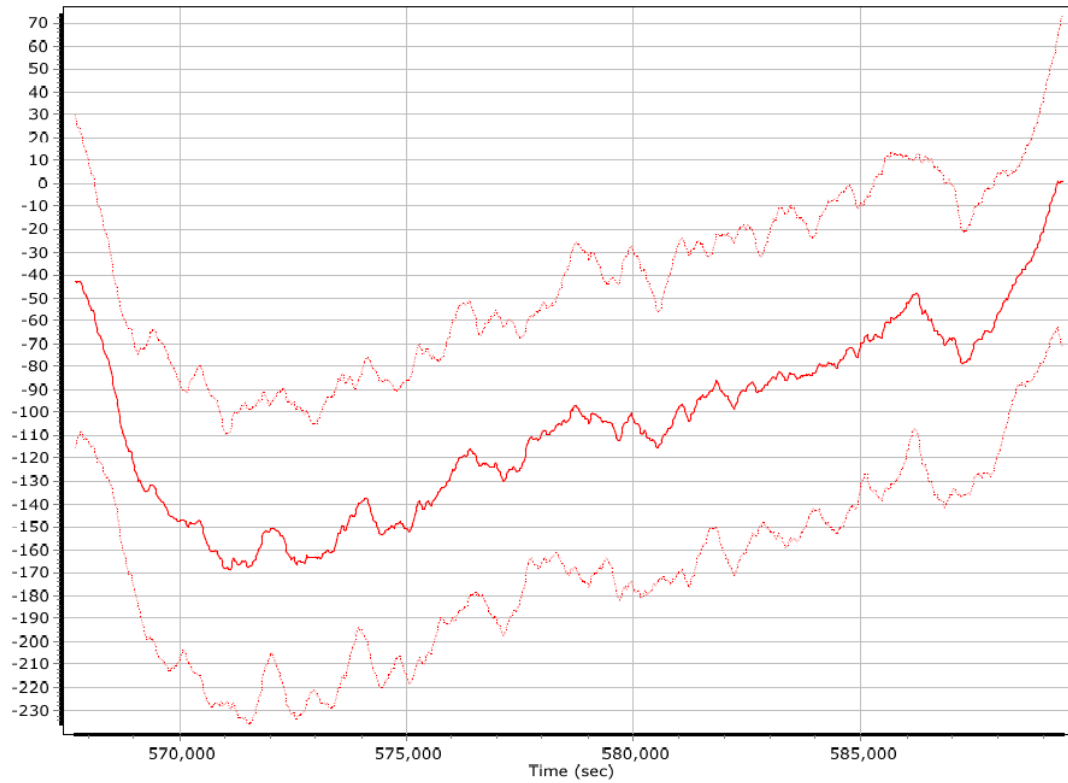



x accelerometer scale error (ppm)

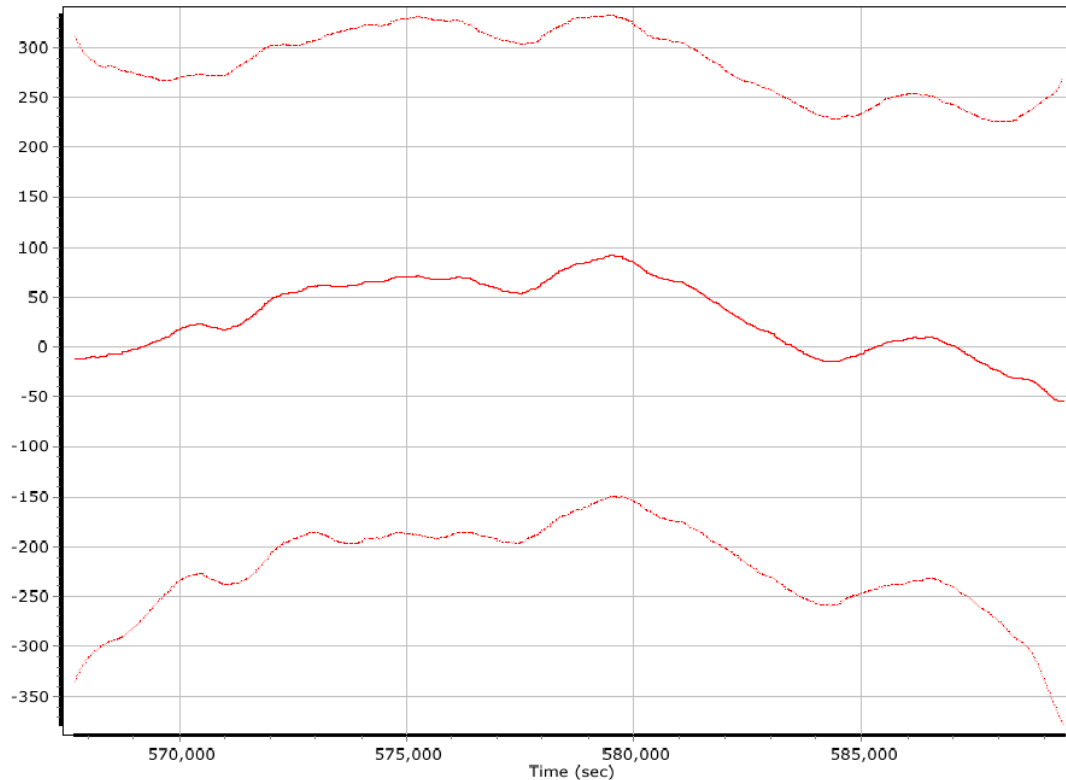

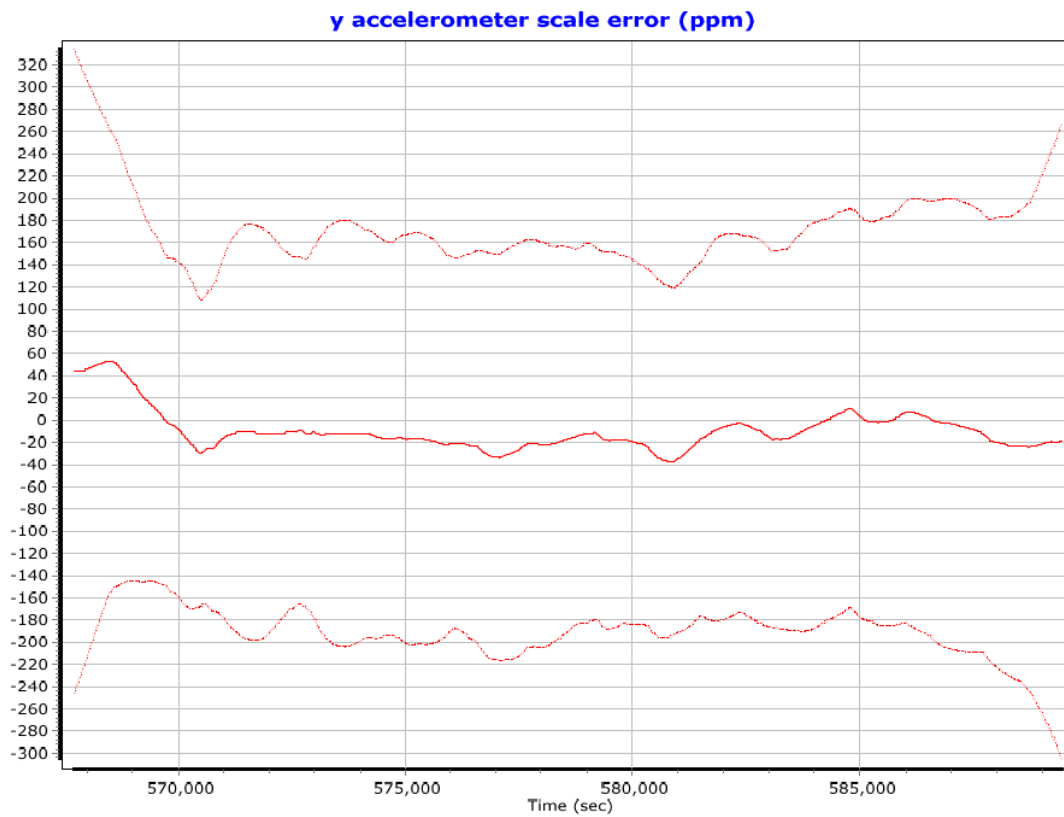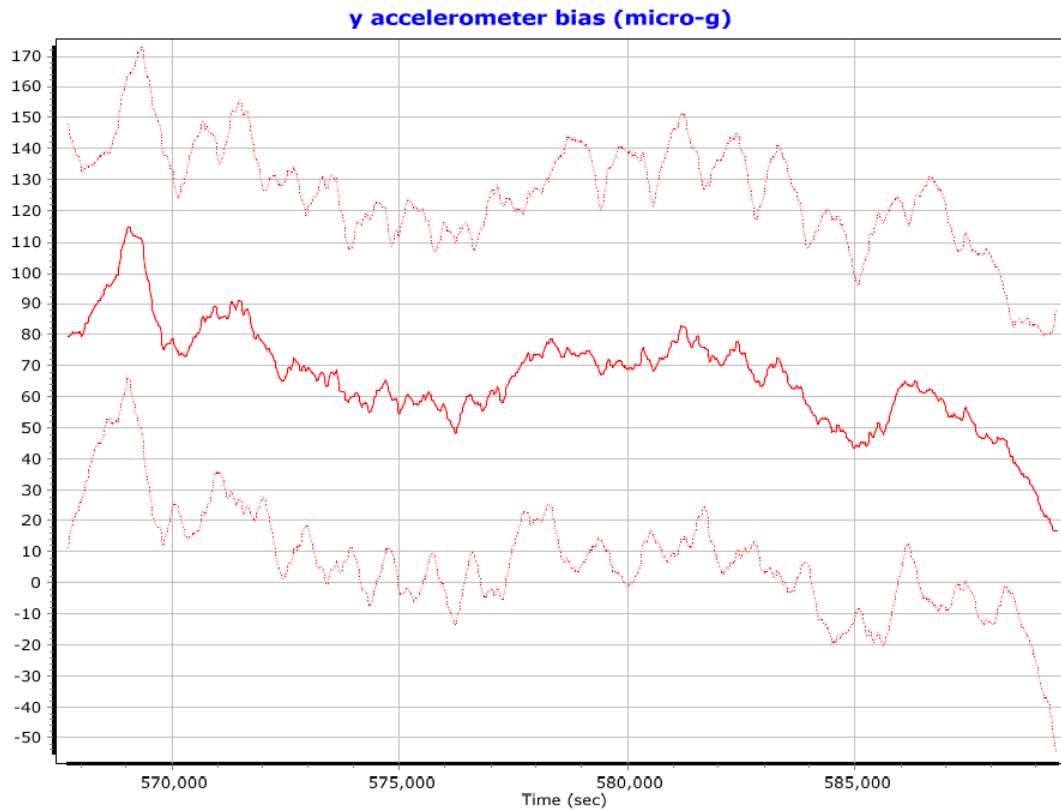

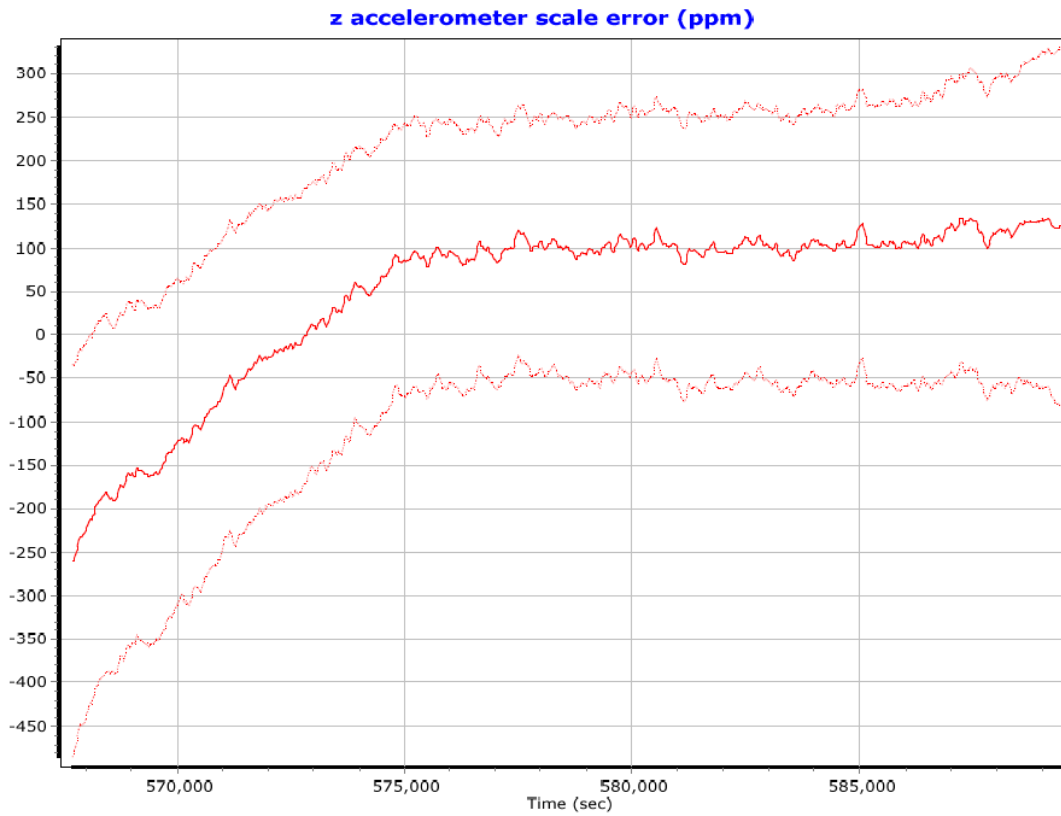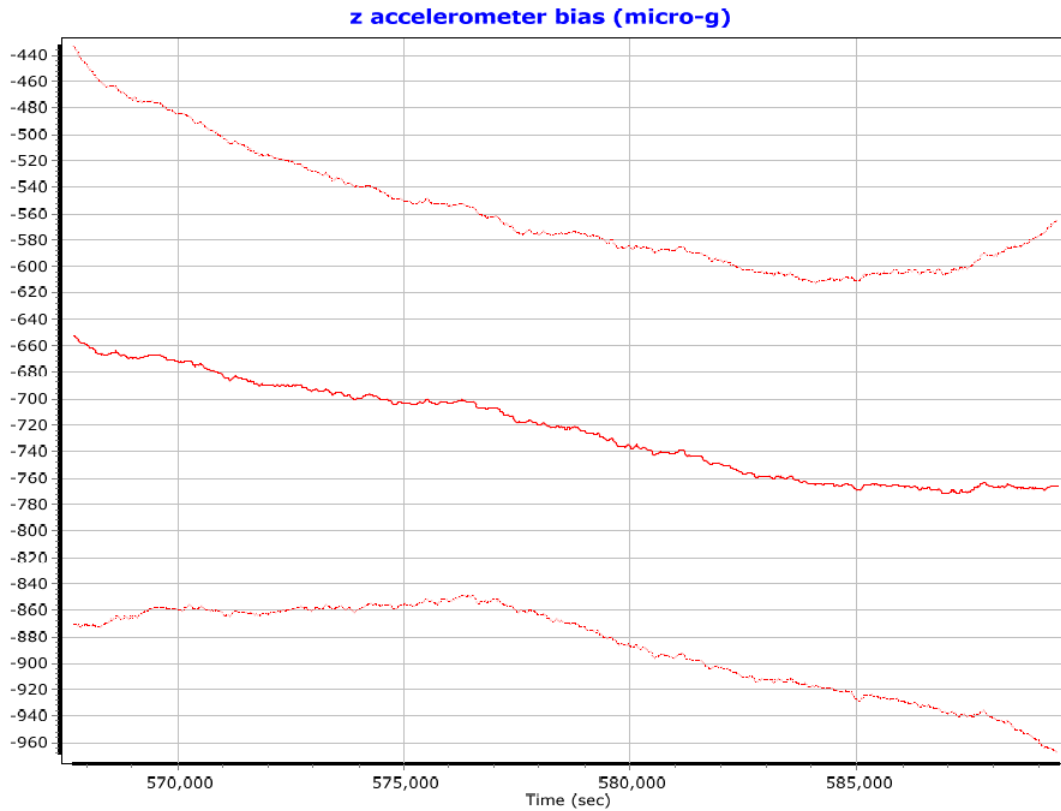

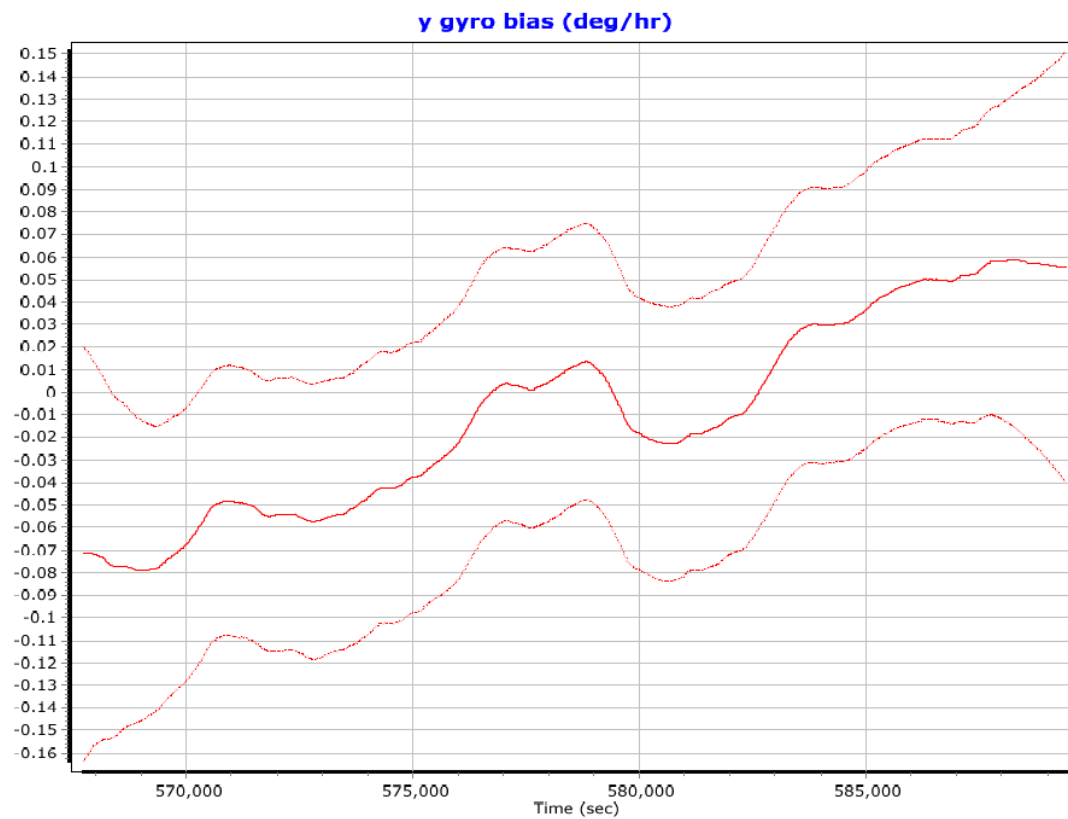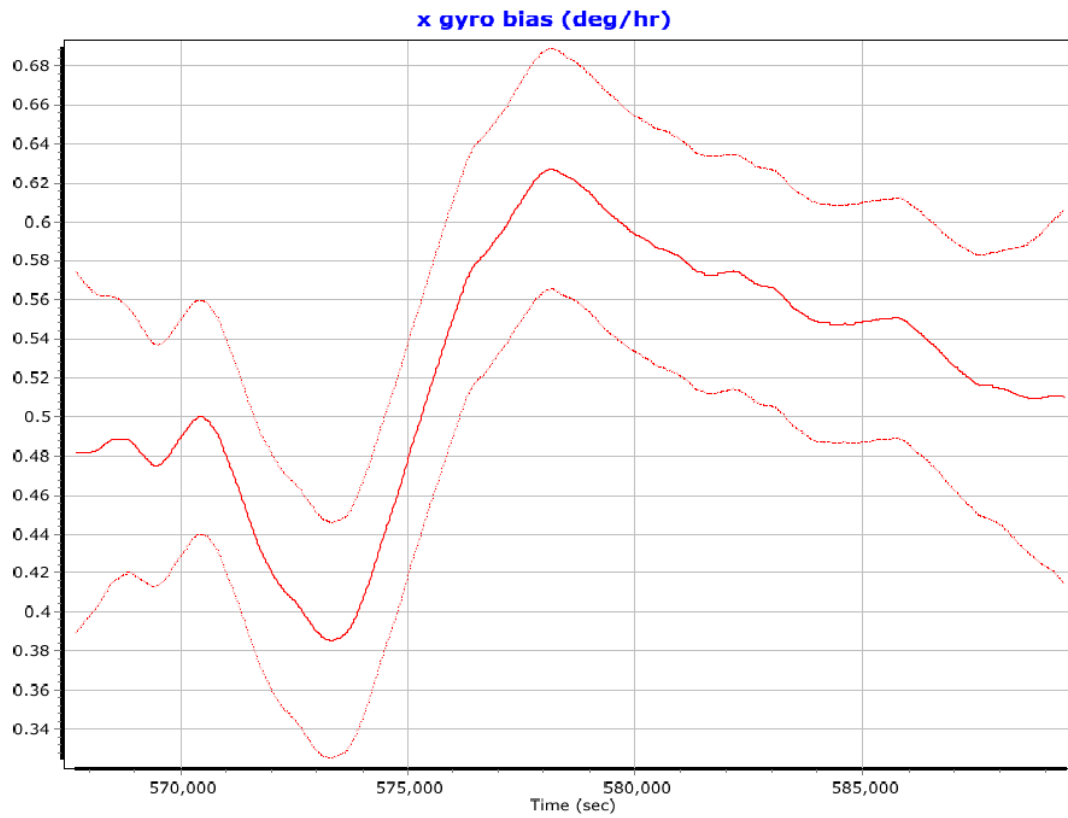

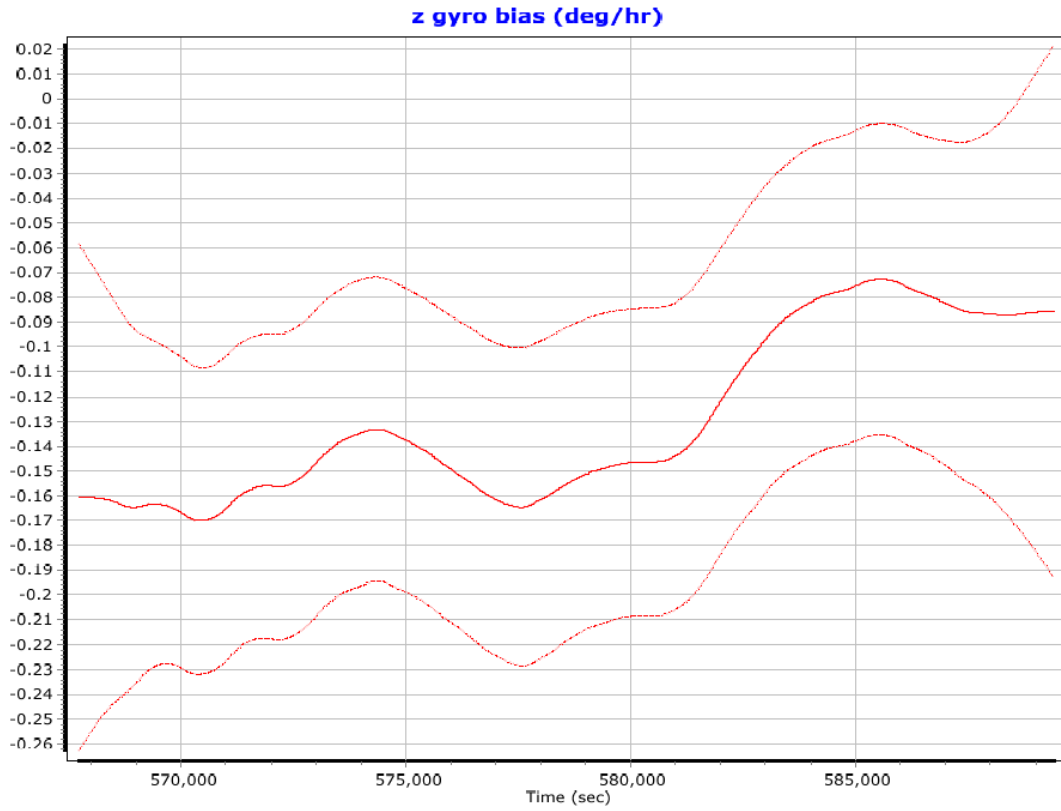






## MISSION 6 – 5417126B GNSS PROCESSING


Project: 5417126b

GrafNav v8.50.4320

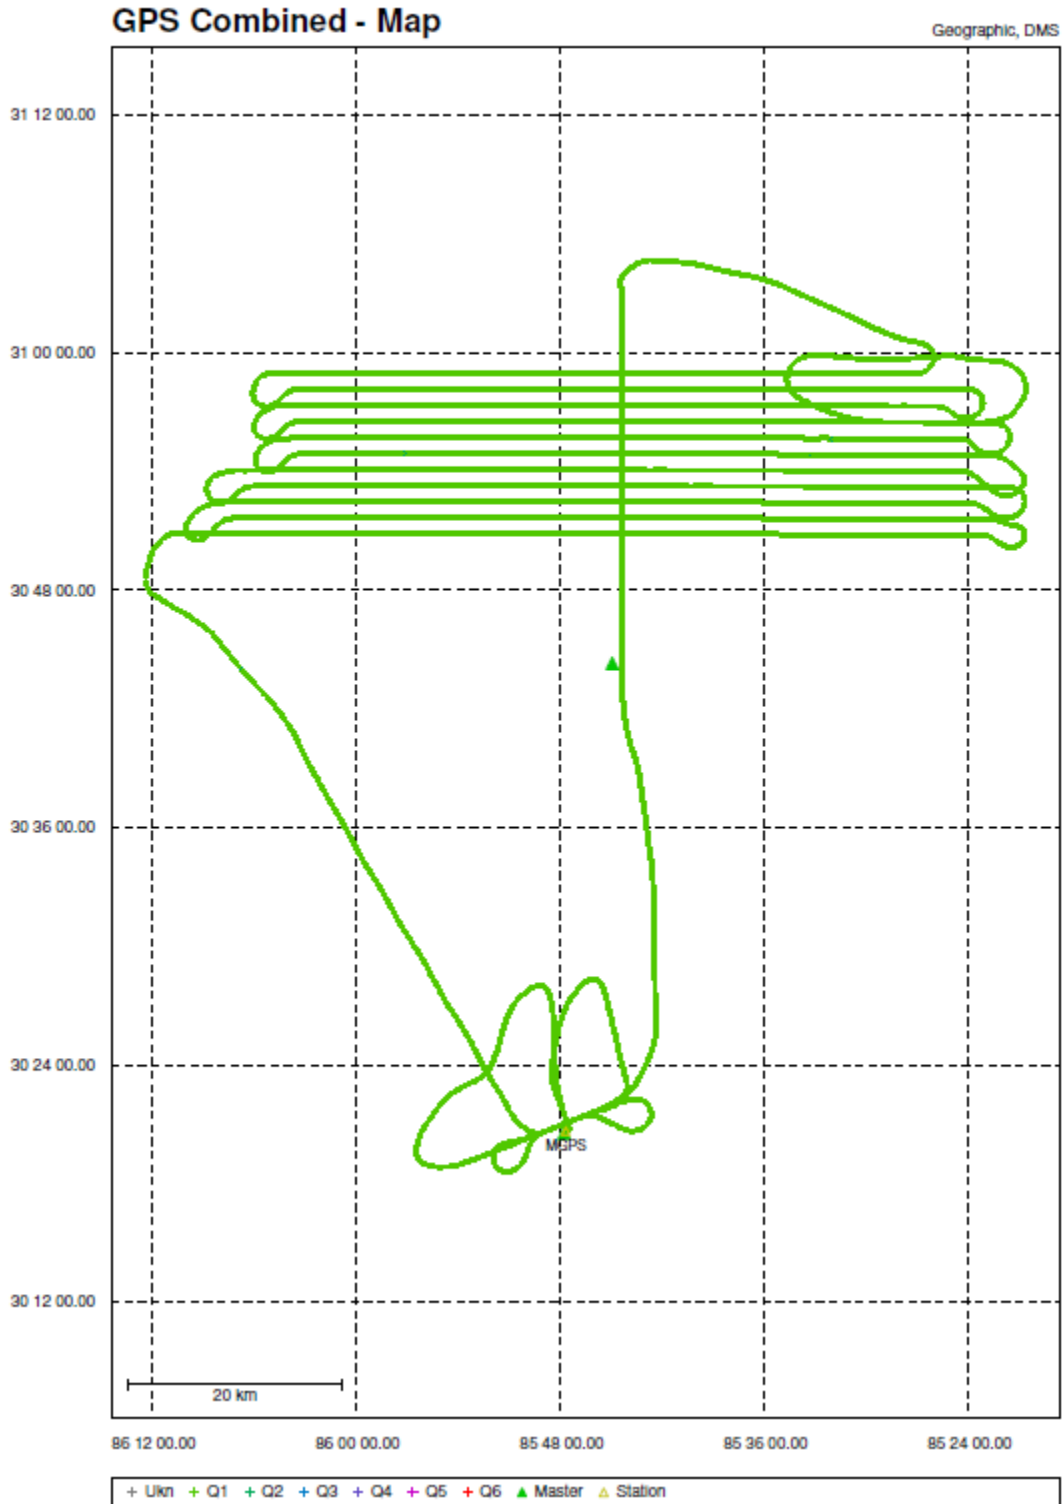

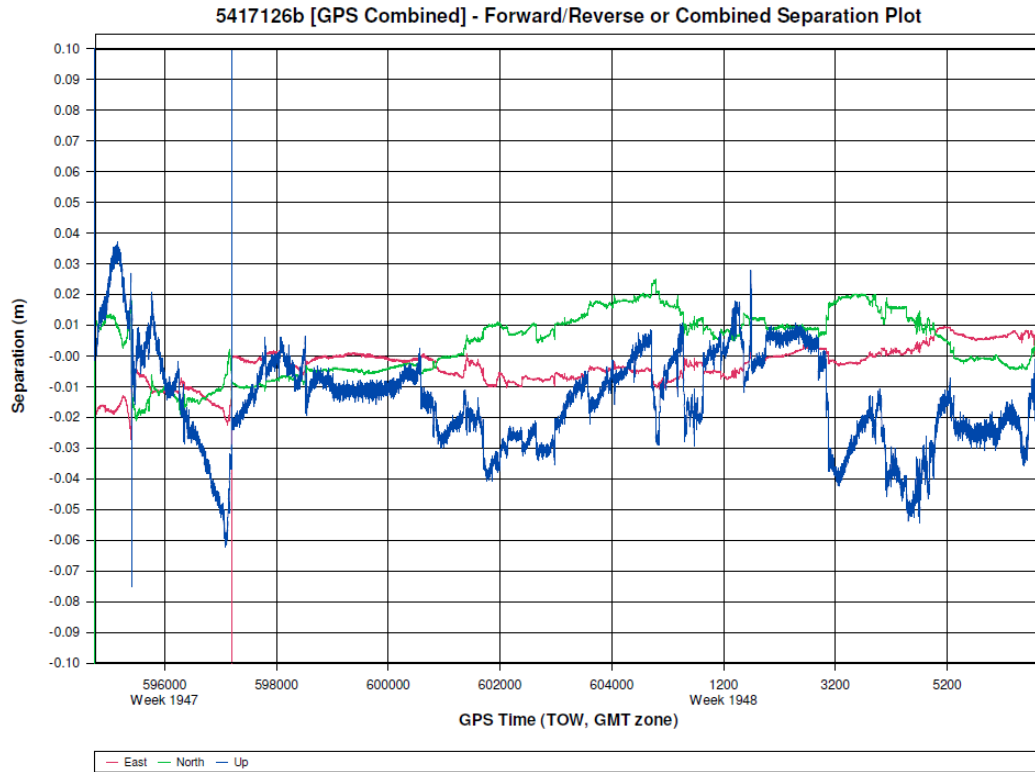

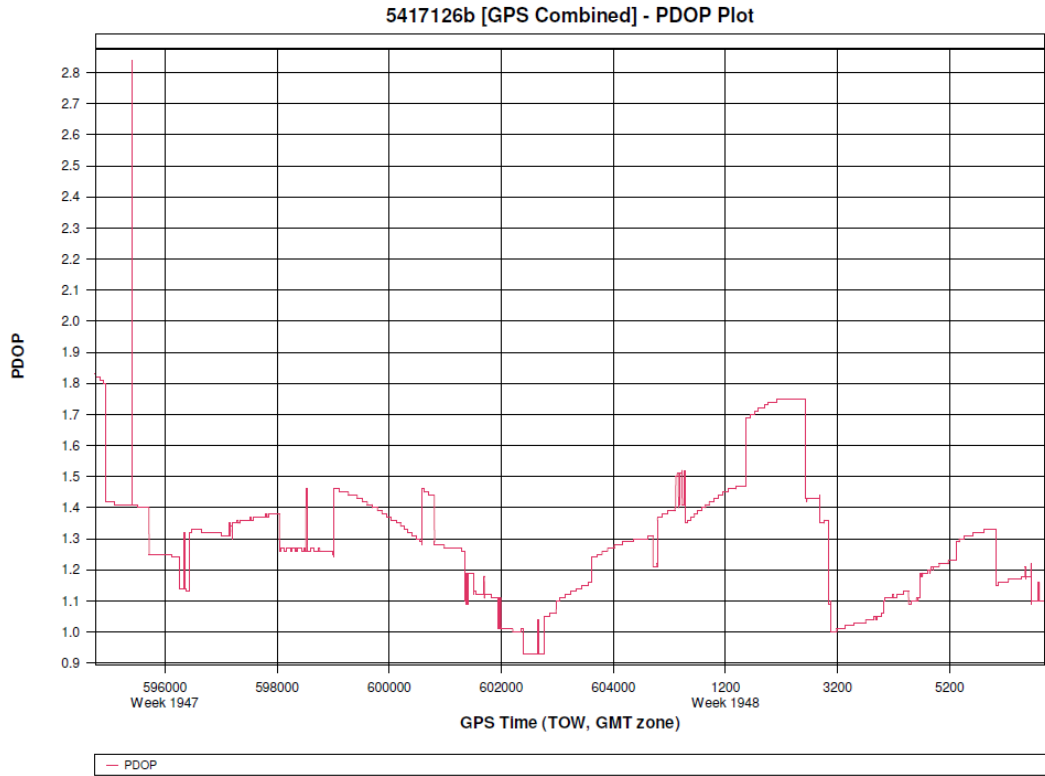

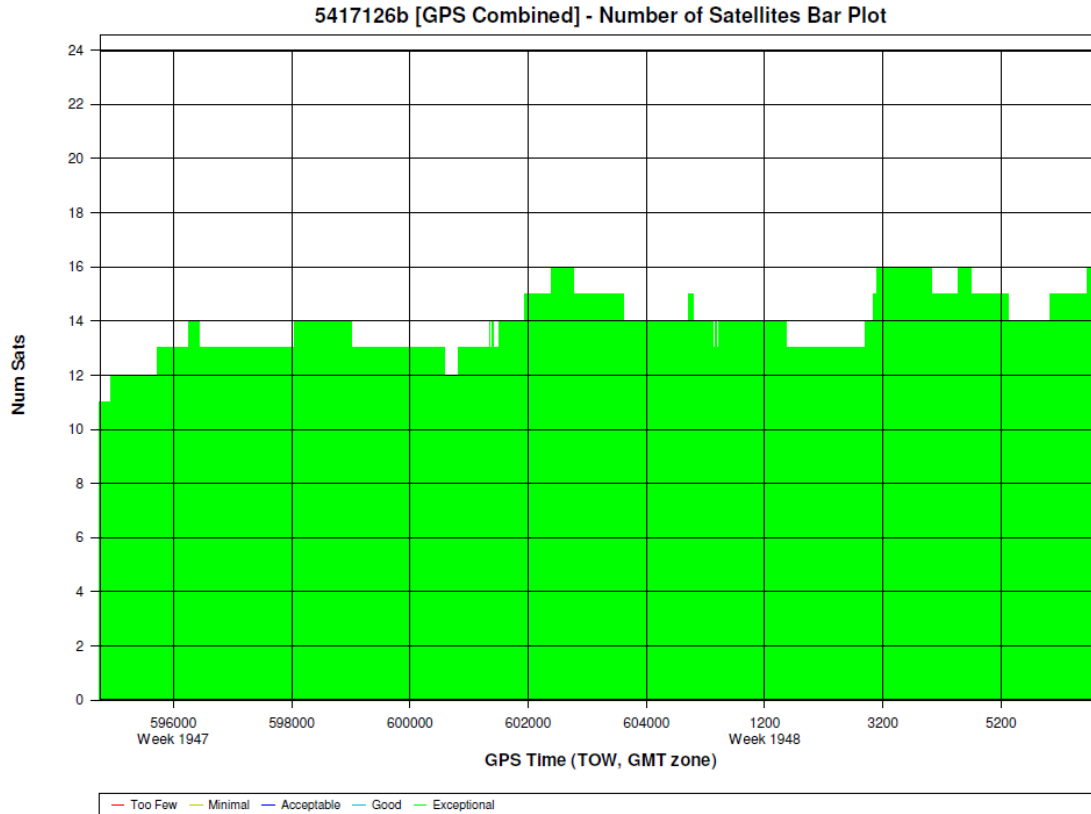

Processing Summary Information

Program: GrafNav  
 Version: 8.50.4320  
 Project: F:\Projects\3123\_ChoctawacheeWalton\LIDAR\5417126b\05\_INS-GPS\_PROC\01\_POS\5417126b\5417126b\GNSS\5417126b.gnv  
 Solution Type: Combined

Number of Epochs:  
 Total in GPB file: 16973  
 No processed position: 0  
 Missing Fwd or Rev: 8  
 With bad C/A code: 0  
 With bad L1 Phase: 0

Measurement RMS Values:  
 L1 Phase: 0.0176 (m)  
 C/A Code: 0.85 (m)  
 L1 Doppler: 0.793 (m/s)

Fwd/Rev Separation RMS Values:  
 East: 0.007 (m)  
 North: 0.011 (m)  
 Height: 0.028 (m)

Fwd/Rev Sep. RMS for dual FWD/REV fixes (16963 occurrences):  
 East: 0.007 (m)

North: 0.011 (m)  
Height: 0.021 (m)

Quality Number Percentages:

Q 1: 99.9 %  
Q 2: 0.1 %  
Q 3: 0.0 %  
Q 4: 0.0 %  
Q 5: 0.0 %  
Q 6: 0.0 %

Position Standard Deviation Percentages:

0.00 - 0.10 m: 100.0 %  
0.10 - 0.30 m: 0.0 %  
0.30 - 1.00 m: 0.0 %  
1.00 - 5.00 m: 0.0 %  
5.00 m + over: 0.0 %

Percentages of epochs with DD\_DOP over 10.00:


DOP over Tol: 0.0 %

Baseline Distances:


Maximum: 63.937 (km)  
Minimum: 6.050 (km)  
Average: 40.406 (km)  
First Epoch: 21.791 (km)  
Last Epoch: 21.785 (km)



### MISSION 6 – 5417126B SENSOR ERRORS



x accelerometer bias (micro-g)

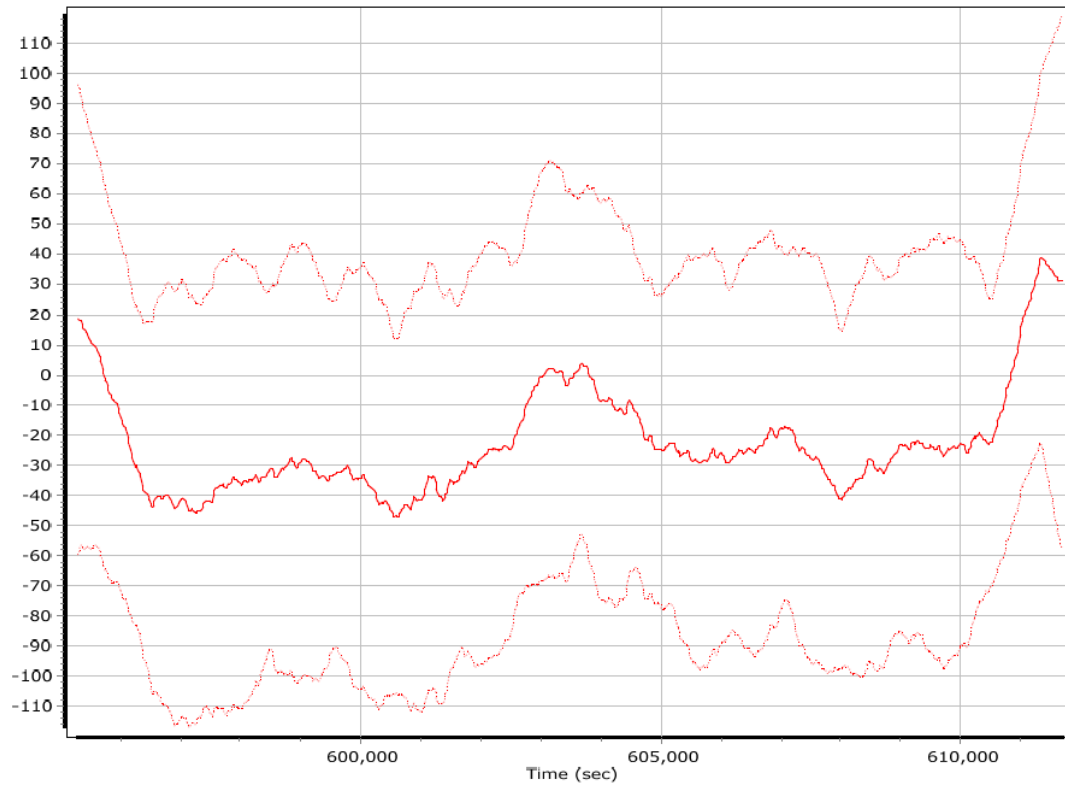



x accelerometer scale error (ppm)

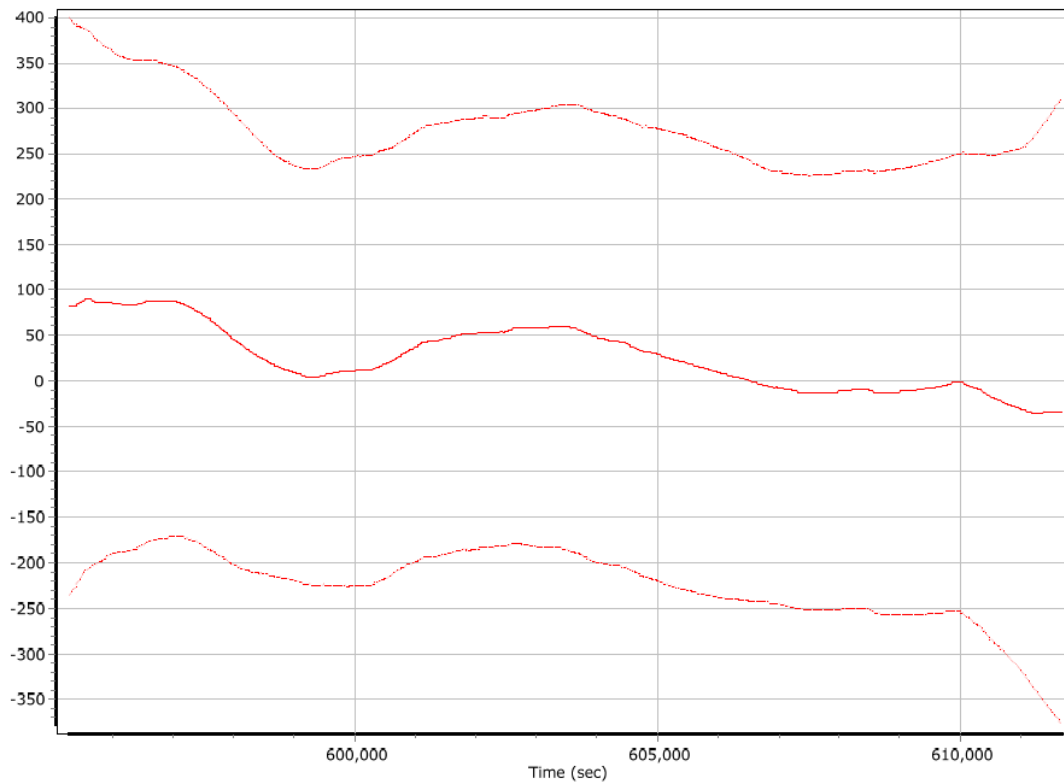


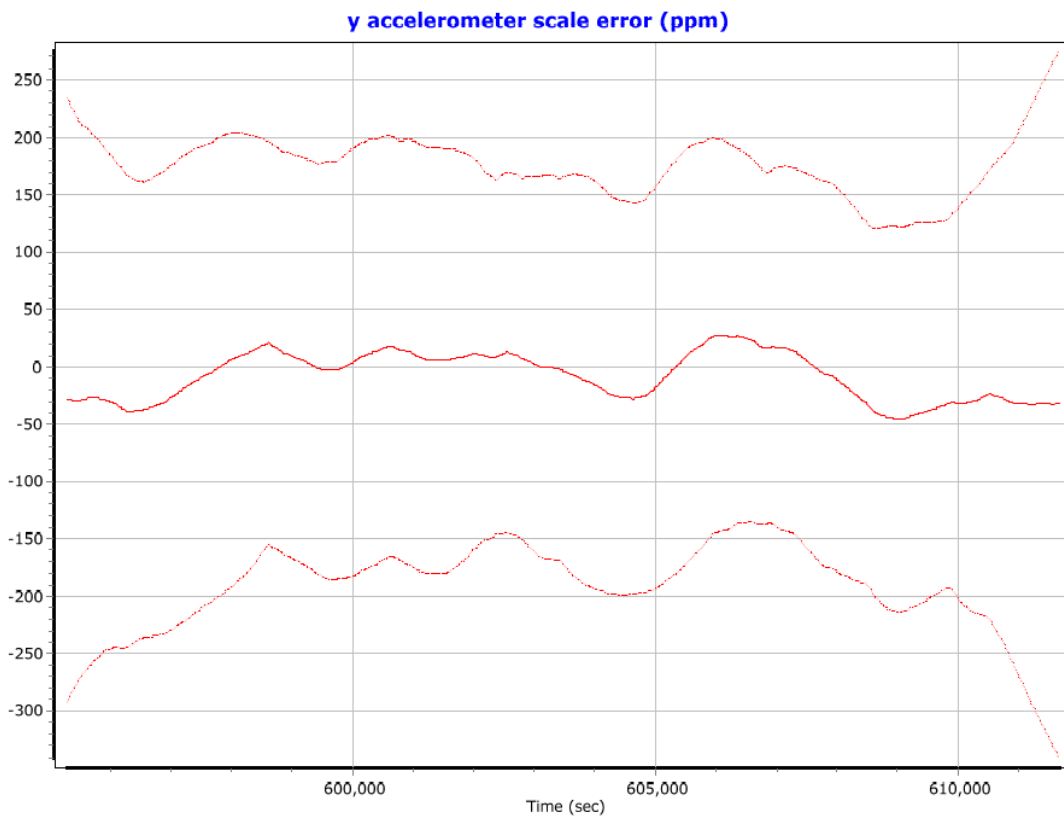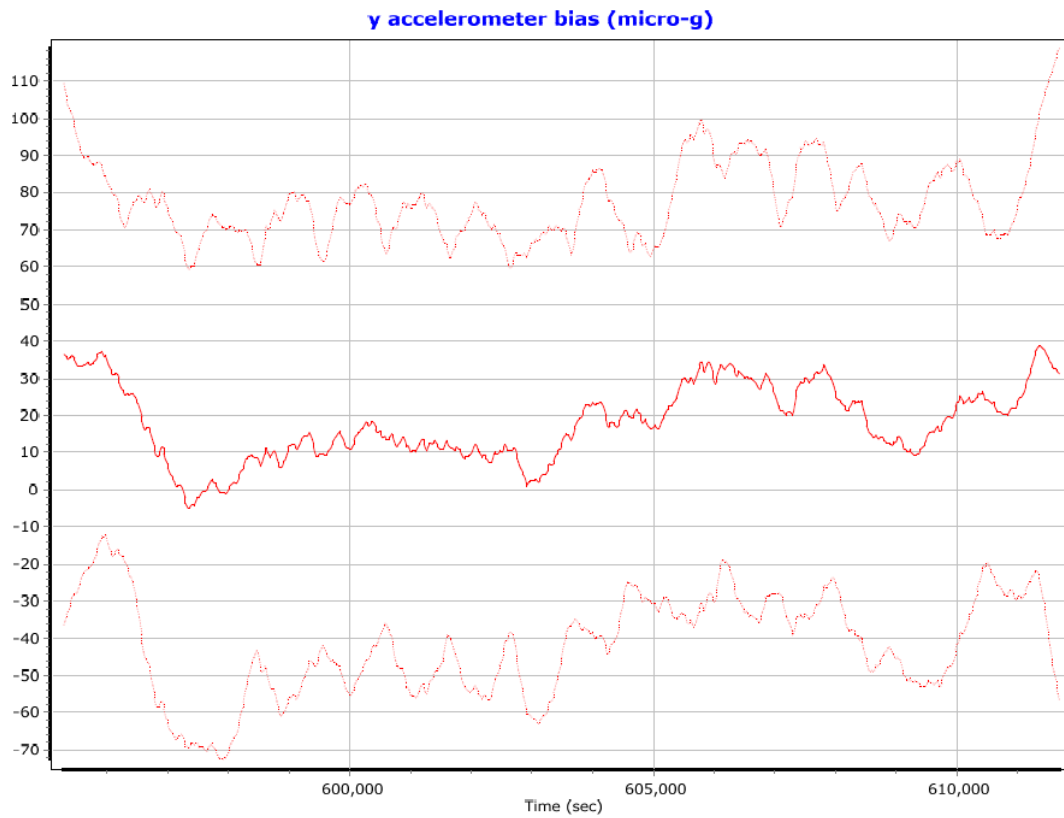

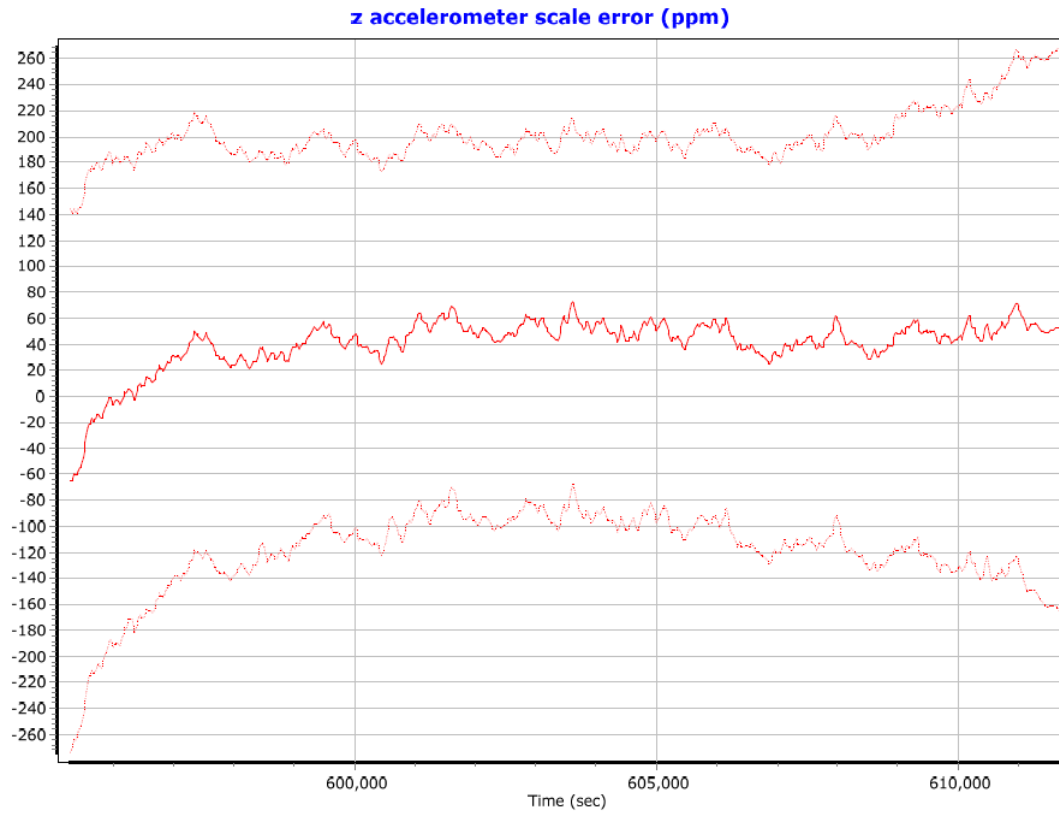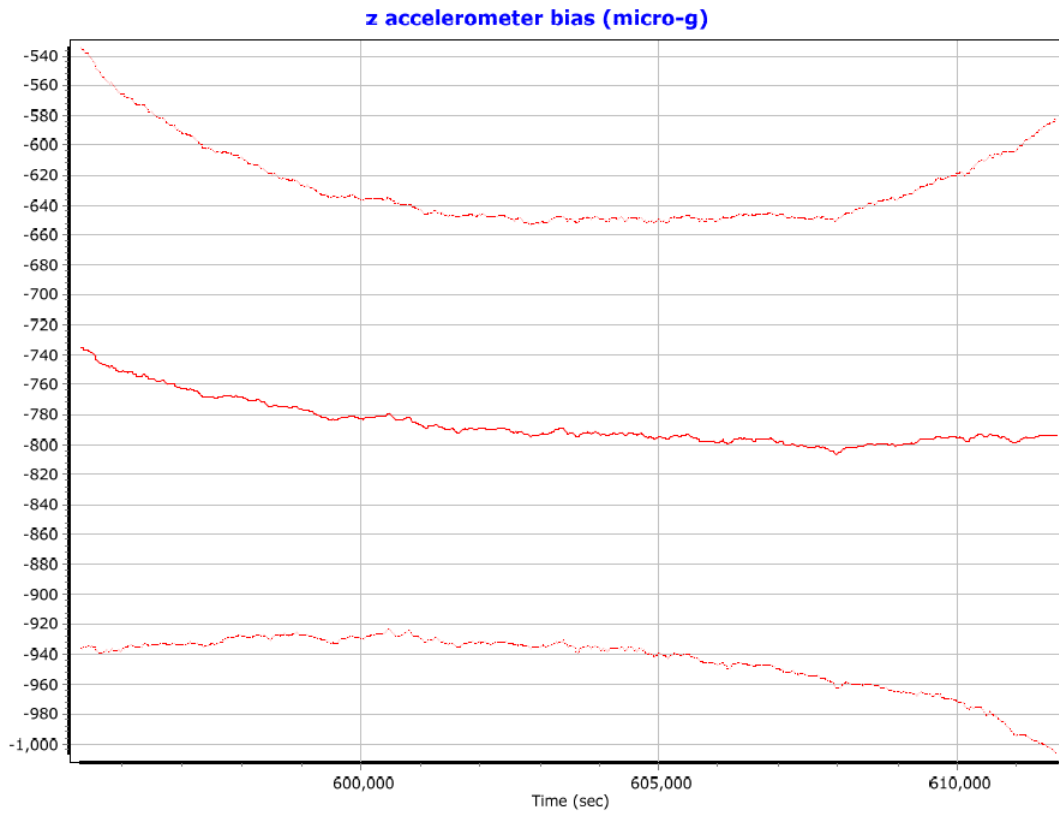



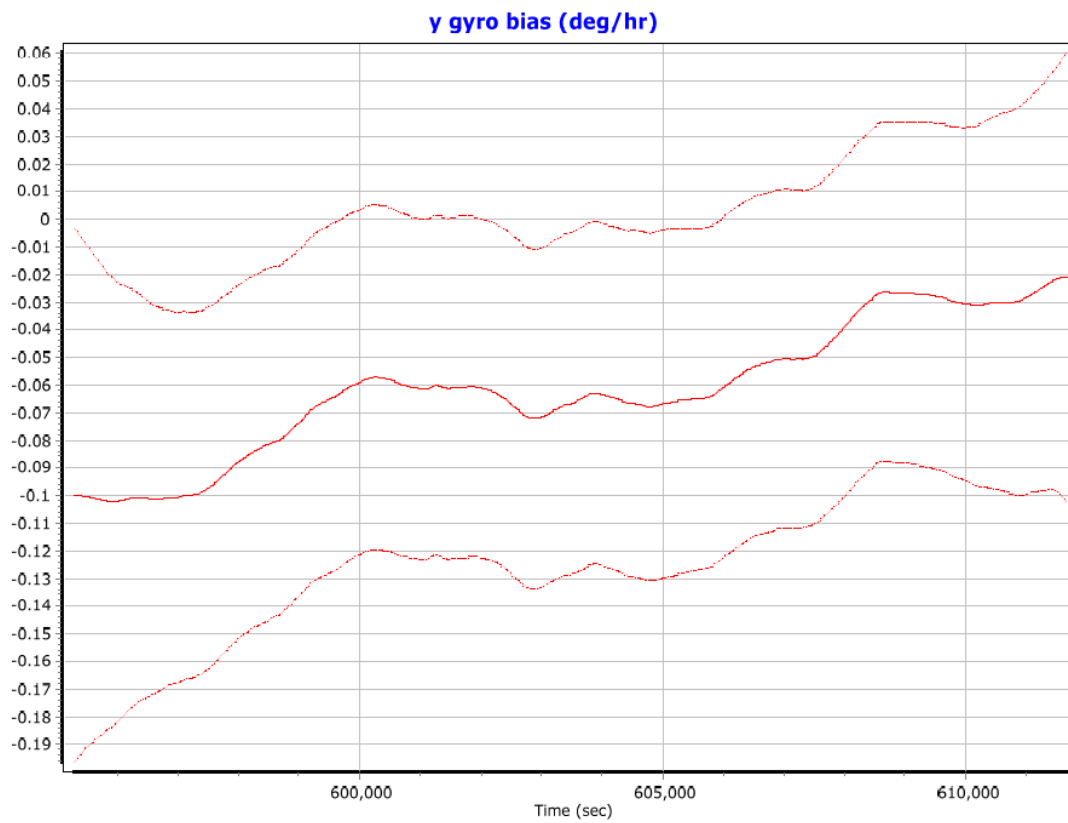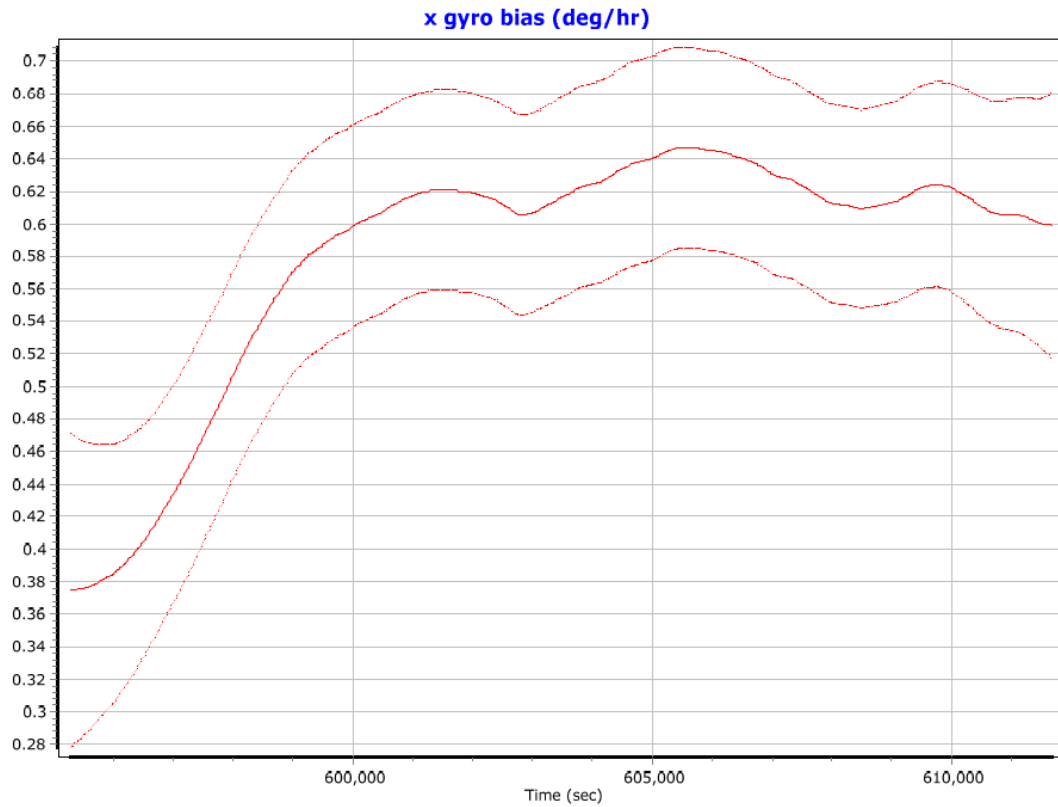


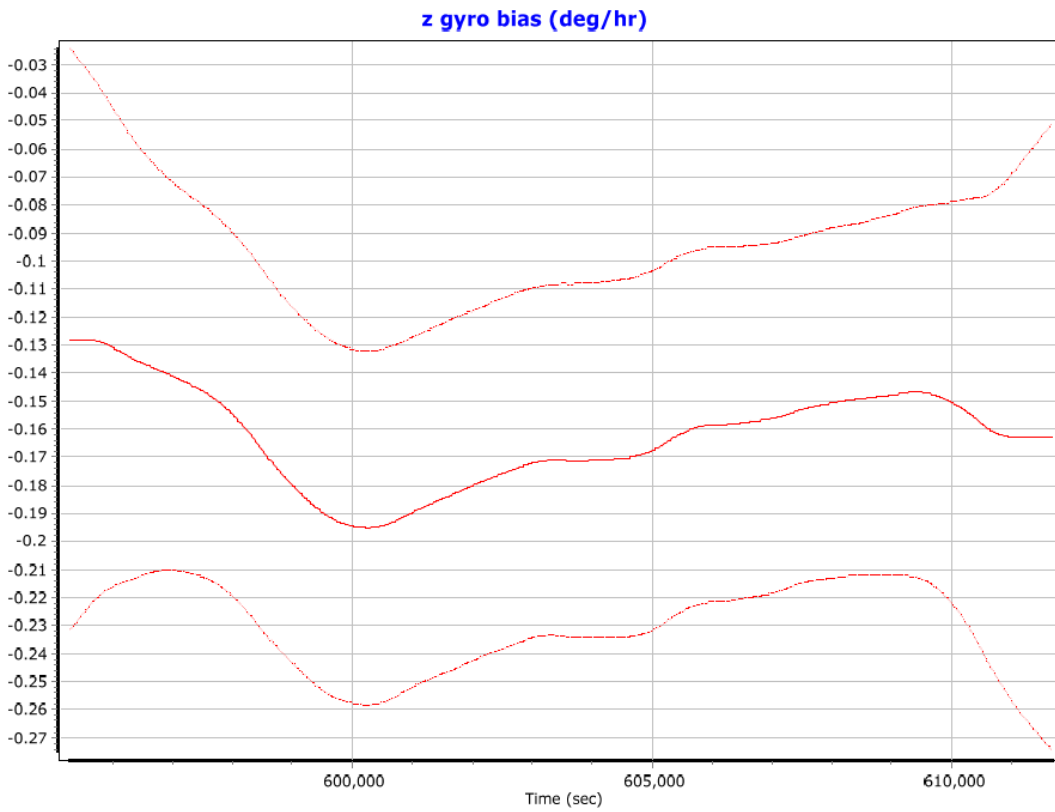


### MISSION 7 – 5417127A GNSS PROCESSING


Project: 5417127a


GrafNav v8.50.4320

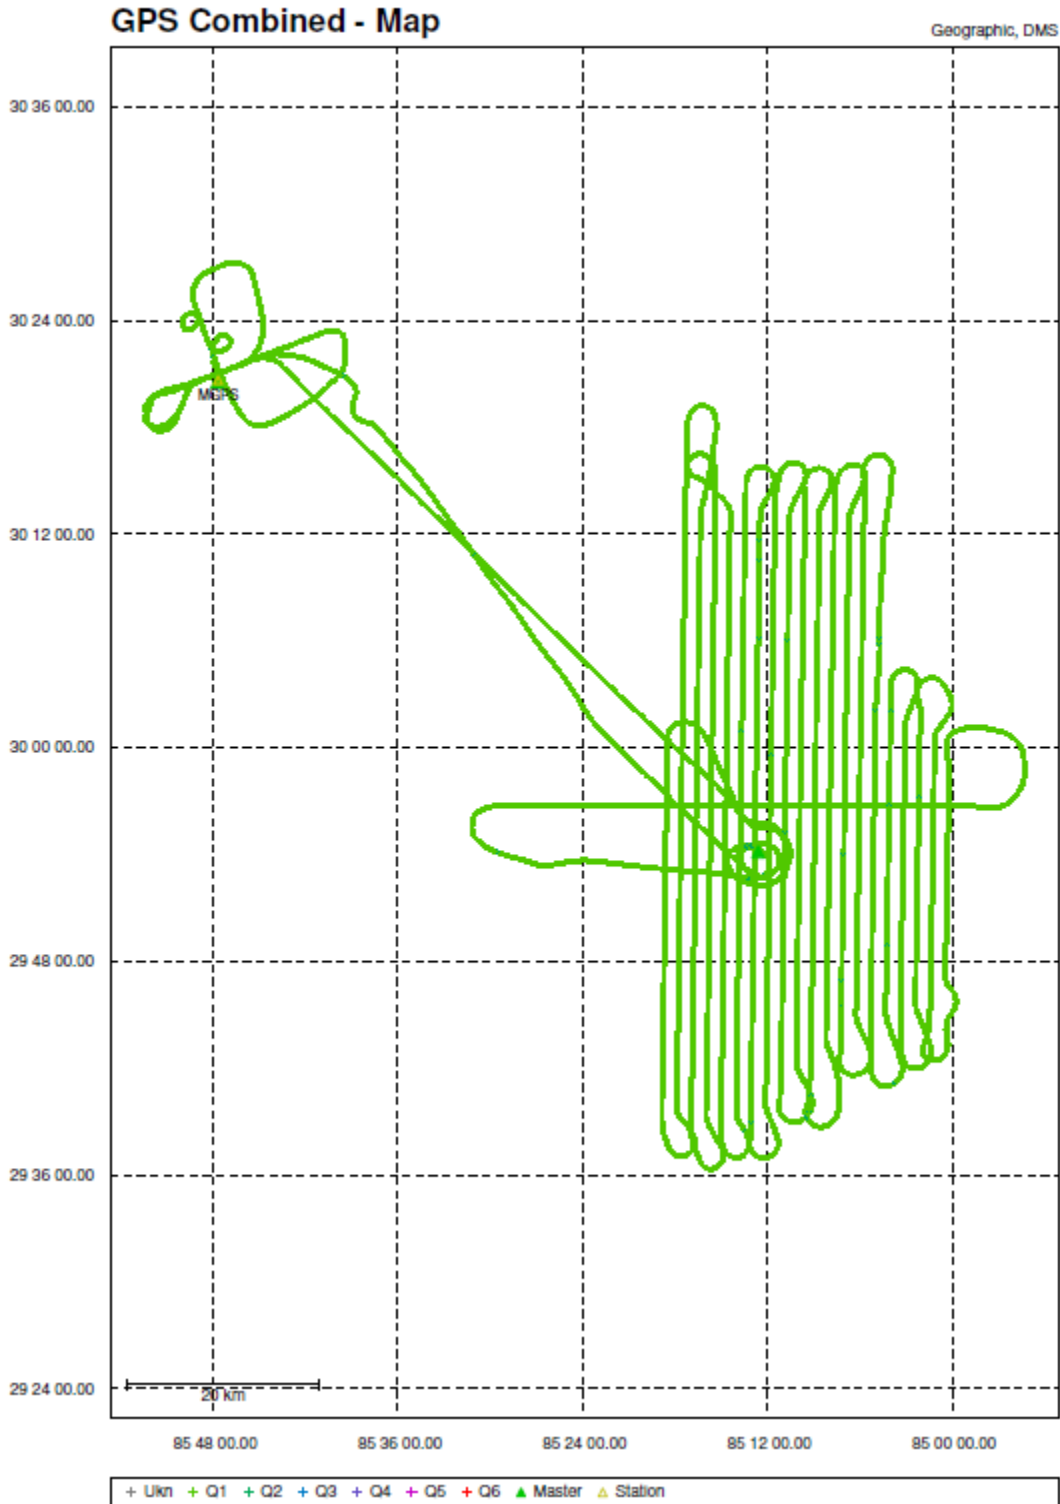

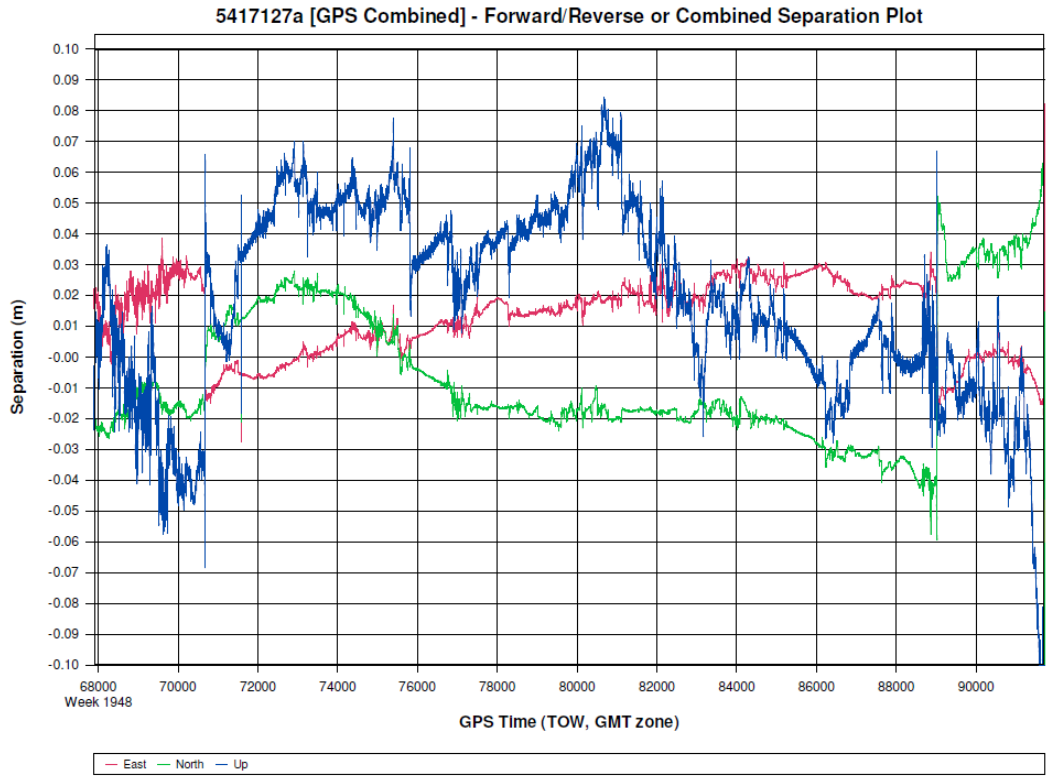

5417127a [GPS Combined] - PDOP Plot

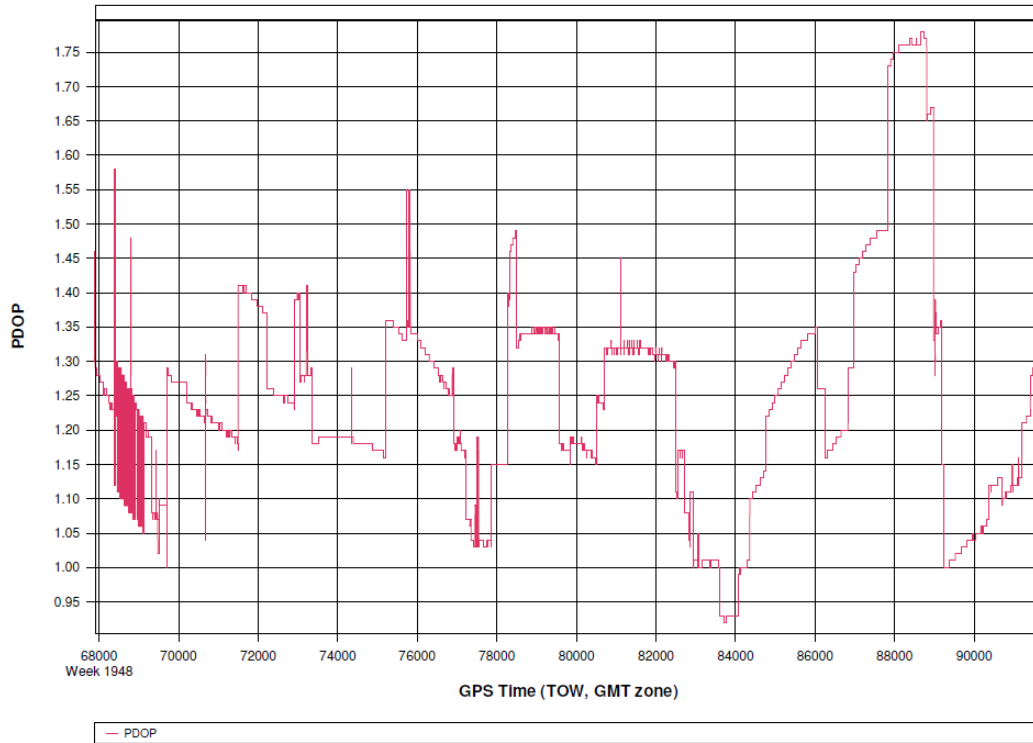

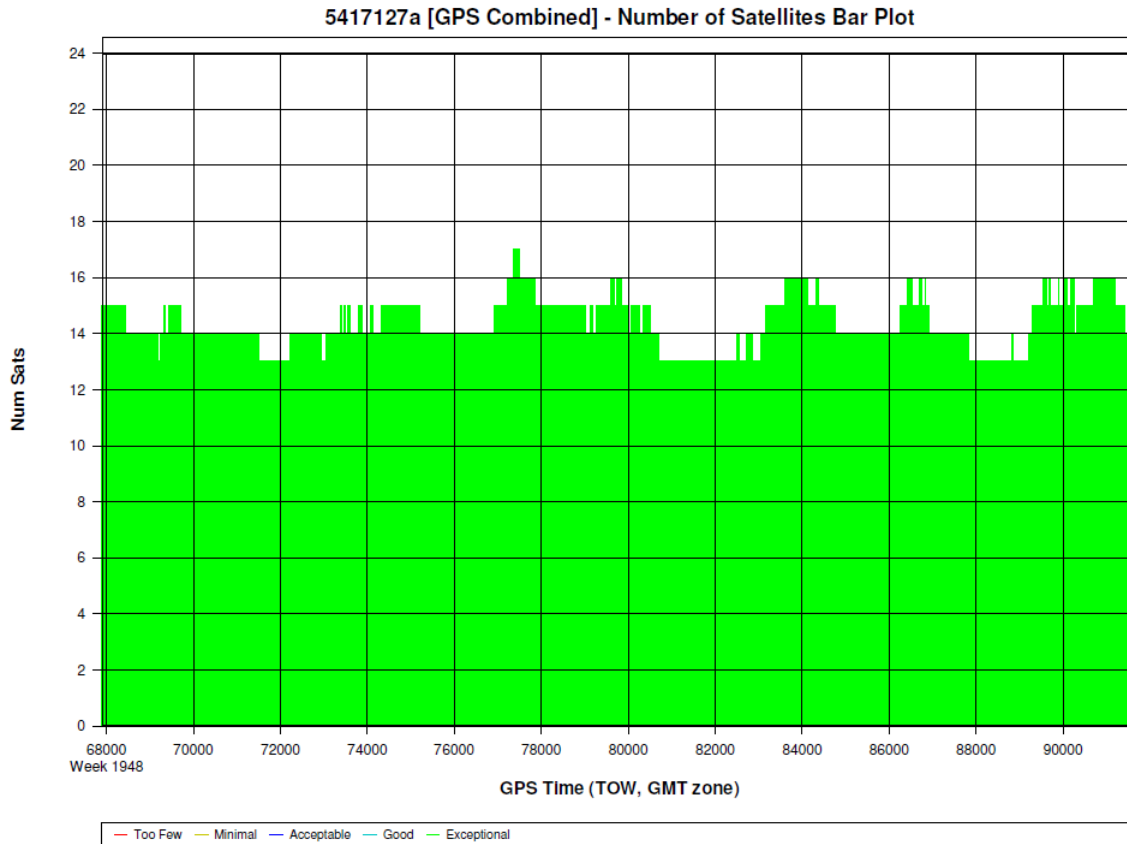

Processing Summary Information

Program: GrafNav  
 Version: 8.50.4320  
 Project: F:\Projects\3123\_ChoctawacheeWalton\LIDAR\5417127a\05\_INS-GPS\_PROC\01\_POS\5417127a\5417127a\GNSS\5417127a.gnv  
 Solution Type: Combined

Number of Epochs:  
 Total in GPB file: 23845  
 No processed position: 0  
 Missing Fwd or Rev: 6  
 With bad C/A code: 0  
 With bad L1 Phase: 0

Measurement RMS Values:  
 L1 Phase: 0.0197 (m)  
 C/A Code: 0.91 (m)  
 L1 Doppler: 0.673 (m/s)

Fwd/Rev Separation RMS Values:  
 East: 0.018 (m)  
 North: 0.025 (m)  
 Height: 0.066 (m)

Fwd/Rev Sep. RMS for dual FWD/REV fixes (23805 occurrences):

East: 0.017 (m)  
North: 0.023 (m)  
Height: 0.036 (m)

Quality Number Percentages:

Q 1: 99.4 %  
Q 2: 0.6 %  
Q 3: 0.0 %  
Q 4: 0.0 %  
Q 5: 0.0 %  
Q 6: 0.0 %

Position Standard Deviation Percentages:

0.00 - 0.10 m: 100.0 %  
0.10 - 0.30 m: 0.0 %  
0.30 - 1.00 m: 0.0 %  
1.00 - 5.00 m: 0.0 %  
5.00 m + over: 0.0 %

Percentages of epochs with DD\_DOP over 10.00:


DOP over Tol: 0.0 %

Baseline Distances:


Maximum: 74.585 (km)  
Minimum: 3.975 (km)  
Average: 41.329 (km)  
First Epoch: 33.593 (km)  
Last Epoch: 37.104 (km)

### MISSION 7 – 5417127A SENSOR ERRORS



x accelerometer bias (micro-g)

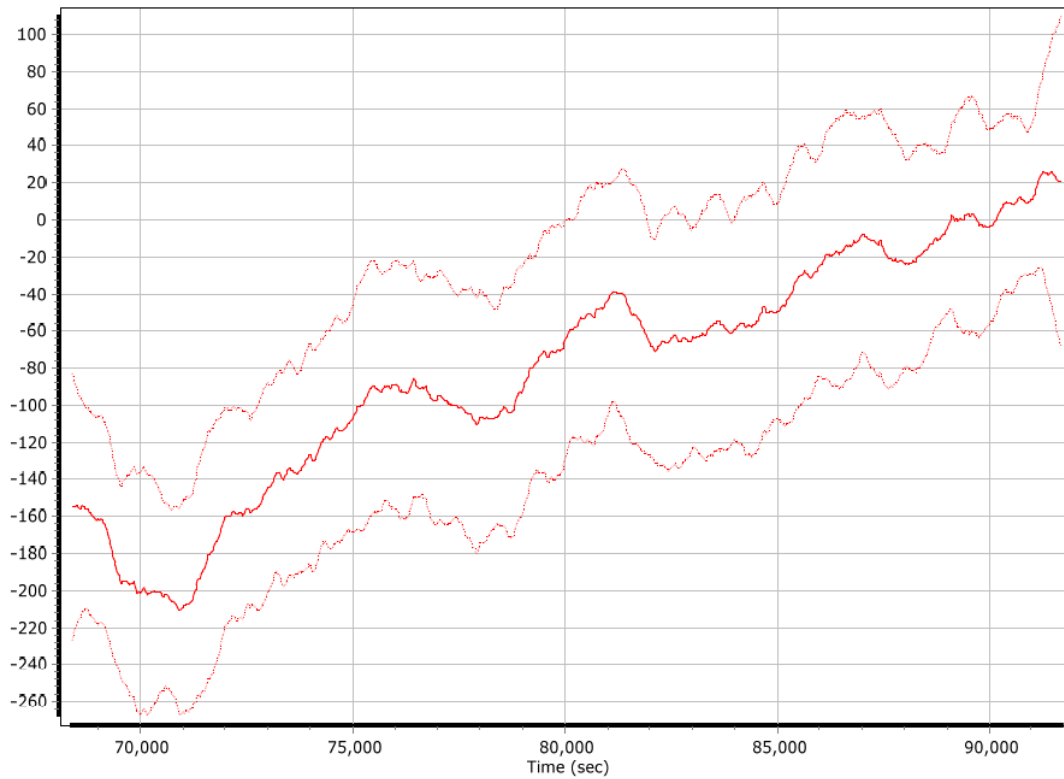


x accelerometer scale error (ppm)

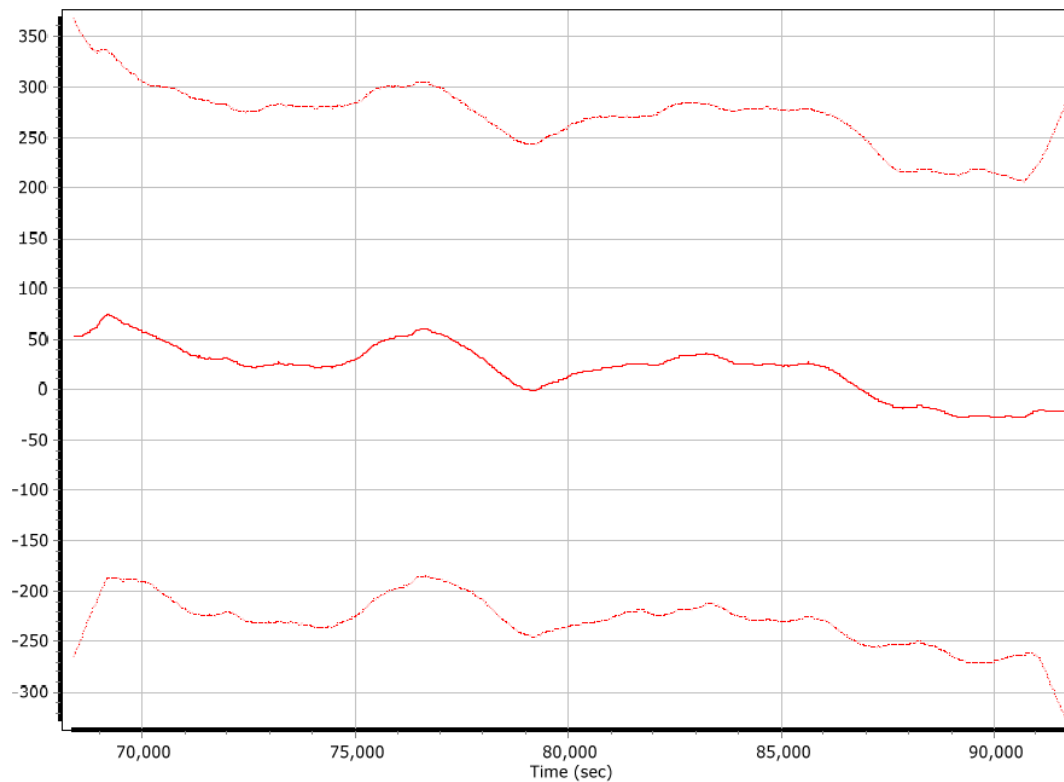




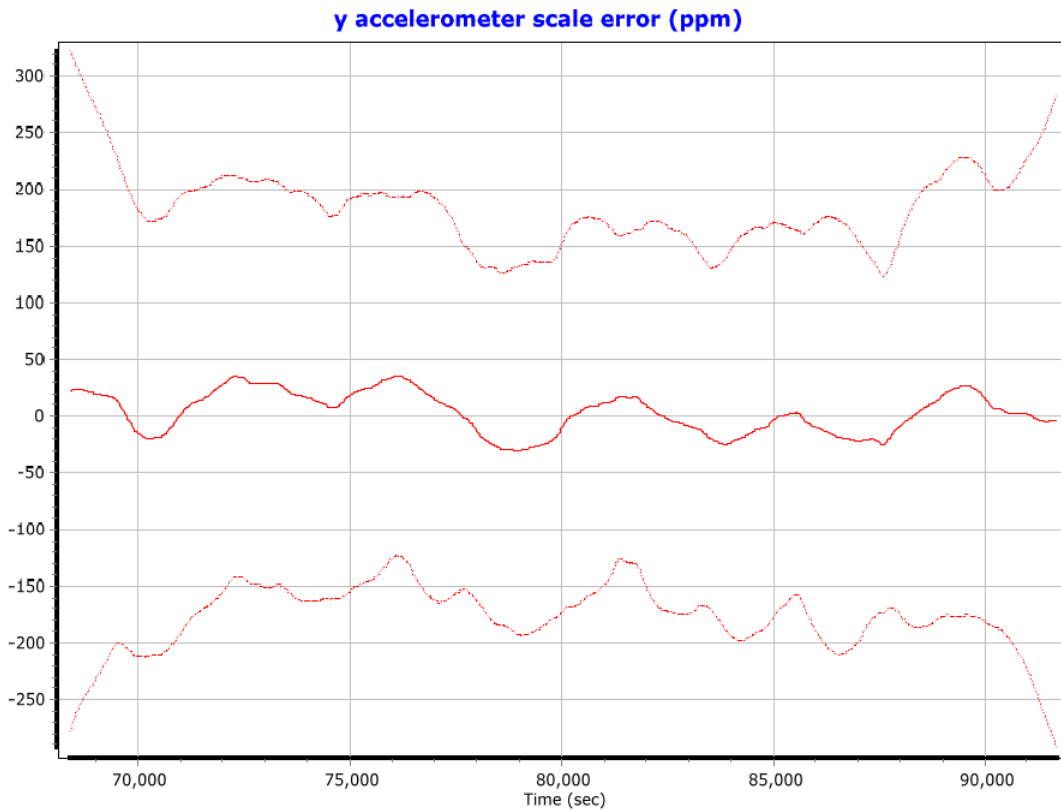
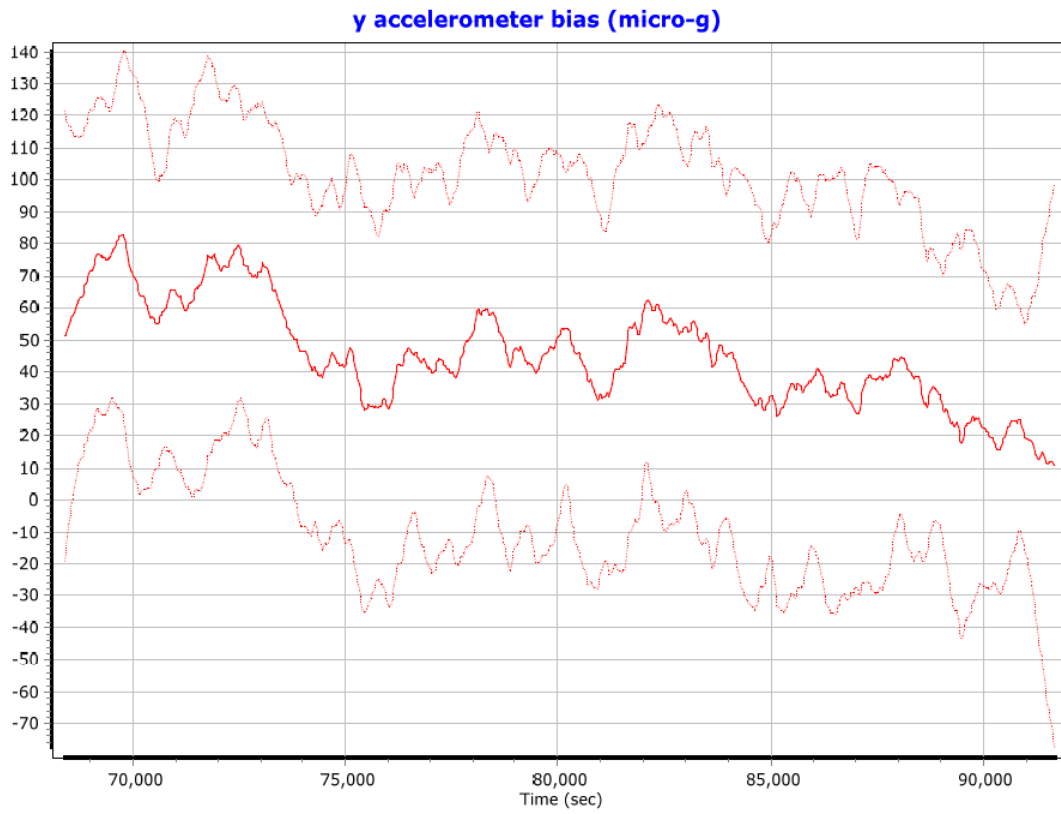



**z accelerometer bias (micro-g)**

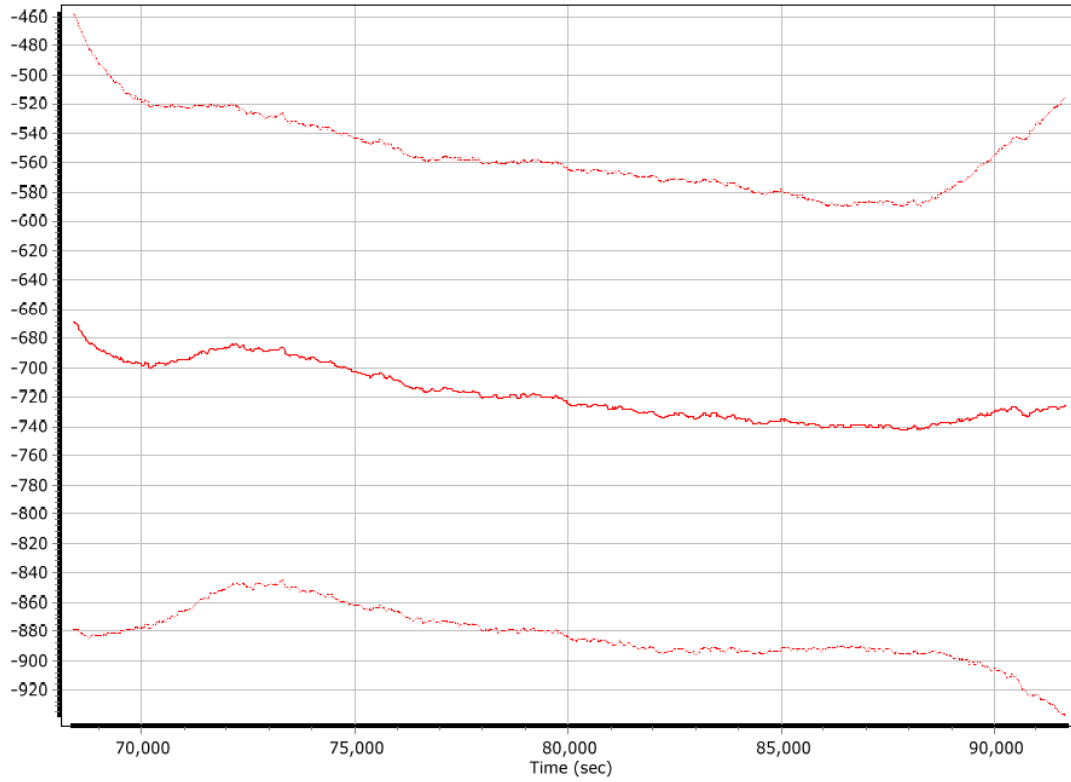

**z accelerometer scale error (ppm)**

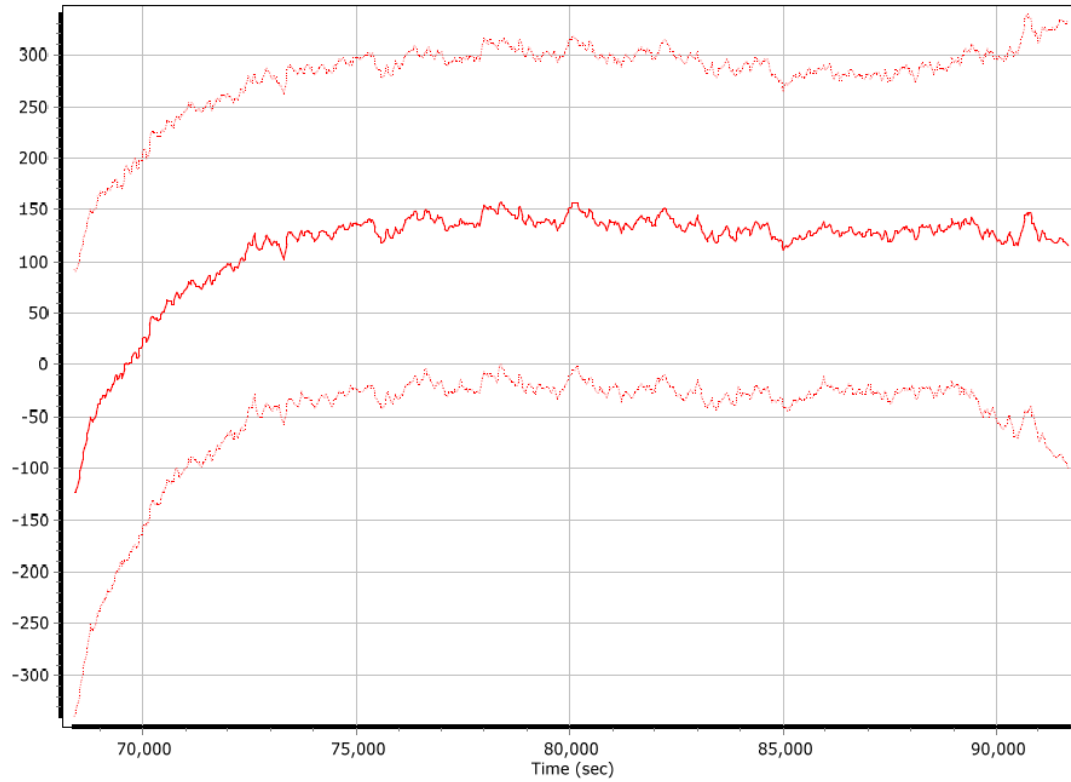

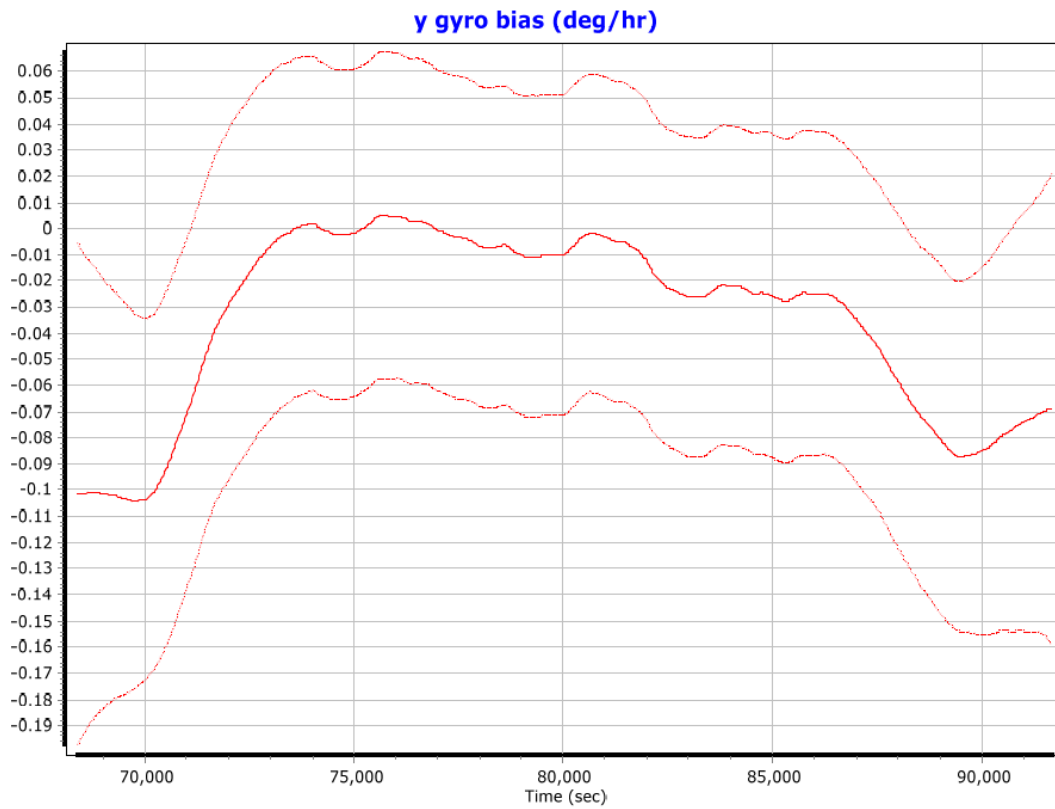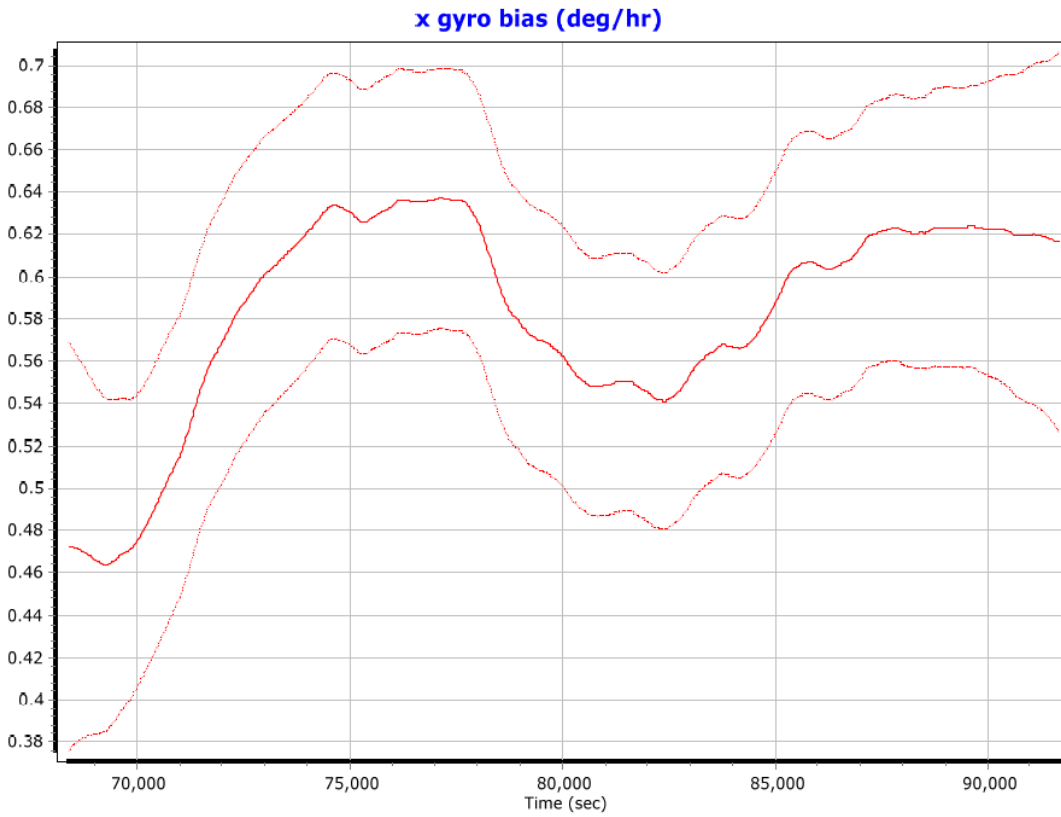


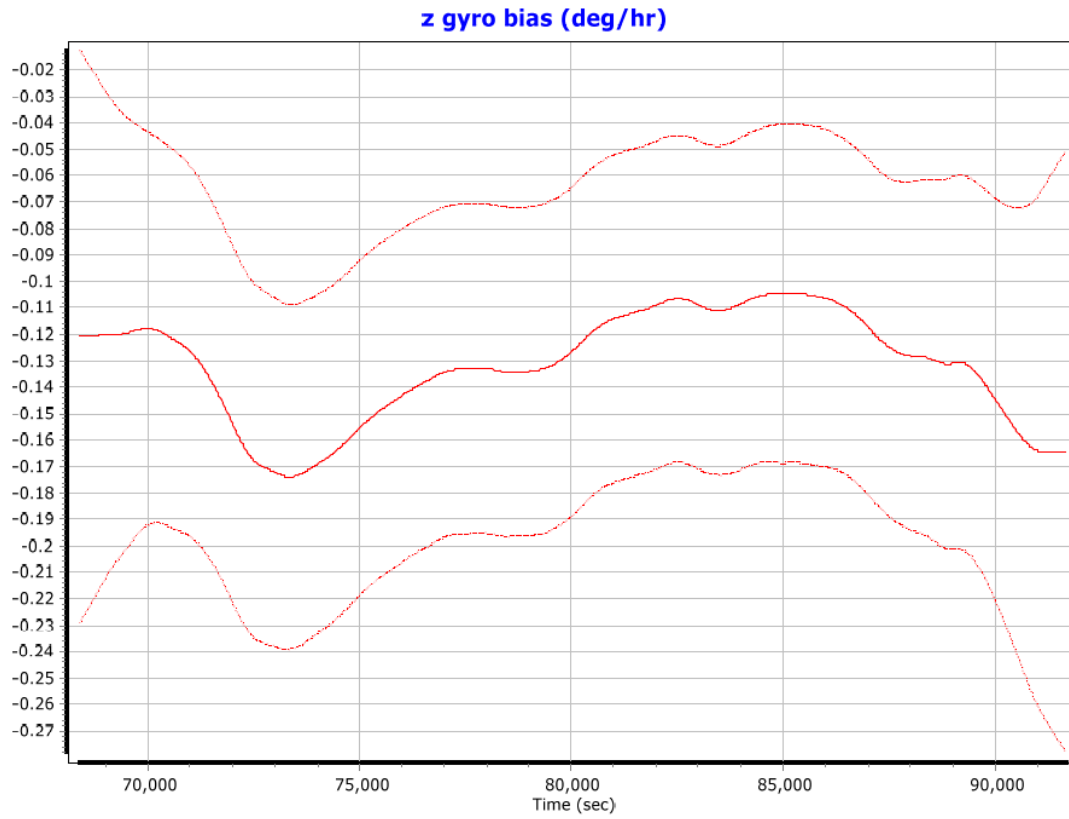



## MISSION 8 – 5417136A GNSS PROCESSING


Project: 5417136a

GrafNav v8.50.4320

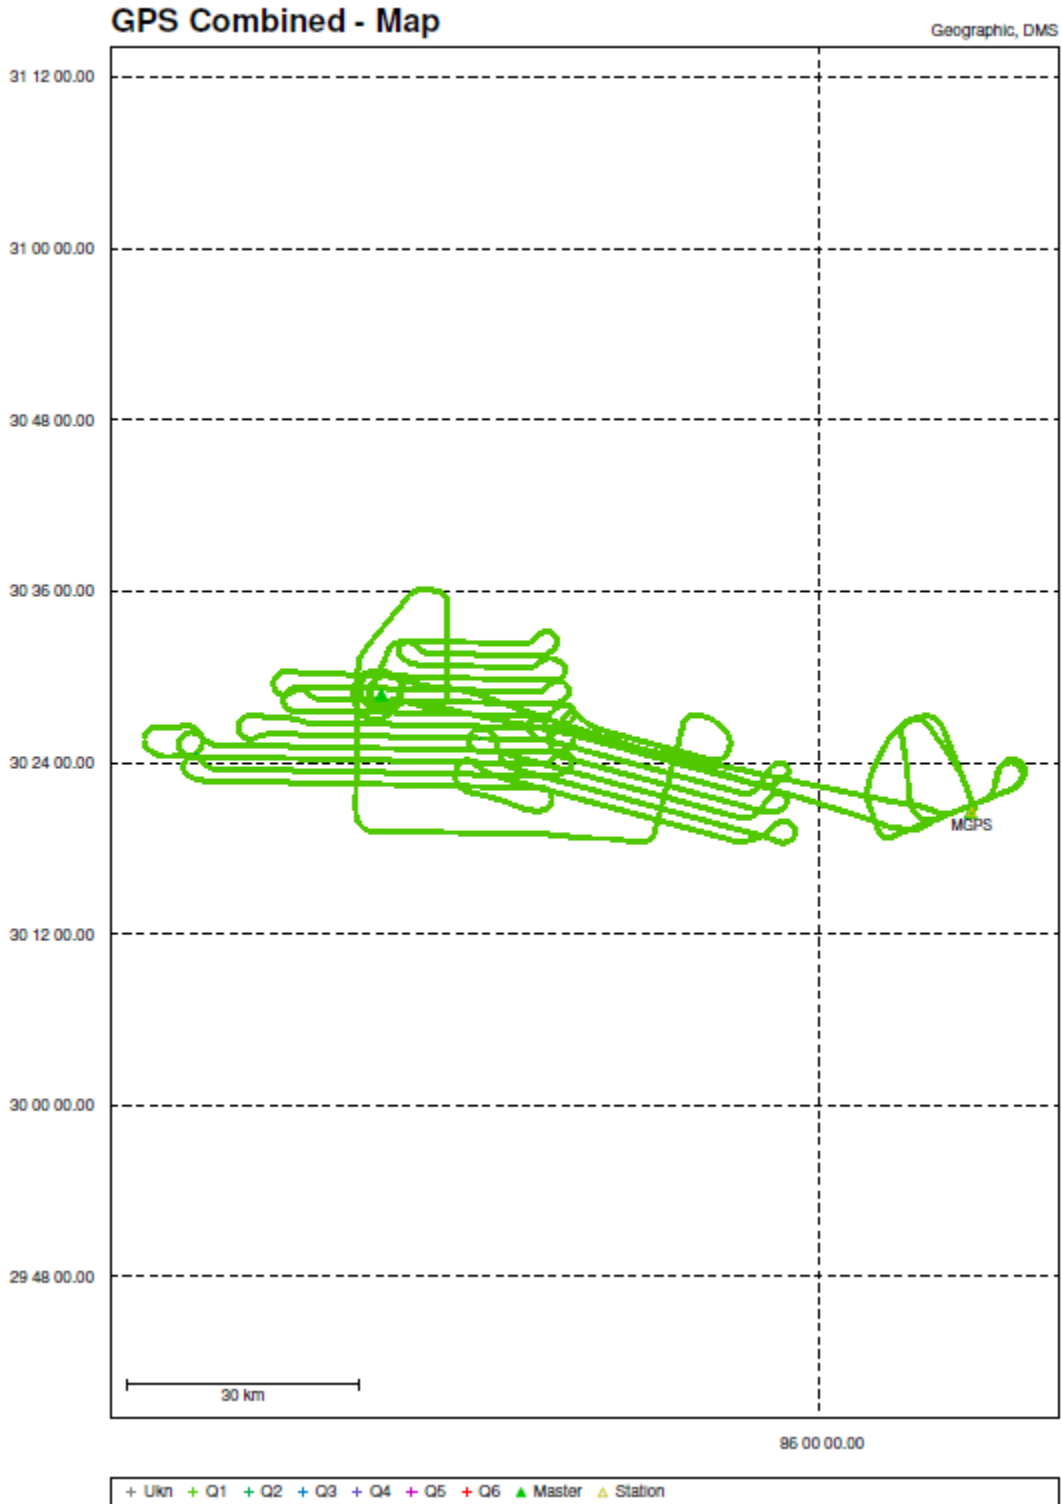

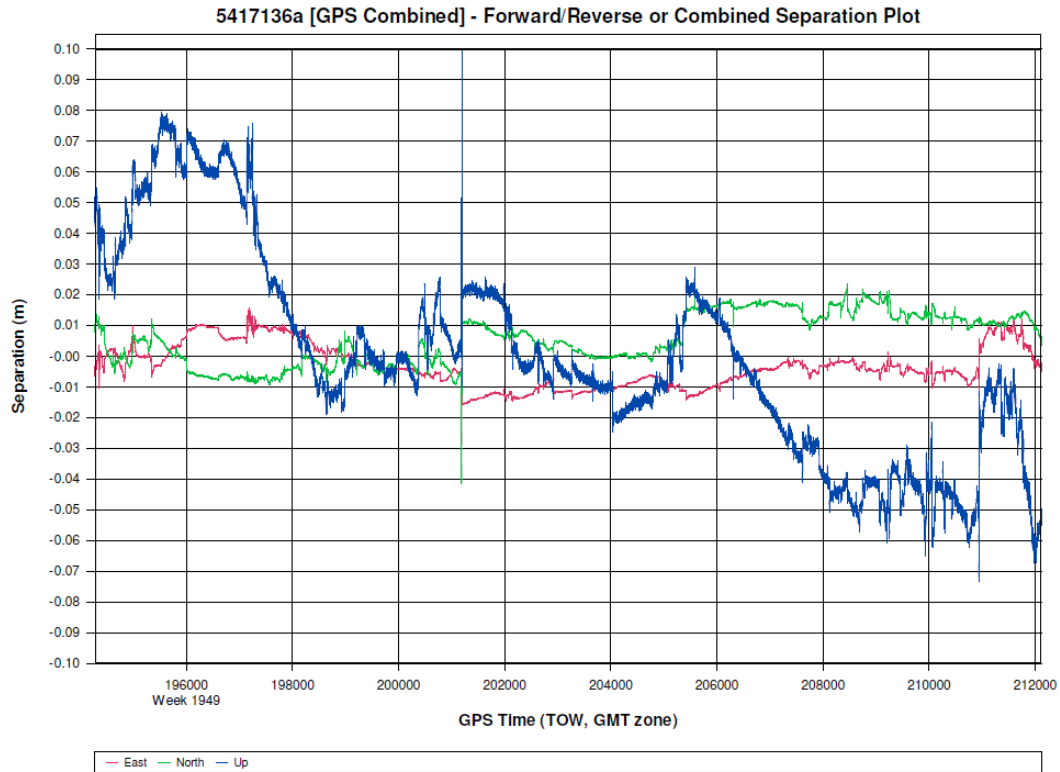

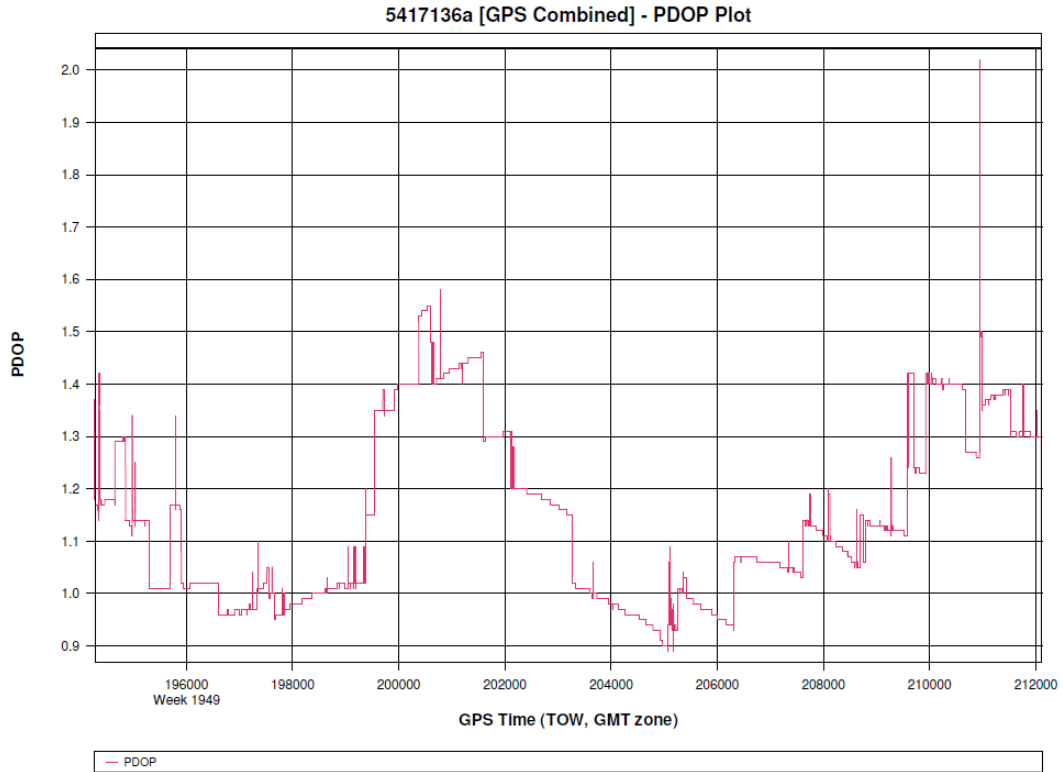

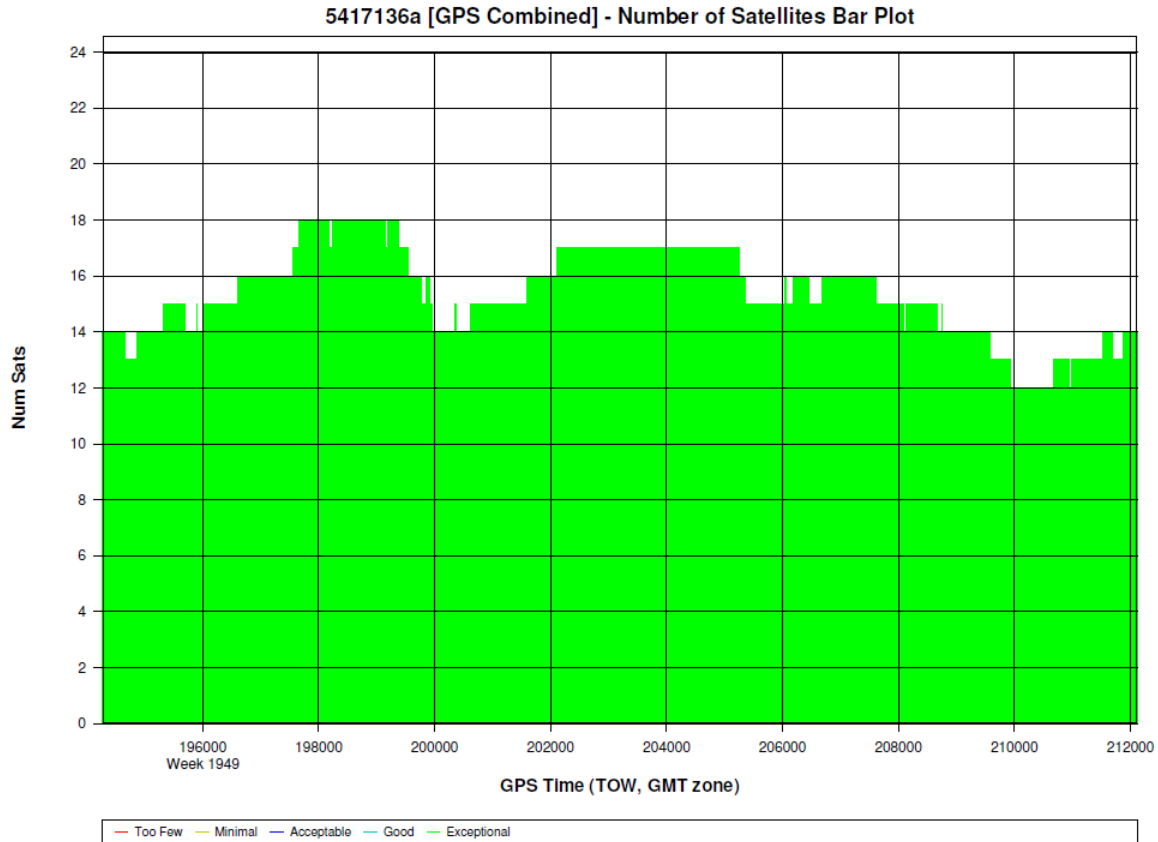

Processing Summary Information

Program: GrafNav  
 Version: 8.50.4320  
 Project: F:\Projects\3123\_ChoctawacheeWalton\LIDAR\5417136a\05\_INS-GPS\_PROC\01\_POS\5417136a\5417136a\GNSS\5417136a.gnv  
 Solution Type: Combined

Number of Epochs:

Total in GPB file: 17863  
 No processed position: 0  
 Missing Fwd or Rev: 6  
 With bad C/A code: 0  
 With bad L1 Phase: 0

Measurement RMS Values:

L1 Phase: 0.0187 (m)  
 C/A Code: 0.72 (m)  
 L1 Doppler: 0.762 (m/s)

Fwd/Rev Separation RMS Values:

East: 0.008 (m)  
 North: 0.010 (m)  
 Height: 0.037 (m)

Fwd/Rev Sep. RMS for dual FWD/REV fixes (17856 occurrences):



East: 0.008 (m)  
North: 0.010 (m)  
Height: 0.033 (m)

Quality Number Percentages:

Q 1: 99.8 %  
Q 2: 0.2 %  
Q 3: 0.0 %  
Q 4: 0.0 %  
Q 5: 0.0 %  
Q 6: 0.0 %

Position Standard Deviation Percentages:

0.00 - 0.10 m: 100.0 %  
0.10 - 0.30 m: 0.0 %  
0.30 - 1.00 m: 0.0 %  
1.00 - 5.00 m: 0.0 %  
5.00 m + over: 0.0 %

Percentages of epochs with DD\_DOP over 10.00:


DOP over Tol: 0.0 %

Baseline Distances:


Maximum: 68.899 (km)  
Minimum: 2.104 (km)  
Average: 29.399 (km)  
First Epoch: 30.615 (km)  
Last Epoch: 39.001 (km)



### MISSION 8 – 5417136A SENSOR ERRORS



**x accelerometer bias (micro-g)**


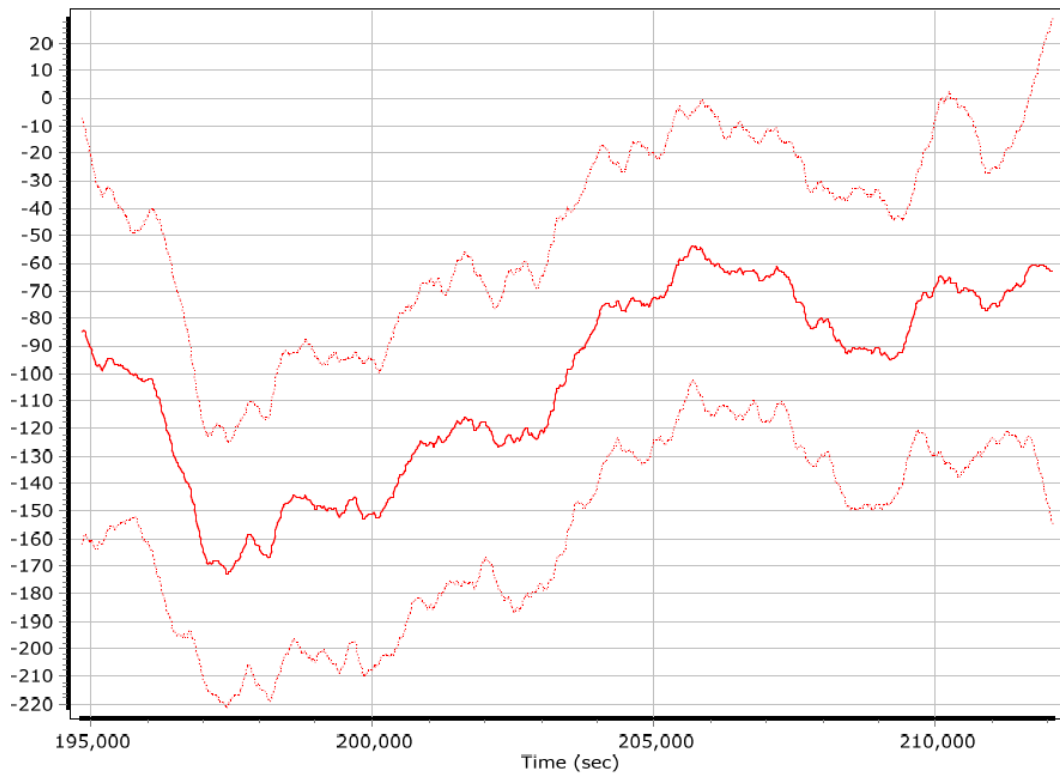



**x accelerometer scale error (ppm)**

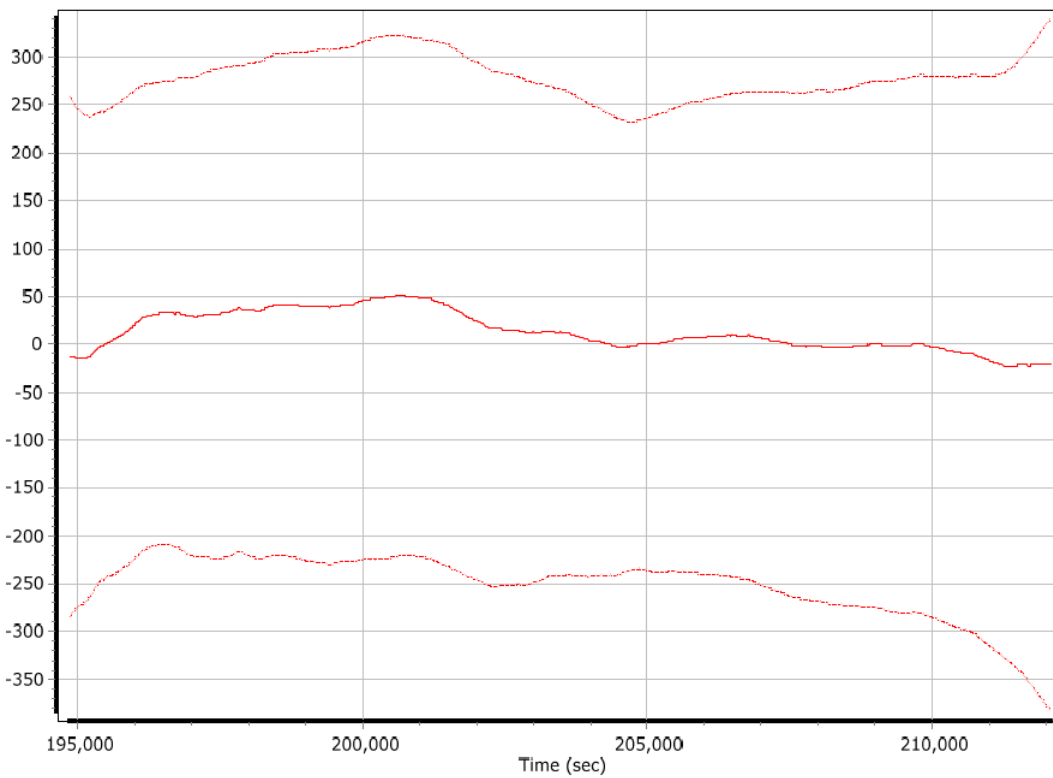

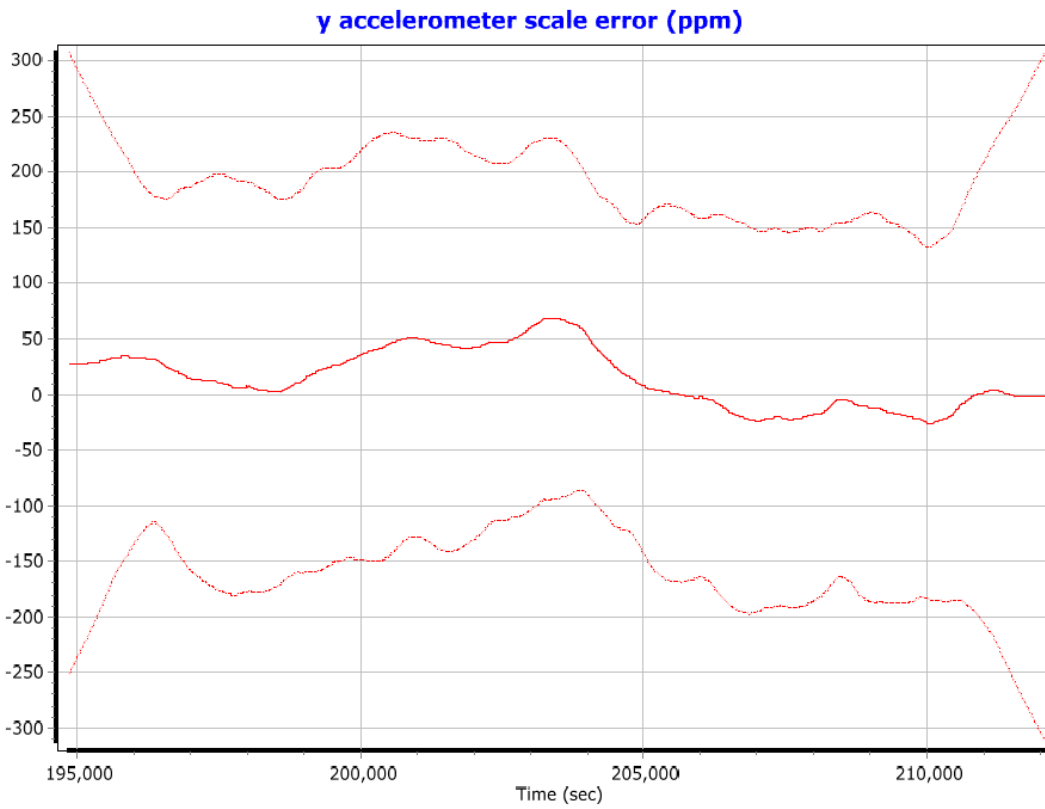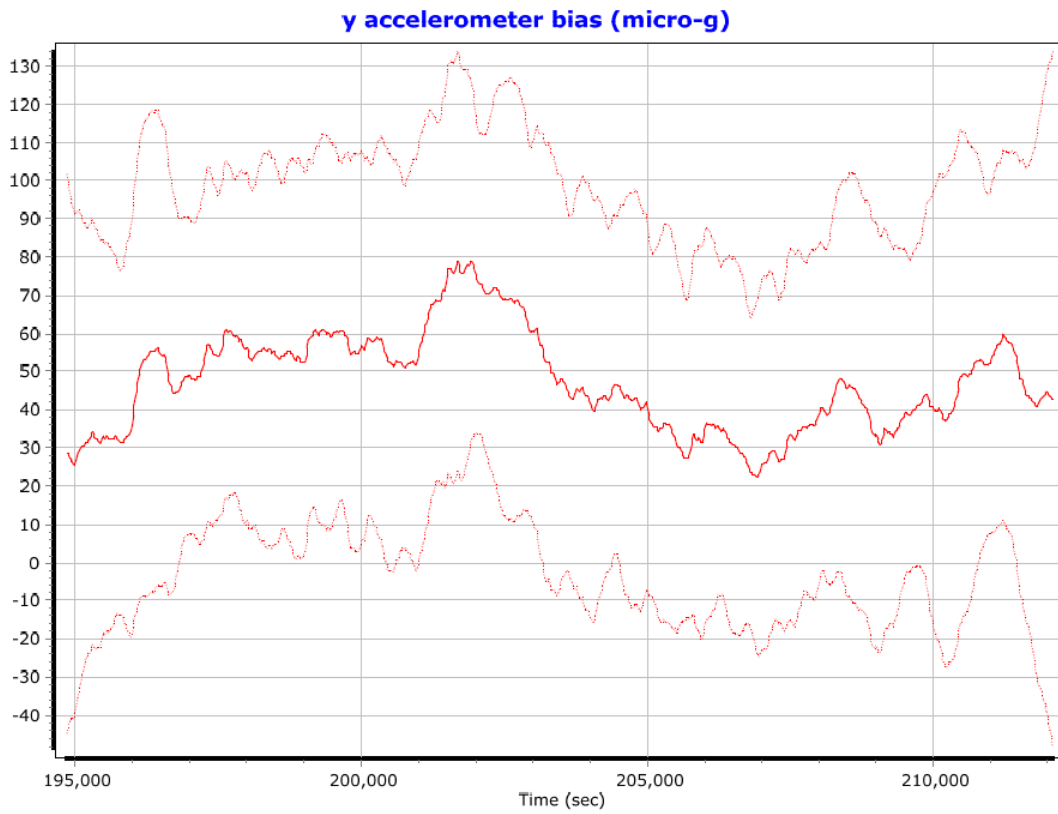

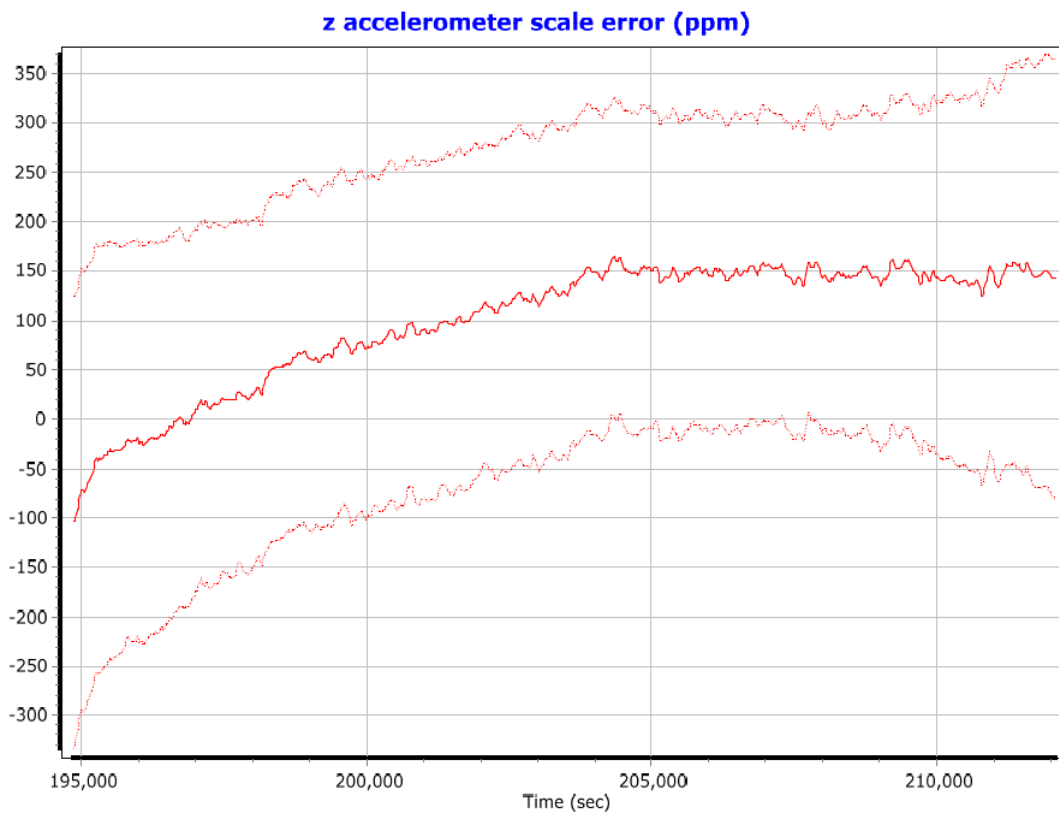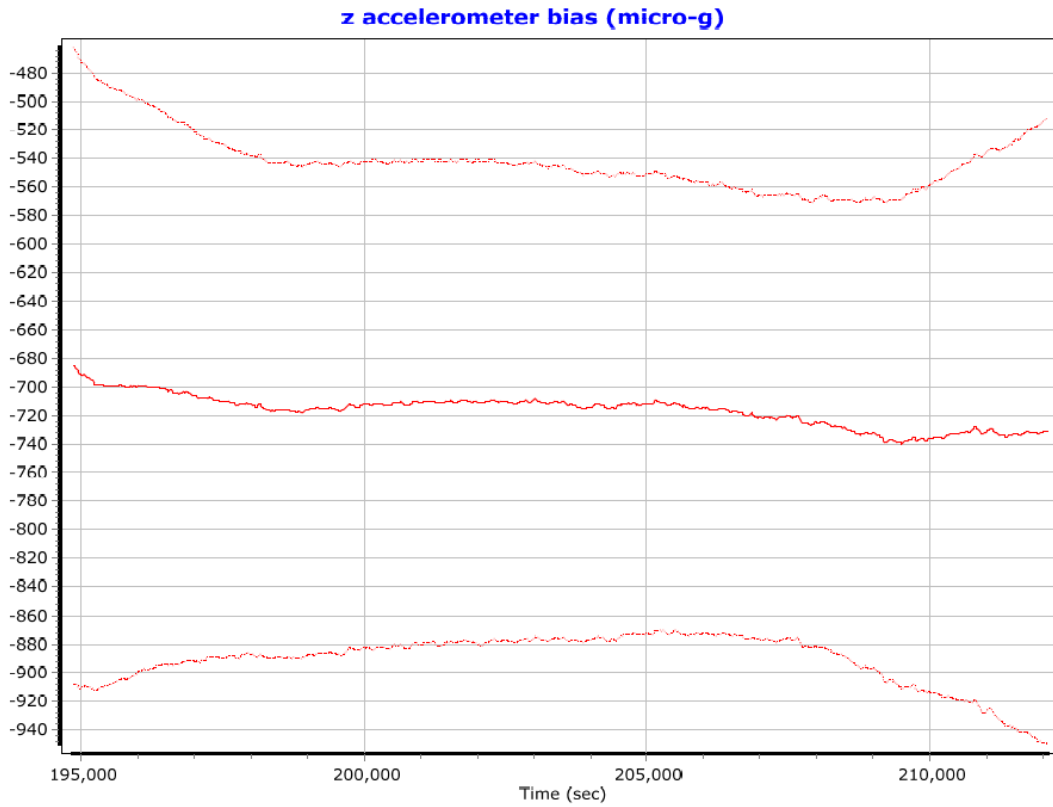

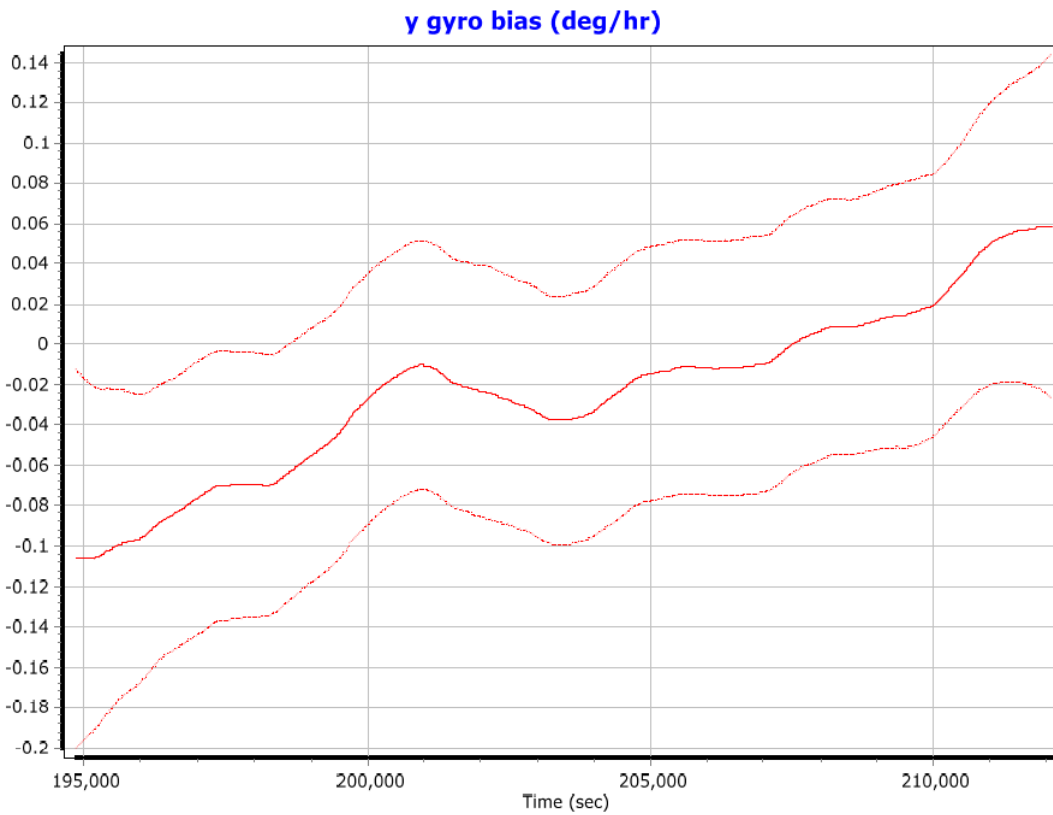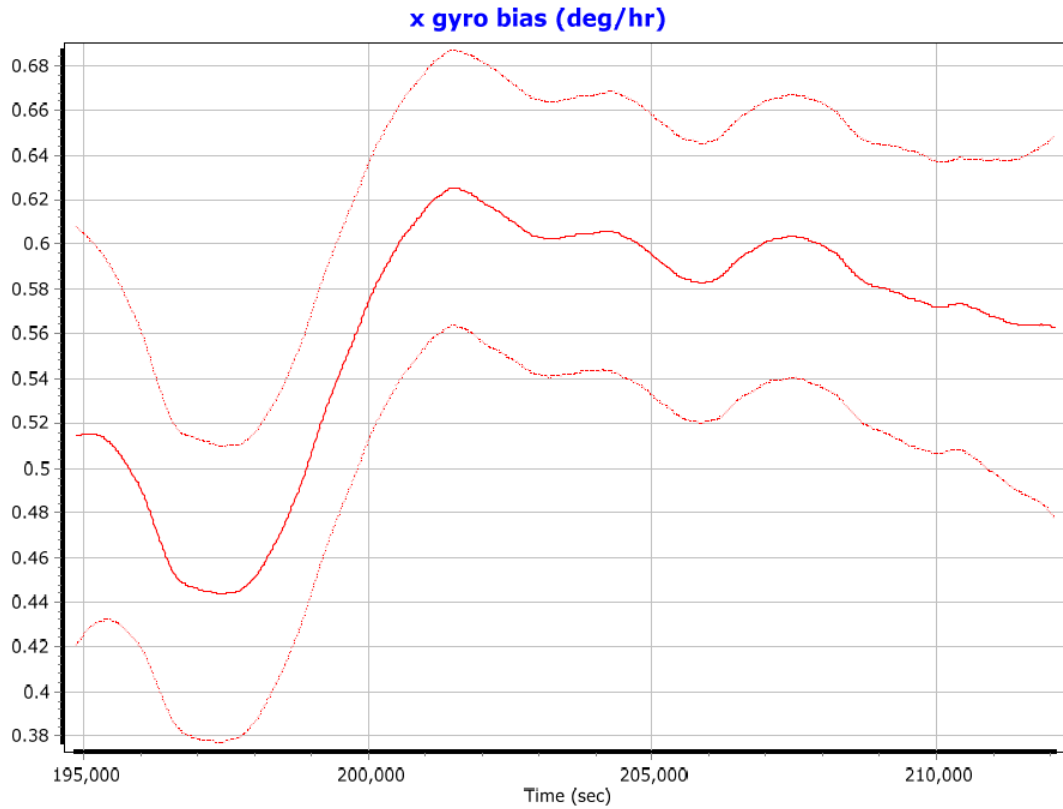

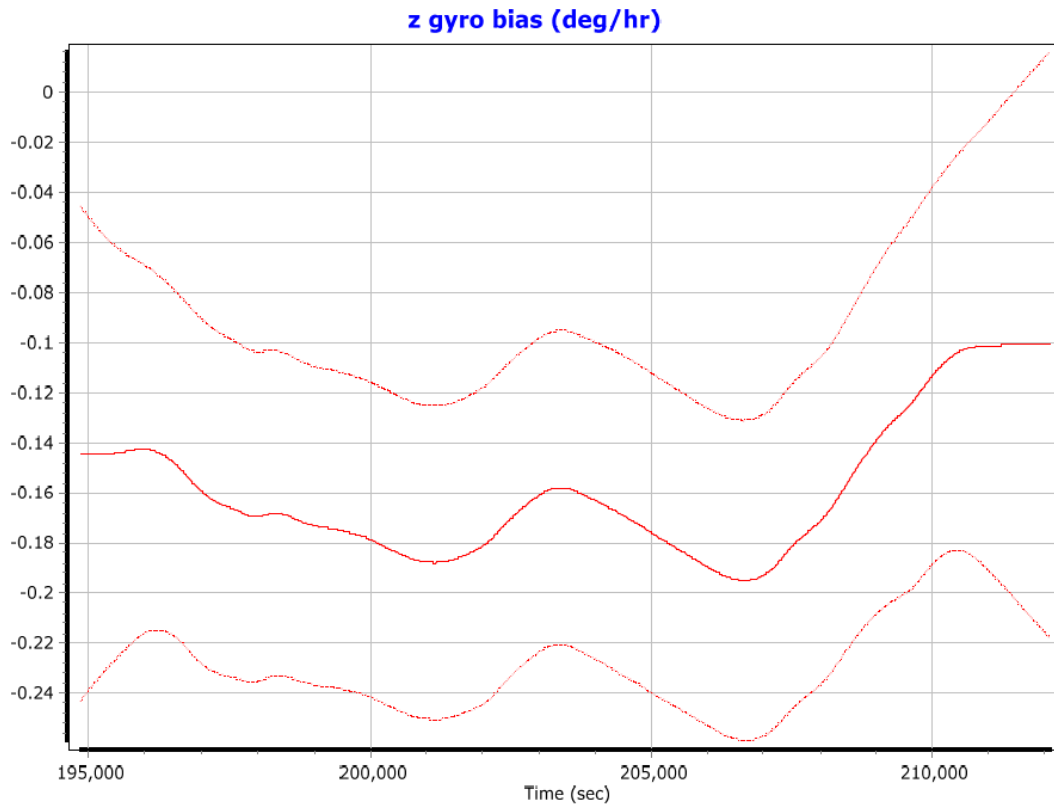


### MISSION 9 – 5417137A GNSS PROCESSING


Project: 5417137a


GrafNav v8.50.4320



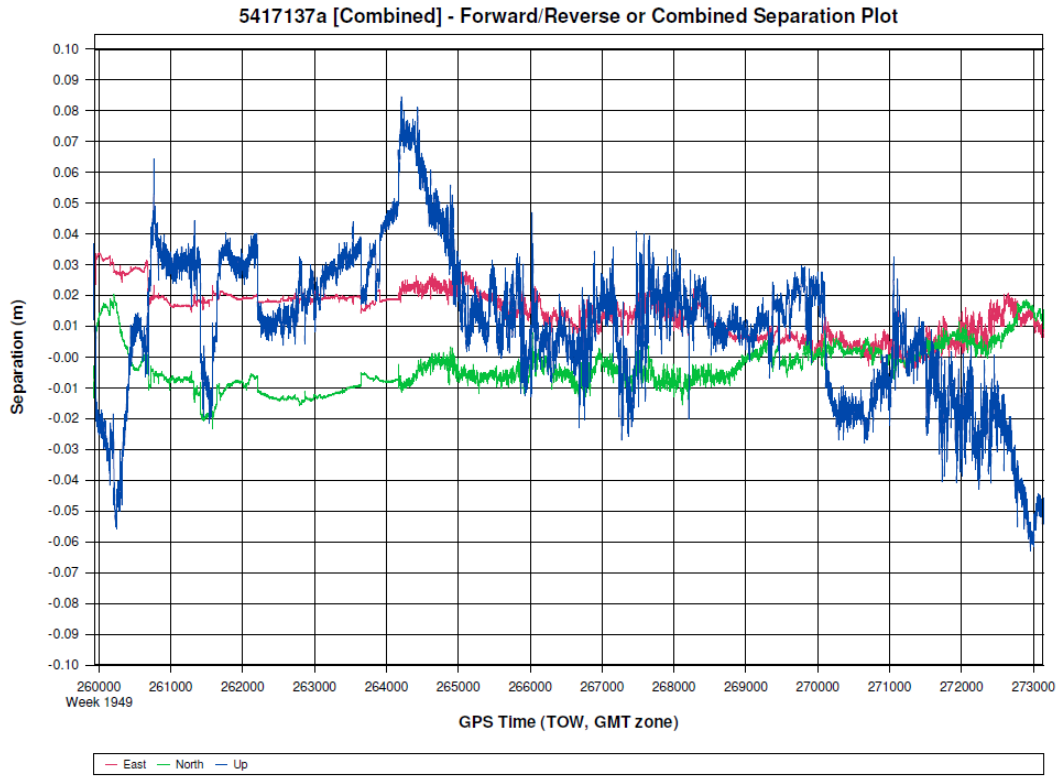



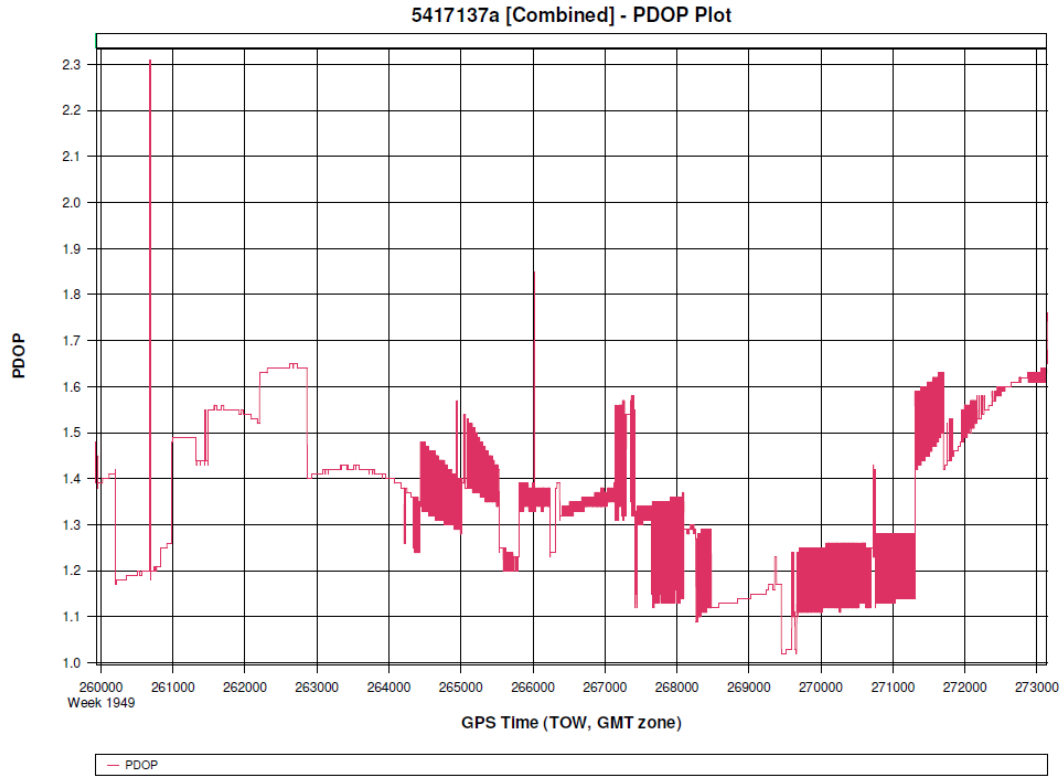

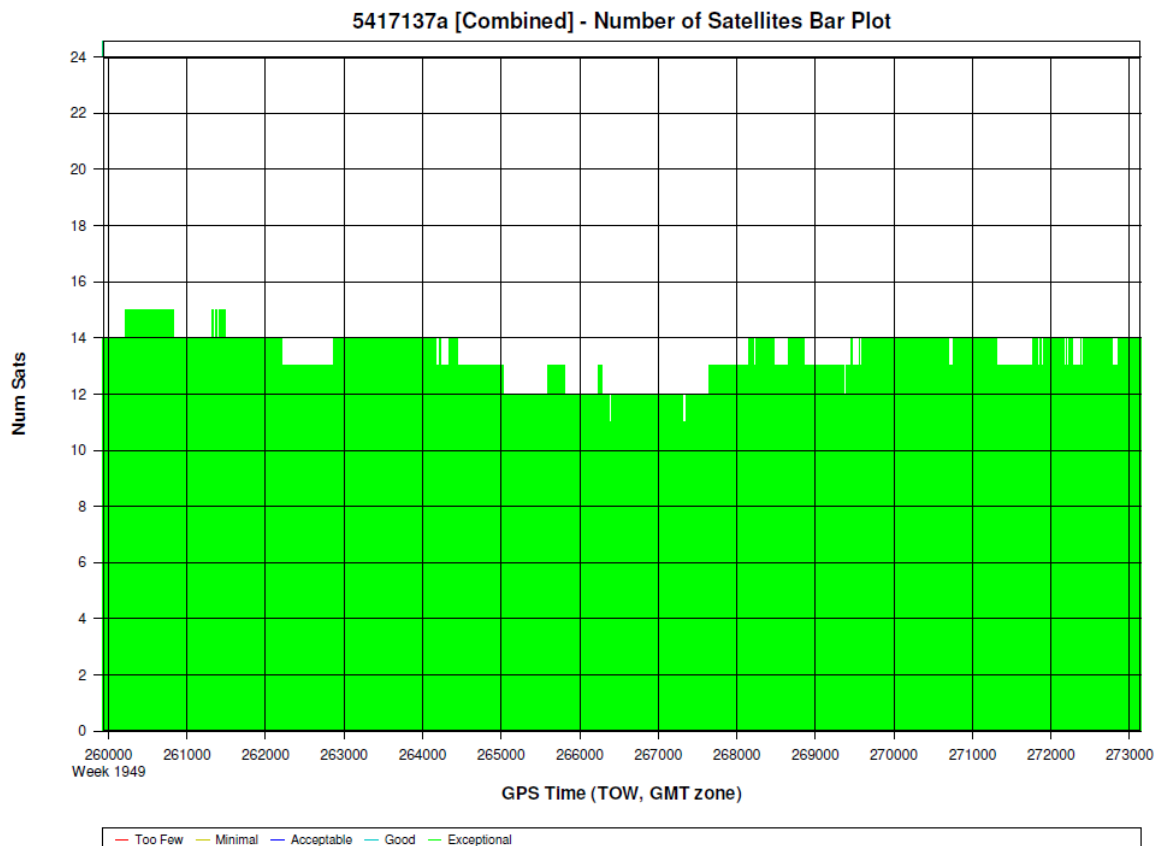

Processing Summary Information

Program: GrafNav  
 Version: 8.50.4320  
 Project: F:\Projects\3123\_ChoctawacheeWalton\LIDAR\5417137a\05\_INS-GPS\_PROC\01\_POS\5417137a\5417137a\GNSS\5417137a.gnv  
 Solution Type: Combined

Number of Epochs:

Total in GPB file: 13225  
 No processed position: 0  
 Missing Fwd or Rev: 5  
 With bad C/A code: 0  
 With bad L1 Phase: 0

Measurement RMS Values:

L1 Phase: 0.0181 (m)  
 C/A Code: 0.87 (m)  
 L1 Doppler: 0.688 (m/s)

Fwd/Rev Separation RMS Values:

East: 0.016 (m)  
 North: 0.008 (m)  
 Height: 0.026 (m)

Fwd/Rev Sep. RMS for dual FWD/REV fixes (13220 occurrences):

East: 0.016 (m)  
North: 0.008 (m)  
Height: 0.026 (m)

Quality Number Percentages:

Q 1: 99.5 %  
Q 2: 0.5 %  
Q 3: 0.0 %  
Q 4: 0.0 %  
Q 5: 0.0 %  
Q 6: 0.0 %

Position Standard Deviation Percentages:

0.00 - 0.10 m: 100.0 %  
0.10 - 0.30 m: 0.0 %  
0.30 - 1.00 m: 0.0 %  
1.00 - 5.00 m: 0.0 %  
5.00 m + over: 0.0 %

Percentages of epochs with DD\_DOP over 10.00:


DOP over Tol: 0.0 %

Baseline Distances:


Maximum: 85.666 (km)  
Minimum: 7.531 (km)  
Average: 33.777 (km)  
First Epoch: 32.798 (km)  
Last Epoch: 19.592 (km)

### MISSION 9 – 5417137A SENSOR ERRORS


x accelerometer bias (micro-g)

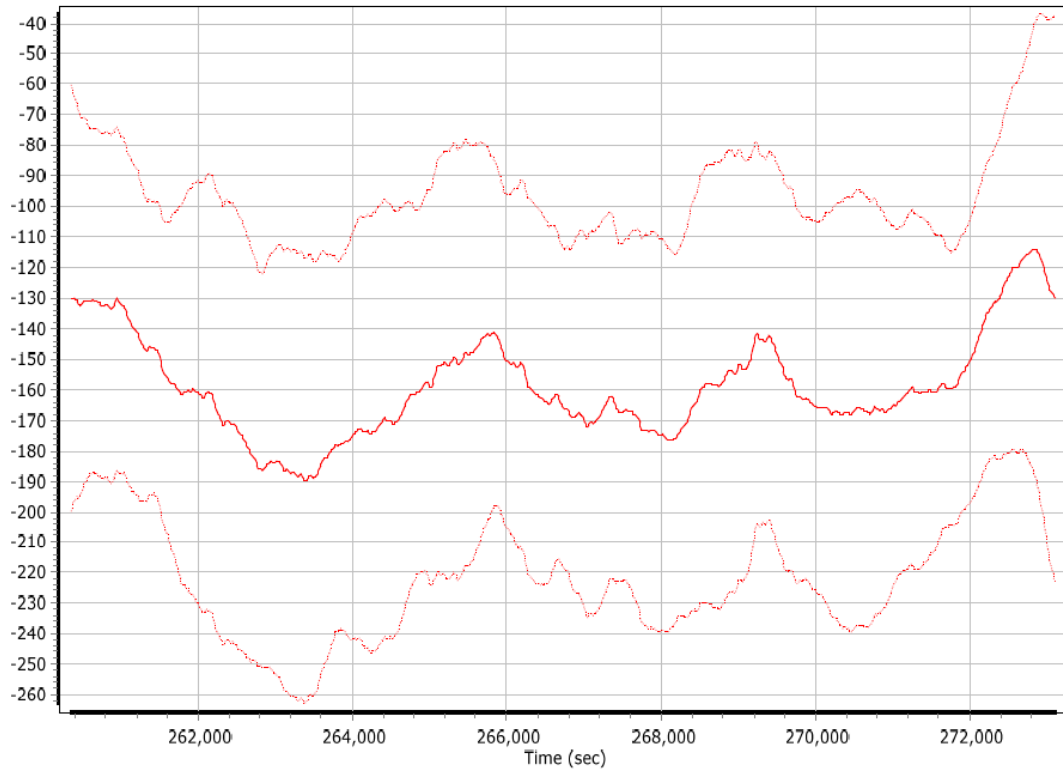


x accelerometer scale error (ppm)

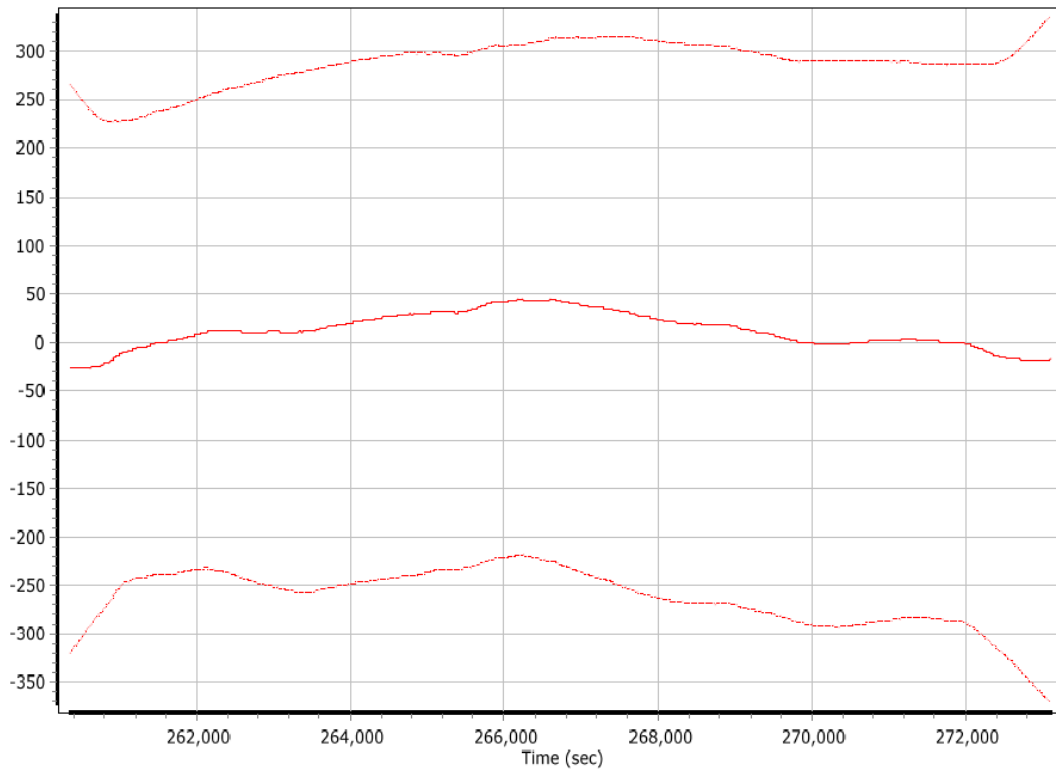


**y accelerometer bias (micro-g)**

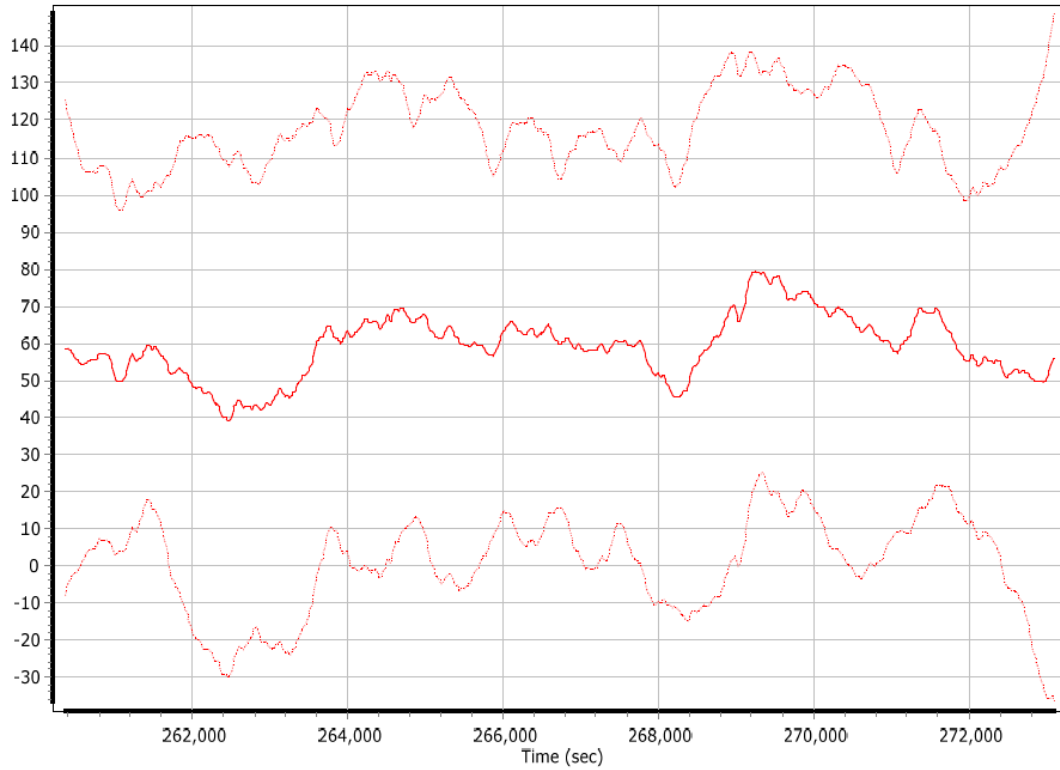


**y accelerometer scale error (ppm)**

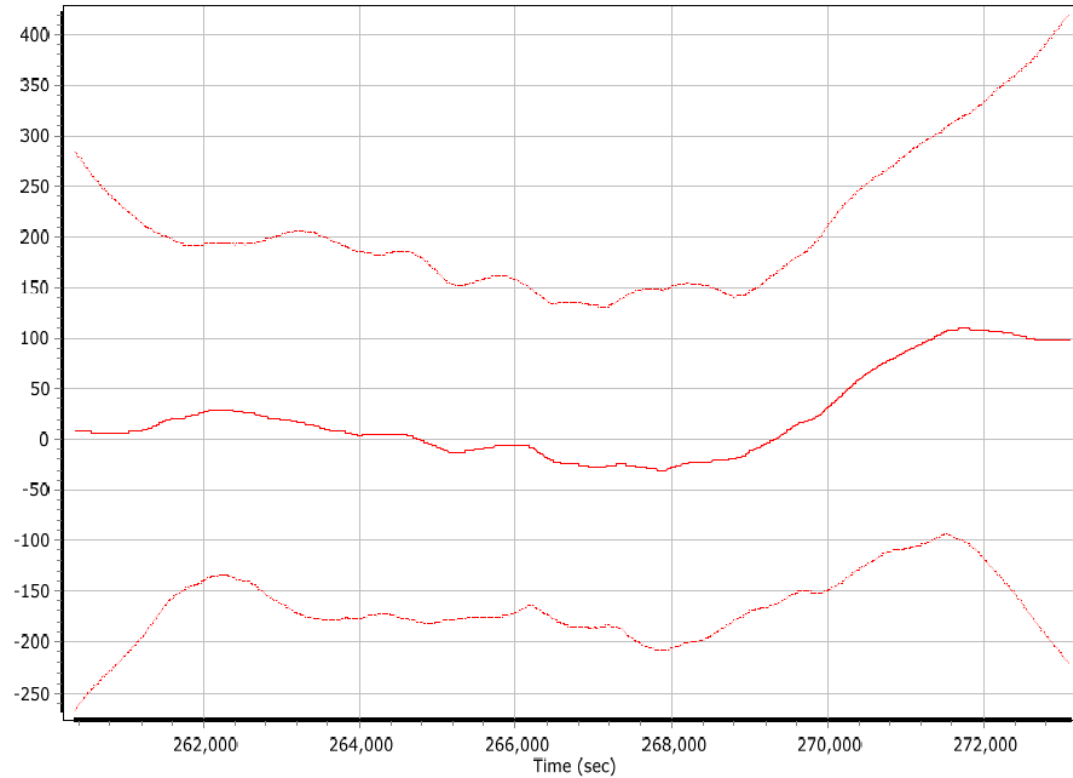


**z accelerometer bias (micro-g)**

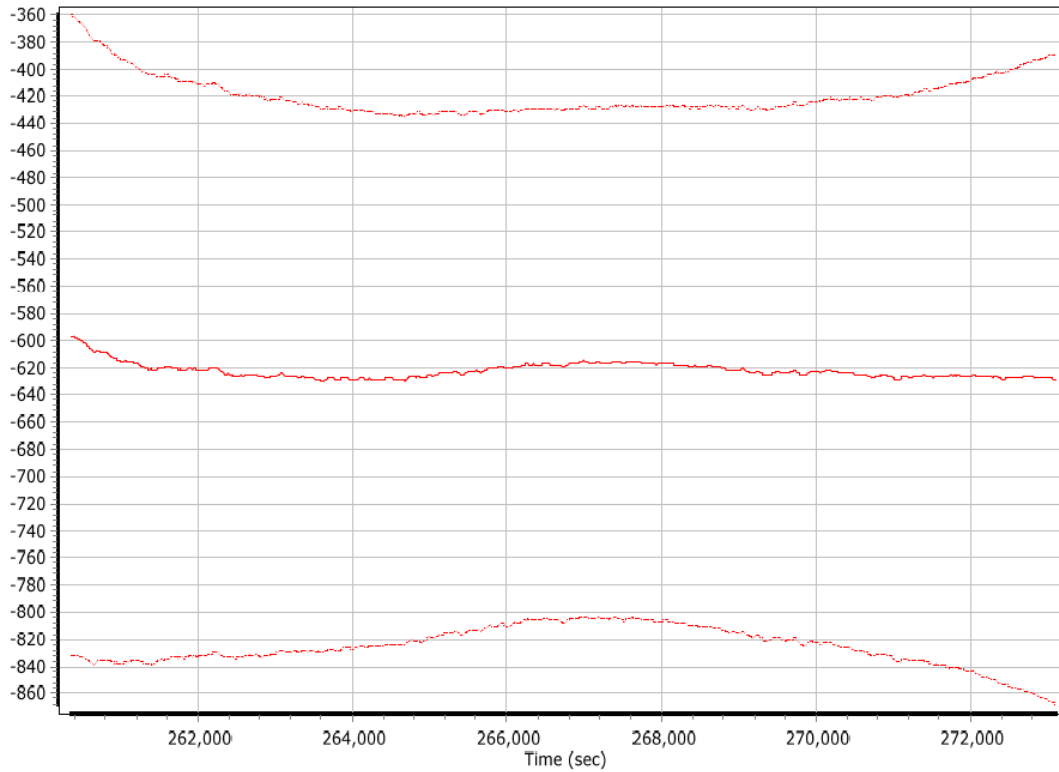

**z accelerometer scale error (ppm)**

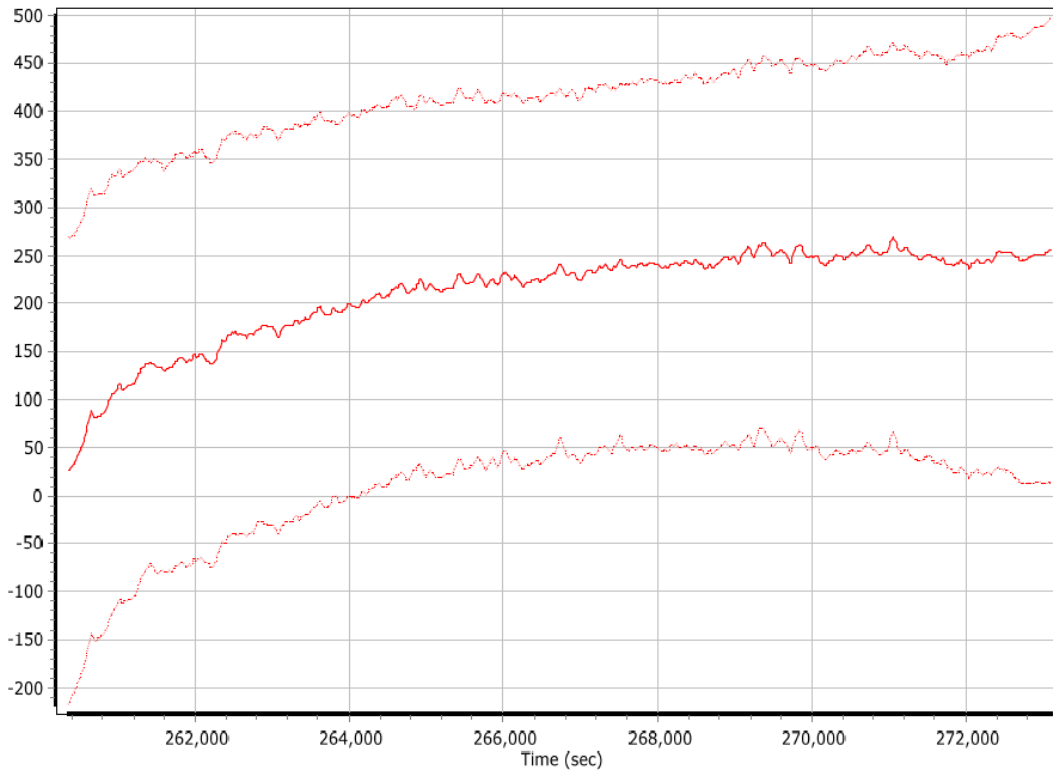

x gyro bias (deg/hr)

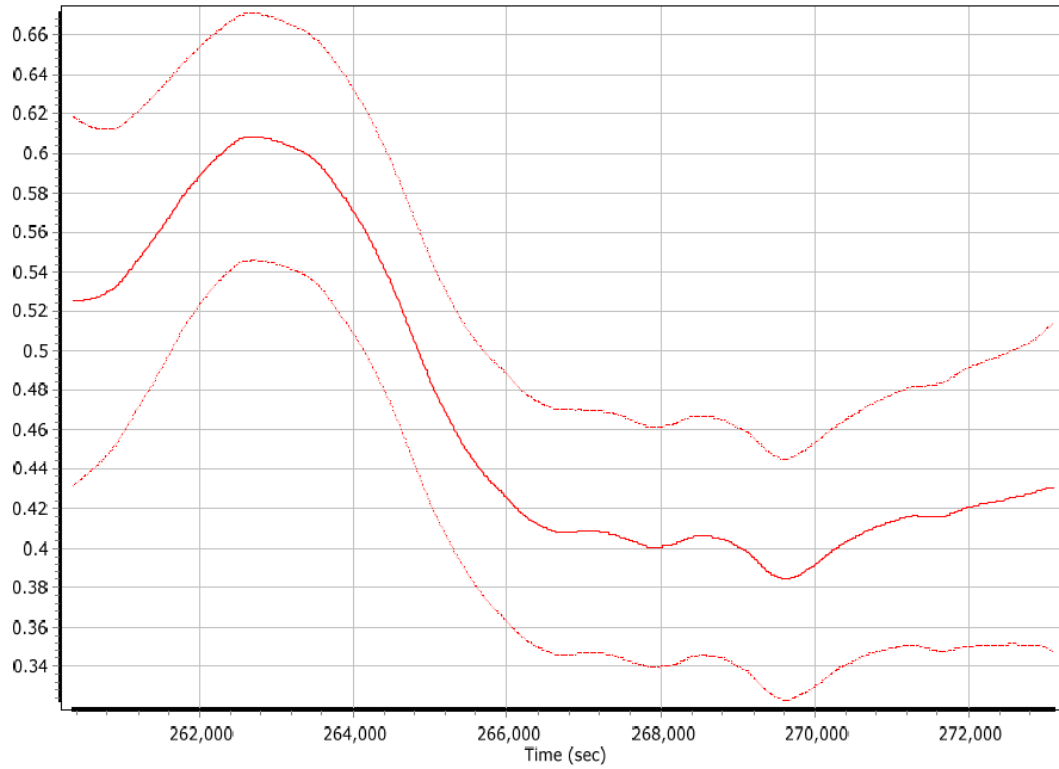

y gyro bias (deg/hr)

