



Dewberry Engineers Inc. | 813.225.1325
1000 North Ashley Drive, Suite 801 | 813.225.1385 fax
Tampa, FL 33602 | www.dewberry.com

ID Southern ID_2018_D19

WUID: 300227

Report Produced for U.S. Geological Survey

USGS Contract: G16PC00020

Task Order: D01-GPSC3 140G0219F0356

Report Date: October 10, 2023

SUBMITTED BY:

Dewberry

1000 North Ashley Drive Suite 801

Tampa, FL 33602

813.225.1325

SUBMITTED TO:

U.S. Geological Survey

tnm_help@usgs.gov

TABLE OF CONTENTS

Attachments	2
1. Executive Summary	3
1.1 Project Team	3
1.2 Project Area	3
1.3 Coordinate Reference System	4
1.4 Project Deliverables	4
1.5 Dewberry Production Workflow Diagram	5
2. Lidar Acquisition Report.....	7
2.1 Acquisition Extents	7
2.2 Acquisition Summary	8
2.3 Sensor Calibration and Boresight	8
2.4 Lidar Acquisition and Processing Details	9
2.5 Lidar System parameters	10
2.6 Acquisition Static Control	11
2.7 ABGNSS-Inertial Processing	12
2.8 Calibration Process (Project Mission Calibration)	12
2.9 Final Calibration Verification	12
3. Lidar Processing & Qualitative Assessment	13
3.1 Initial Processing	13
3.1.1 Post Calibration Lidar Review	13
3.2 Data Classification and Editing	15
3.2.1 Qualitative Review	16
3.2.2 Formatting Review	20
4. Breakline Processing & Qualitative Assessment	21
4.1 Breakline Production Methodology	21
4.1.1 Breakline Collection Requirements	21
4.2 Breakline Qualitative Assessment.....	23
5. DEM Processing & Qualitative Assessment	24
5.1 DEM Production Methodology	24
5.2 DEM Qualitative Assessment.....	25
6. Derivative Lidar Products	26
6.1 Swath Separation Images	26
6.2 Intensity Images	27
6.3 Interswath and Intraswath Polygons	30
6.3.1 Interswath Accuracy.....	30
6.3.2 Intraswath Accuracy.....	31
6.4 Maximum Surface Height Rasters (MSHRs).....	33
6.5 Flightline Extents GDB	33

ID_SouthernID_2018_D19
D01-GPSC3 140G0219F0356
10/10/2023

ATTACHMENTS

Appendix A: QSI GPS Processing Report

Appendix B: Eagle GPS Processing Report

Appendix C: AXIS GPS Processing Report

1. EXECUTIVE SUMMARY

The primary purpose of this project was to develop a consistent and accurate surface elevation dataset derived from high-accuracy light detection and ranging (lidar) technology for the ID SouthernID_2018_D19 WUID 300227 project area.

Lidar data were processed and classified according to project specifications. Detailed breaklines and bare-earth Digital Elevation Models were produced for the project area. Project components were formatted based on a tile grid with each tile covering an area 1,500 m by 1,500 m. A total of 54,482 were produced for the project, providing approximately 42,120 sq. miles of coverage. A total of 4,257 tiles were produced for WUID 300227, providing approximately 3,223 sq. miles of coverage.

1.1 Project Team

Dewberry served as the prime contractor for the project. In addition to project management, Dewberry was responsible for LAS classification, all lidar products, breakline production, digital elevation model (DEM) production, and quality assurance.

Dewberry completed the ground survey for the project and delivered surveyed checkpoints. Ground control points and checkpoints were surveyed for the project. Ground control points were used in calibration activities and checkpoints were used in independent testing of the vertical accuracy of the lidar-derived surface model.

Acquisition providers Quantum Spatial Inc. (QSI), Axis Geospatial (AXIS), and Eagle Mapping completed lidar data acquisition, and Dewberry performed data calibration and processing for entire project area.

1.2 Project Area

The work unit area is shown in figure 1. WUID 300227 contains 4,257 1,500 m by 1,500 m tiles. The project area tile grid contains 54,482 1,500 m by 1,500 m tiles.

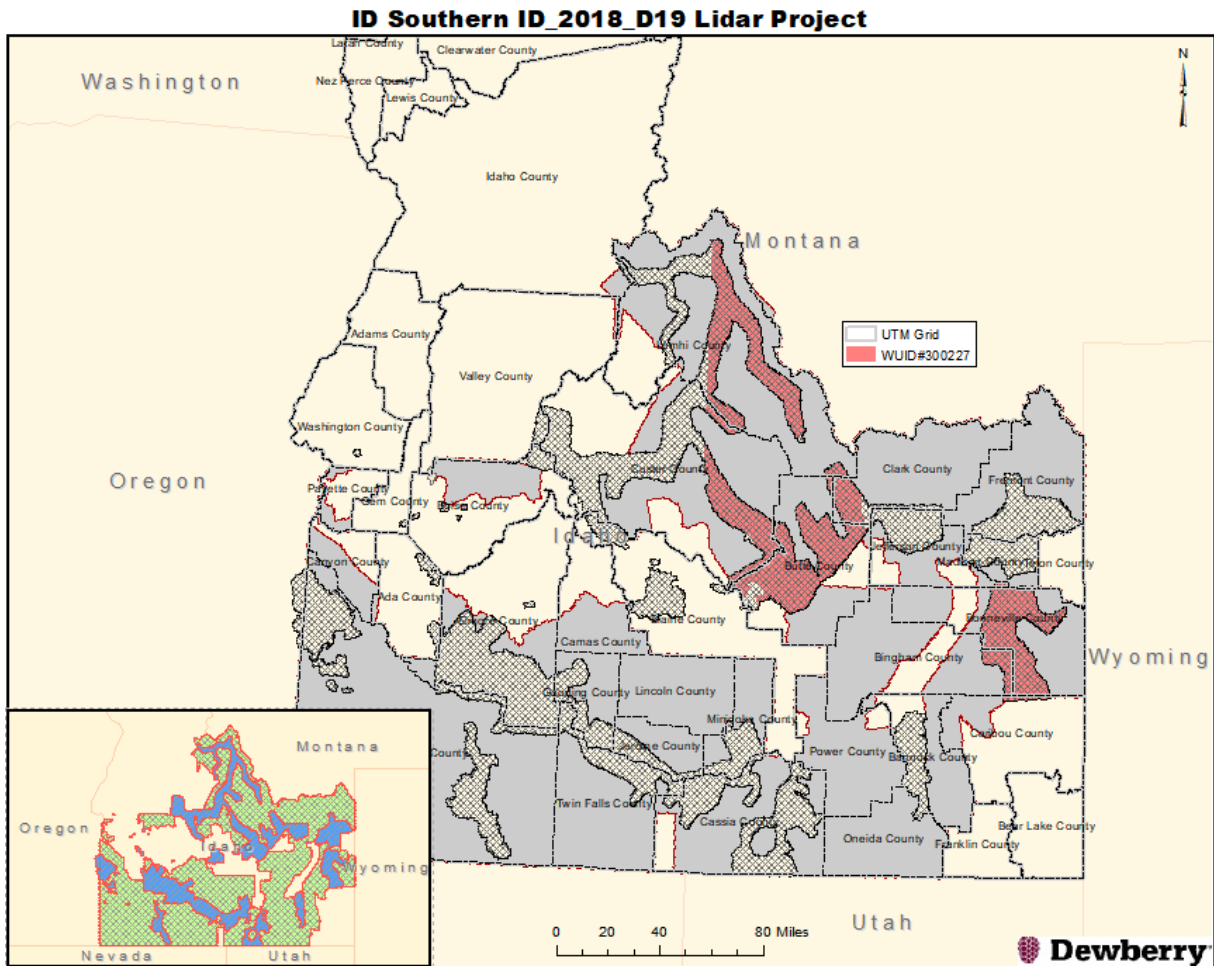


Figure 1. Project map and tile grid

1.3 Coordinate Reference System

Data produced for the project are delivered in the following spatial reference system:

Horizontal Datum:	North American Datum of 1983 with the 2011 Adjustment (NAD 83 (2011))
Vertical Datum:	North American Vertical Datum of 1988 (NAVD88)
Geoid Model:	Geoid12B
Coordinate System:	UTM Zone 12N
Horizontal Units:	Meters
Vertical Units:	Meters

1.4 Project Deliverables

The deliverables for the project are as follows:

1. Project Extents (Esri SHP)

2. Classified Point Cloud (tiled LAS)
3. Intensity Images (tiled, 8-bit gray scale, GeoTIFF format)
4. Breakline Data (file GDB)
5. Bare Earth Surface (tiled raster DEM, GeoTIFF format)
6. Swath Separation Images
7. Interswath Polygons
8. Intraswath Polygons
9. Metadata (XML)
10. Work Unit Report
11. Flightline Extents GDB
12. Maximum Surface Height Rasters (tiled raster MSHRs, GeoTIFF format)

1.5 Dewberry Production Workflow Diagram

The diagram below outlines Dewberry's standard lidar production workflow.

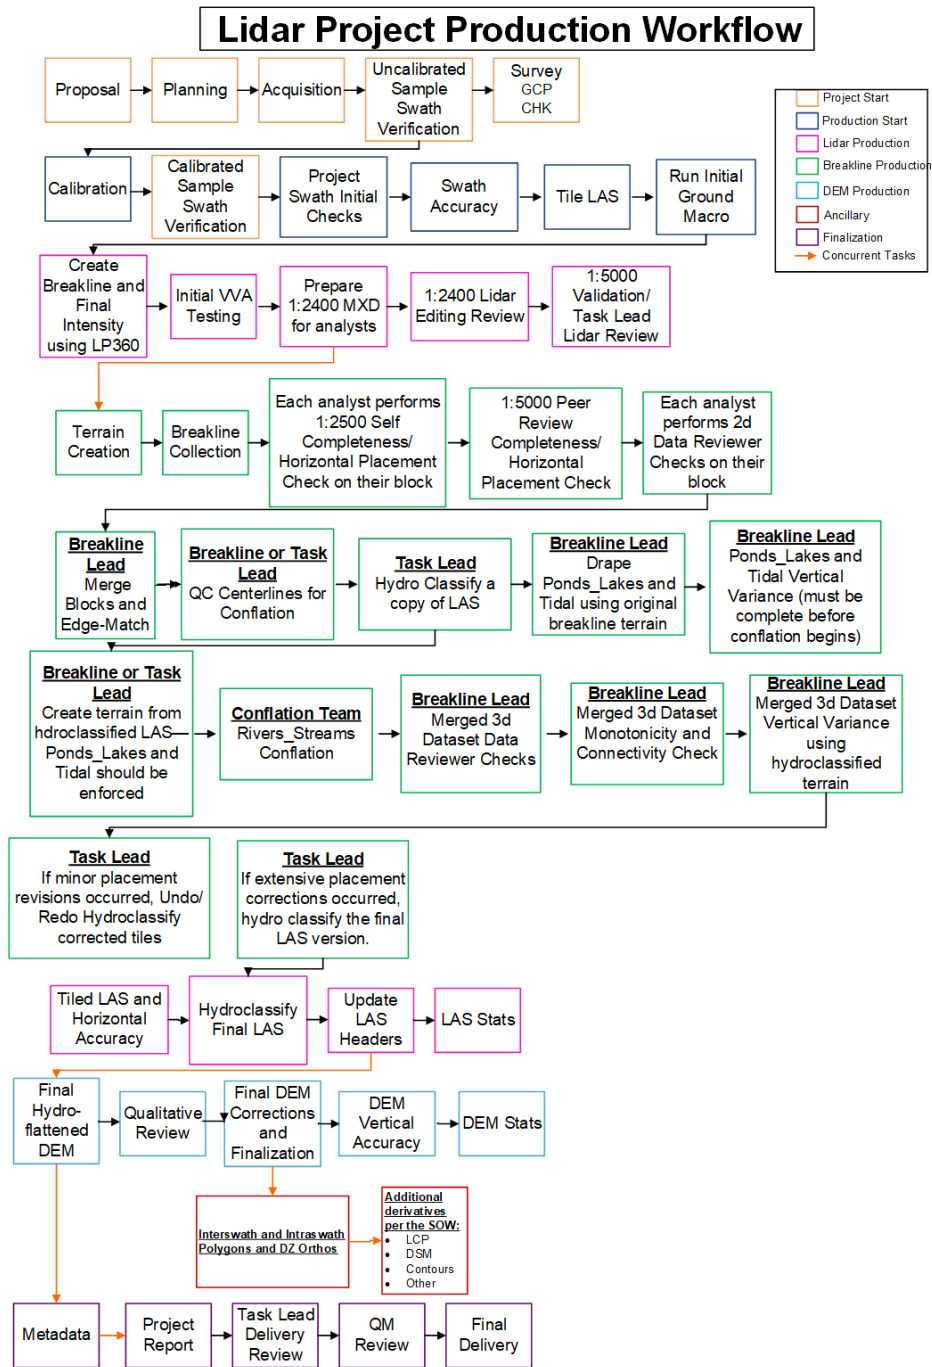


Figure 2. Dewberry's Lidar Production Workflow Diagram

2. LIDAR ACQUISITION REPORT

Dewberry elected to subcontract the lidar acquisition activities to QSI, AXIS, and Eagle Mapping. QSI, AXIS, and Eagle Mapping were responsible for providing lidar acquisition, raw data conversion from sensors and delivery of lidar data files to Dewberry for WUID 300227.

2.1 Acquisition Extents

The figure below shows flightline vectors by lift.

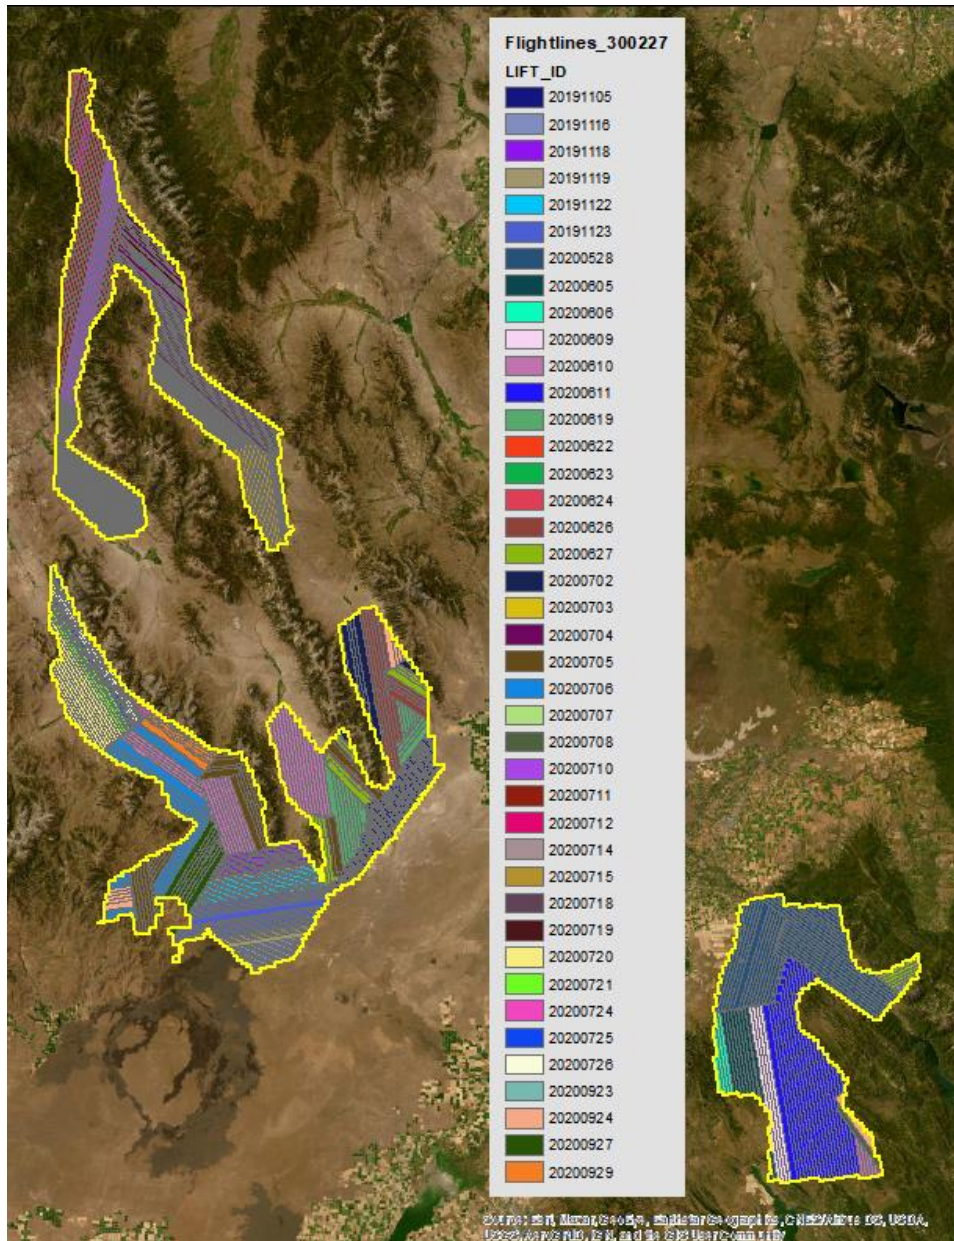


Figure 3. WUID 300227 swaths

2.2 Acquisition Summary

Dewberry elected to subcontract the lidar acquisition activities to Acquisition Providers QSI, AXIS, and Eagle Mapping. QSI, AXIS, and Eagle Mapping were responsible for providing lidar acquisition, raw data conversion from sensors and delivery of lidar data files to Dewberry for these work units. QSI acquired QL1 lidar data using an Optech Galaxy Prime, AXIS used a Riegl VQ1560i, and Eagle Mapping used a Riegl LMS-Q1560 lidar sensor in 2019 and a Riegl VQ 1560ii lidar sensor in 2020 for this work unit by monitoring suitable ground and weather conditions according to 3DEP lidar base specifications.

Acquisition providers planned a total of 661 passes over WUID 300227 for Quality Level 1 data acquisition as a series of parallel flight lines with cross flight lines for the purposes of quality control. QSI planned 197 passes, AXIS planned 62, and Eagle Mapping planned 402. The flight plan included zigzag flight line collection to compensate for the drift commonly associated with onboard inertial measurement unit (IMU) systems. In order to reduce potential errors in the data attributable to flight planning, Acquisition Providers followed FEMA's Guidelines and Specifications for Flood Hazard Mapping Partners, Appendix A: Guidance for Aerial Mapping and Survey. The guidance includes the following minimum criteria:

- A digital flight line layout using Riegl RiParameter and Optech Mission Management flight design software for direct integration into the aircraft flight navigation system;
- Planned flight lines, flight line numbers, and coverage area;
- Lidar coverage extended by a predetermined margin beyond all project borders to ensure necessary over-edge coverage appropriate for specific task order deliverables;
- Investigation of local restrictions related to air space and any controlled areas so that required permissions can be obtained in a timely manner with respect to project schedule; and
- Filed flight plans as required by local Air Traffic Control (ATC) prior to each mission.

QSI, AXIS, and Eagle Mapping monitored weather and atmospheric conditions and conducted lidar missions only when no conditions existed below the sensor that would affect the collection of data. QSI, AXIS, and Eagle Mapping accessed reliable weather sites and indicators (webcams) to establish the highest probability for successful data acquisition.

2.3 Sensor Calibration and Boresight

Prior to the ID_SouthernID project acquisition, QSI completed a sensor boresight on 10/25/2019 in Twin Falls, ID, AXIS completed a sensor boresight on 09/06/2018, Easton, MD, and Eagle Mapping completed a sensor boresight on 02/28/20 at the Chilliwack Regional Airport in Chilliwack, BC. The boresight consisted of multiple opposing lines in an E-W direction as well as multiple opposing lines in a N-S direction. The swaths have a large overlap (>60%) with neighbors. The trajectory (.sbt) was processed using Applanix PosPac and raw swath data (.las) was produced using Riegl RiProcess and Optech's Lidar Mapping Suite. The boresight was calibrated and then analyzed. All deemed necessary corrections are then applied to the sensor orientation internal files.

Data collected by the lidar unit is reviewed for completeness, acceptable density and to make sure all data is captured without errors or corrupted values. In addition, all GPS, aircraft trajectory, mission information, and ground control files are reviewed and logged into a database.

On a project level, a supplementary coverage check is carried out to ensure no data voids unreported by Field Operations are present.

The initial points for each mission calibration are inspected for flight line errors, flight line overlap, slivers or gaps in the data, point data minimums, or issues with the lidar unit or GPS. Roll, pitch and scanner scale are optimized during the calibration process until the relative accuracy is met.

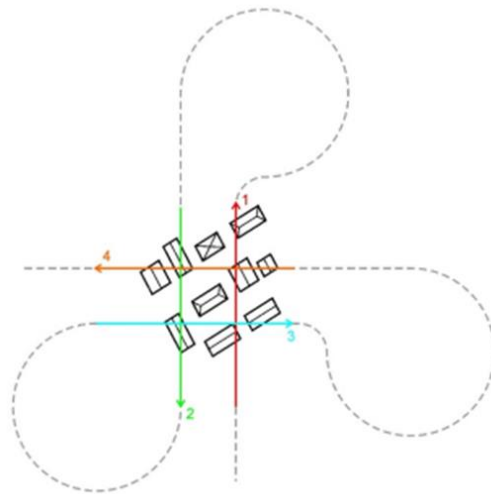


Figure 4. A typical calibration and boresight flight plan where above ground features are acquired from all four cardinal directions, any offsets of the above ground features between overlapping and other directional flight lines are analyzed, and corrections are applied as necessary to ensure proper configuration of the sensor

2.4 Lidar Acquisition and Processing Details

Table 1 outlines lidar acquisition details, including the project spatial reference system, and processing software used for WUID 300227. The data for WUID 300227 were acquired in Albers Equal Area and reprojected to NAD83 (2011) UTM Zone 12 for the final project deliverables.

Table 1. Lidar acquisition details

Parameter	Value
Number of Flight lines	661
Approximate Area	3,223 sq. miles
Acquisition Dates WUID 300227	November 05, 2019 – September 29, 2020
Horizontal Datum	North American Datum of 1983 (NAD83)
Vertical Datum	North American Vertical Datum of 1988 (NAVD88)
Geoid Model	Geoid12B
Coordinate Reference System	Albers Equal Area
Horizontal Units	Meters
Vertical Units	Meters
Kinematic Solution Processing Software:	Applanix Pospac
Point Cloud Generation Software	Riegl RiProcess and Optech's Lidar Mapping Suite
Calibration Software	BayesMap StripAlign

2.5 Lidar System parameters

Acquisition Provider QSI operated a Cessna 402B aircraft (Tail # N274MR) with an Optech Galaxy PRIME lidar system, AXIS operated a Cessna 206 (Tail # N223TC) and a Piper Navajo (Tail # N359RX) outfitted with a Riegl VQ1560i lidar system, and Eagle Mapping operated a Piper Navajo outfitted with a Riegl LMS-Q1560 in 2019 and a Riegl VQ 1560ii in 2020. Table 2 details the lidar system parameters used during acquisition for WUIDs 300227.

Table 2. Acquisition Providers QSI, AXIS, and Eagle Mapping lidar system parameters.

Parameter	Value – QL1 (QSI)	Value – QL1 (AXIS)	Value – QL1 (Eagle Mapping)	Value – QL1 (Eagle Mapping)
System	Galaxy PRIME	VQ1560i	LMS-Q1560	VQ1560ii
Altitude (m above ground level)	2450	823-1707	1200	1500
Nominal flight speed (kts)	160	175	140	140
Scanner pulse rate (kHz)	500	700 / 1000	2 x 400	2 x 1000
Scan frequency (Hz)	88	89.4 / 114	167	320
Pulse duration of the scanner (ns)	3.5	3	3	3
Pulse width of the scanner (m)	0.6125	0.31	0.6	0.6
Central wavelength of the sensor laser (nm)	1064	1064	1064	1064
Multiple pulses in the air	Yes	Yes	Yes	Yes
Beam divergence (mrad)	<= 0.25	<= 0.25	<= 0.25	<= 0.25
Swath width (m)	1042	1700	1064	1064
Nominal swath width on the ground (m)	1042	2200 / 2390	1368	1681
Swath overlap (%)	60%	55%	55%	25%
Total sensor scan angle (degrees)	24	58.52	58.52	58.52
Computed down track spacing per beam (m)	0.47	0.38	0.60	0.42
Computed cross track Spacing per beam (m)	0.47	0.707	0.61	0.42
Nominal pulse spacing (NPS) (single swath) (m)	0.33	0.3	0.45	0.31
Nominal Pulse Density (NPD) (single swath) (points per sq m)	9.99	11	5.0	9.9
Maximum Number of Returns per Pulse	8	7	7	9

2.6 Acquisition Static Control

The project area consists of limited number of operational CORS base stations operating at 1 Hz and many areas are not accessible by road to set up base stations. As a result, base stations were not setup to meet the 20-mile baseline requirement. Instead, Trimble PP-RTX solution for GPS/IMU data post-processing approach was utilized during the lidar acquisition and adjustment of trajectories due to the lack of CORS network. PP-RTX uses Applanix POSPac MMS software leveraging near real-time atmospheric models from Trimble’s extensive worldwide network of continuously operating base stations to produce highly accurate trajectories. Detailed parameters information is provided in Appendices A, B and, C: GPS Processing Reports.

2.7 ABGNSS-Inertial Processing

ABGNSS-Inertial processing was performed using the software identified in Table 1. The reference frame used for this processing does not always match the project spatial reference system and is shown in Table 3.

Appendices A, B, and C contain additional mission GPS and IMU processing covering:

- Pospac graphics and processing
- Graphics of any reference stations used for differential correction
- Graphics of processing interface to show trajectory data and labeled reference stations for each lift (only graphics of trajectory when precise point position is used).
- Graphics of processed plots for each mission/flight/lift to include:
 1. Forward/reverse separation of trajectory
 2. Estimated accuracy of trajectory
 3. Any additional plots used in the analyses of trajectory quality

Table 3. Spatial reference system used for ABGNSS-Inertial processing

Parameter	Value
Horizontal Datum	North American Datum of 1983 (NAD83)
Vertical Datum	North American Vertical Datum of 1988 (NAVD88)
Geoid Model	Geoid12B
Coordinate Reference System	Albers Equal Area
Horizontal Units	Meters
Vertical Units	Meters

2.8 Calibration Process (Project Mission Calibration)

Lidar mission flight trajectories were combined with raw point files in Riegl’s RiParameter Suite and Optech’s Lidar Mapping Suite. The initial points (.las) for each mission calibration were inspected for flight line errors, spatial distribution, data voids, density, or issues with the lidar sensor. If a calibration error greater than specification was observed within the mission, the necessary roll, pitch, and scanner scale corrections were calculated and corrections were applied to each individual swath using the BayesMap StripAlign software. In addition, all GPS, aircraft trajectory, mission information, and ground control files were reviewed and logged into a database. The missions with the new calibration values were regenerated and validated internally once again to ensure quality.

2.9 Final Calibration Verification

Dewberry surveyed 54 ground control points (GCPs) in flat, non-vegetated areas to test the accuracy of the calibrated swath data in WUID 300227. GCPs were located in open, non-vegetated terrain. To assess the accuracy of calibration, the heights of the ground control points were compared with a surface derived from the calibrated swath lidar. A full list of GCPs used for accuracy testing is included in the GCP Survey Report provided with project deliverables.

Table 4. Summary of calibrated swath vertical accuracy tested with ground control points

Land Cover Type	# of Points	RMSE _z (m)	NVA (m)	Mean (m)	Median (m)	Skew	Std Dev (m)	Min (m)	Max (m)	Kurtosis
Ground Control Points (GCPs)	54	0.053	0.103	0.012	0.009	-0.638	0.052	-0.148	0.115	1.105

3. LIDAR PROCESSING & QUALITATIVE ASSESSMENT

3.1 Initial Processing

Dewberry performed vertical accuracy validation of the swath data, inter-swath relative accuracy validation, intra-swath relative accuracy validation, verification of horizontal alignment between swaths, and confirmation of point density and spatial distribution. This initial assessment allowed Dewberry to determine whether the data was suitable for full-scale production.

3.1.1 Post Calibration Lidar Review

The table below identifies requirements verified by Dewberry prior to tiling the swath data, running initial ground macros, and starting manual classification.

Table 5. Post calibration and initial processing data verification steps

Requirement	Description of Deliverables	Additional Comments
Non-vegetated vertical accuracy (NVA) of the swath data meet required specifications of 19.6 cm at the 95% confidence level based on RMSE _z (10 cm) x 1.96	The swath NVA was tested and passed specifications.	None
The NPD/NPS (or Aggregate NPD/Aggregate NPS) meets required specification of 8 ppsm or 0.35 m NPS. The NPD (ANPD) is calculated from first return points only.	The average calculated (A)NPD of this project is 19.87 ppsm. Density raster visualization also passed specifications.	None
Spatial Distribution requires 90% of the project grid, calculated with cell sizes of 2*NPS, to contain at least one lidar point. This is calculated from first return points only.	99.72% of cells (2*NPS cell size) had at least 1 lidar point within the cell.	None
Within swath (Intra-swath or hard surface repeatability) relative accuracy must meet ≤ 6 cm maximum difference	Within swath relative accuracy passed specification.	None
Between swath (Inter-swath or swath overlap) relative accuracy must meet 8 cm RMSDz/16 cm maximum difference. These thresholds are tested in open, flat terrain.	Between swath relative accuracy passed specification, calculated from single return lidar points.	None

Requirement	Description of Deliverables	Additional Comments
Horizontal Calibration-There should not be horizontal offsets (or vertical offsets) between overlapping swaths that would negatively impact the accuracy of the data or the overall usability of the data. Assessments made on rooftops or other hard planar surfaces where available.	Horizontal calibration met project requirements.	None
Ground Penetration-The missions were planned appropriately to meet project density requirements and achieve as much ground penetration beneath vegetation as possible	Ground penetration beneath vegetation was acceptable.	None
Sensor Anomalies-The sensor should perform as expected without anomalies that negatively impact the usability of the data, including issues such as excessive sensor noise and intensity gain or range-walk issues	No sensor anomalies were present.	None
Edge of Flight line bits-These fields must show a minimum value of 0 and maximum value of 1 for each swath acquired, regardless of which type of sensor is used	Edge of Flight line bits were populated correctly	None
Scan Direction bits-These fields must show a minimum value of 0 and maximum value of 1 for each swath acquired with sensors using oscillating (back-and-forth) mirror scan mechanism. These fields should show a minimum and maximum of 0 for each swath acquired with Riegl sensors as these sensors use rotating mirrors.	Scan Direction bits were populated correctly	None
Swaths are in LAS v1.4 formatting	Swaths were in LAS v1.4 as required by the project.	None
All swaths must have File Source IDs assigned (these should equal the Point Source ID or the flight line number)	File Source IDs were correctly assigned	None
GPS timestamps must be in Adjusted GPS time format and Global Encoding field must also indicate Adjusted GPS timestamps	GPS timestamps were Adjusted GPS time and Global Encoding field were correctly set to 17	None
Intensity values must be 16-bit, with values ranging between 0-65,535	Intensity values were 16-bit	None

Requirement	Description of Deliverables	Additional Comments
Point Source IDs must be populated and swath Point Source IDs should match the File Source IDs	Point Source IDs were assigned and match the File Source IDs	None

3.2 Data Classification and Editing

Once the calibration, absolute swath vertical accuracy, and relative accuracy of the data were confirmed, Dewberry utilized proprietary and TerraScan software for processing. The acquired 3D laser point clouds were tiled according to the project tile grid using proprietary software. Once tiled, the laser points were classified using a proprietary routine in TerraScan. This routine classified any obvious low outliers in the dataset to class 7 and high outliers in the dataset to class 18. Points along flight line edges that may be geometrically unusable were flagged as withheld and classified to a separate class so that they would be excluded from the initial ground algorithm. After points that could negatively affect the ground were removed from class 1, the ground layer was extracted from this remaining point cloud using an iterative surface model.

This surface model was generated using four main parameters: building size, iteration angle, iteration distance, and maximum terrain angle. The initial model was based on low points being selected by a "roaming window" with the assumption that these were the ground points. The size of this roaming window was determined by the building size parameter. The low points were triangulated and the remaining points were evaluated and subsequently added to the model if they met the iteration angle and distance constraints. This process was repeated until no additional points were added within iterations. Points that did not relate to classified ground within the maximum terrain angle were not captured by the initial model.

After the initial automated ground routine, each tile was imported into TerraScan and a surface model was created to examine the ground classification. Dewberry analysts visually reviewed the ground surface model and corrected errors in the ground classification such as vegetation, buildings, and bridges that were present following the initial processing. Dewberry analysts employed 3D visualization techniques to view the point cloud at multiple angles and in profile to ensure that non-ground points were removed from the ground classification. Bridge decks were classified to class 17 and bridge saddle breaklines were used where necessary. After the ground classification corrections were completed, the dataset was processed through a water classification routine that utilized breaklines to automatically classify hydro features. The water classification routine selected ground points within the breakline polygons and automatically classified them as class 9, water. During this water classification routine, points that were within 1 NPS distance or less of the hydrographic feature boundaries were moved to class 20, ignored ground, to avoid hydro-flattening artifacts along the edges of hydro features.

The withheld bit was set on the withheld points previously identified in TerraScan before the ground classification routine was performed. The withheld bit was set on points classified as noise (classes 7 and 18) after manual clean-up.

After manual classification, the LAS tiles were peer reviewed and then underwent a final independent QA/QC. After the final QA/QC and corrections, all headers, appropriate point data records, and variable length records, including spatial reference information, were updated and verified using proprietary Dewberry software.

3.2.1 Qualitative Review

Dewberry’s qualitative assessment of lidar point cloud data utilized a combination of statistical analyses and visual interpretation. Methods and products used in the assessment included profile- and map view-based point cloud review, pseudo image products (e.g., intensity orthoimages), TINs, DEMs, DSMs, and point density rasters. This assessment looked for incorrect classification and other errors sourced in the LAS data. Lidar data are peer reviewed, reviewed by task leads (senior level analysts), and verified by an independent QA/QC team at key points within the lidar workflow.

The following table describes Dewberry’s standard editing and review guidelines for specific types of features, land covers, and lidar characteristics.

Table 6. Lidar editing and review guidelines

Category	Editing Guideline	Additional Comments
No Data Voids	The SOW for the project defines unacceptable data voids as voids greater than 4 x ANPS ² , or 1.96 m ² , that are not related to water bodies or other areas of low near-infrared reflectivity and are not appropriately filled by data from an adjacent swath. The LAS files were used to produce density grids based on Class 2 (ground) points for review.	No unacceptable voids were identified in this dataset
Artifacts	Artifacts in the point cloud are typically caused by misclassification of points in vegetation or man-made structures as ground. Low-lying vegetation and buildings are difficult for automated grounding algorithms to differentiate and often must be manually removed from the ground class. Dewberry identified these features during lidar editing and reclassified them to Class 1 (unassigned). Artifacts up to 0.3 m above the true ground surface may have been left as Class 2 because they do not negatively impact the usability of the dataset.	None
Bridge Saddles	The DEM surface models are created from TINs or terrains. TIN and terrain models create continuous surfaces from the input points, interpolating surfaces beneath bridges where no lidar data was acquired. The surface	None

Category	Editing Guideline	Additional Comments
	<p>model in these areas tend to be less detailed. Bridge saddles may be created where the surface interpolates between high and low ground points. Dewberry identifies problems arising from bridge removal and resolves them by reclassifying misclassified ground points to class 1 and/or adding bridge saddle breaklines where applicable due to interpolation.</p>	
Culverts and Bridges	<p>It is Dewberry's standard operating procedure to leave culverts in the bare earth surface model and remove bridges from the model. In instances where it is difficult to determine whether the feature was a culvert or bridge, Dewberry errs on the side of culverts, especially if the feature is on a secondary or tertiary road.</p>	None
In-Ground Structures	<p>In-ground structures typically occur on military bases and at facilities designed for munitions testing and storage. When present, Dewberry identifies these structures in the project and includes them in the ground classification.</p>	No in-ground structures present in this dataset
Dirt Mounds	<p>Irregularities in the natural ground, including dirt piles and boulders, are common and may be misinterpreted as artifacts that should be removed. To verify their inclusion in the ground class, Dewberry checked the features for any points above or below the surface that might indicate vegetation or lidar penetration and reviews ancillary layers in these locations as well. Whenever determined to be natural or ground features, Dewberry edits the features to class 2 (ground)</p>	No dirt mounds or other irregularities in the natural ground were present in this dataset
Irrigated Agricultural Areas	<p>Per project specifications, Dewberry collected all areas of standing water greater than or equal to 0.8 hectare, including areas of standing water</p>	Areas of flooded fields were delineated with a Low Confidence Polygon

Category	Editing Guideline	Additional Comments
	<p>within agricultural areas and not within wetland or defined waterbody, hydrographic, or tidal boundaries. Areas of standing water that did not meet the 0.8 hectare size criteria were not collected.</p>	
Wetland/Marsh Areas	<p>Vegetated areas within wetlands/marsh areas are not considered water bodies and are not hydroflattened in the final DEMs. However, it is sometimes difficult to determine true ground in low wet areas due to low reflectivity. In these areas, the lowest points available are used to represent ground, resulting in a sparse and variable ground surface. Open water within wetland/marsh areas greater than or equal to 0.8 hectare is collected as a waterbody.</p>	Wetlands/marshes are present in the data
Flight Line Ridges	<p>Flight line ridges occur when there is a difference in elevation between adjacent flight lines or swaths. If ridges are visible in the final DEMs, Dewberry ensures that any ridges remaining after editing and QA/QC are within project relative accuracy specifications.</p>	No flight line ridges are present in the data
Temporal Changes	<p>If temporal differences are present in the dataset, the offsets are identified with a shapefile.</p>	Temporal polygons provided to delineate temporal offsets
Low NIR Reflectivity	<p>Some materials, such as asphalt, tars, and other petroleum-based products, have low NIR reflectivity. Large-scale applications of these products, including roadways and roofing, may have diminished to absent lidar returns. USGS LBS allow for this characteristic of lidar but if low NIR reflectivity is causing voids in the final bare earth surface, these locations are identified with a shapefile.</p>	No Low NIR Reflectivity is present in the data
Laser Shadowing	<p>Shadows in the LAS can be caused when solid features like trees or</p>	No Laser Shadowing is present in the data

Category	Editing Guideline	Additional Comments
	<p>buildings obstruct the lidar pulse, preventing data collection on one or more sides of these features. First return data is typically collected on the side of the feature facing toward the incident angle of transmission (toward the sensor), while the opposite side is not collected because the feature itself blocks the incoming laser pulses. Laser shadowing typically occurs in areas of single swath coverage because data is only collected from one direction. It can be more pronounced at the outer edges of the single coverage area where higher scanning angles correspond to more area obstructed by features. Building shadow in particular can be more pronounced in urban areas where structures are taller. Data are edited to the fullest extent possible within the point cloud. As long as data meet other project requirements (density, spatial distribution, etc.), no additional action taken.</p>	

USGS and Dewberry observed some instances of minor undulations in the ground within WUID 300227. The events are minor and mostly consist of less than 8 cm of changes. These are caused by pitch and roll events while operating the Optech sensor and can be exacerbated by the terrain.

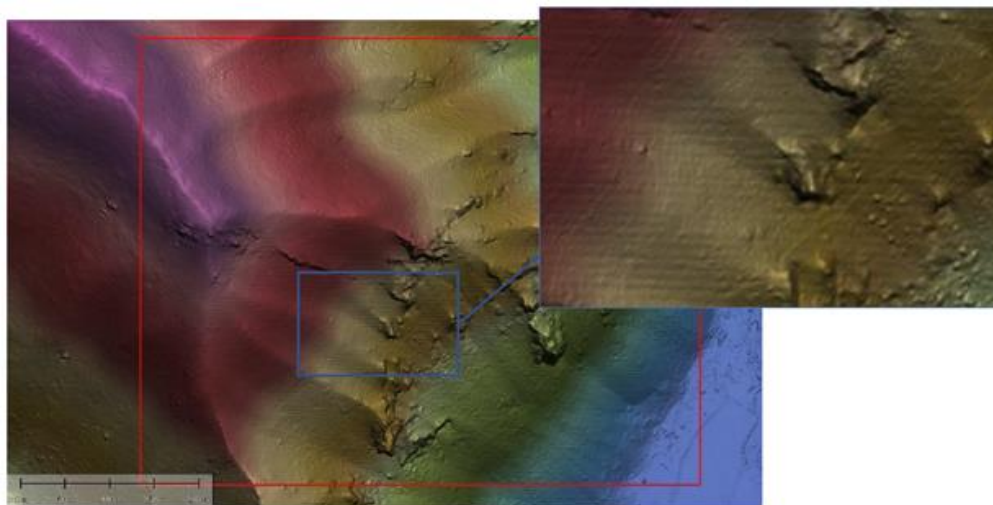


Figure 5. Pitch and Roll Events

3.2.2 Formatting Review

After the final QA/QC was performed and all corrections were applied to the dataset, all lidar files were updated to the final format requirements and the final formatting, header information, point data records, and variable length records were verified using proprietary tools. The table below lists the primary lidar header fields that are updated and verified.

Table 7. Classified lidar formatting parameters

Parameter	Project Specification	Pass/Fail
LAS Version	1.4	Pass
Point Data Record Format	6	Pass
Horizontal Coordinate Reference System	NAD83 (2011) UTM Zone 12, meters in WKT format	Pass
Vertical Coordinate Reference System	NAVD88 (Geoid12B), meters in WKT format	Pass
Global Encoder Bit	17 for adjusted GPS time	Pass
Time Stamp	Adjusted GPS time (unique timestamps)	Pass
System ID	Sensor used to acquire data	Pass
Multiple Returns	The sensor shall be able to collect multiple returns per pulse and the return numbers are recorded	Pass
Intensity	16-bit intensity values recorded for each pulse	Pass
Classification	Class 1: Unclassified Class 2: Ground	Pass

Parameter	Project Specification	Pass/Fail
	Class 7: Low Noise Class 9: Water Class 17: Bridge Decks Class 18: High Noise Class 20: Ignored Ground Class 22: Temporal Exclusion	
Withheld Points	Withheld bits set for geometrically unreliable points and for noise points in classes 7 and 18	Pass
Scan Angle	Recorded for each pulse	Pass
XYZ Coordinates	Recorded for each pulse	Pass

4. BREAKLINE PROCESSING & QUALITATIVE ASSESSMENT

4.1 Breakline Production Methodology

Breaklines were manually digitized within an Esri software environment, using full point cloud intensity imagery, bare earth terrains and DEMs, the lidar point cloud, and ancillary ortho imagery where appropriate.

Breakline features with static or semi-static elevations (ponds and lakes, bridge saddles, and soft feature breaklines) were converted to 3D breaklines within the Esri environment where breaklines were draped on terrains or the lidar point cloud. Subsequent processing was done on ponds/lakes to identify the minimum z-values within these features and re-applied that minimum elevation to all vertices of the breakline feature.

Linear hydrographic features show downhill flow and maintain monotonicity. These breaklines underwent conflation by using a combination of Esri and LP360 software. Centerlines were draped on terrains, enforced for monotonicity, and those elevations were then assigned to the bank lines for the final river/stream z-values.

Tidal breaklines may have been converted to 3D using either method, dependent on the variables within each dataset.

4.1.1 Breakline Collection Requirements

The table below outlines breakline collection requirements for this dataset.

Table 8. Breakline collection requirements

Parameter	Project Specification	Additional Comments
Ponds and Lakes	Breaklines are collected in all inland ponds and lakes ~0.8 hectare or greater. These features are flat and level water bodies at a single elevation for each vertex along the bank.	None

Parameter	Project Specification	Additional Comments
Rivers and Streams	Breaklines are collected for all streams and rivers ~30 m nominal width or wider. These features are flat and level bank to bank, gradient will follow the surrounding terrain and the water surface will be at or below the surrounding terrain. Streams/river channels will break at culvert locations however not at elevated bridge locations.	None
Tidal	Breaklines are collected as polygon features depicting water bodies such as oceans, seas, gulfs, bays, inlets, salt marshes, very large lakes, etc. Includes any significant water body that is affected by tidal variations. Tidal variations over the course of collection, and between different collections, can result in discontinuities along shorelines. This is considered normal and should be retained. Variations in water surface elevation resulting from tidal variations during collection should not be removed or adjusted. Features should be captured as a dual line with one line on each bank. Each vertex placed shall maintain vertical integrity. Parallel points on opposite banks of the tidal waters must be captured at the same elevation to ensure flatness of the water feature. The entire water surface edge is at or below the immediate surrounding terrain.	No tidally influenced features are in this dataset so no tidal breaklines were collected.
Islands	Donuts will exist where there are islands greater than 1 acre in size within a hydro feature.	None
Bridge Saddle Breaklines	Bridge Saddle Breaklines are collected where bridge abutments were interpolated after bridge removal causing saddle artifacts.	None
Soft Features	Soft Feature Breaklines are collected where additional enforcement of the modeled bare earth terrain was	None

Parameter	Project Specification	Additional Comments
	required, typically on hydrographic control structures or vertical waterfalls, due to large vertical elevation differences within a short linear distance on a hydrographic feature.	

4.2 Breakline Qualitative Assessment

Dewberry performed both manual and automated checks on the collected breaklines. Breaklines underwent peer reviews, breakline lead reviews (senior level analysts), and final reviews by an independent QA/QC team. The table below outlines high level steps verified for every breakline dataset.

Table 9. Breakline verification steps.

Parameter	Requirement	Pass/Fail
Collection	Collect breaklines according to project specifications using lidar-derived data, including intensity imagery, bare earth ground models, density models, slope models, and terrains.	Pass
Placement	Place the breakline inside or seaward of the shoreline by 1-2 x NPS in areas of heavy vegetation or where the exact shoreline is hard to delineate.	Pass
Completeness	Perform a completeness check, breakline variance check, and all automated checks on each block before designating that block complete.	Pass
Merged Dataset	Merge completed production blocks. Ensure correct horizontal and vertical snapping between all production blocks. Confirm correct horizontal placement of breaklines.	Pass
Merged Dataset Completeness Check	Check entire dataset for features that were not captured but that meet baseline specifications or other metrics for capture. Features should be collected consistently across tile boundaries.	Pass
Edge Match	Ensure breaklines are correctly edge-matched to adjoining datasets. Check completion type, attribute coding, and horizontal placement.	Pass
Vertical Consistency	Waterbodies shall maintain a constant elevation at all vertices Vertices should not have excessive min or max z-values when compared to adjacent vertices	Pass

Parameter	Requirement	Pass/Fail
	<p>Intersecting features should maintain connectivity in X, Y, Z planes</p> <p>Dual line streams shall have the same elevation at any given cross-section of the stream</p>	
Vertical Variance	Using a terrain created from lidar ground (class 2, 8, and 20 as applicable) and water points (class 9) to compare breakline Z values to interpolated lidar elevations to ensure there are no unacceptable discrepancies.	Pass
Monotonicity	Dual line streams generally maintain a consistent down-hill flow and collected in the direction of flow – some natural exceptions are allowed	Pass
Topology	<p>Features must not overlap or have gaps</p> <p>Features must not have unnecessary dangles or boundaries</p>	Pass
Hydro-classification	The water classification routine selected ground points within the breakline polygons and automatically classified them as class 9, water. During this water classification routine, points that were within 1 NPS distance or less of the hydrographic feature boundaries were moved to class 20, ignored ground, to avoid hydroflattening artifacts along the edges of hydro features.	Pass
Hydro-flattening	Perform hydro-flattening and hydro-enforcement checks. Tidal waters should preserve as much ground as possible and can be non-monotonic.	Pass

5. DEM PROCESSING & QUALITATIVE ASSESSMENT

5.1 DEM Production Methodology

Dewberry utilized LP360 to generate DEMs. LP360 uses TIN (Triangulated Irregular Network) as the interpolated surface method. A TIN divides a surface into a set of contiguous, non-overlapping, Delaunay triangles. The height of each triangle vertex interpolates together to construct the surface. Dewberry utilized both ArcGIS and Global Mapper for QA/QC.

The final classified lidar points in all bare earth classes were loaded into LP360 along with the final 3D breaklines and the project tile grid. A raster was generated from the lidar data with breaklines enforced and clipped to the project tile grid. The DEM was reviewed for any issues requiring corrections, including remaining lidar misclassifications, erroneous breakline elevations, incorrect or incomplete hydro-flattening or hydro-enforcement, and processing artifacts. The formatting of the DEM tiles was verified before the tiles were loaded

into Global Mapper to ensure that there was no missing or corrupt data and that the DEMs matched seamlessly across tile boundaries. A final qualitative review was then conducted by an independent review department within Dewberry.

5.2 DEM Qualitative Assessment

Dewberry performed a comprehensive qualitative assessment of the bare earth DEM deliverables to ensure that all tiled DEM products were delivered with the proper extents, were free of processing artifacts, and contained the proper referencing information. Dewberry conducted the review in ArcGIS using a hillshade model of the full dataset with a partially transparent colored elevation model overlaid. The tiled DEMs were reviewed at a scale of 1:5,000 to look for artifacts caused by the DEM generation process and to verify correct and complete hydro-flattening and hydro-enforcement. Upon correction of any outstanding issues, the DEM data was loaded into Global Mapper for its second review and to verify corrections.

The table below outlines high level steps verified for every DEM dataset.

Table 10. DEM verification steps

Parameter	Requirement	Pass/Fail
Digital Elevation Model (DEM) of bare-earth w/ breaklines	DEM of bare-earth terrain surface (0.5 m) is created from lidar ground points and breaklines. DEMs are tiled without overlaps or gaps, show no edge artifact or mismatch, DEM deliverables are .tif format	Pass
DEM Compression	DEM's are not compressed	Pass
DEM NoData	Areas outside survey boundary are coded as NoData. Internal voids (e.g., open water areas) are coded as NoData (-999999)	Pass
Hydro-flattening	Ensure DEMs were hydro-flattened or hydro-enforced as required by project specifications	Pass
Monotonicity	Verify monotonicity of all linear hydrographic features	Pass
Breakline Elevations	Ensure adherence of breaklines to bare-earth surface elevations, i.e., no floating or digging hydrographic feature	Pass
Bridge Removal	Verify removal of bridges from bare-earth DEMs and no saddles present	Pass
DEM Artifacts	Correct any issues in the lidar classification that were visually expressed in the DEMs. Reprocess the DEMs following lidar corrections.	Pass
DEM Tiles	Split the DEMs into tiles according to the project tiling scheme	Pass

Parameter	Requirement	Pass/Fail
DEM Formatting	Verify all properties of the tiled DEMs, including coordinate reference system information, cell size, cell extents, and that compression is not applied to the tiled DEMs. GDAL version 2.4.0 used for all DEM formatting.	Pass
DEM Extents	Load all tiled DEMs into Global Mapper and verify complete coverage within the (buffered) project boundary and verify that no tiles are corrupt	Pass

6. DERIVATIVE LIDAR PRODUCTS

USGS required several derivative lidar products to be created. Each type of derived product is described below.

6.1 Swath Separation Images

Dewberry verified inter-swath or between swath relative accuracy of the dataset by generating swath separation images in conjunction with interswath polygons. Color-coding is used to help visualize elevation differences between overlapping swaths. Pixels that do not contain points from overlapping flight lines are colored according to their intensity values.

The swath separation images are symbolized by the following ranges:

- 0-8 cm: **Green**
- 8-16 cm: **Yellow**
- >16 cm: **Red**

Areas of vegetation and steep slopes (slopes with 16 cm or more of valid elevation change across one raster pixel) are expected to appear yellow or red in the SSIs. Flat, open areas are expected to be green in the SSIs. Large or continuous sections of yellow or red pixels following flight line patterns and not the terrain or vegetation can indicate the data was not calibrated correctly or that there were issues during acquisition that could affect the usability of the data.

Dewberry generated swath separation images using LP360 software. These images were created from the last return of all points except points classified as noise and/or flagged as withheld. Point Insertion was used as the Surface Method and the cell size was set to 2x the deliverable DEM cell size. The three interval bins used are bulleted above and the parameter to “Modulate source differences by Intensity” was set to 50%. The output GeoTIFF rasters are tiled to the project tile grid, clipped to the master DPA, and formatted (including defining the CRS which matches the project CRS) using GDAL software, version 2.4.0. The image below shows the generated SSIs for this work unit.

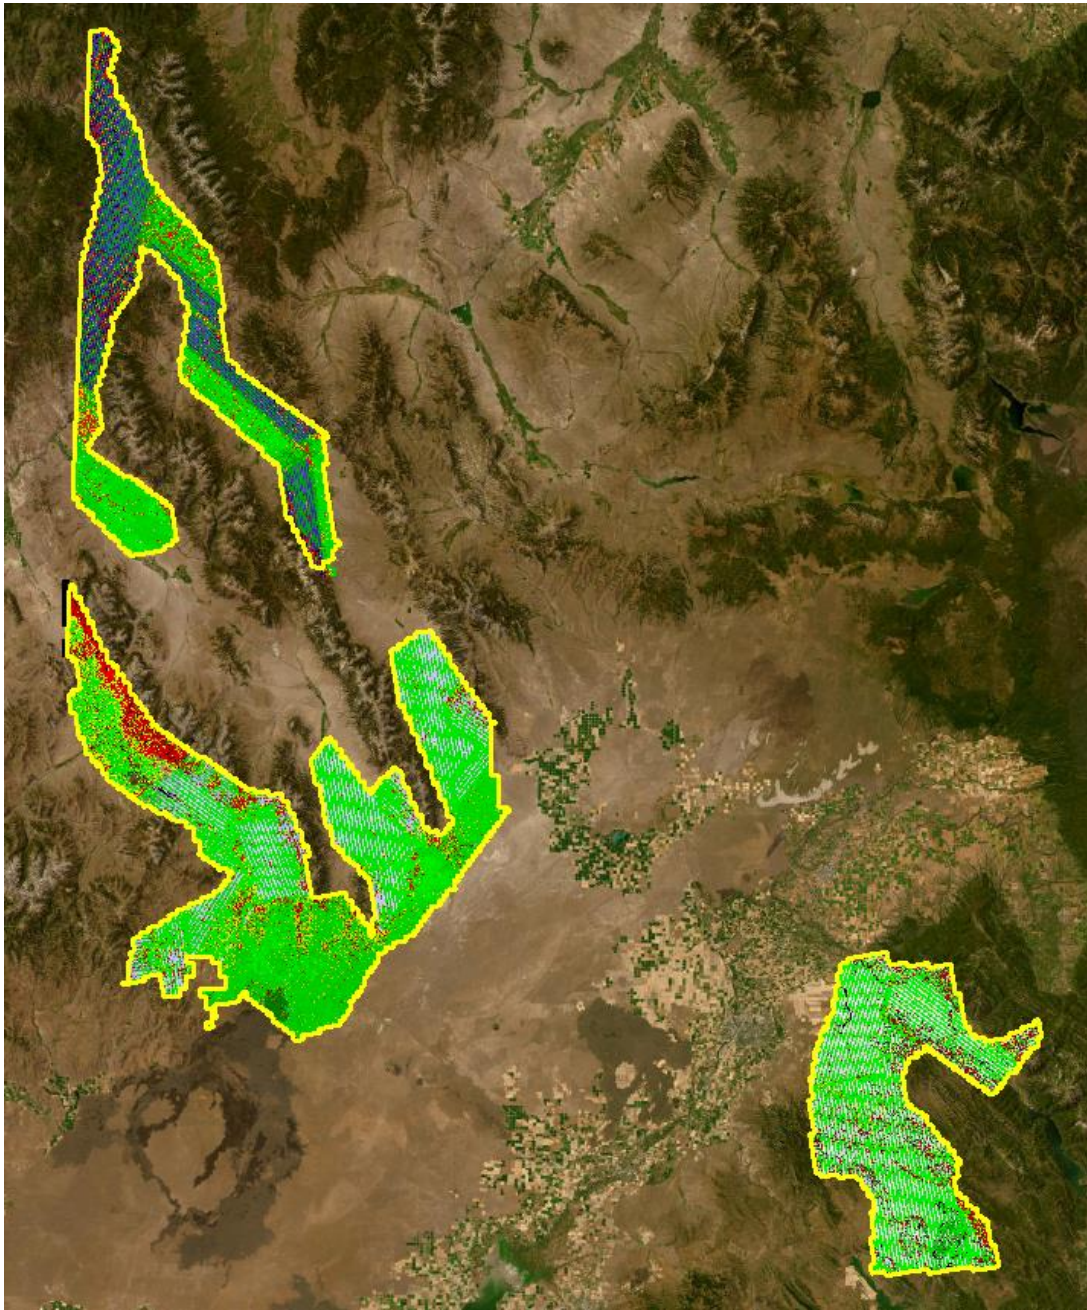


Figure 6. Swath Separation Images (SSIs) generated for WUID 300227.

6.2 Intensity Images

The intensity imagery was created from the point cloud intensity values of first returns from all point classes except for noise (classes 7 and 18) and points flagged as withheld were used to create the raster. The review of the intensity imagery included looking for anomalous intensity values, voids, and processing artifacts.

Intensity Range Corrections

Intensity values are determined by the strength of the return pulse and is influenced by a number of factors, including the reflectivity of the target. Low reflectivity targets, like road surfaces, typically appear as darker pixels in the intensity imagery. Higher reflective surfaces like paint stripes or wet surfaces result in higher intensity return and will have brighter pixels in the intensity imagery.

Although the areas in question are not directly over bodies of water, the terrain where the issues are present are located within the wetland marsh. Marshes are defined as areas of low flat ground that are typically always wet and soft. The wetlands may not appear visibly “wet” in the DEM, intensity imagery, or aerial imagery but water is present at or above the soil level causing saturated or waterlogged soil for a sufficient period of the year.

While water or wet surfaces typically absorbs most of the NIR wavelength, lidar pulses at or near nadir have a higher probability of returning some energy to the lidar sensor whereas lidar pulses at larger incident angles will be more likely to scatter and reflect in the opposite direction of the incident angle. This can result in water features, especially larger water features, showing a “striping” pattern of light and dark in the intensity imagery.

Due to ranging differences in bright and dark targets due to range walk, these ranging errors are corrected during initial processing of sensor data. However, once the maximum receiver threshold is reached there is a phenomena known as “time over threshold” that occurs. This occurs in extremely reflective environments, and the received values are brighter than the receivers dynamic (or static) range. The end result is that the target is known to be “very bright” but it is unknown the magnitude of brightness over the threshold, or the timing of the waveform curve over that threshold. Primarily due to the inability to fit a gaussian pulse correctly to the return it has an inherent ranging error that cannot be corrected any larger than the maximum correction for bright targets.

For these areas, that are a result of time over threshold errors, there is not a known “brightness” of the target return that can be used for a correction. In the case of flat areas with consistent intensity (e.g. runway paint stripes), the error can be corrected based on the geometric offset between the planar data since intensity is assumed to be constant in the error area. Unfortunately, in the Idaho project examples, it is visible that there is an “arc” to the offset points. This is likely due to the fact that the intensity is still changing as the reflectance angle approaches its maximum. Due to this non-linear nature and the true return intensity value being unknown creates a situation that cannot be directly or simply corrected without additional sensor and return modeling.

The image below shows the intensity value for the identified LAS point that appears bright white at nadir. The LAS point has an intensity value of 65,535.

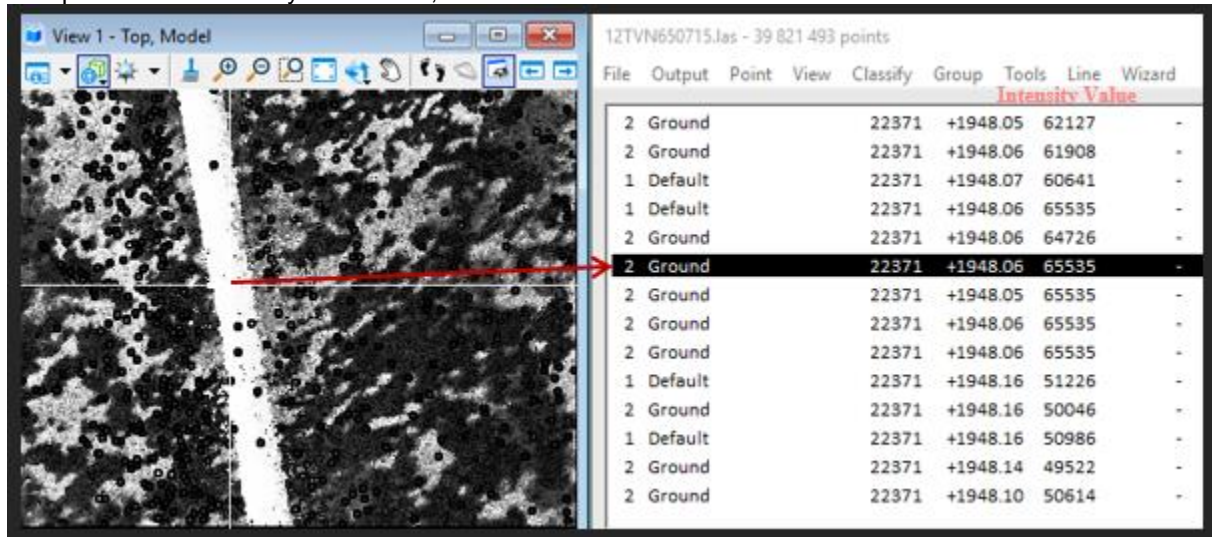


Figure 7. Intensity Value of Points

In the WUID300227 report USGS provided, a screenshot was included showing a 0.057m elevation change between the ground class and vegetation.

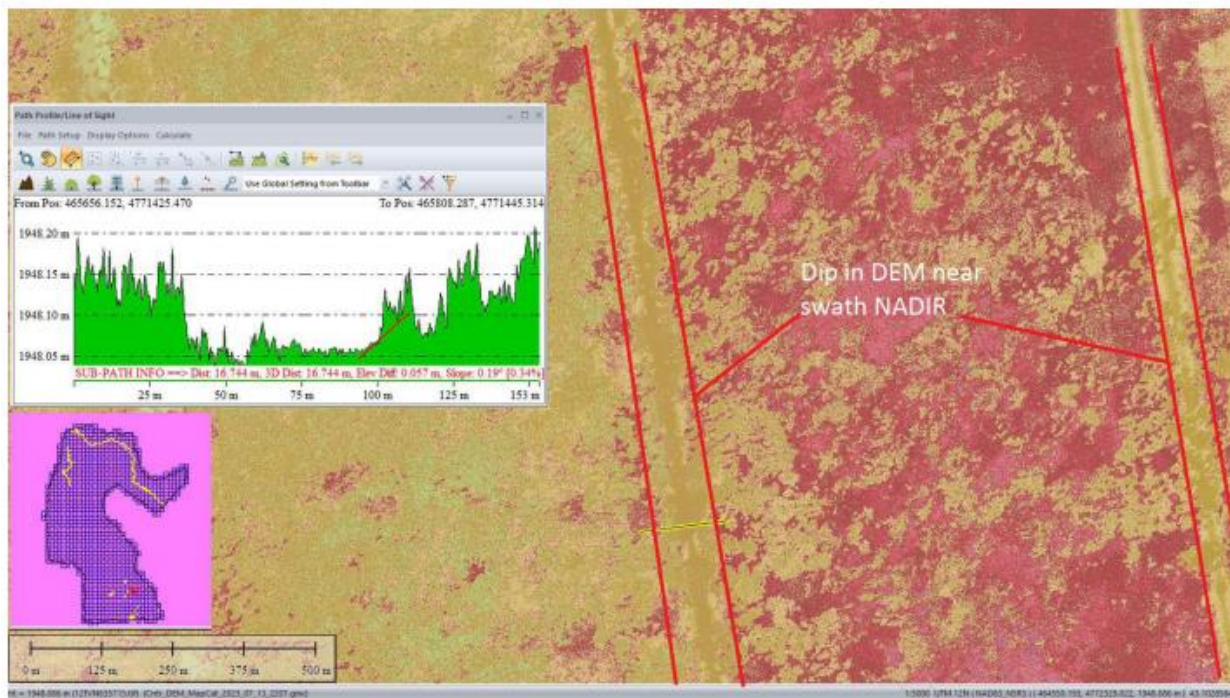


Figure 8. USGS example

Due to the incredibly flat terrain in these areas of the Idaho Southern lidar project, any slight offset in lidar elevation is going to show a much larger difference in the DEM. The DEM in these areas is showing slightly raised ground which can not be corrected by manual efforts.

6.3 Interswath and Intraswath Polygons

6.3.1 Interswath Accuracy

The Interswath accuracy, or overlap consistency, measures the variation in the lidar data within the swath overlap. Interswath accuracy measures the quality of the calibration or boresight adjustment of the data in each lift. Per USGS specifications, overlap consistency was assessed at multiple locations within overlap in non-vegetated areas of only single returns and on slopes less than 10 degrees. As with precision, the interswath consistency was reported by way of a polygon shapefile delineating the sample areas checked and attributed with the following and using the cells within each polygon as sample values:

- Minimum difference in the sample area (numeric)
 - Maximum difference in the sample area (numeric)
 - RMSDz (Root Mean Square Difference in the vertical/z direction) of the sample area (numeric).
- Intraswath Accuracy

Dewberry has developed a relatively robust process for generating these interswath polygons across the entire dataset. The current specification does not explicitly state the amount of areas to be tested. Dewberry therefore ensures that the assessment is as detailed as possible by creating test polygons for all overlap areas. The test areas are generated such that they are on slopes less than 10 degrees and not in vegetated areas. The generated polygons are then attributed with the min/max/RMSDz statistics. Polygons that intersect large waterbodies are removed from the final results, as these are not reliable test locations.

The result of the process is a shapefile of test polygons with their test values, distributed in all of the overlapping areas across the project area. These polygons are then reviewed for any systematic interswath errors that should be considered of concern.

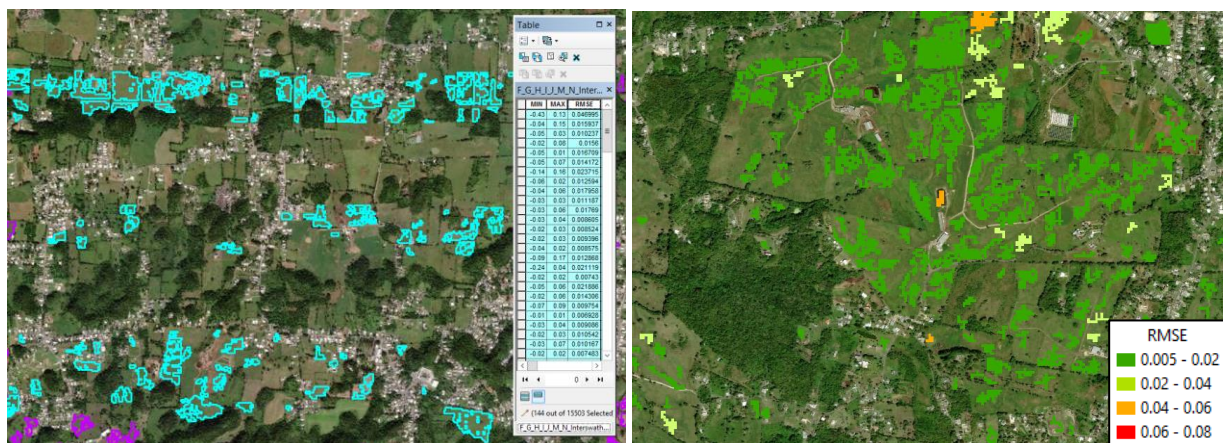


Figure 9. Left: Example interswath polygons and example statistics. Right: Example interswath polygons colored by RMSDz values

6.3.2 Intraswath Accuracy

The intraswath accuracy, or the precision of lidar, measures variations on a surface expected to be flat and without variation. Precision is evaluated to confirm that the lidar system is performing properly and without gross internal error that may not be otherwise apparent. To measure the precision of a lidar dataset, level or flat surfaces were assessed. Swath data in non-overlap areas were assessed using only first returns in non-vegetated areas.

Precision was reported by way of a polygon shapefile delineating the sample areas checked and attributed with the following and using the cells within each polygon as sample values:

- Minimum slope-corrected range (numeric)
- Maximum slope-corrected range (numeric)
- RMSDz of the slope-corrected range (numeric).

Dewberry manually created intraswath polygons where hard surfaces exist within the project area. The intraswath polygon distribution is illustrated in the figure below. The statistics outlined above were then generated per polygon and each polygon was reviewed for acceptability, issues, and trends.

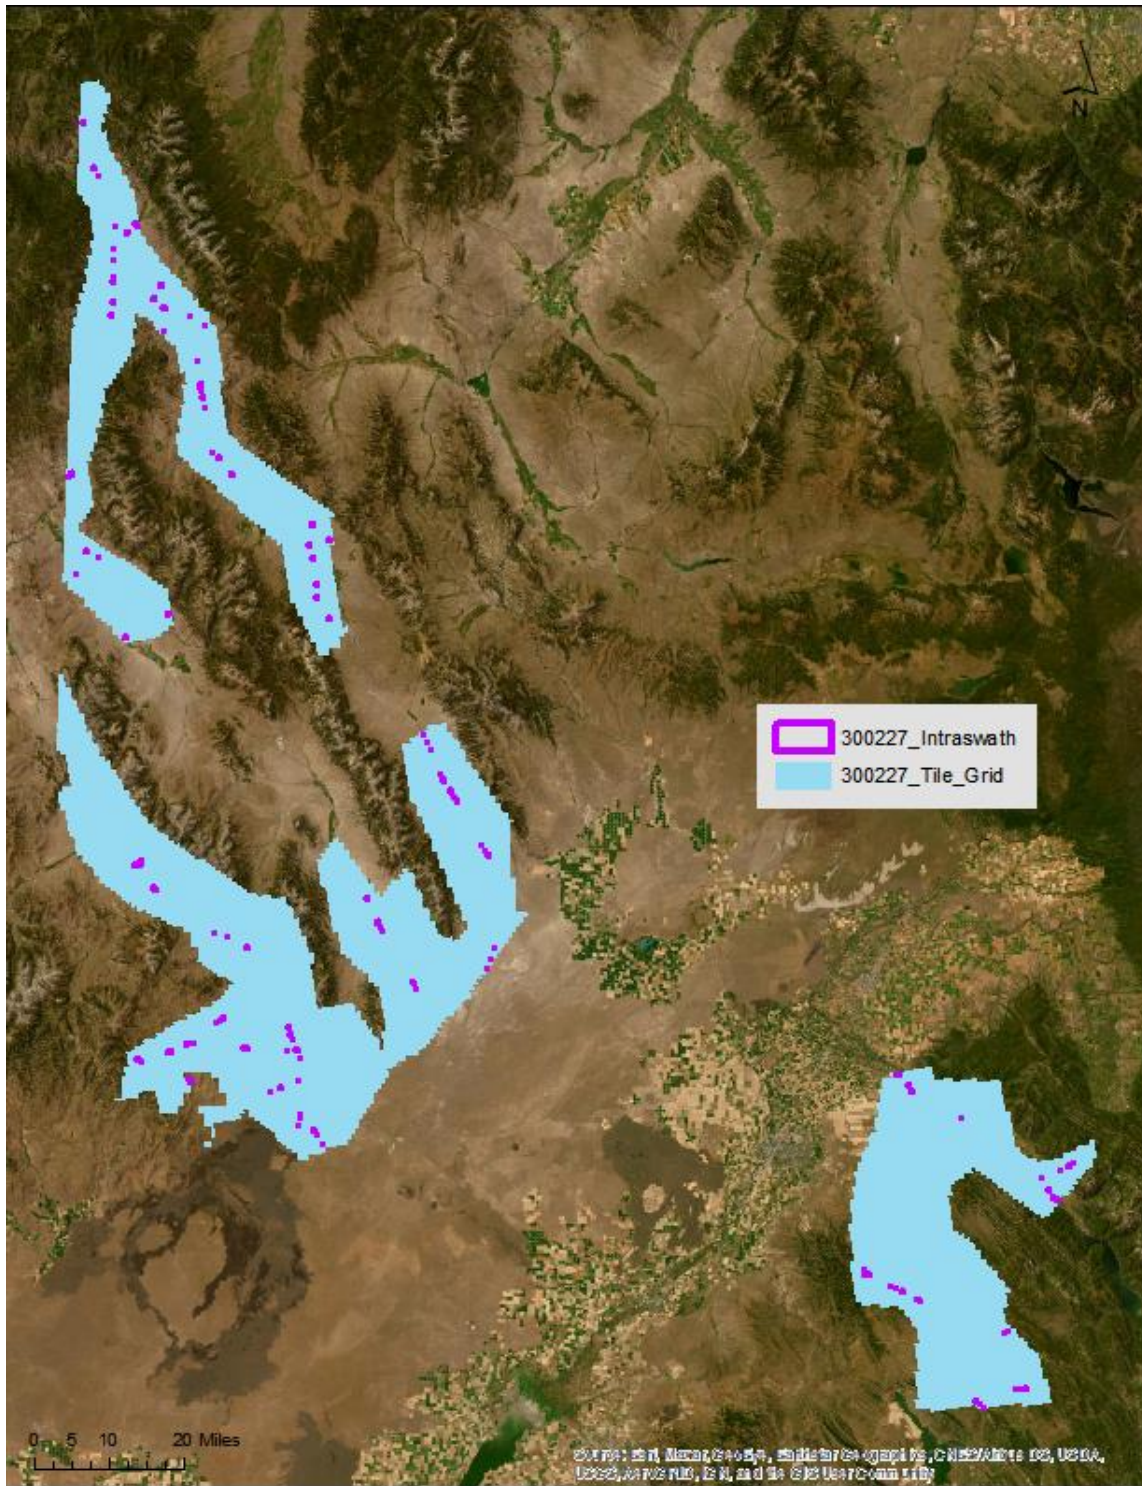


Figure 10. Intraswath polygons used to test intraswath vertical accuracy.



Figure 11. Example test polygon for intraswath testing, and its results

6.4 Maximum Surface Height Rasters (MSHRs)

MSHRs are delivered as tiled GeoTIFFs (32-bit, floating point), with the tile size and naming convention matching the project tile grid, tiled point cloud, and tiled DEM deliverables. MSHRs are provided as proof of performance that Dewberry’s withheld bit flag has been properly set on all points, including noise, which are not deemed valid returns and which should be excluded from all derivative product development. All points, all returns, excluding points flagged as withheld, are used to produce MSHRs. The rasters are produced with a binning method in which the highest elevation of all lidar points intersecting each pixel is applied as the pixel elevation in the resulting raster. Final MSHRs are formatted using GDAL software version 2.4.0, spatially defined to match the project CRS, and the cell size equals 2x the deliverable DEM cell size (unless lidar density at the defined DEM cell size is insufficient for MSHR analysis and then a larger cell size for the MSHRs may be used). Prior to delivery, all MSHRs are reviewed for complete coverage, correct formatting, and any remaining point cloud misclassifications specifically in regard to the use of the withheld bit.

6.5 Flightline Extents GDB

Flightline extents are delivered as polygons in an Esri GDB, delineating actual coverage of each swath used in the project deliverables. Dewberry delivered this GDB using USGS’s provided template so that each polygon contains the following attributes:

- Lift/Mission ID (unique per lift/mission)
- Point Source ID (unique per swath)
- Type of Swath (project, cross-tie, fill-in, calibration, or other)
- Start time in adjusted GPS seconds
- End time in adjusted GPS seconds

ID_SouthernID_2018_D19
D01-GPSC3 140G0219F0356
10/10/2023

Prior to delivery, a final flightline GDB is created from the final, tiled point cloud deliverables to ensure all correct swaths are represented in the flightline GDB. The flightline GDB is then reviewed for complete coverage and correct formatting.