General Information

Mission Information

Project name	19118_DewberryID_P1_1003_L1
Processing date	2021-04-23 15:04:38
Mission date	2019-10-03 14:01:44
Mission duration	04:00:30.000
Processing mode	IN-Fusion PP-RTX

Rover Hardware Information

Product	POS AV 610 VER6 HW2.5-12
Serial number	S/N9273
IMU type	57
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
20191003.683	POS Data
20191003.684	POS Data
20191003.685	POS Data
20191003.686	POS Data
20191003.687	POS Data
20191003.688	POS Data
20191003.689	POS Data
20191003.690	POS Data
20191003.691	POS Data
20191003.692	POS Data
20191003.693	POS Data
20191003.694	POS Data
20191003.695	POS Data
20191003.696	POS Data
20191003.697	POS Data
20191003.698	POS Data
20191003.699	POS Data
20191003.700	POS Data
20191003.701	POS Data
20191003.702	POS Data
20191003.703	POS Data
20191003.704	POS Data
20191003.705	POS Data
20191003.706	POS Data
20191003.707	POS Data

Input Files

File Name	File Type
Ephm2760.19g	GLONASS Broadcast Ephemeris
Ephm2760.19n	GPS Broadcast Ephemeris

Output Files

Filename	File type
sbet_Mission 1.out	SBET Trajectory File

Rover Data Summary

First raw data file	20191003.683		
Last raw data file	20191003.707		
Start GPS week	2073		
Start time	396103.310 (10/3/2019 2:01:43 PM)		
End time	410587.496 (10/3/2019 6:03:07 PM)		
Start of fine alignment	396342.971 (10/3/2019 2:05:42 PM)		
Available subsystems	Primary GNSS, IMU		
POS Event Input	None		
Correction data	None		
IMU Installation Lever Arms & Mounting Angles			
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	180.000
Reference to Primary GNSS lever arm (m)	-0.010	-0.315	-0.926
Reference to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Rover Data QC

Raw IMU Import QC Summary

IMU data input file	imu_Mission 1.dat
IMU data check log file	imudt_Mission 1.log
IMU Records Processed	2896390
Termination Status	Normal
IMU Anomalies	0

Primary Observables & Satellite Data

L1 Satellite Lock/Elevation

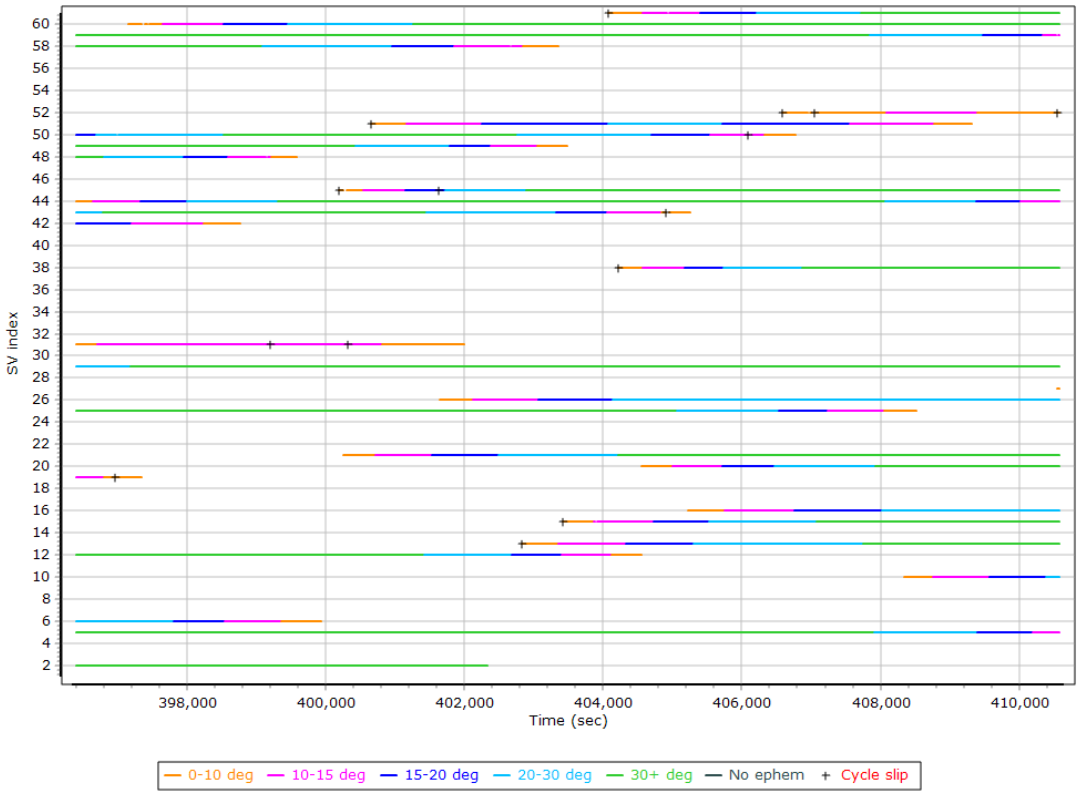

L2 Satellite Lock/Elevation

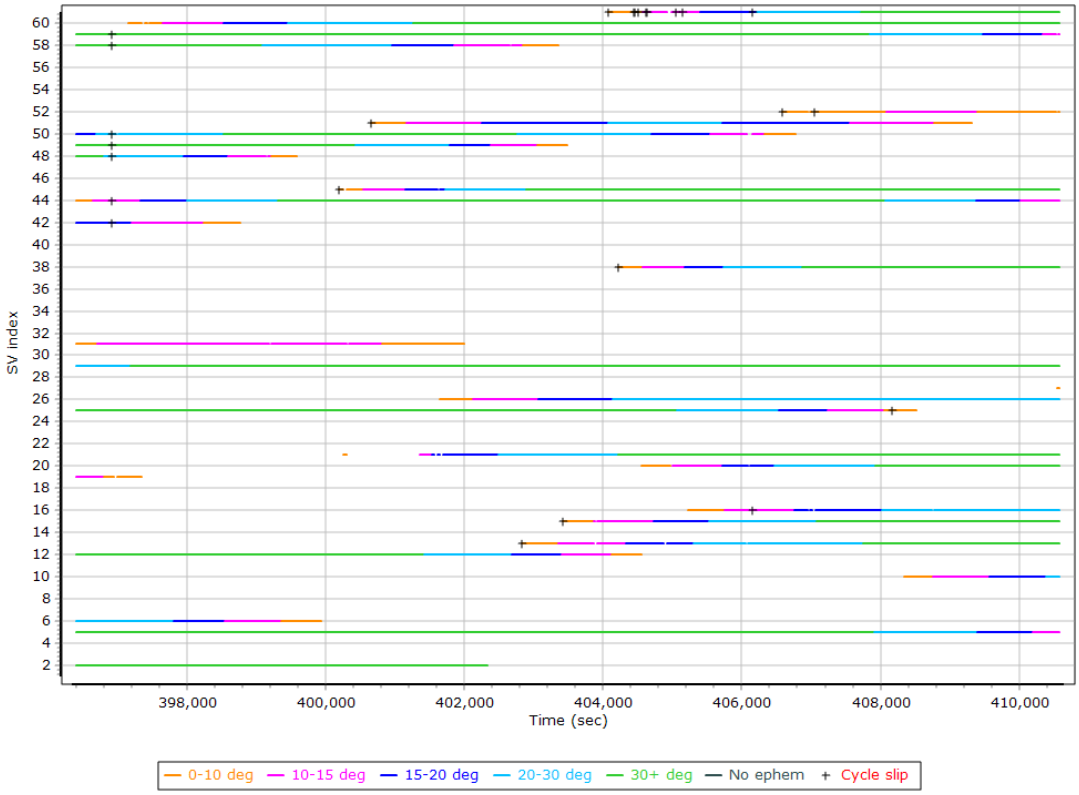

GPS L1 SNR

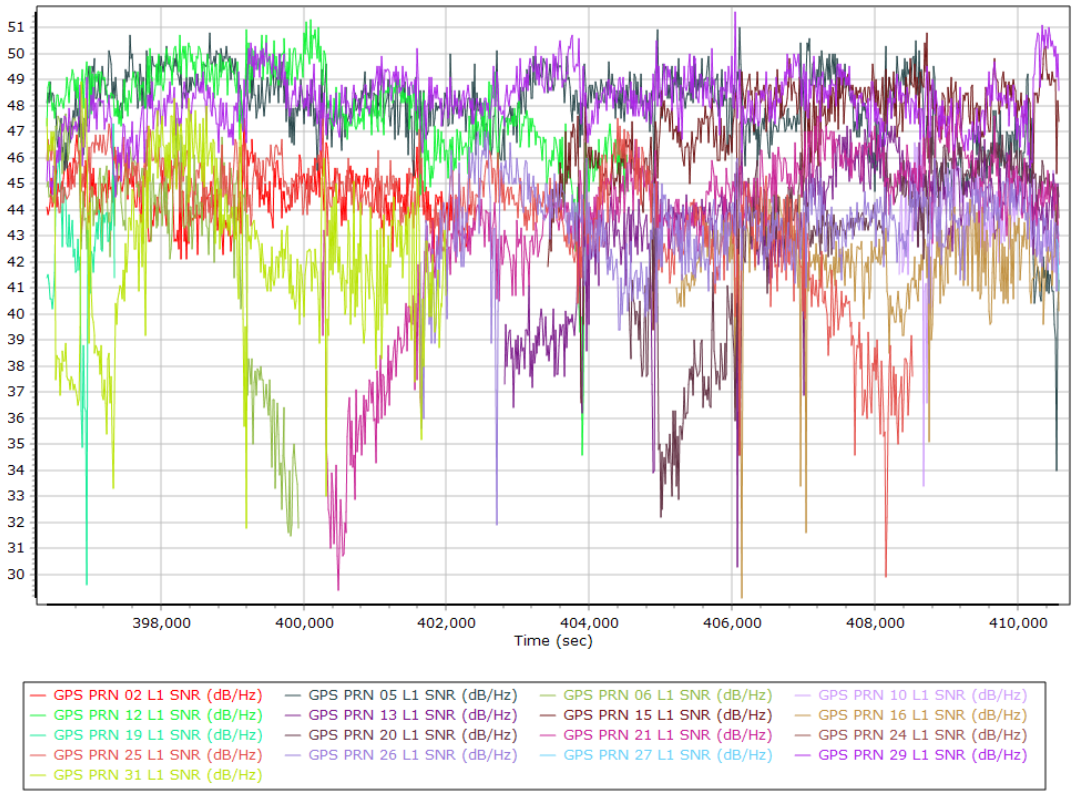

GPS L2 SNR

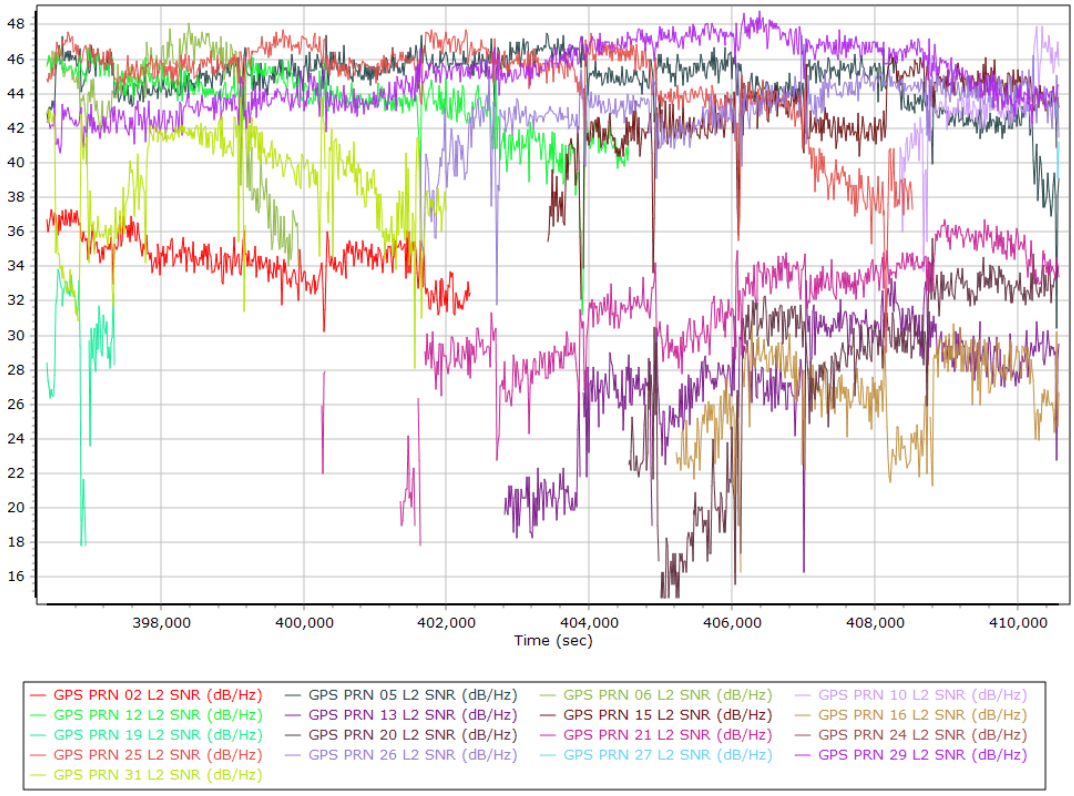

GLONASS L1 SNR

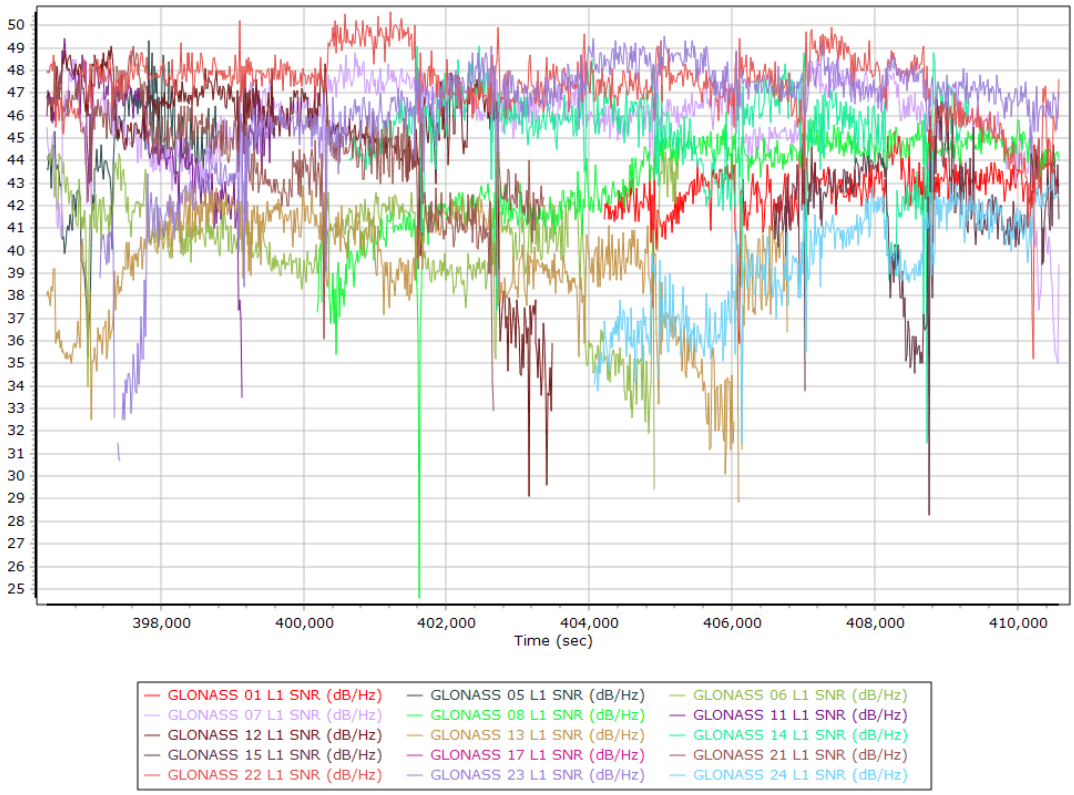

GLONASS L2 SNR

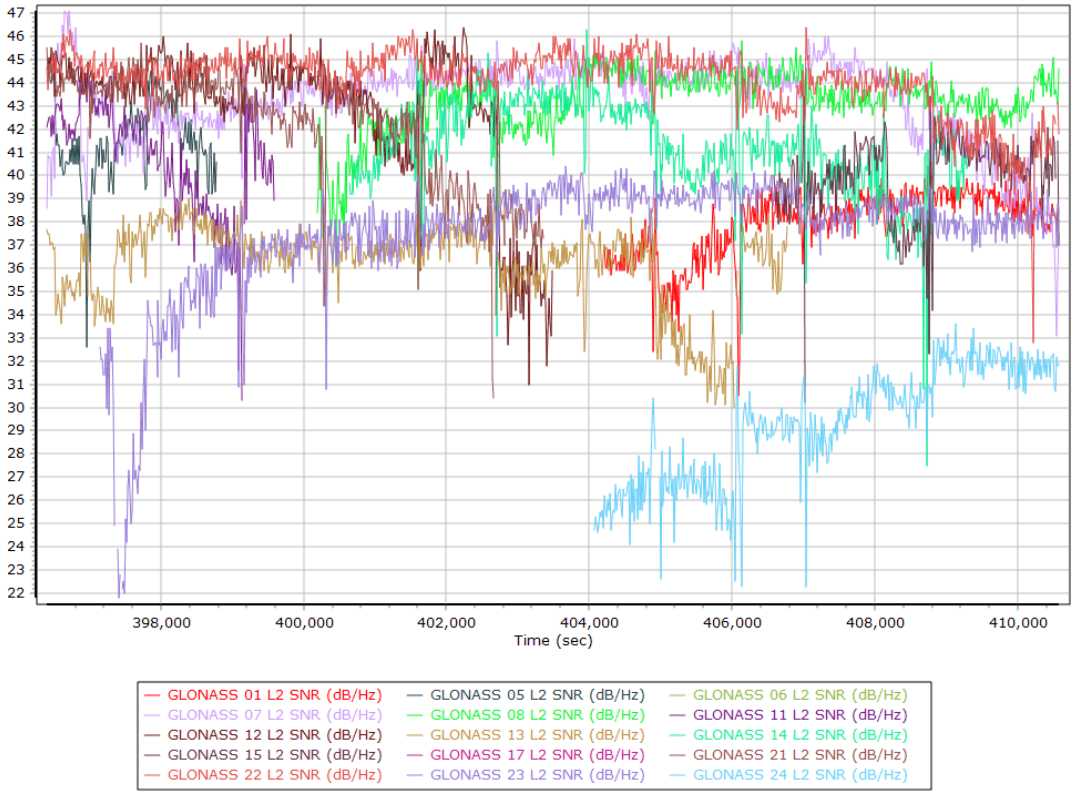

BEIDOU SNR

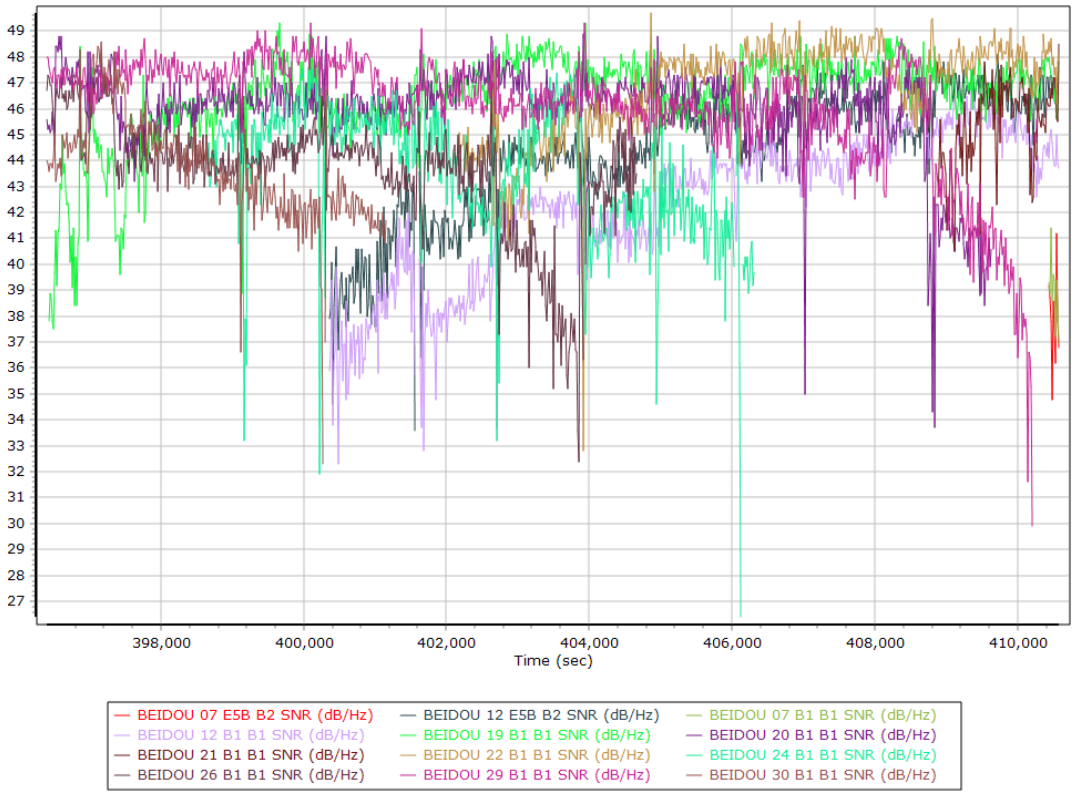

GALILEO SNR

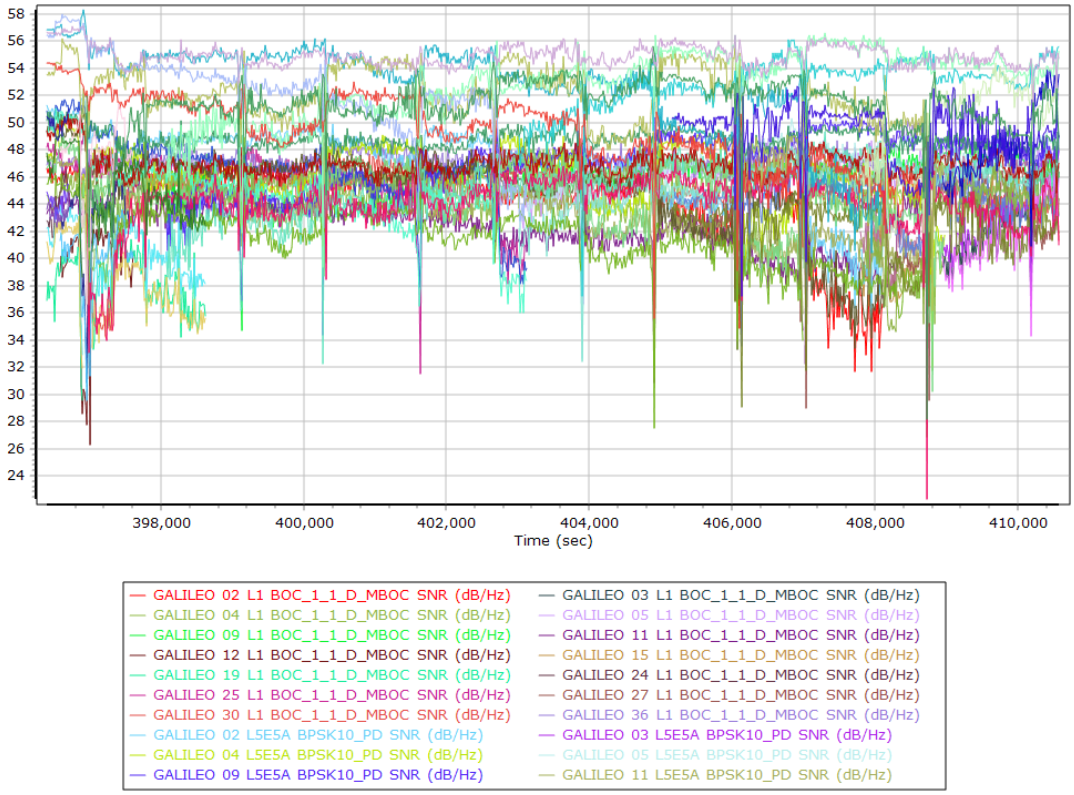
58
56
54
52
50
48
46
44
42
40
38
36
34
32
30
28
26
24
398,000
400,000
402,000
404,000
406,000
408,000
410,000
Time (sec)
GALILEO 02 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 03 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 04 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 05 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 09 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 11 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 12 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 15 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 19 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 24 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 25 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 27 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 30 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 36 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 02 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 03 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 04 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 05 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 09 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 11 L5E5A BPSK10_PD SNR (dB/Hz)

Smoothed Trajectory Information

Top View

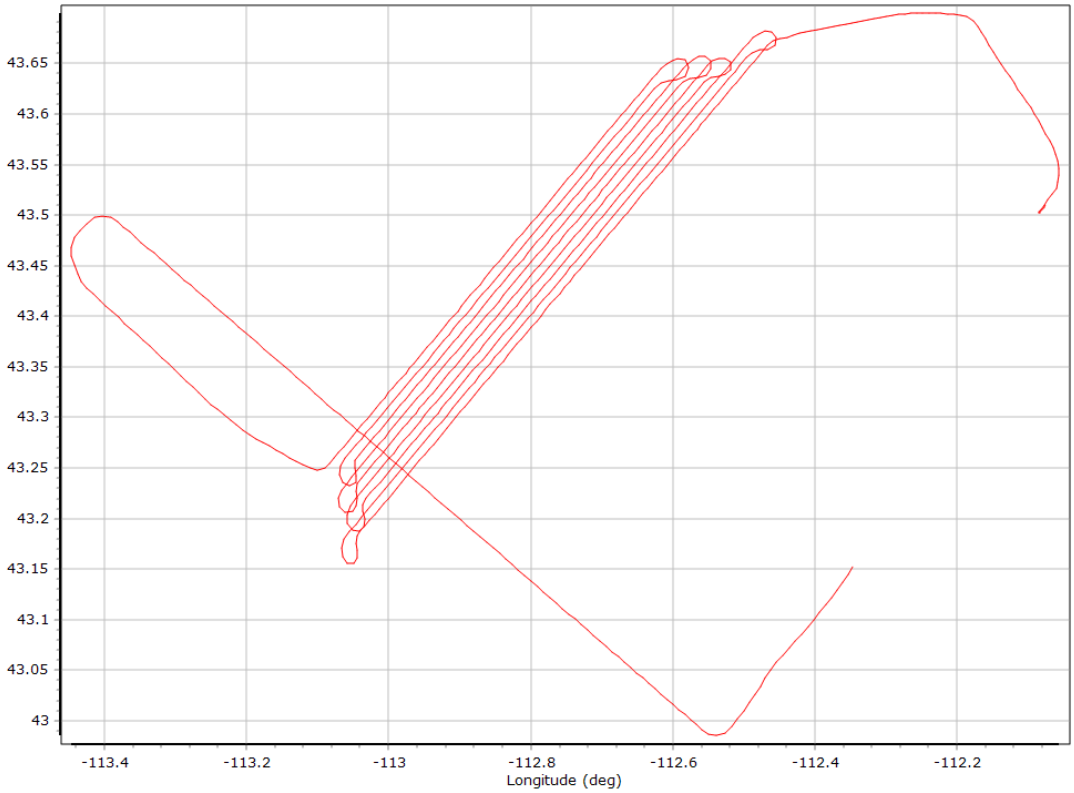

Altitude

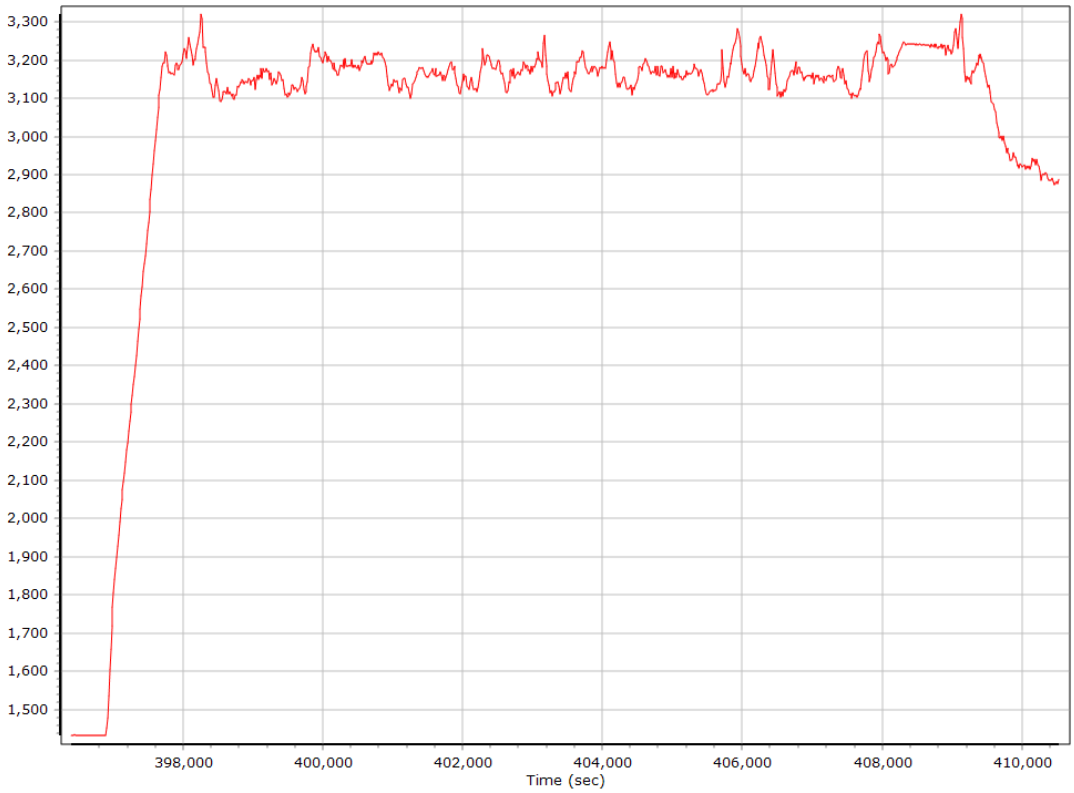

Roll/Pitch

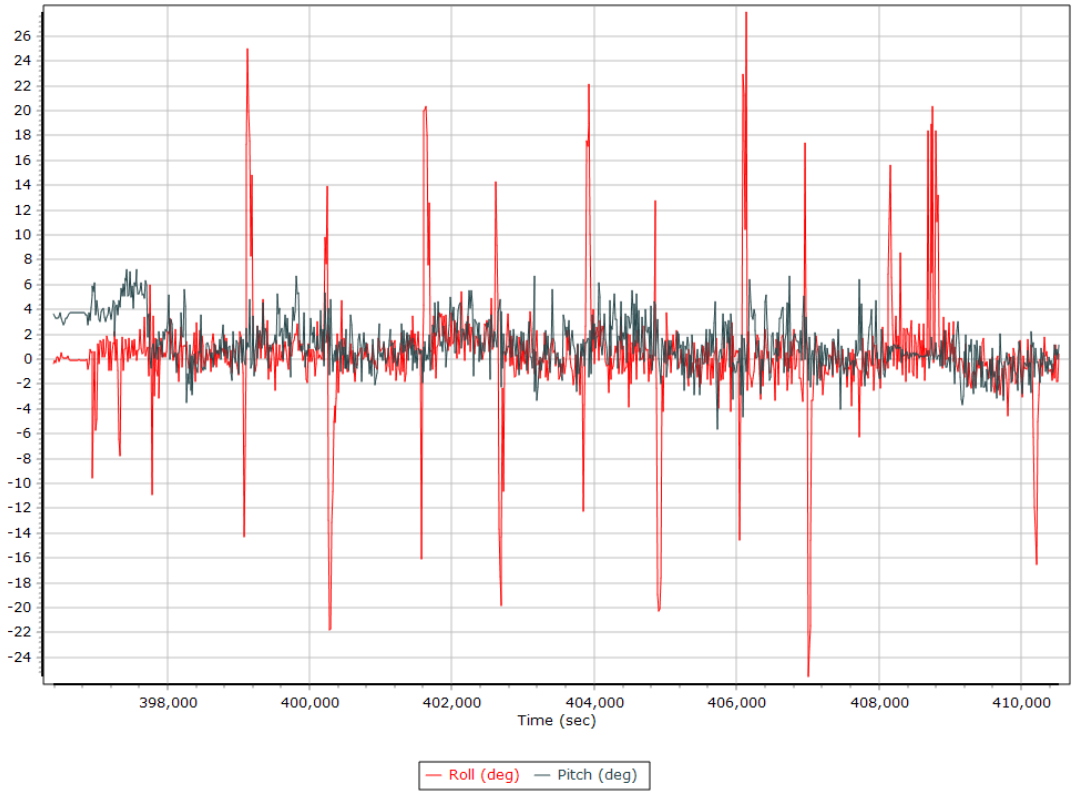

Heading

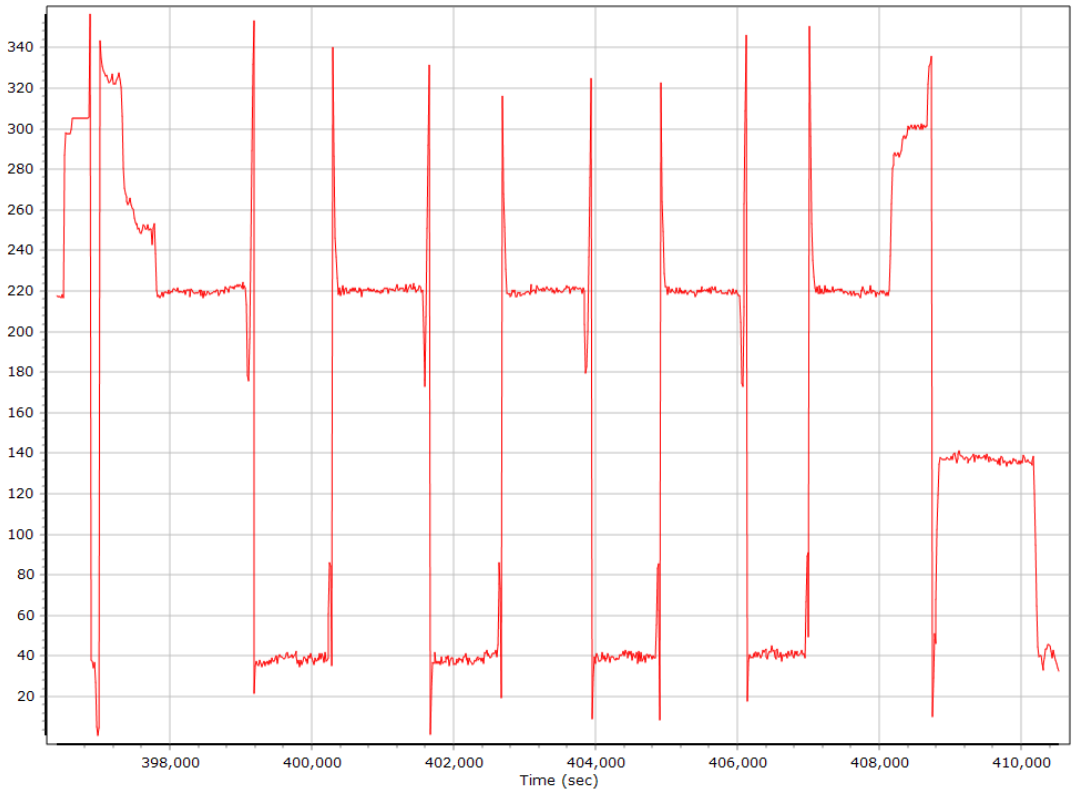

North/East Velocity

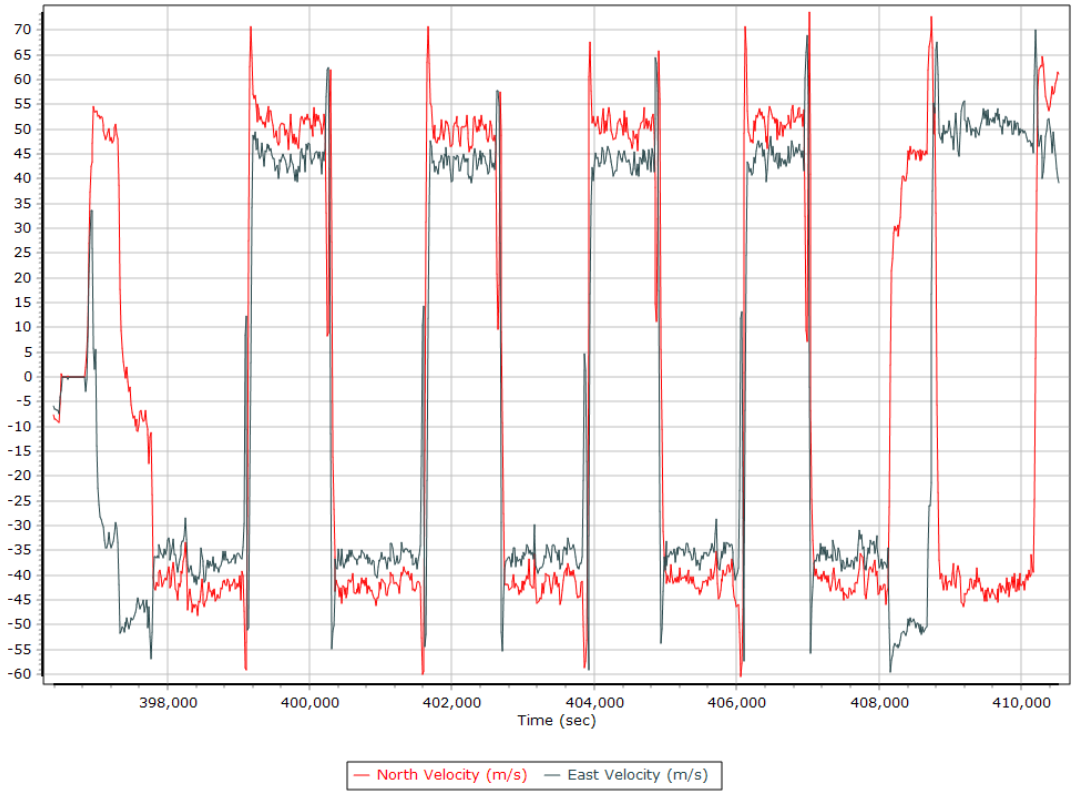

Down Velocity

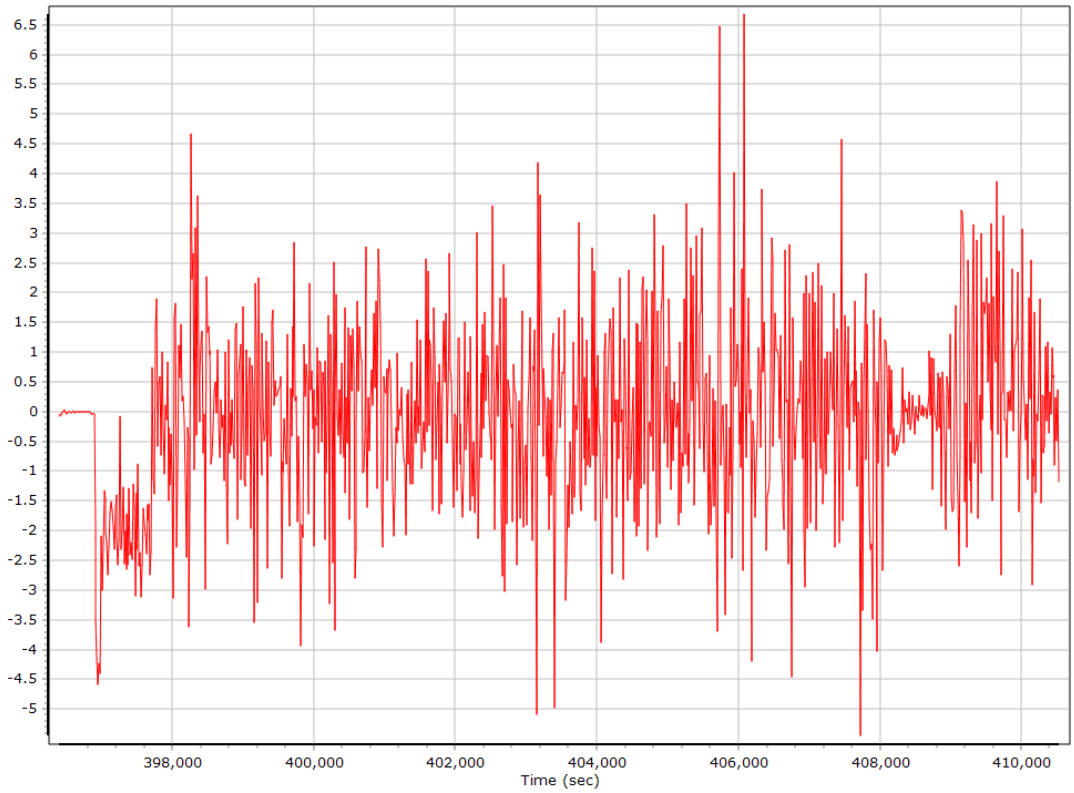

Total Speed

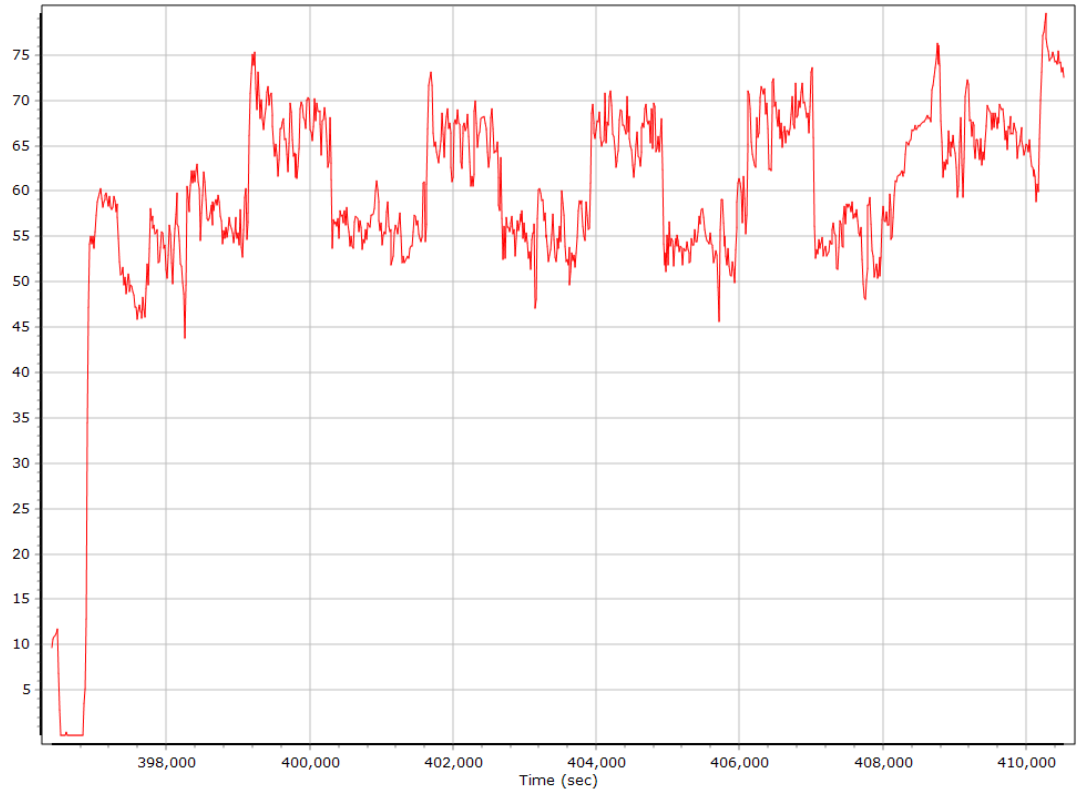

Ground Speed

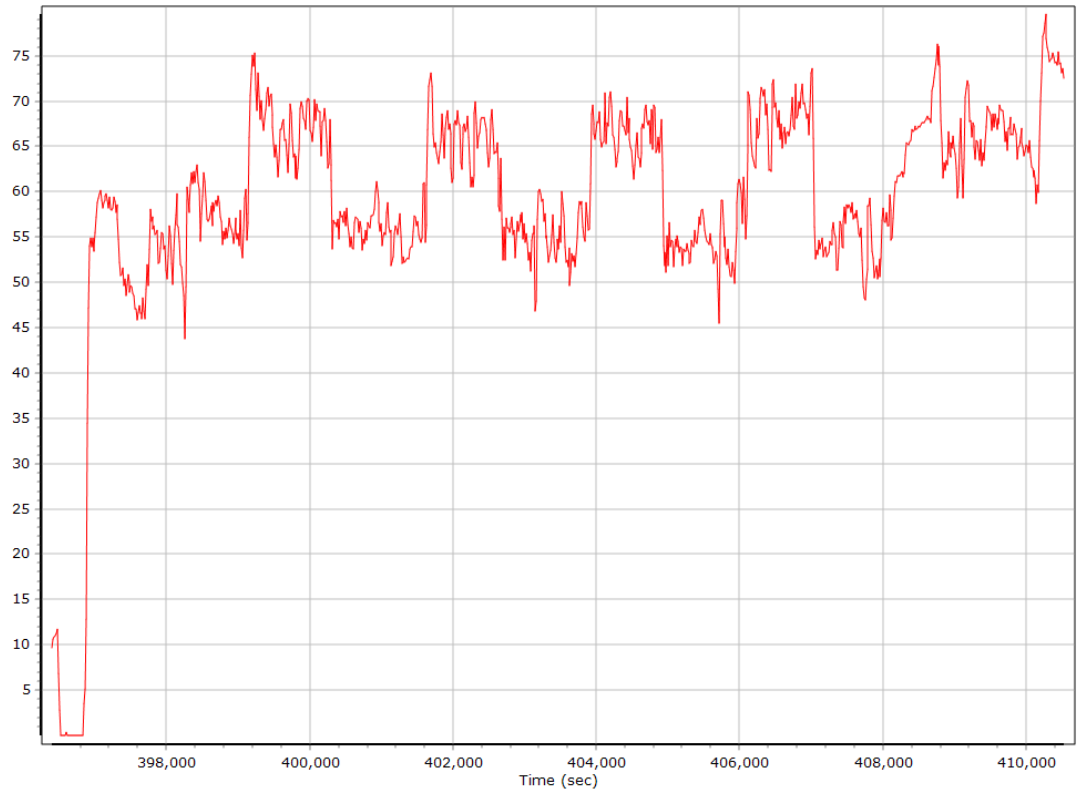

Body Acceleration

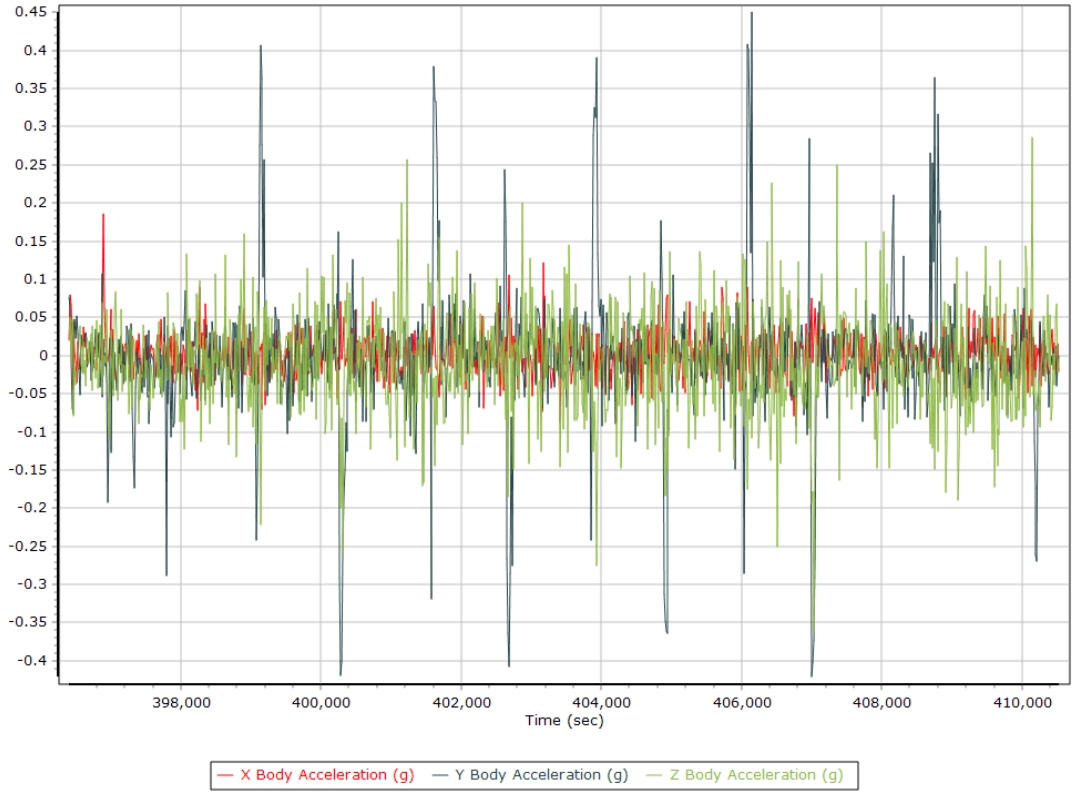

Total Body Acceleration

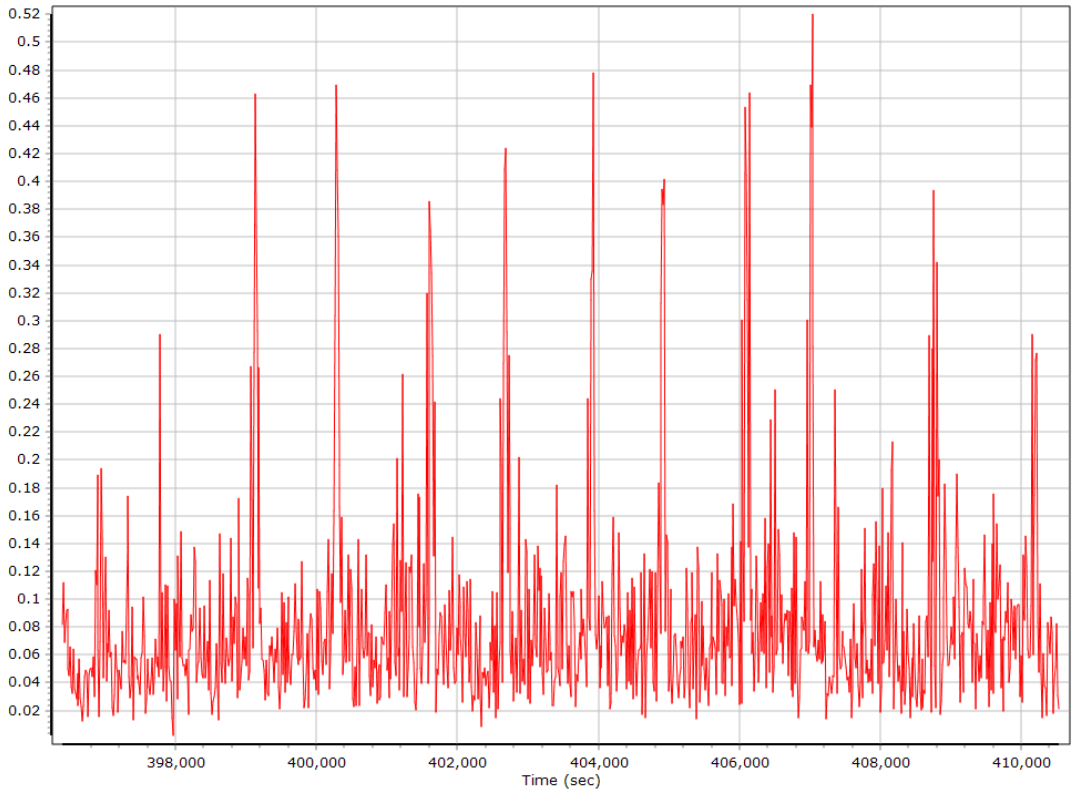

Body Angular Rate

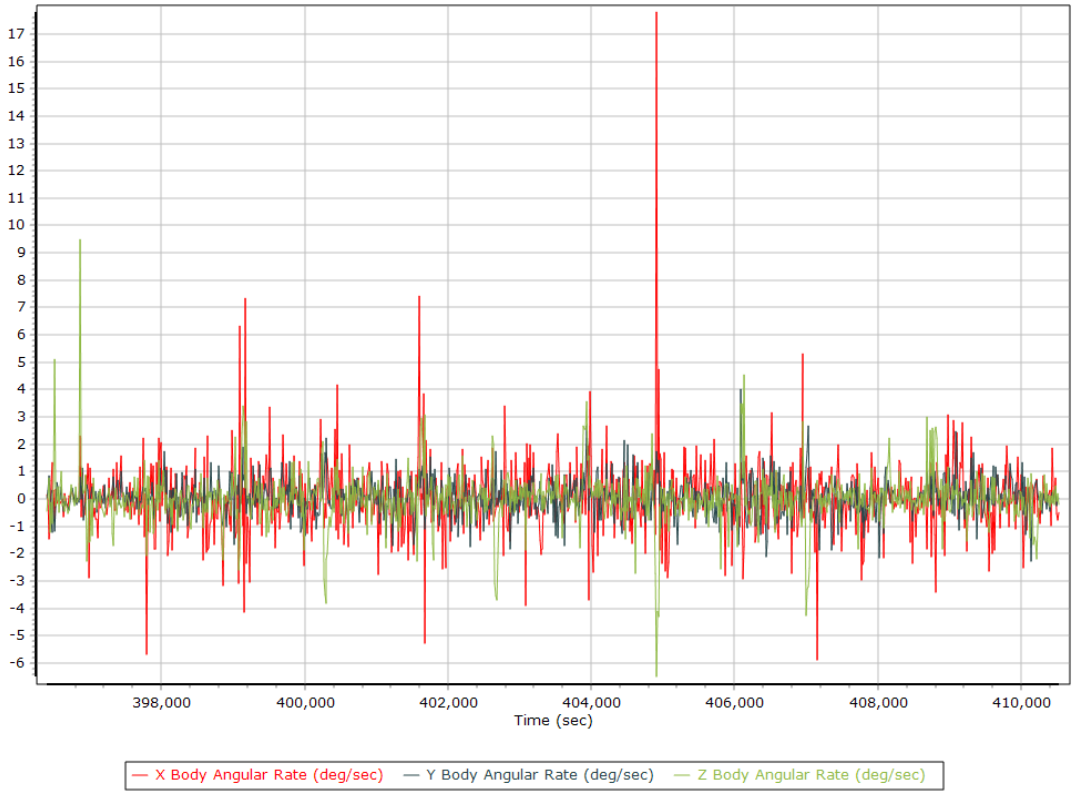

Forward Processed Trajectory Information

Top View

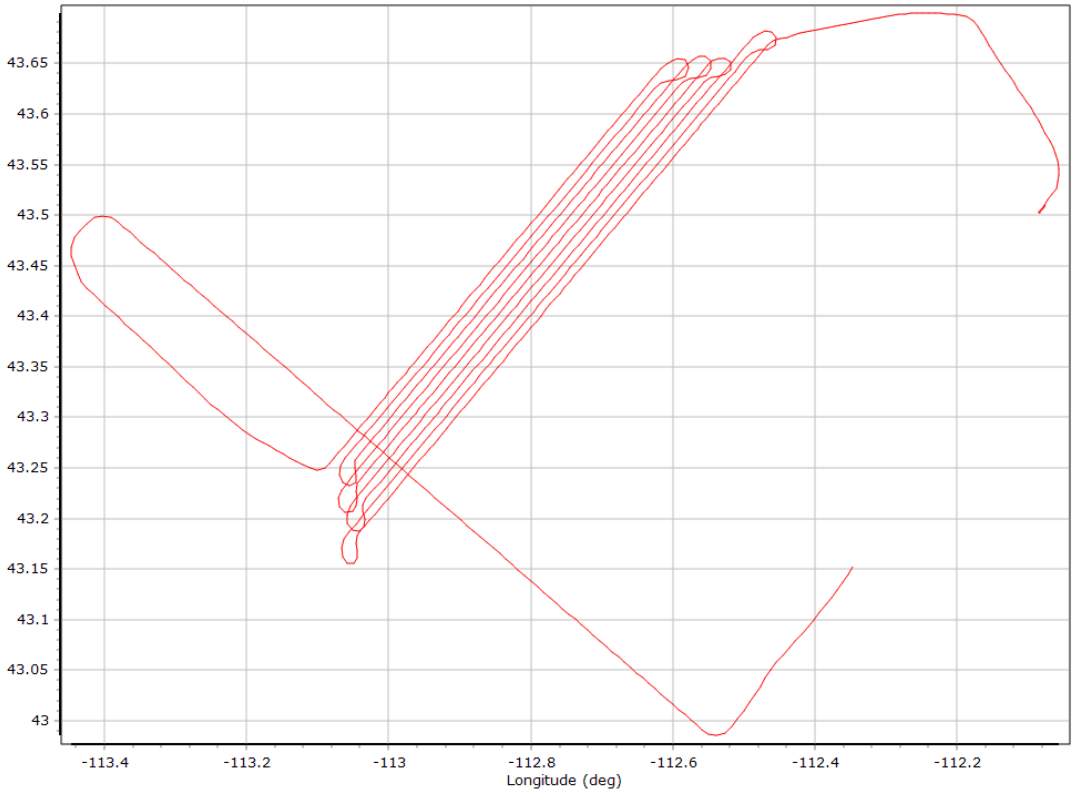

Altitude

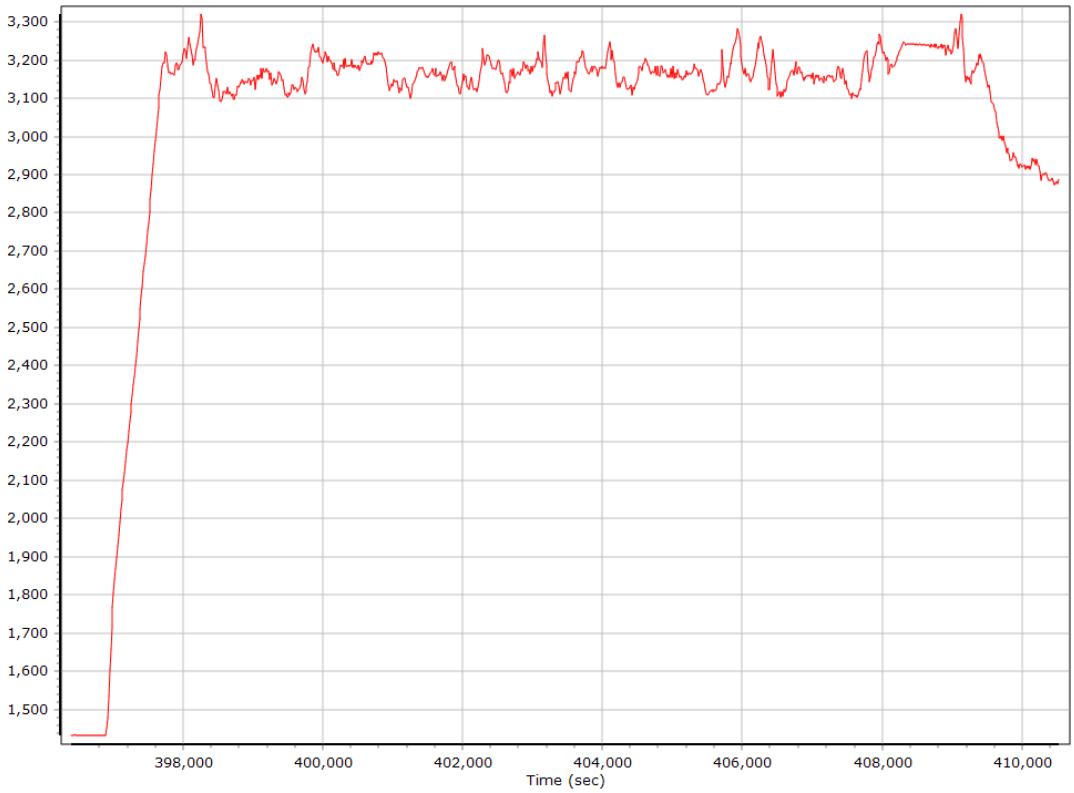

Roll/Pitch

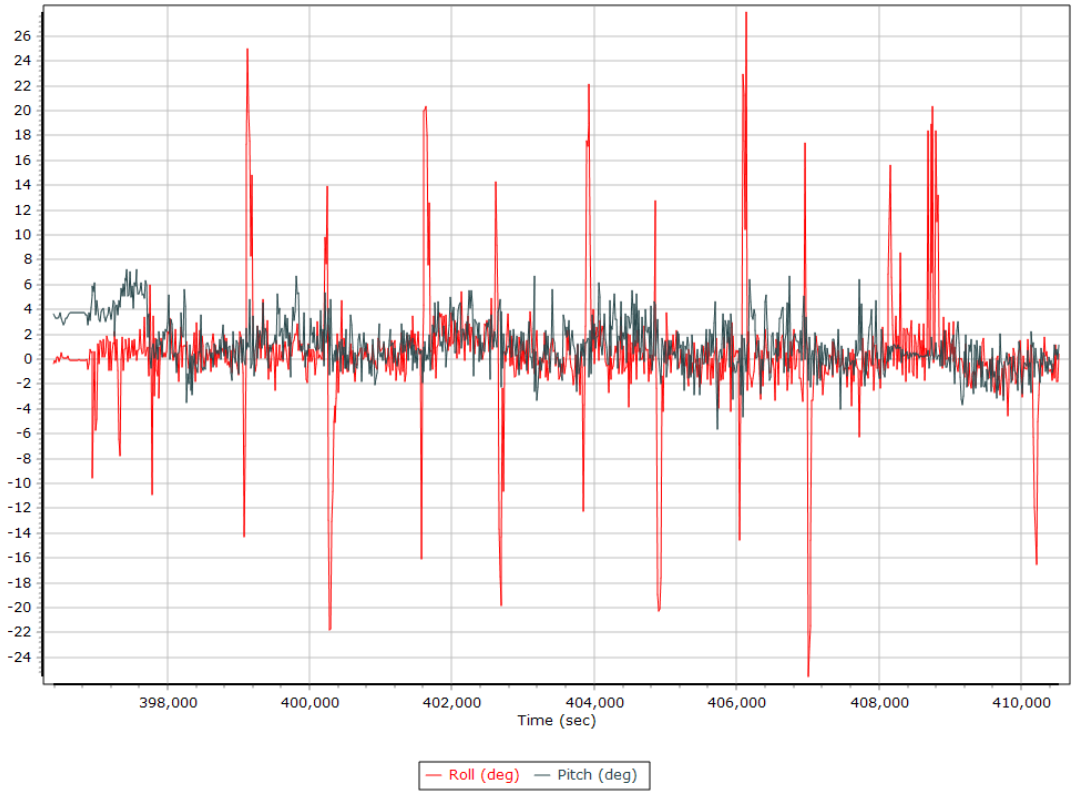

Heading

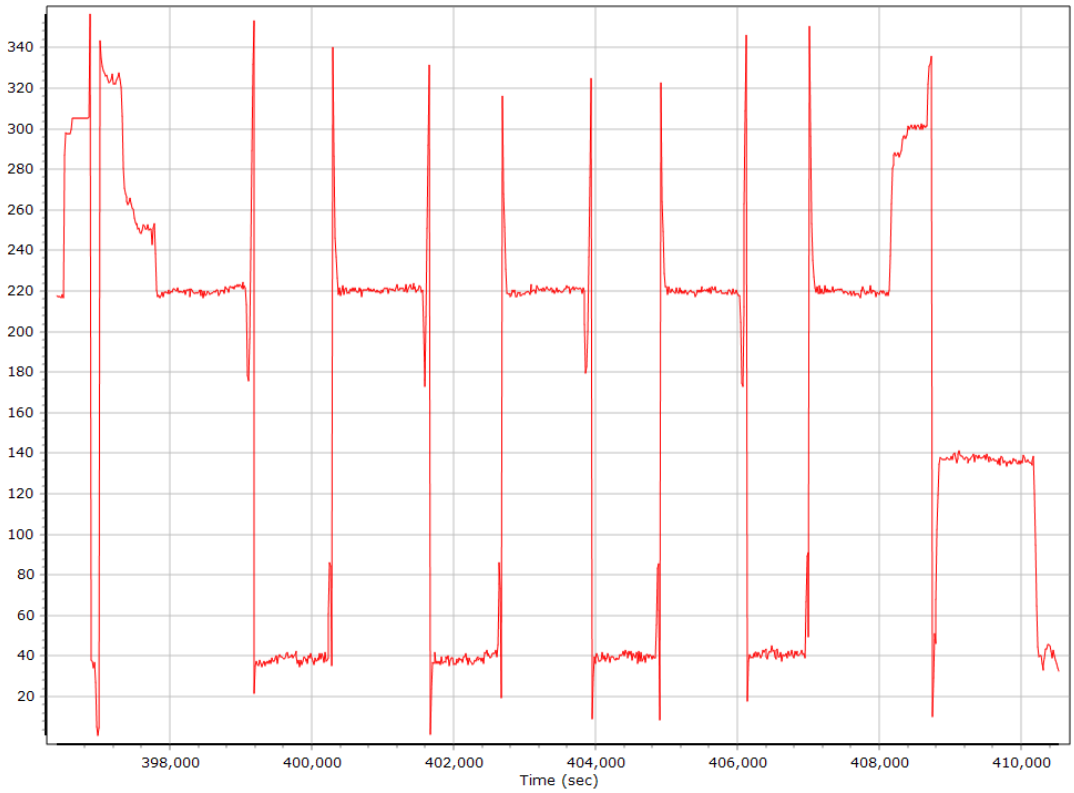

North/East Velocity

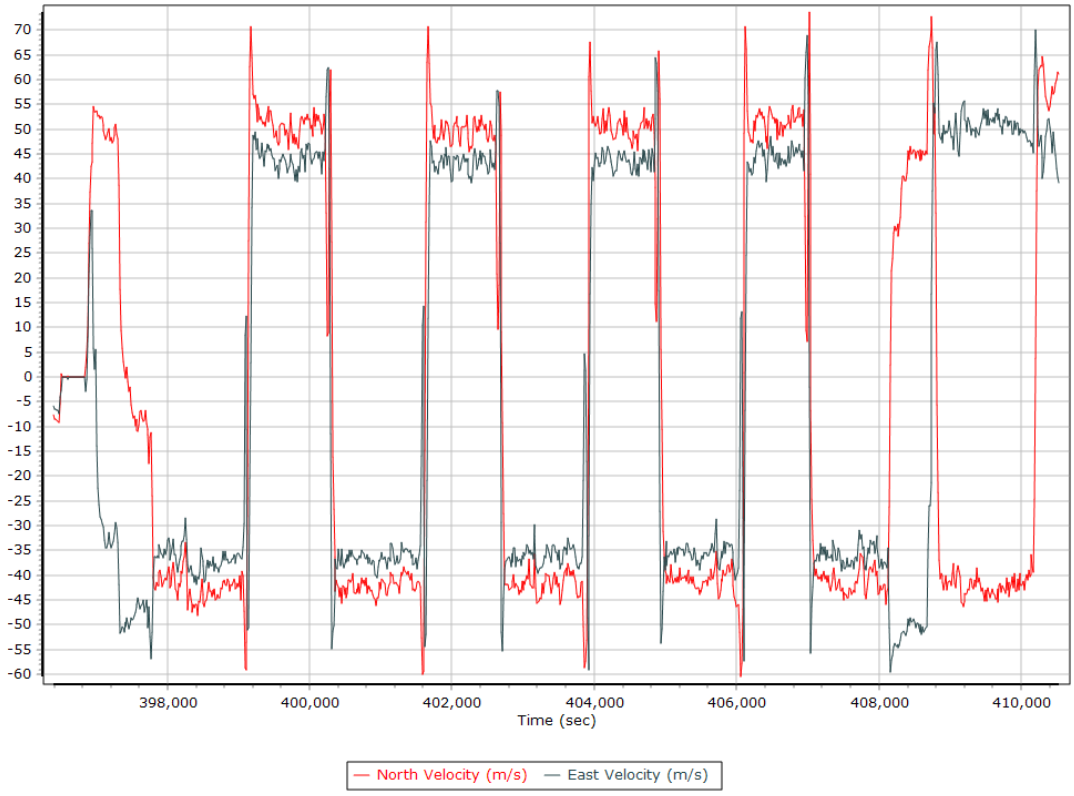

Down Velocity

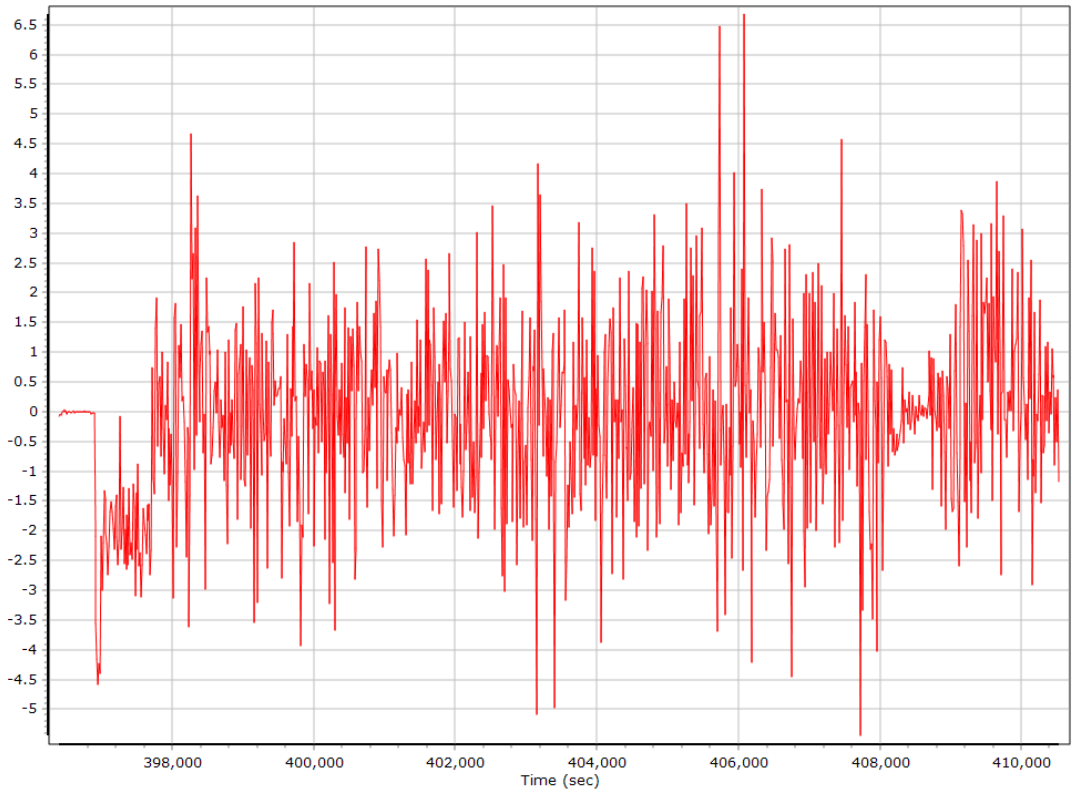

Total Speed

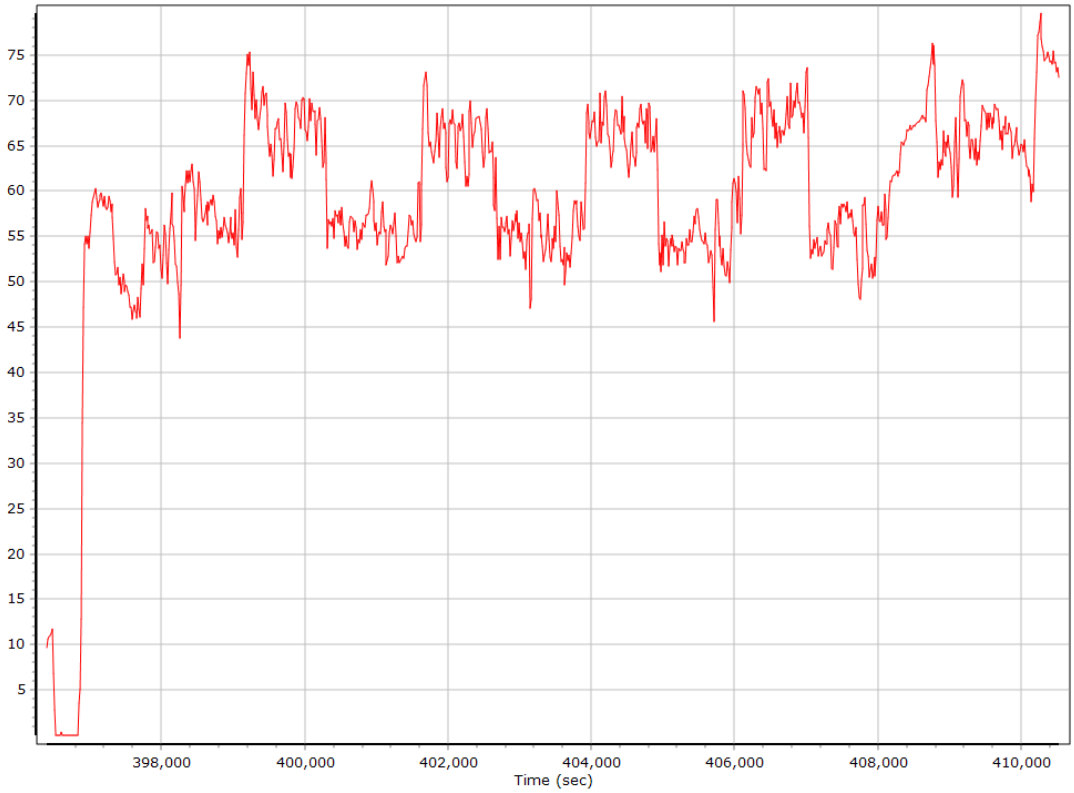

Ground Speed

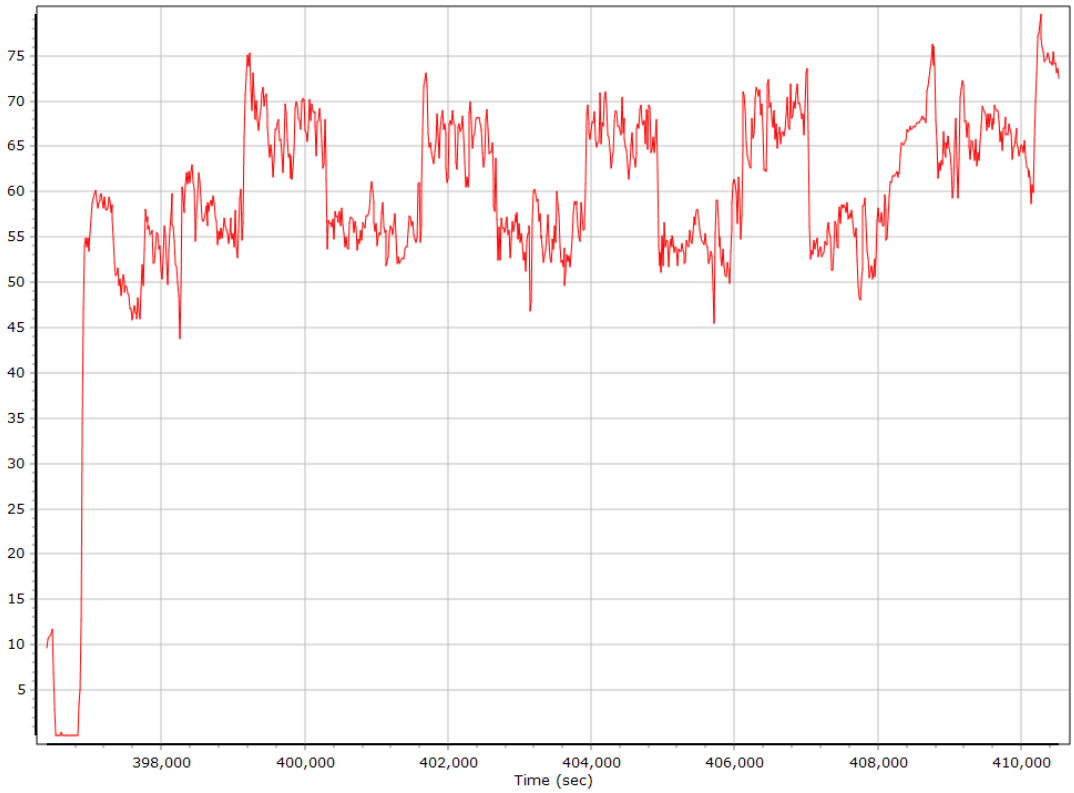

Body Acceleration

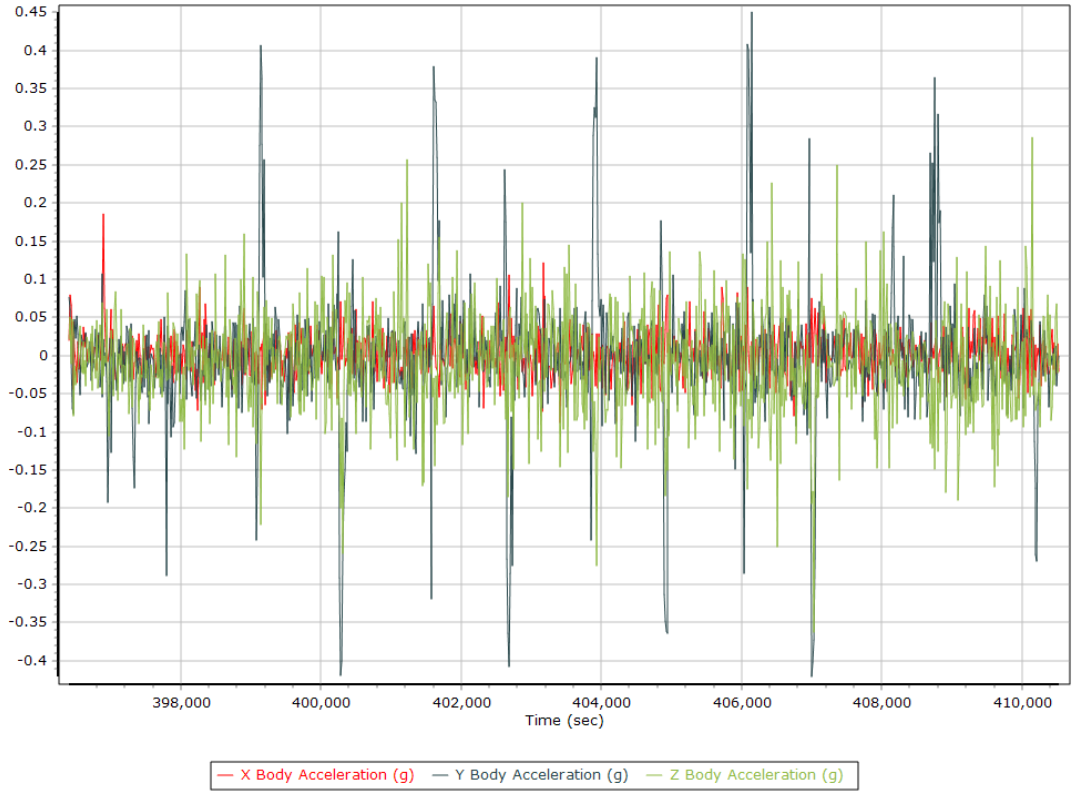

Total Body Acceleration

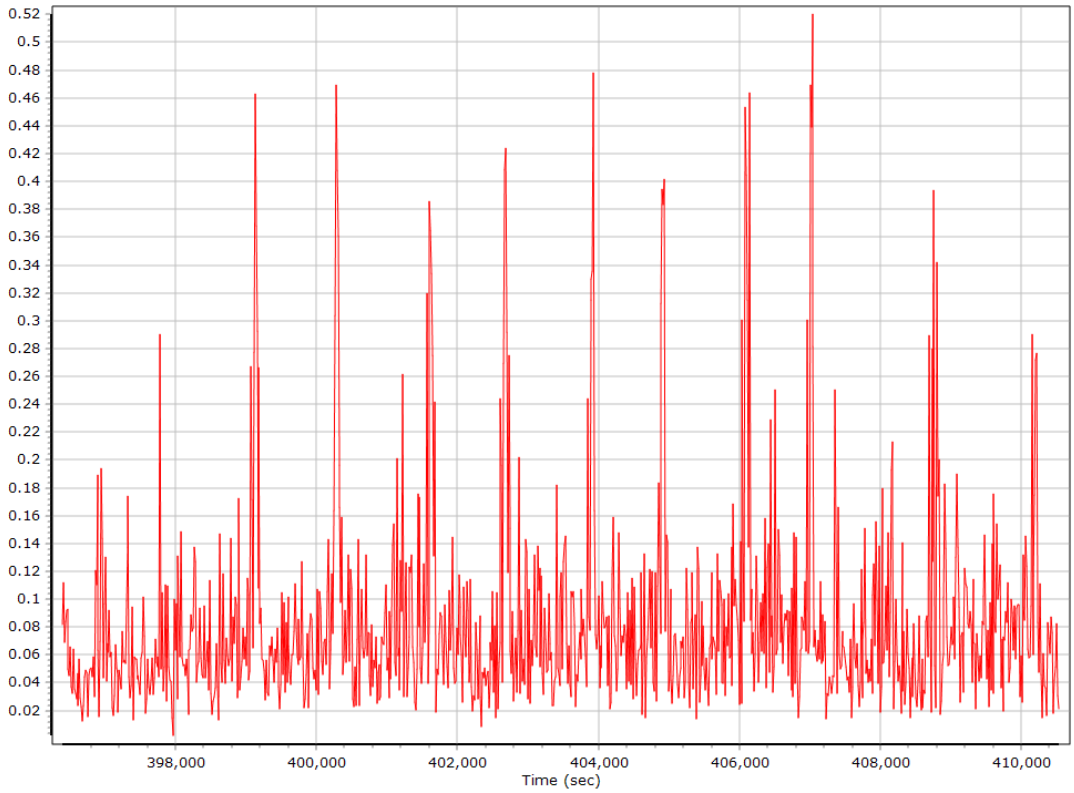

Body Angular Rate

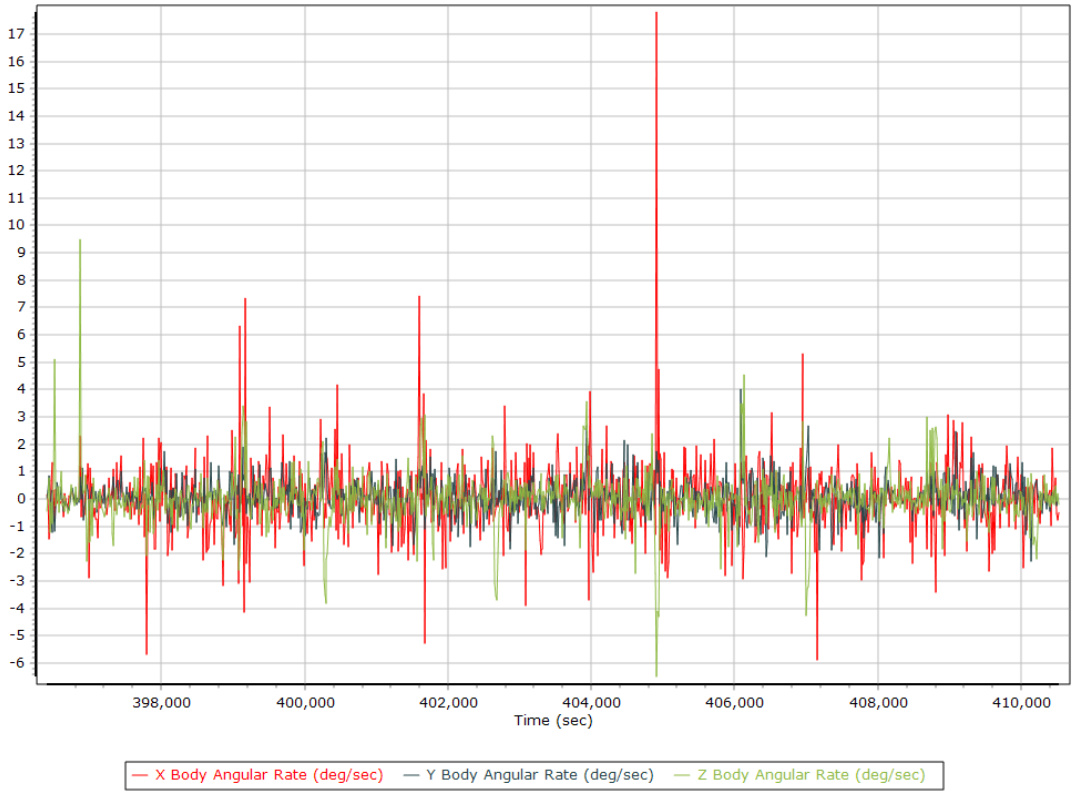

GNSS QC

Num SVs in solution

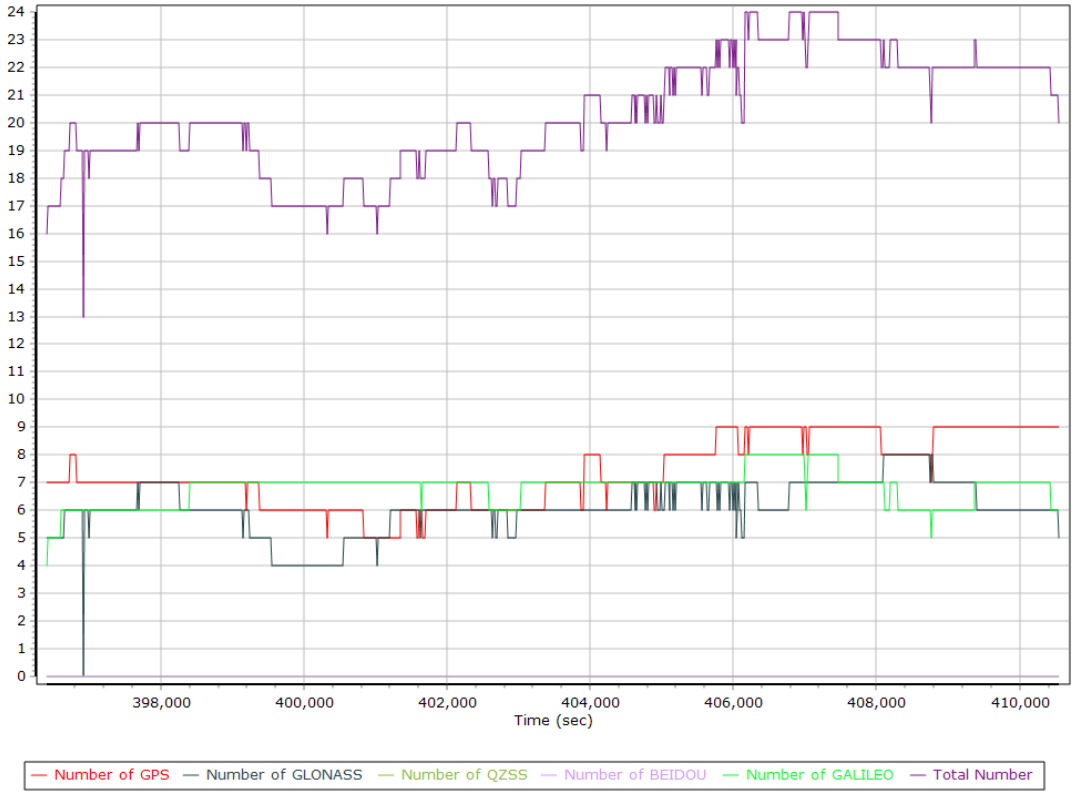

Forward/Reverse Separation

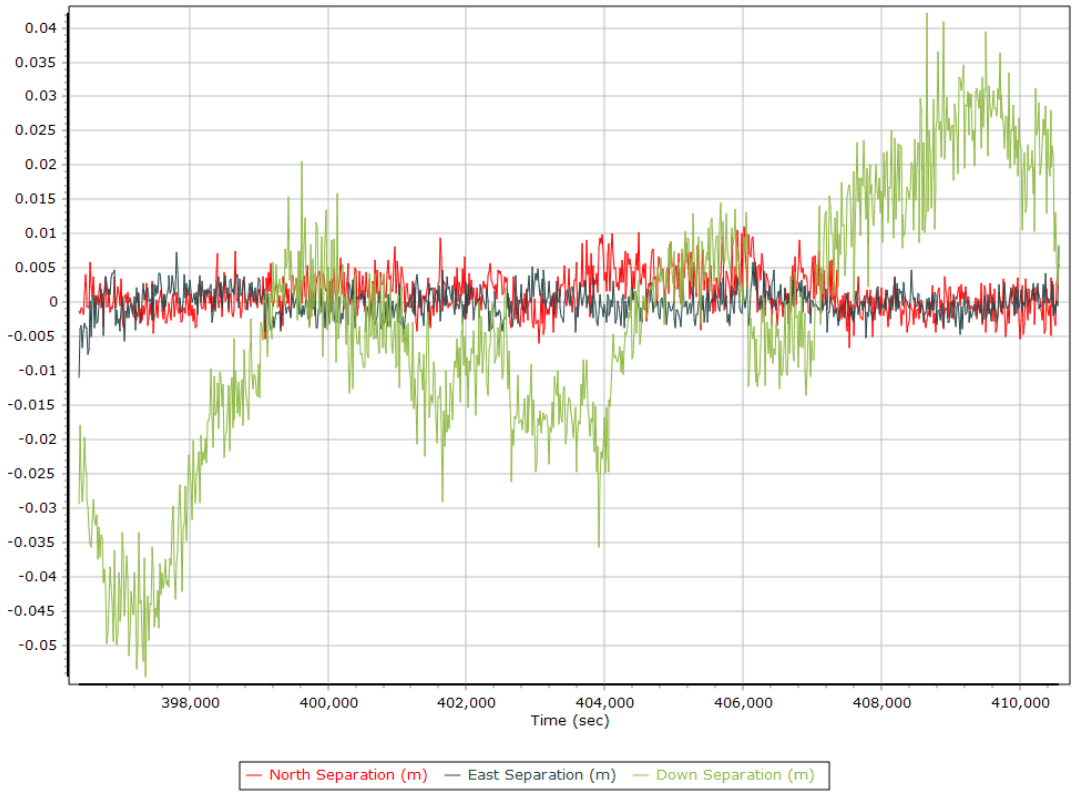

PDOP

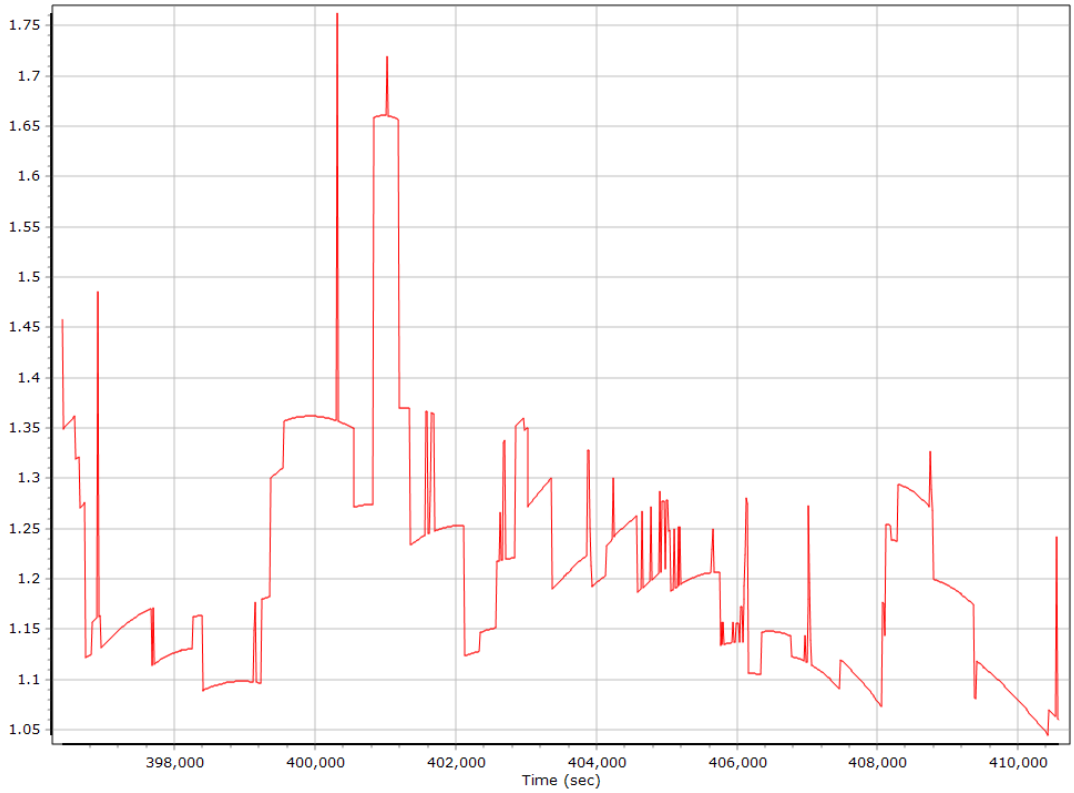

Estimated Position Accuracy

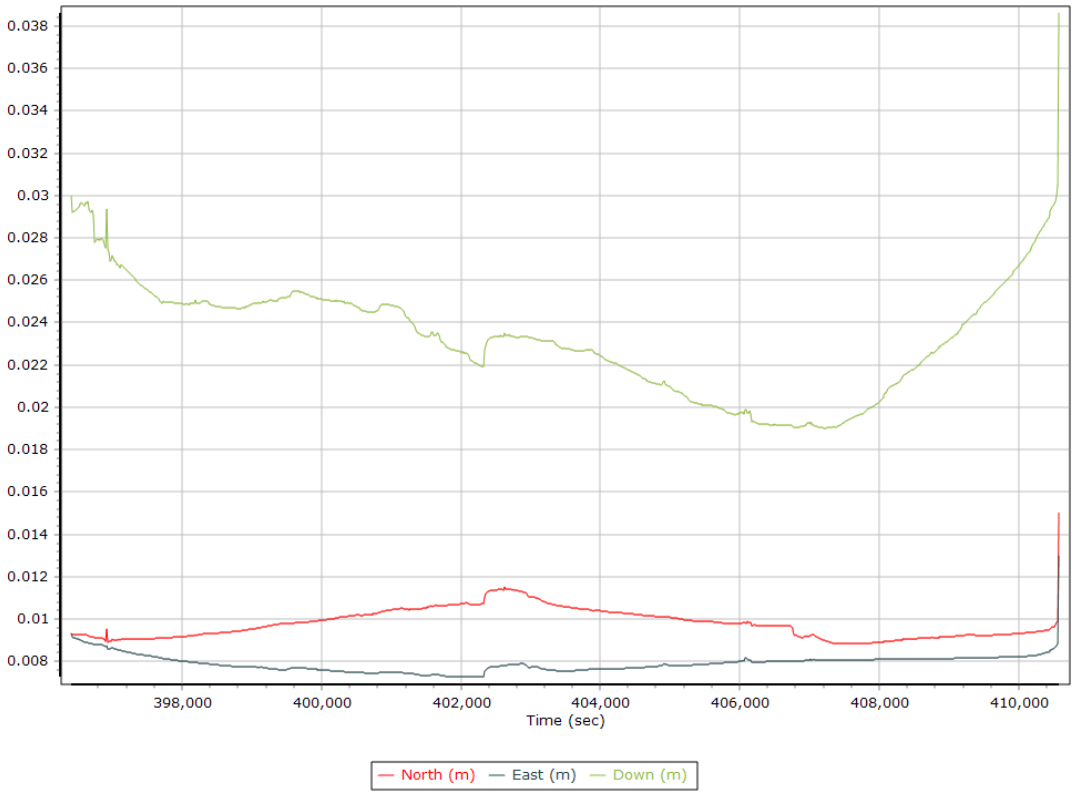

GPS Residuals

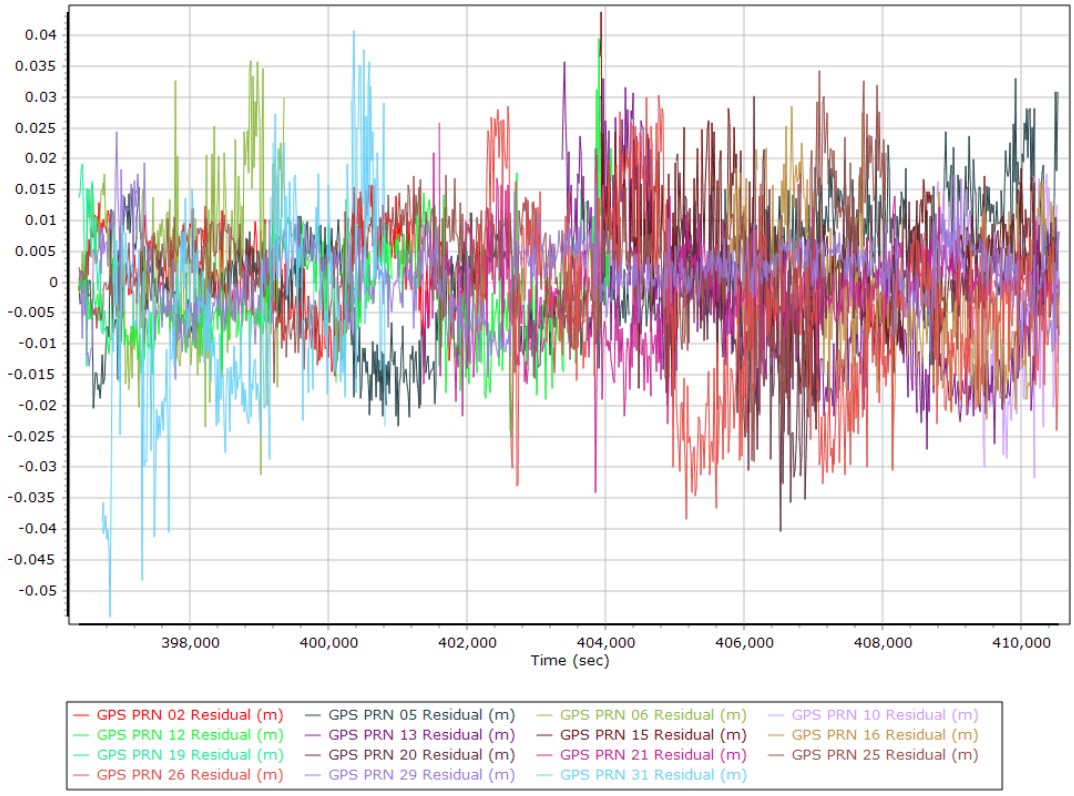

GLONASS Residuals

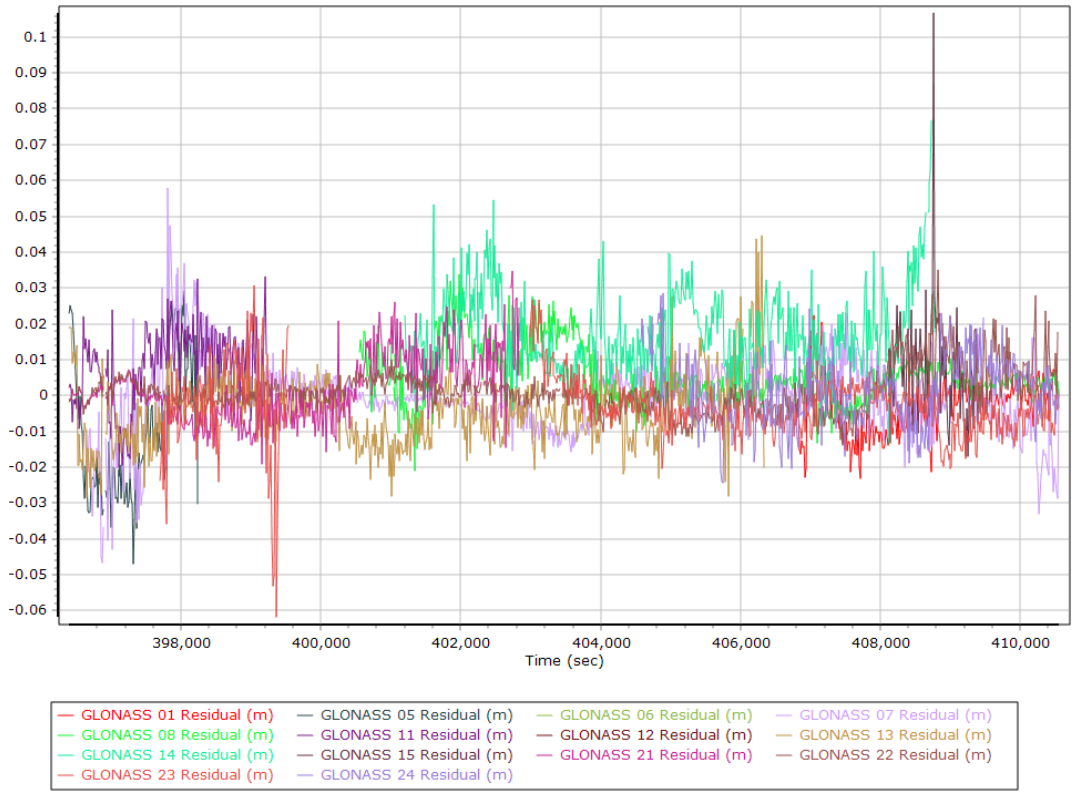

GALILEO Residuals

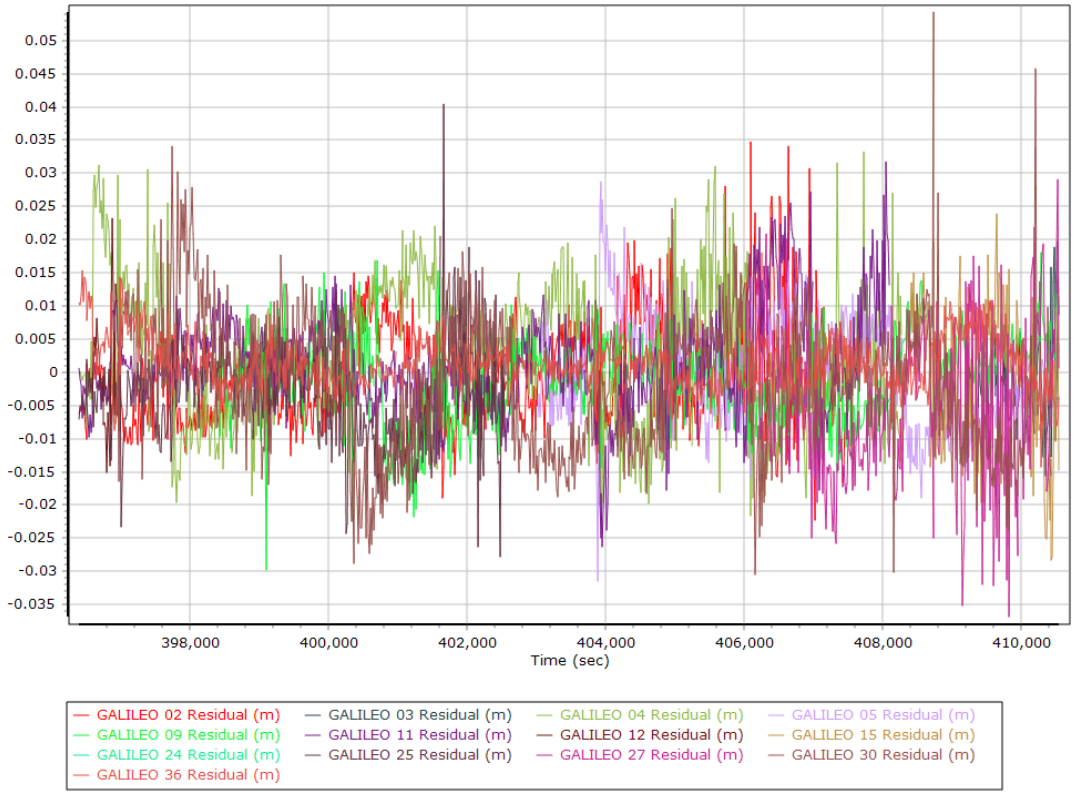

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion PP-RTX		
Stabilized mount	False		
Processing start time	396104.000 (10/3/2019 2:01:44 PM)		
Processing end time	410534.000 (10/3/2019 6:02:14 PM)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	180.000
Reference to Primary GNSS lever arm (m)	0.000	-0.315	-0.926
Reference to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm (m)

X Reference-Primary GNSS Lever Arm (m)

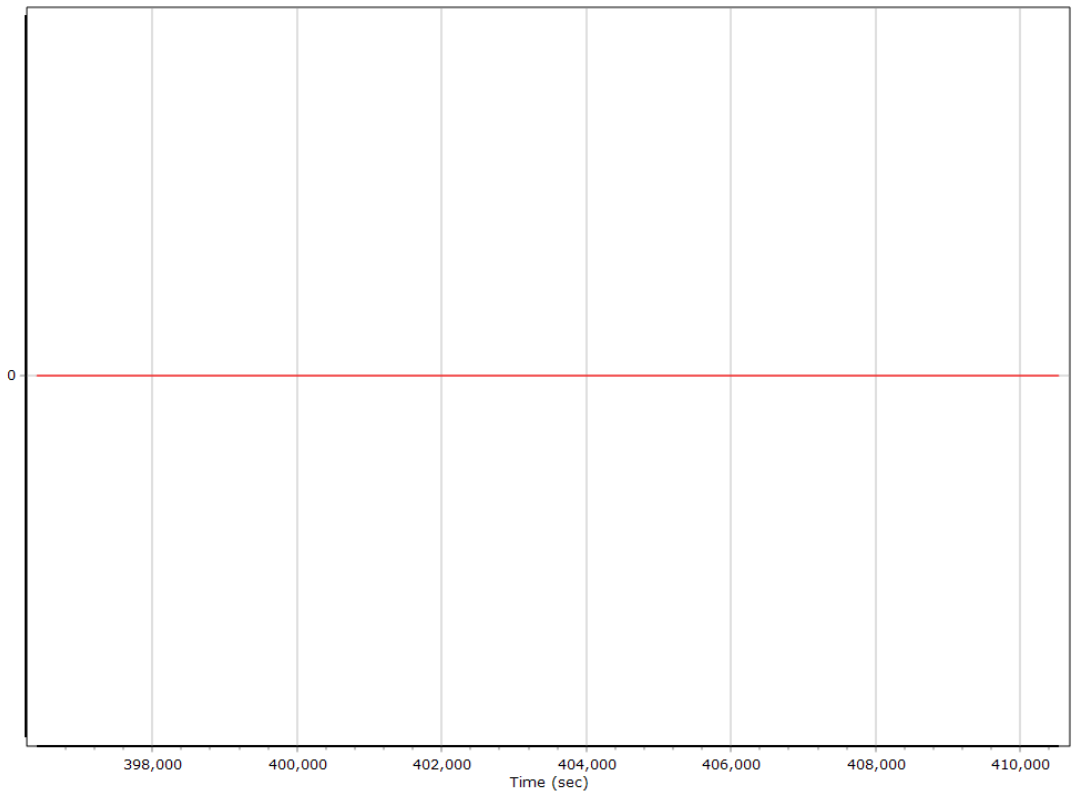

Y Reference-Primary GNSS Lever Arm (m)

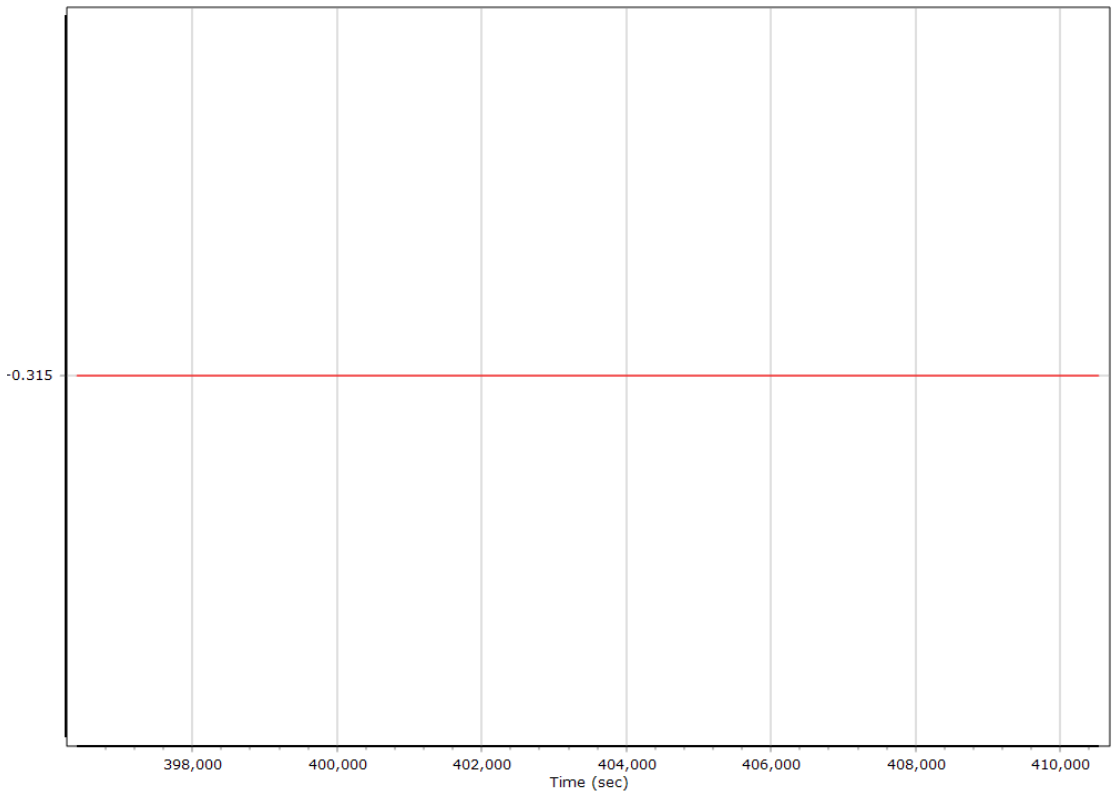

Z Reference-Primary GNSS Lever Arm (m)

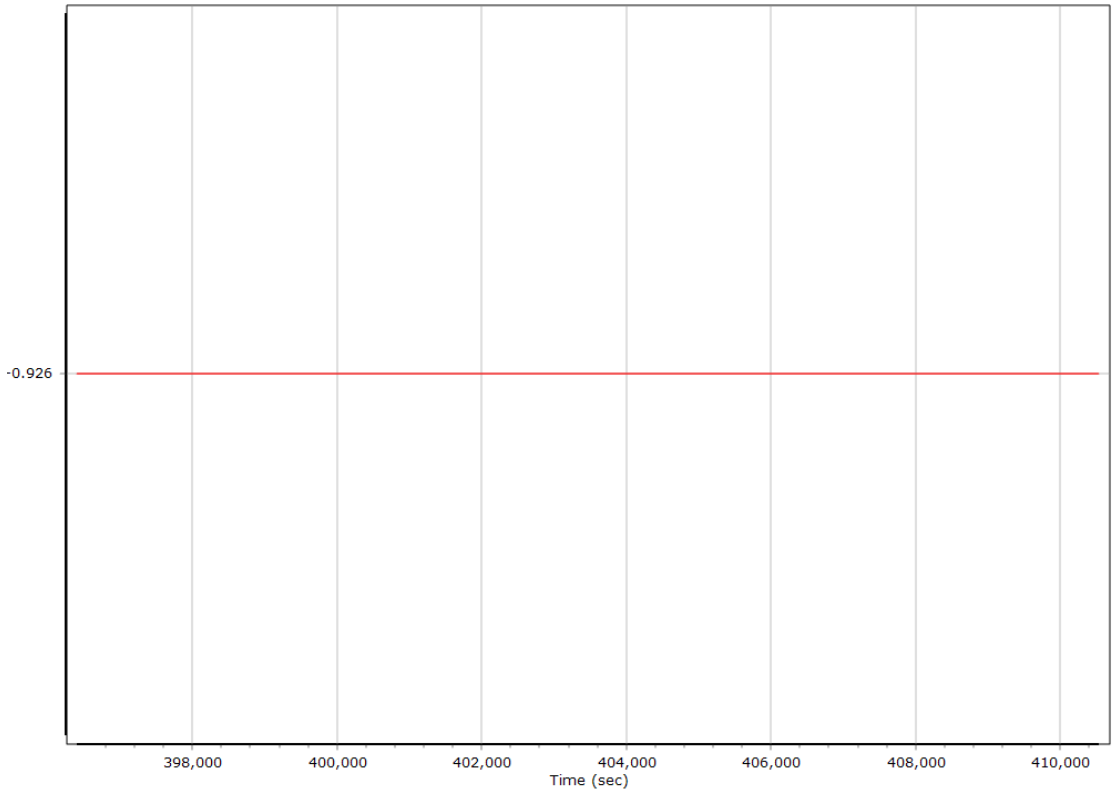

Reference-Primary GNSS Lever Arm Figure of Merit

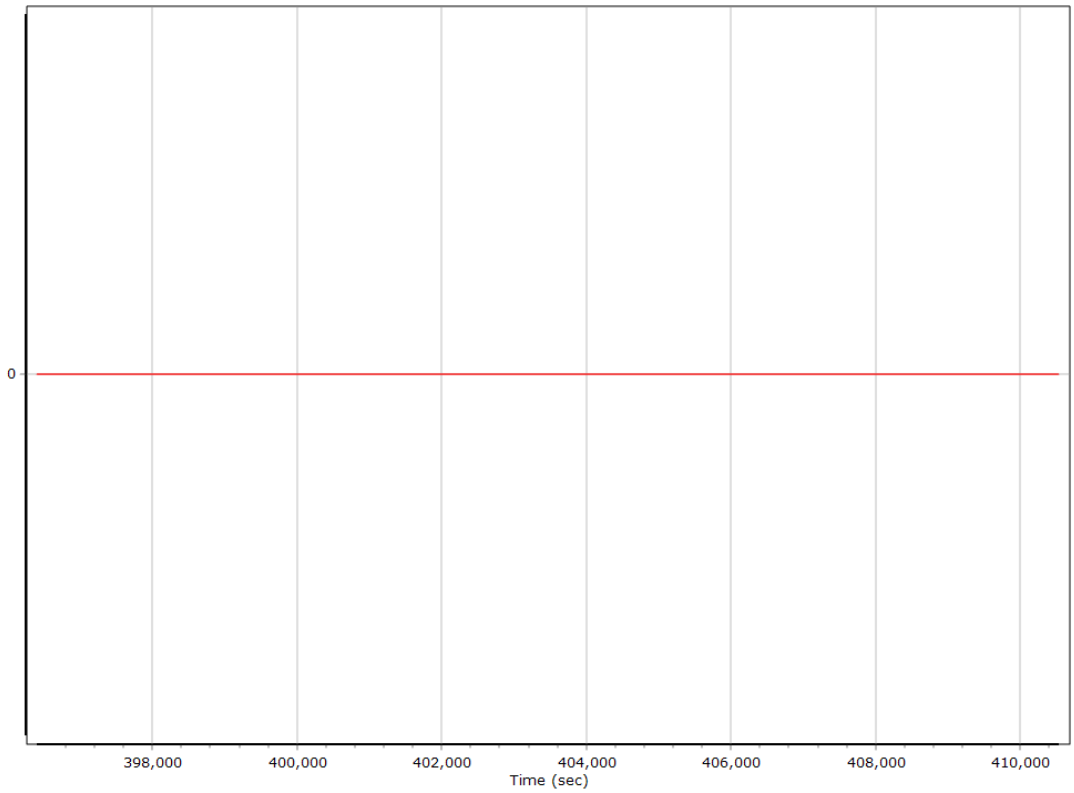

IN-Fusion QC

Forward Processed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

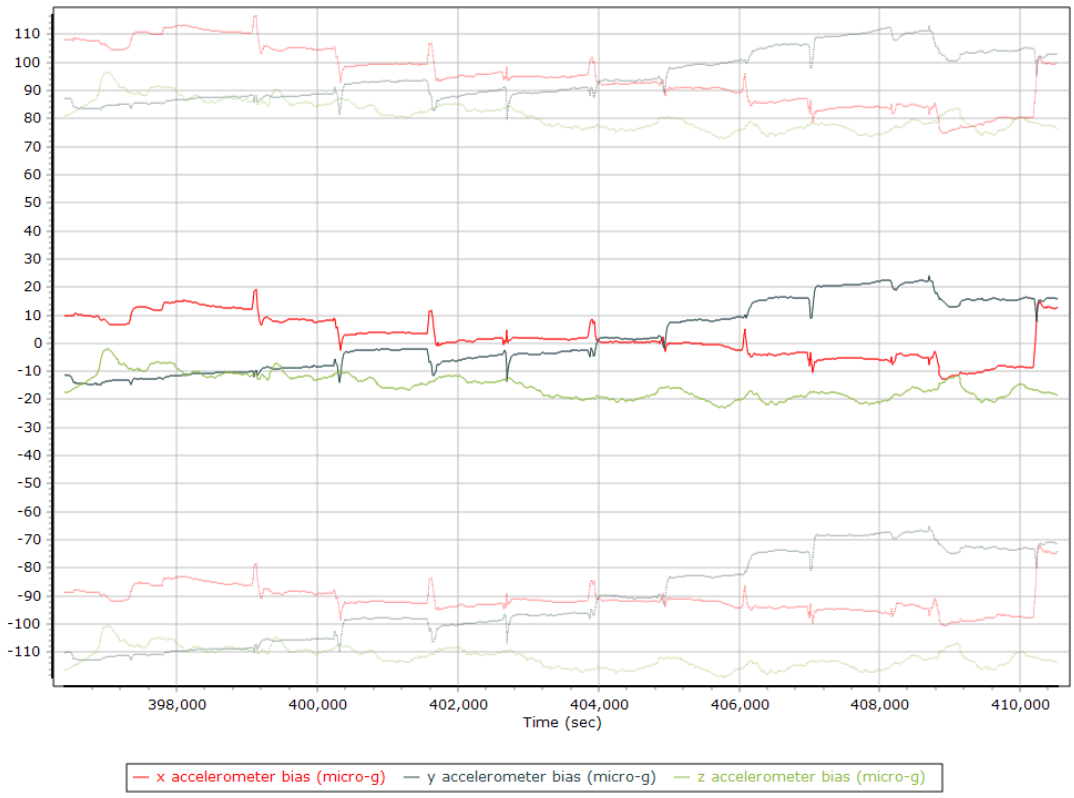

X Accelerometer Bias (micro-g)

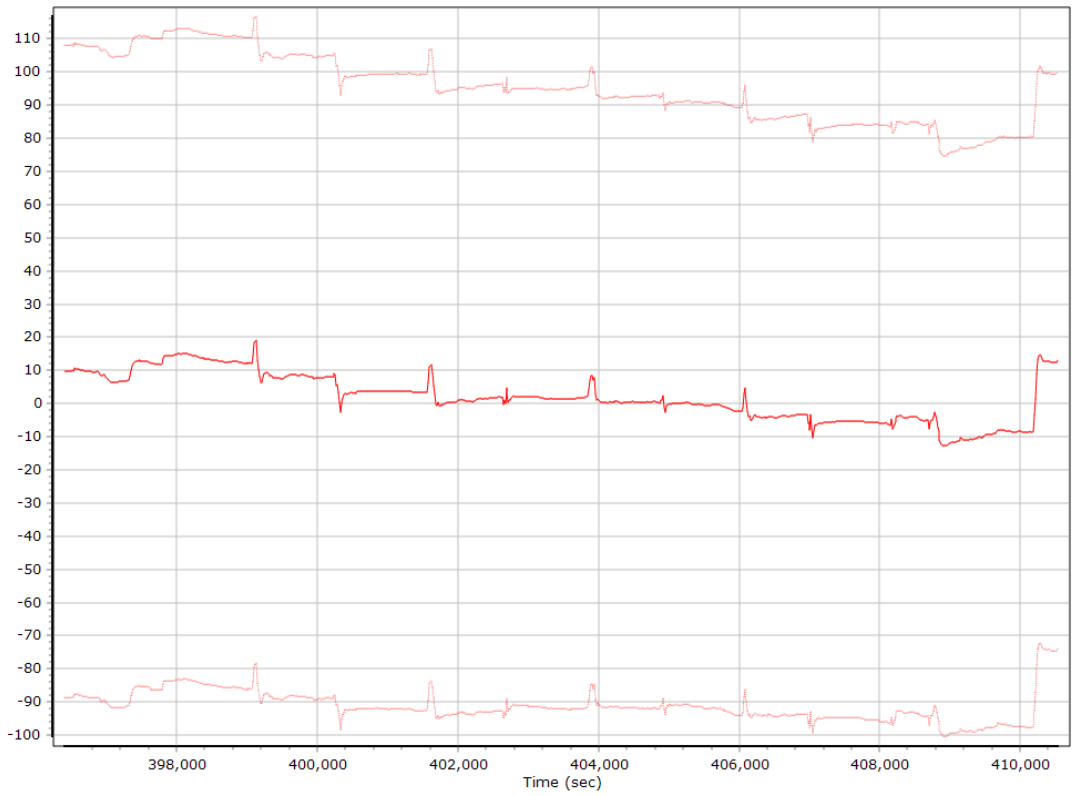

Y Accelerometer Bias (micro-g)

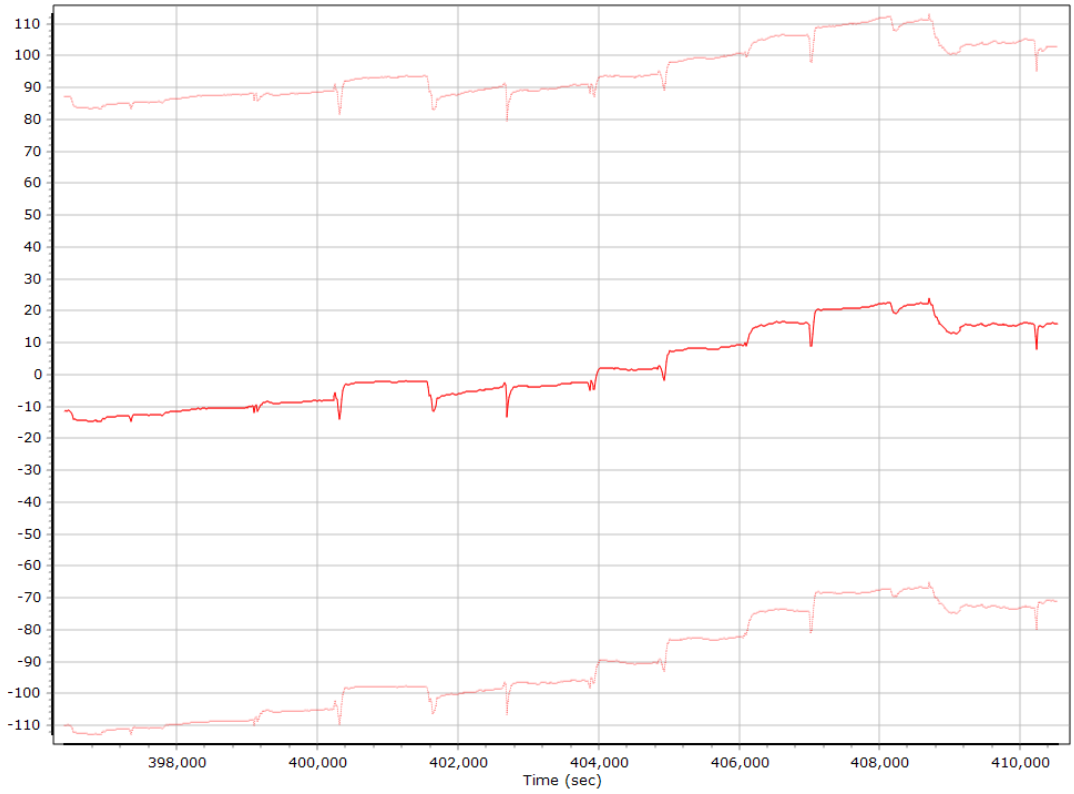

Z Accelerometer Bias (micro-g)

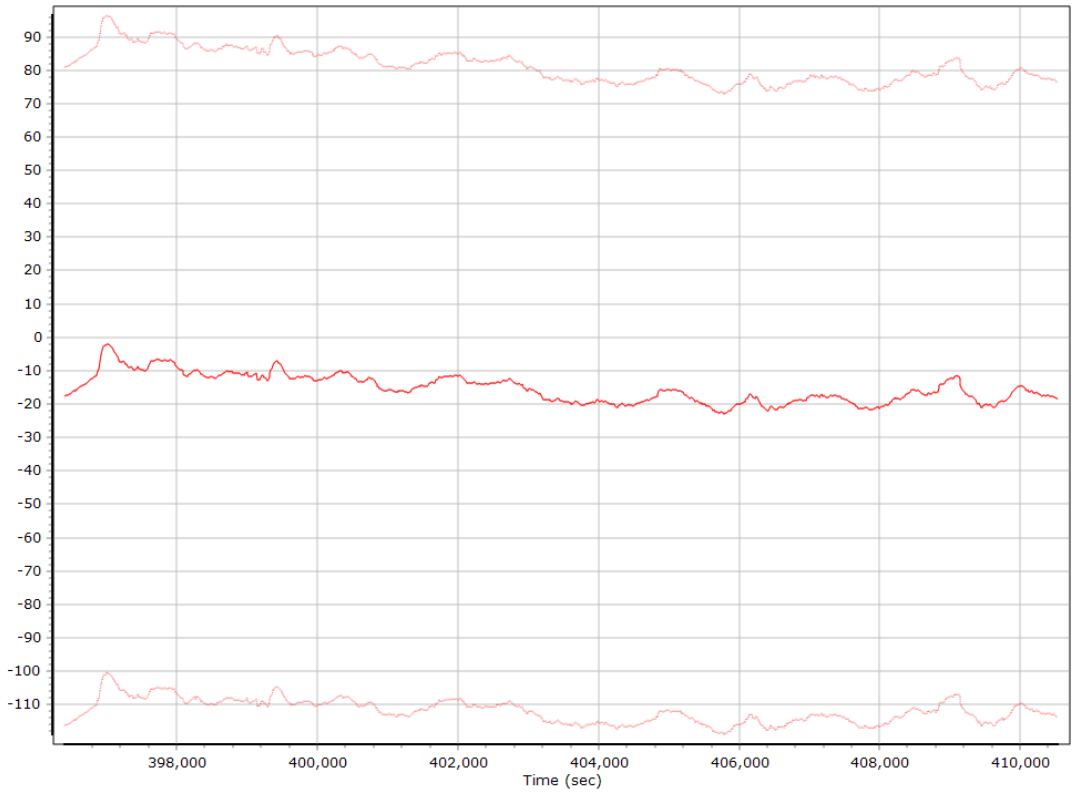

Accelerometer Scale Error (ppm)

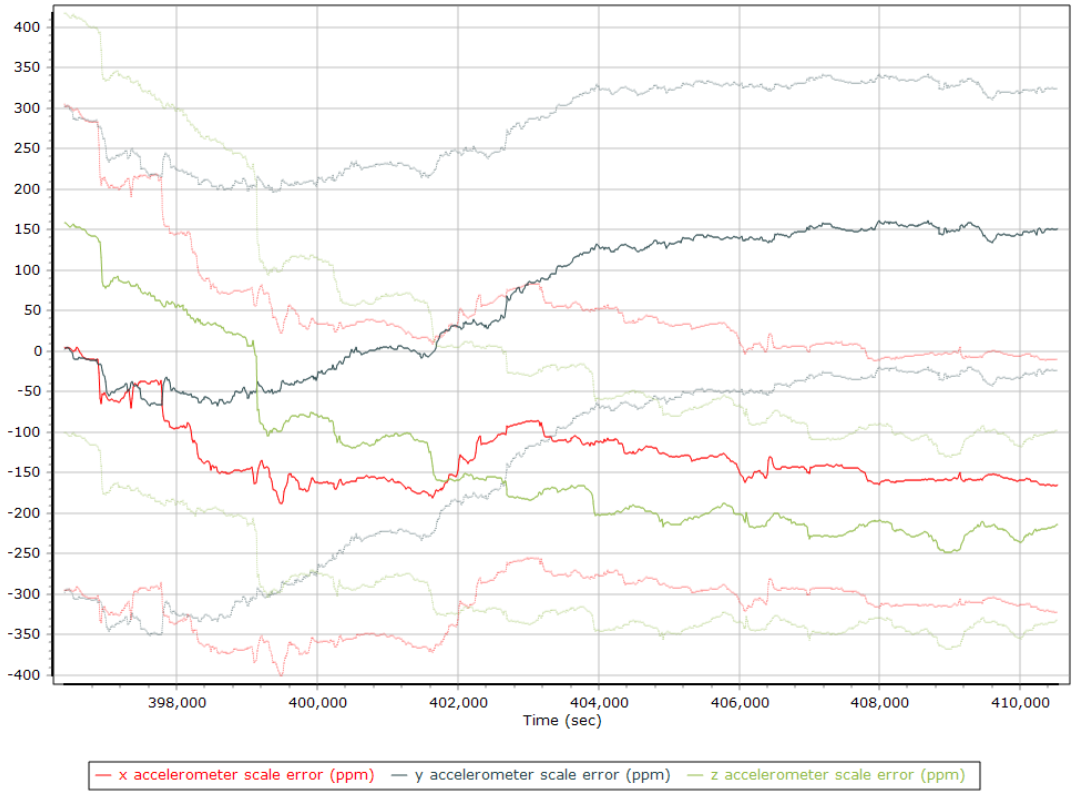

X Accelerometer Scale Error (ppm)

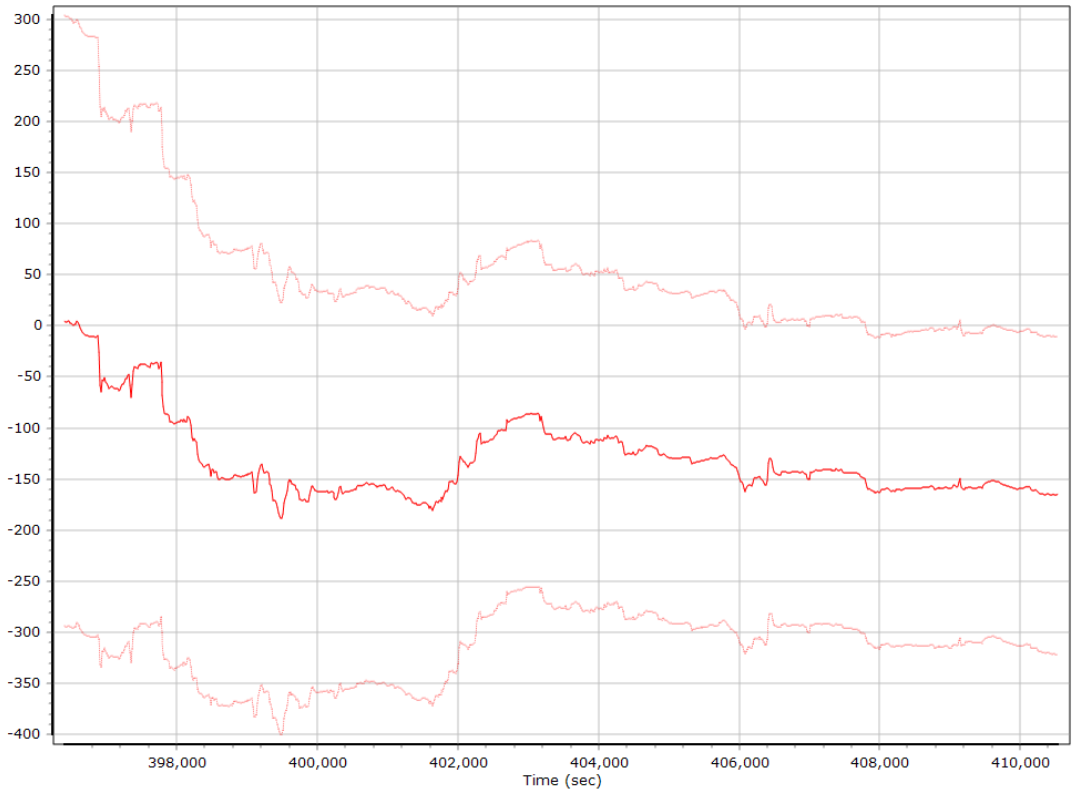

Y Accelerometer Scale Error (ppm)

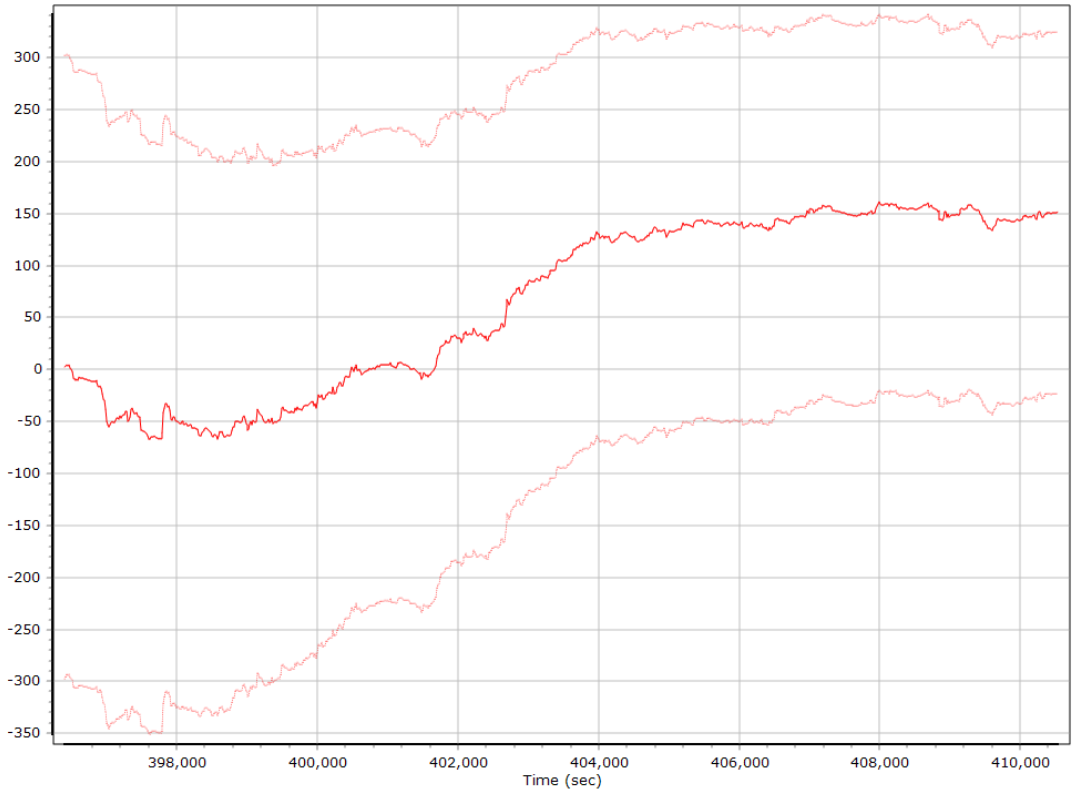

Z Accelerometer Scale Error (ppm)

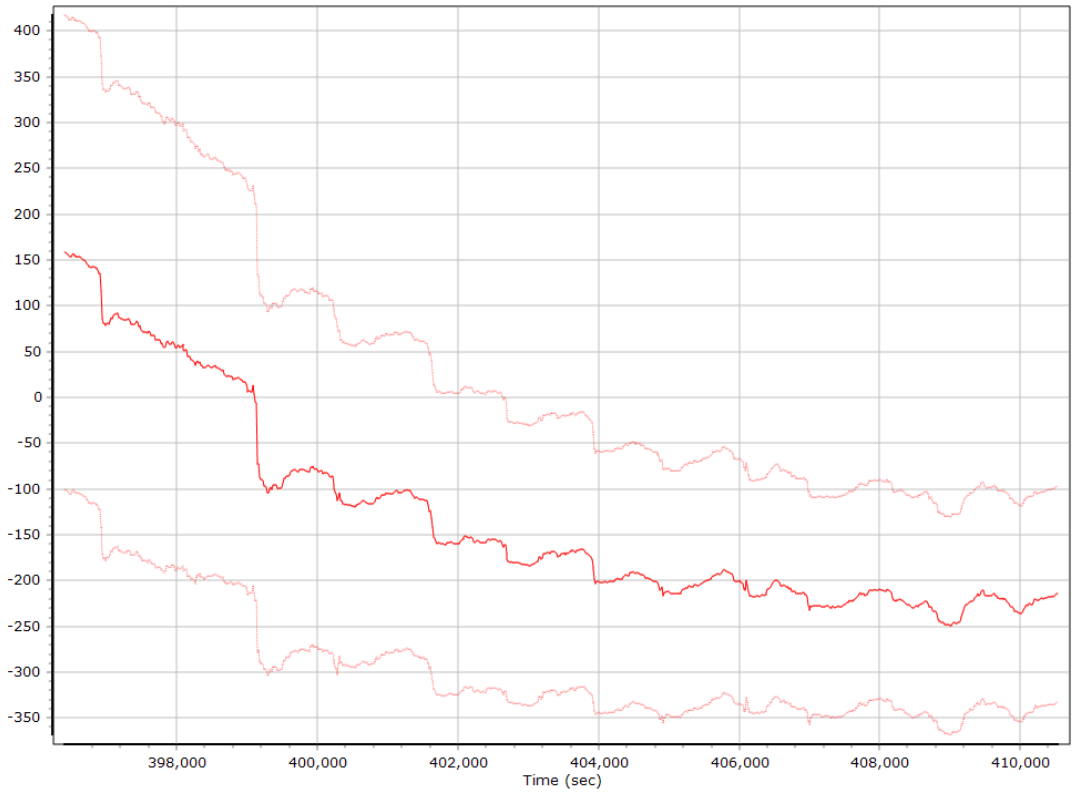

Gyro Bias (deg/h)

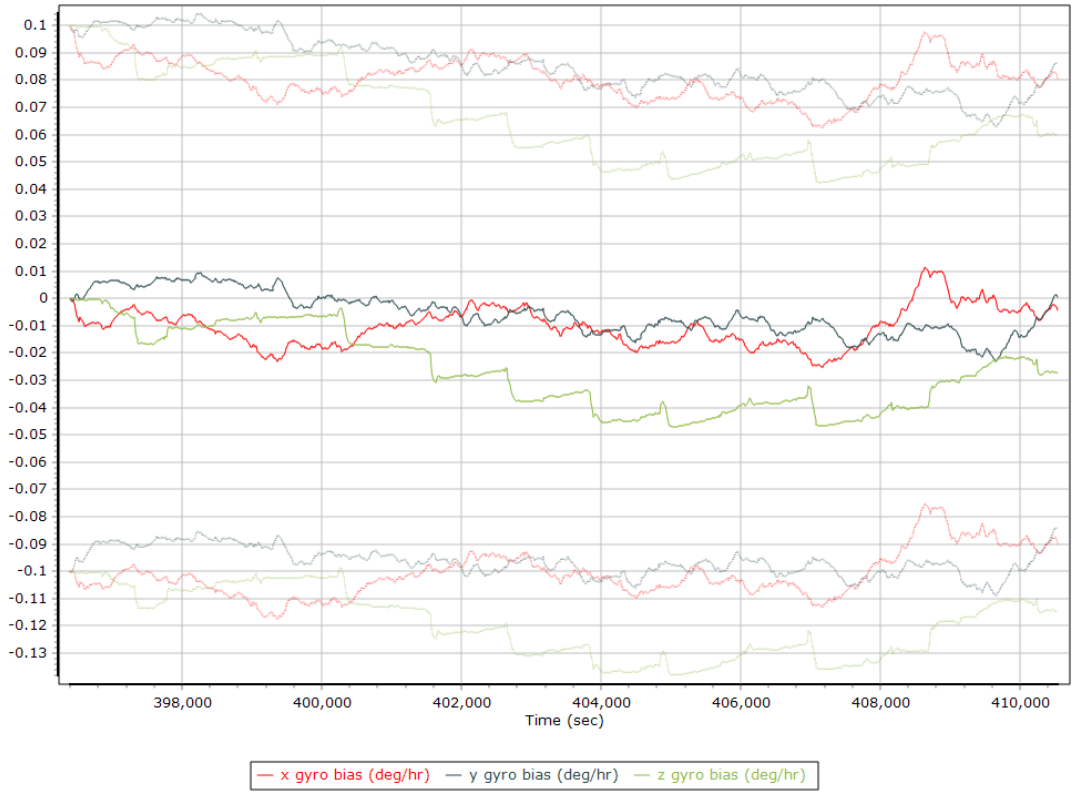

X Gyro Bias (deg/h)

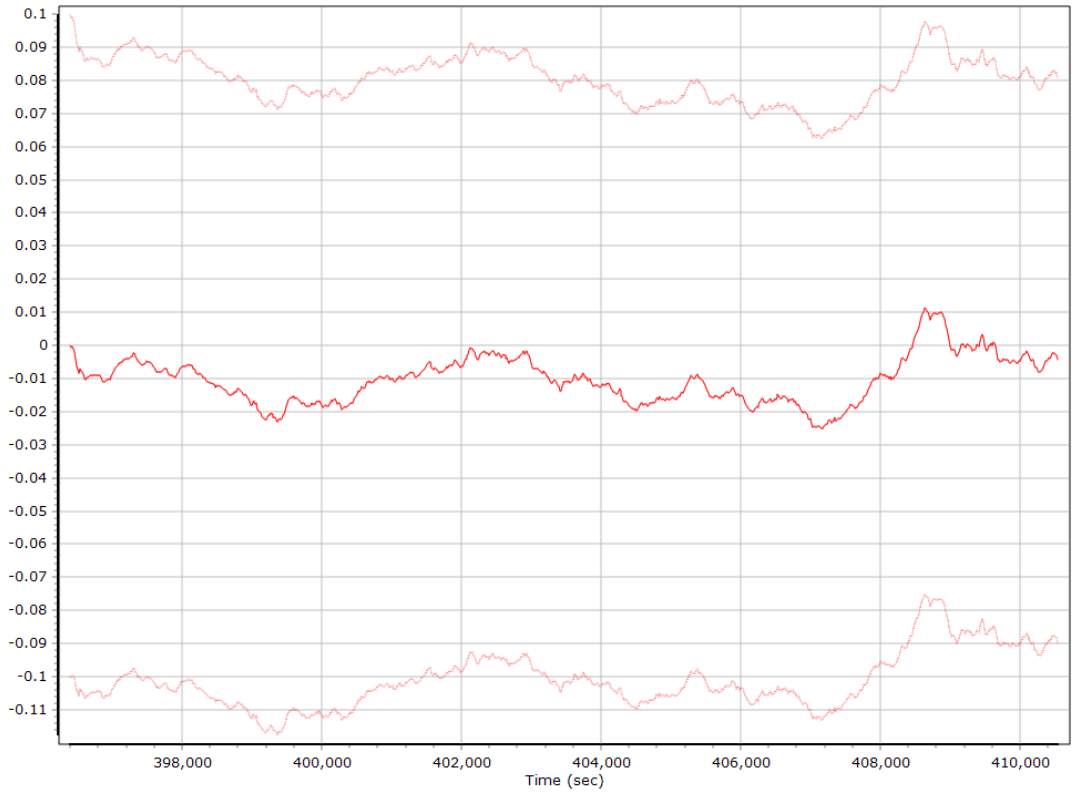

Y Gyro Bias (deg/h)

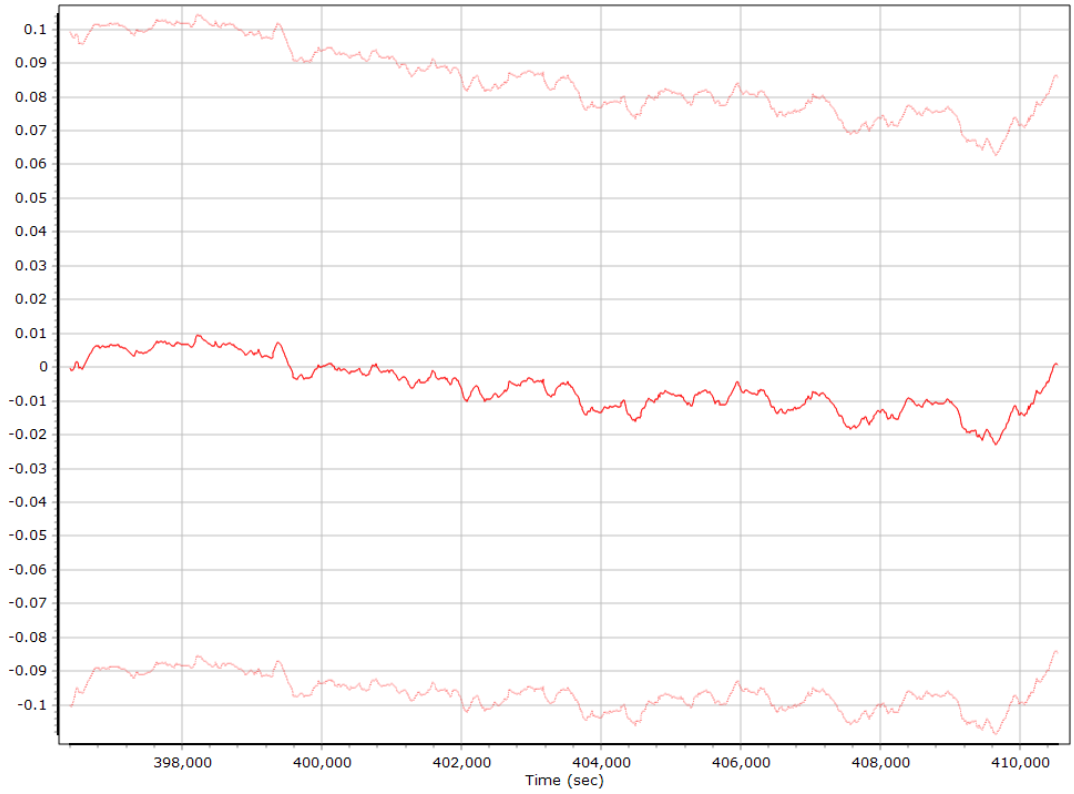

Z Gyro Bias (deg/h)

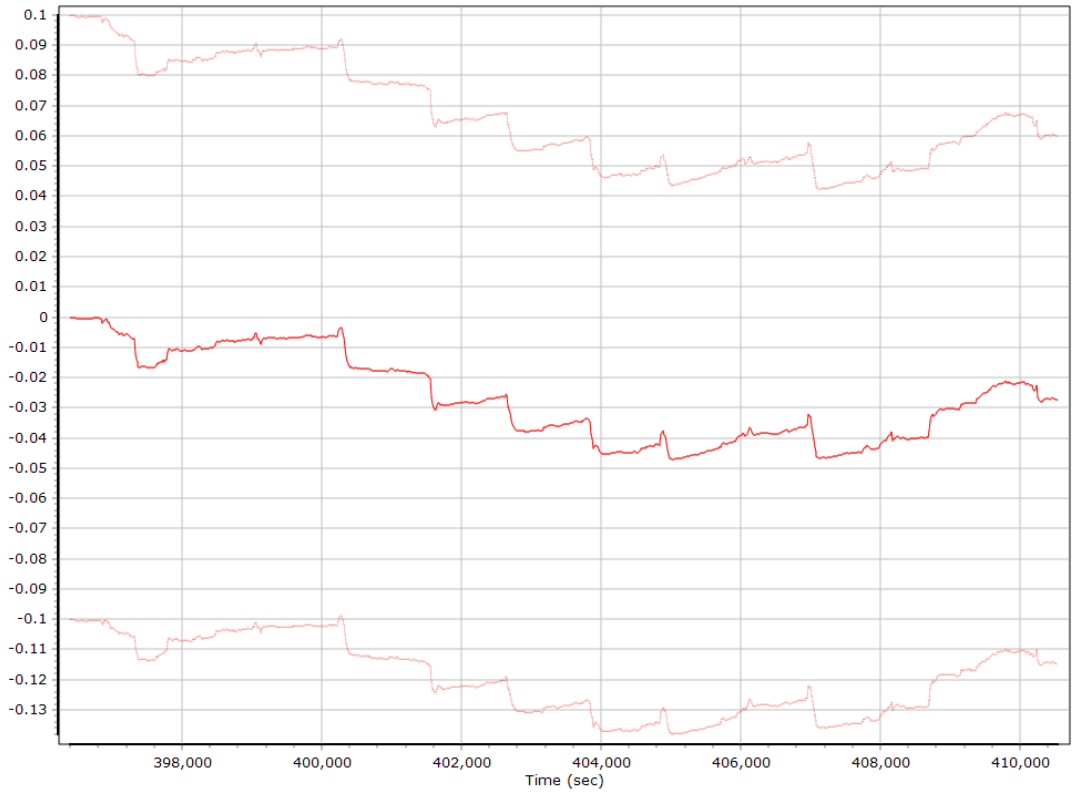

Gyro Scale Error (ppm)

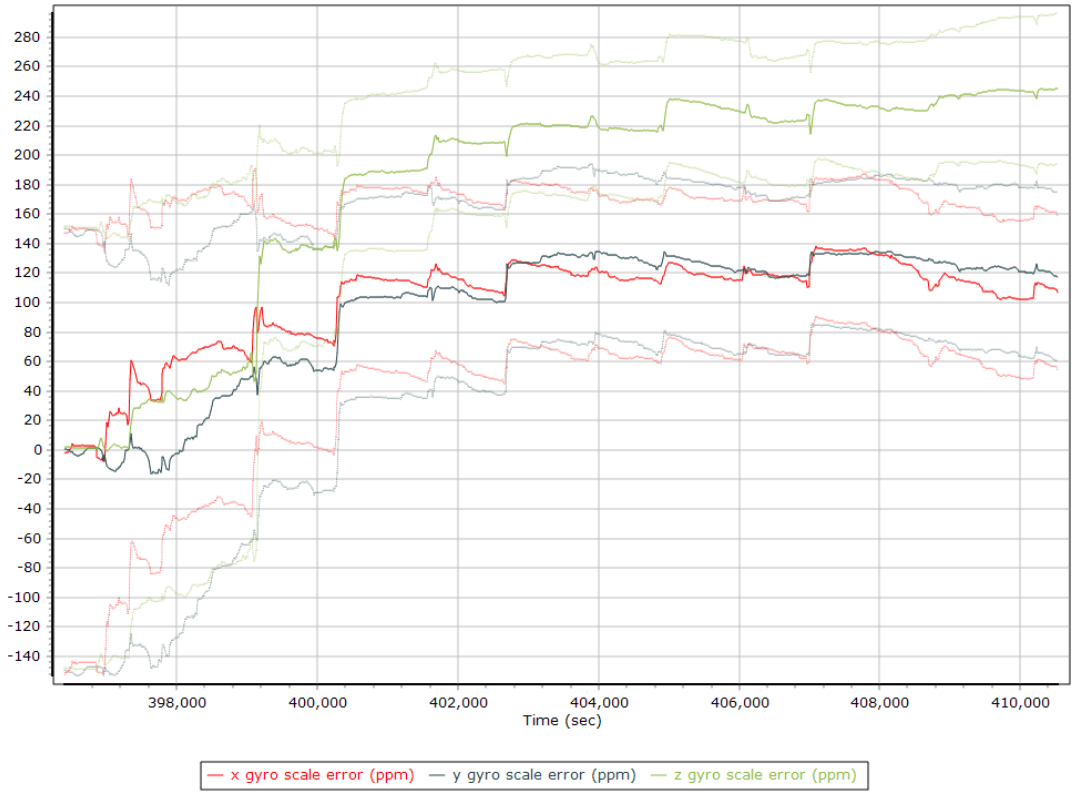

X Gyro Scale Error (ppm)

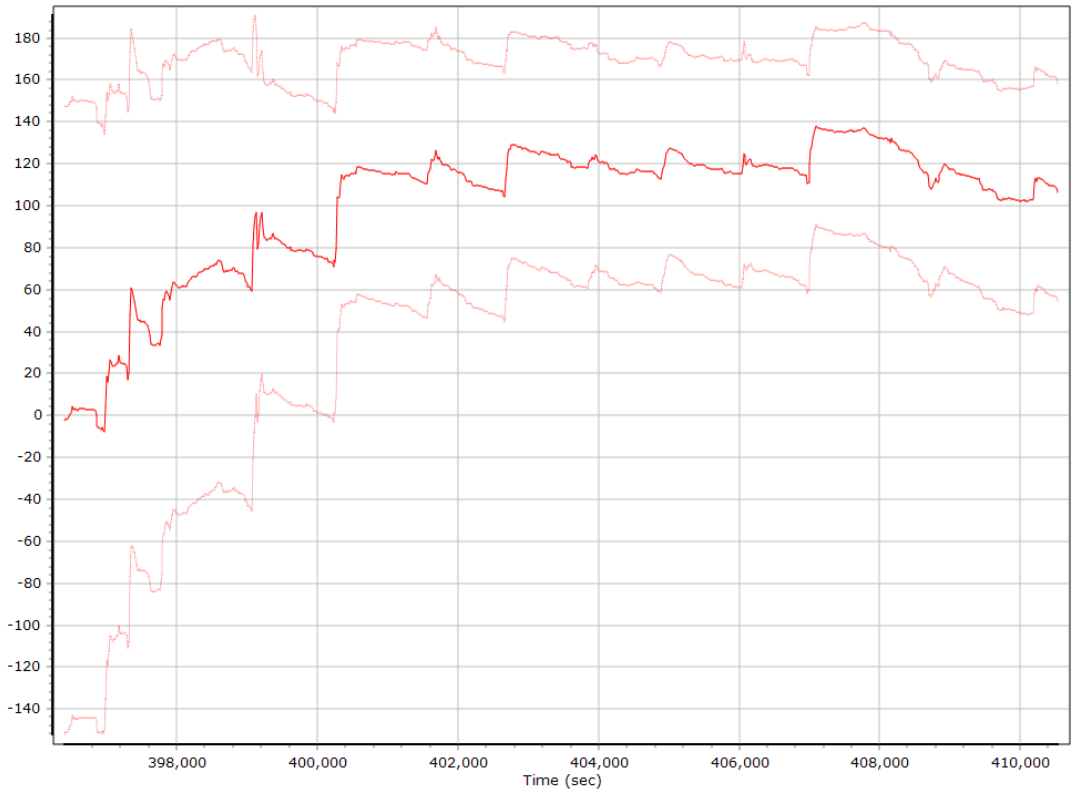

Y Gyro Scale Error (ppm)

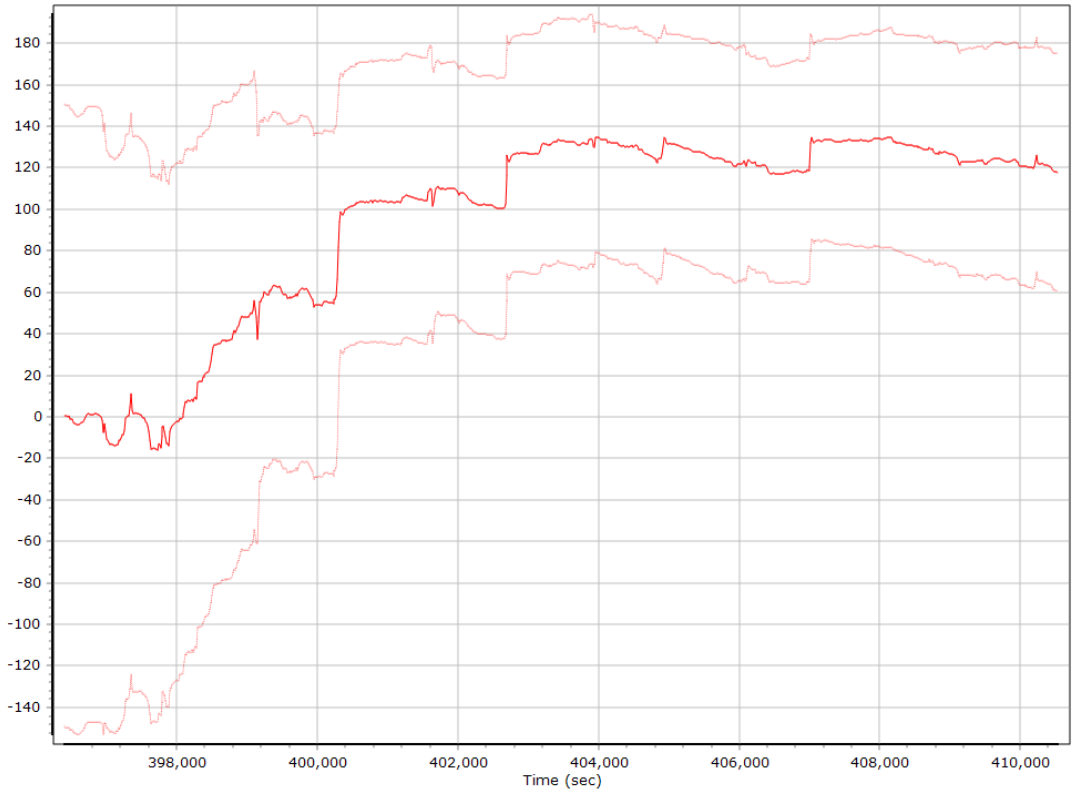

Z Gyro Scale Error (ppm)

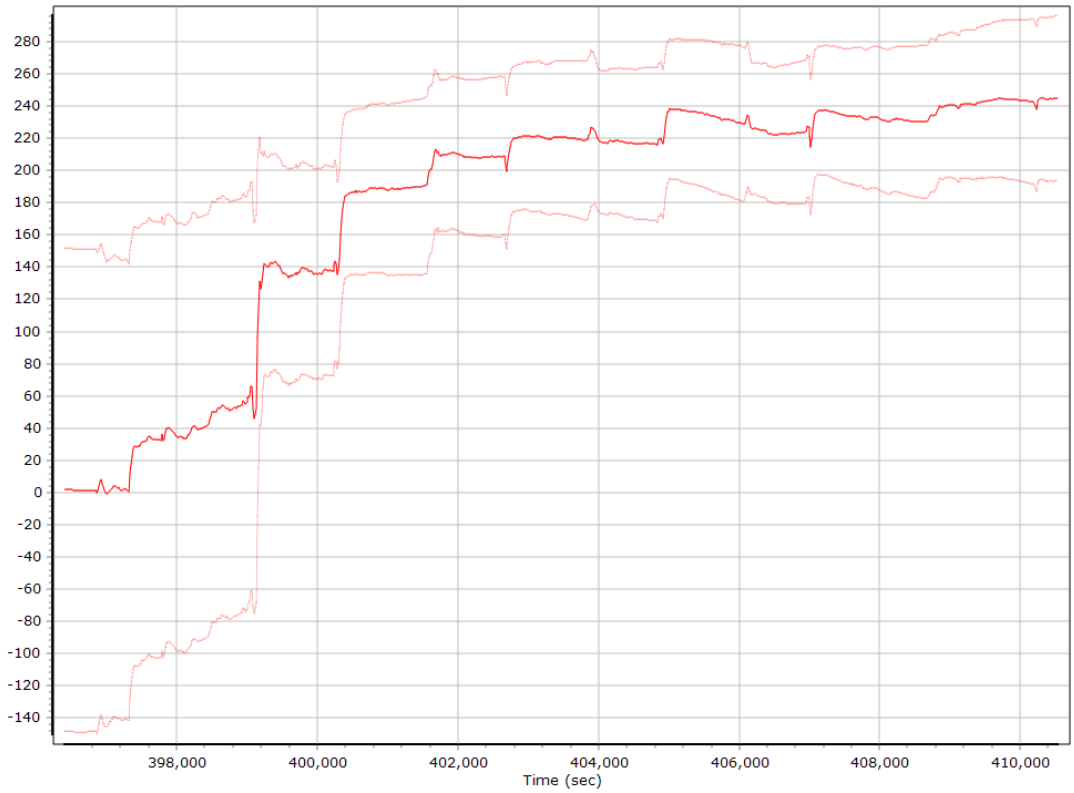

Forward Processed Estimated Constant Errors, Reference Frame

Accelerometer Bias (micro-g)

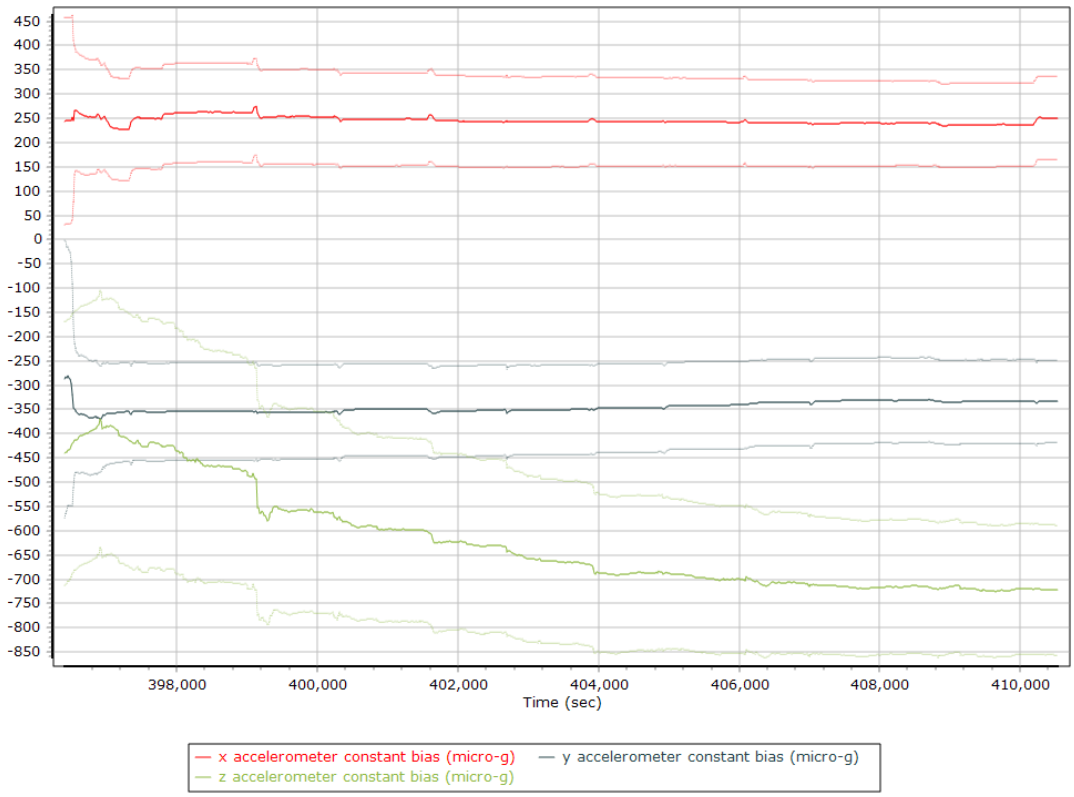

X Accelerometer Bias (micro-g)

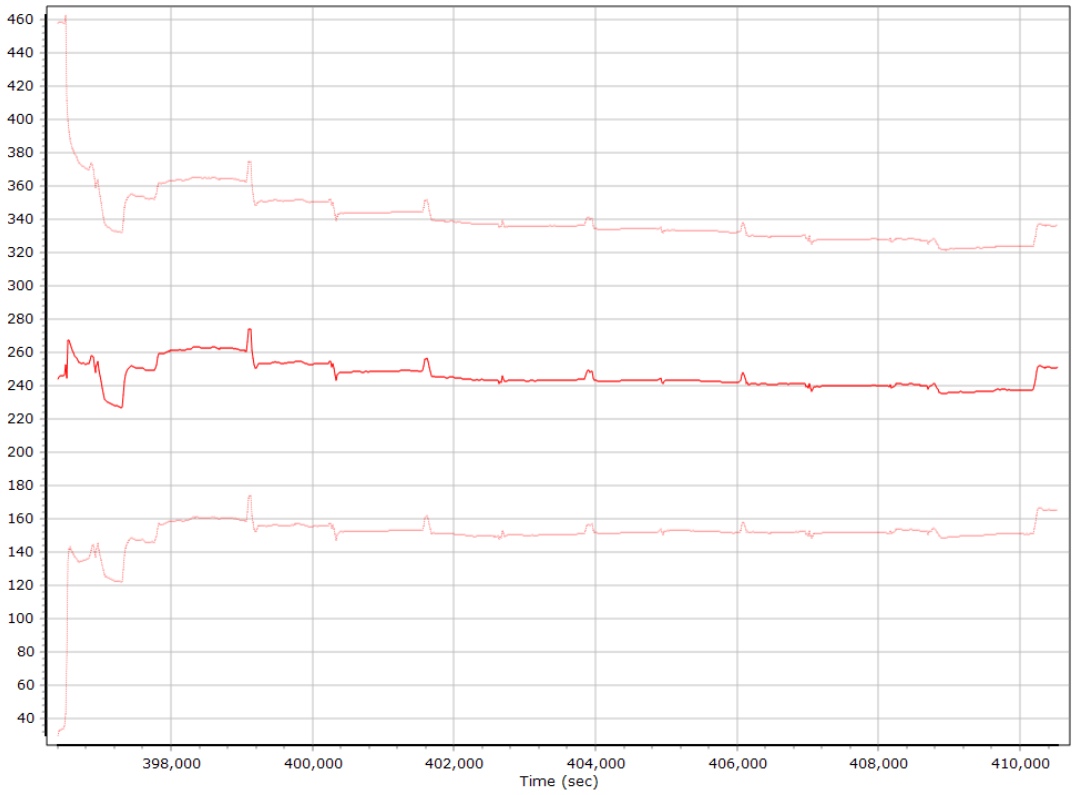

Y Accelerometer Bias (micro-g)

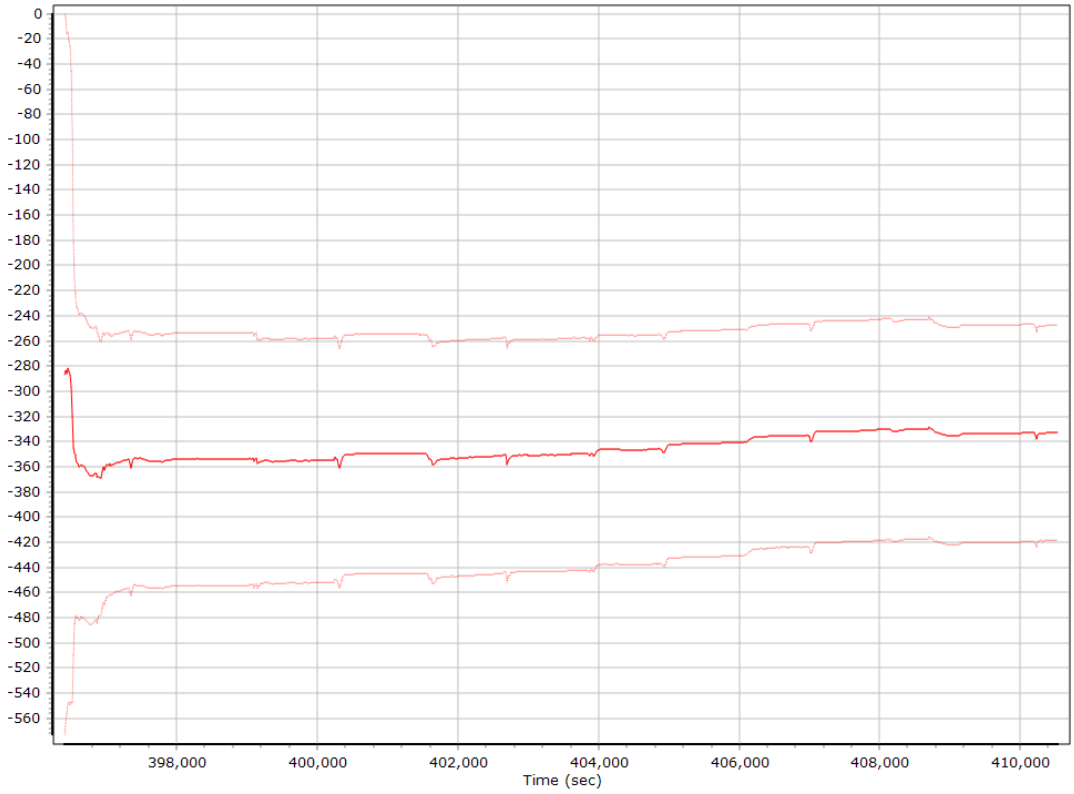

Z Accelerometer Bias (micro-g)

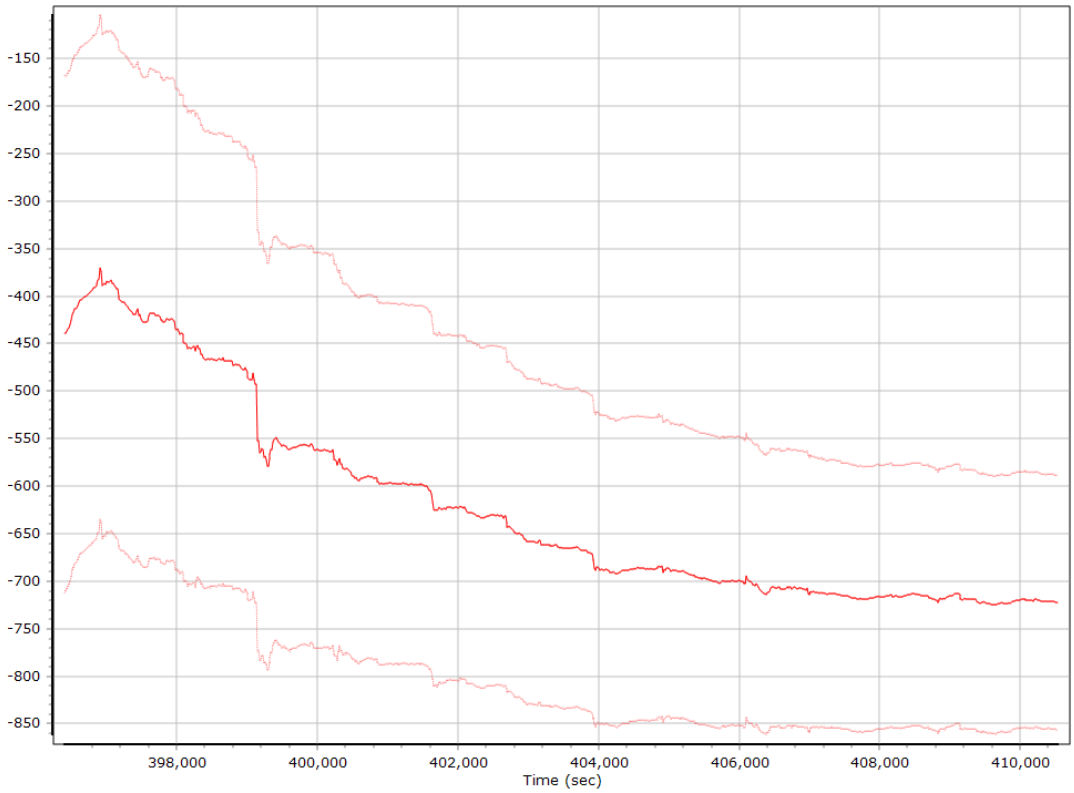

Gyro Bias (deg/h)

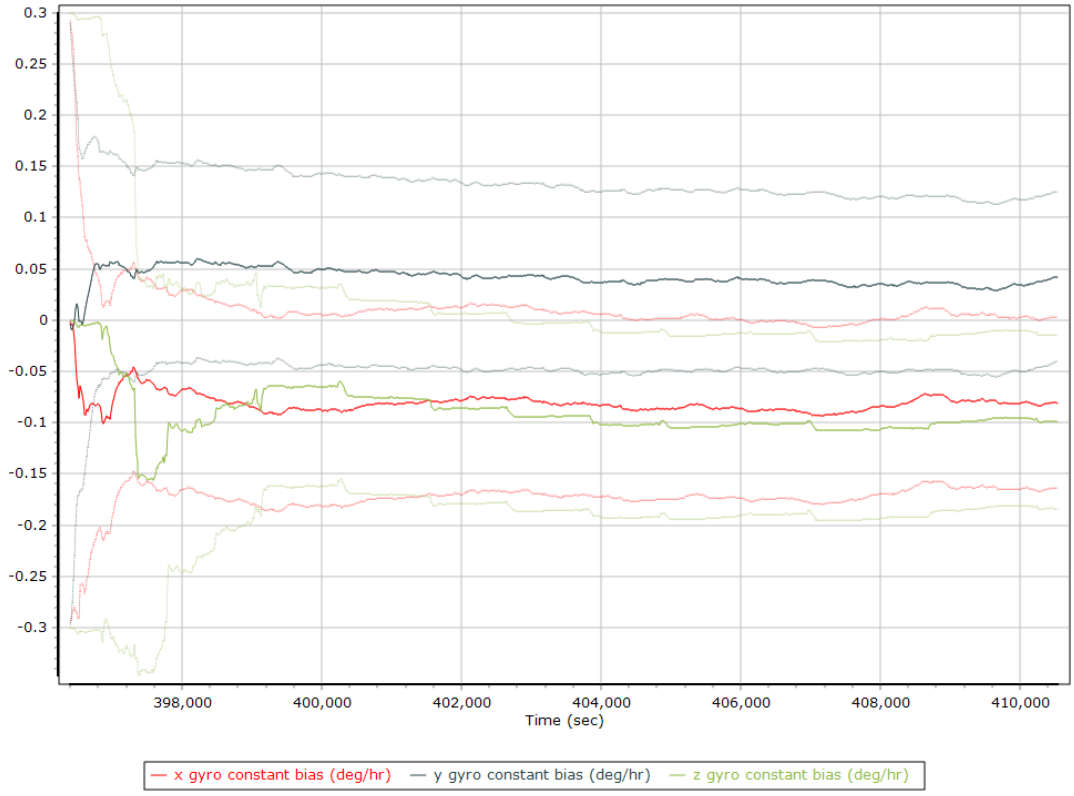

X Gyro Bias (deg/h)

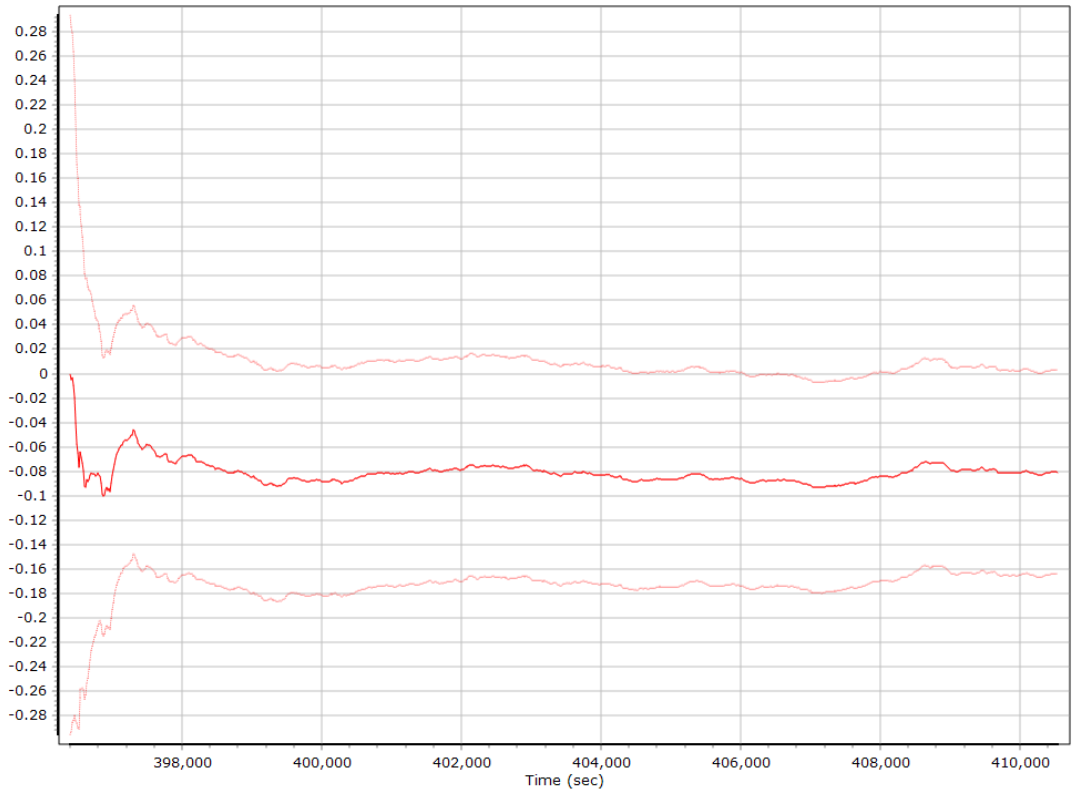

Y Gyro Bias (deg/h)

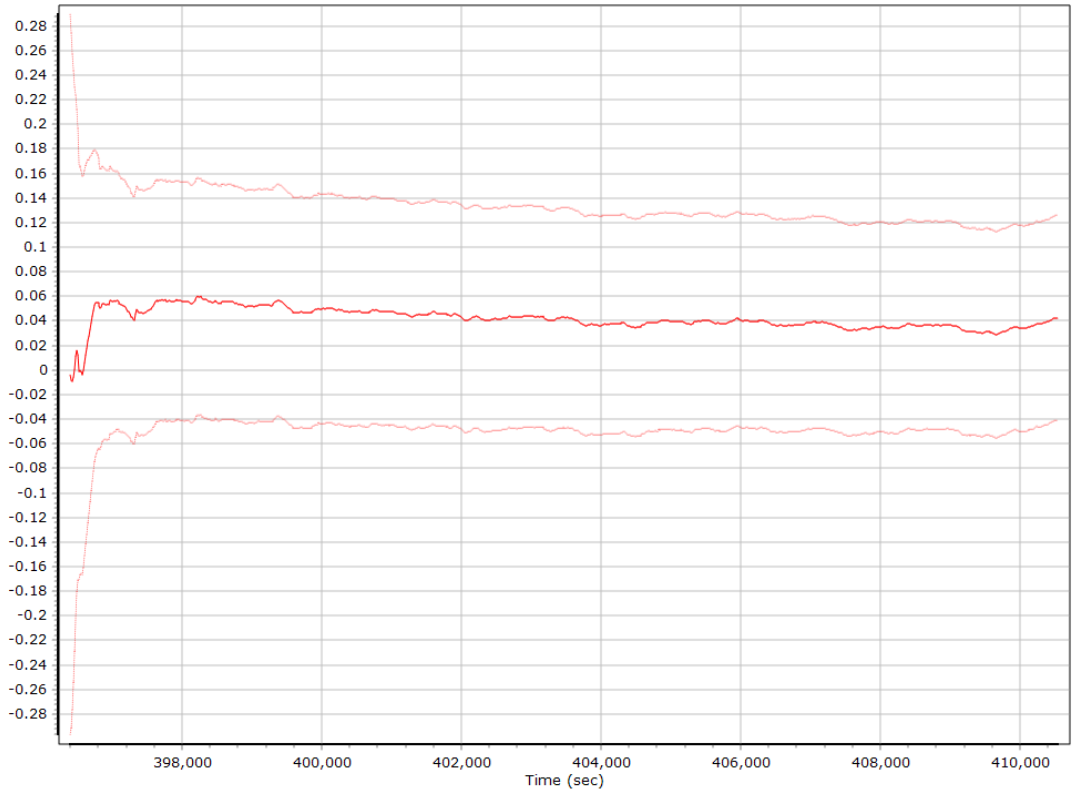

Z Gyro Bias (deg/h)

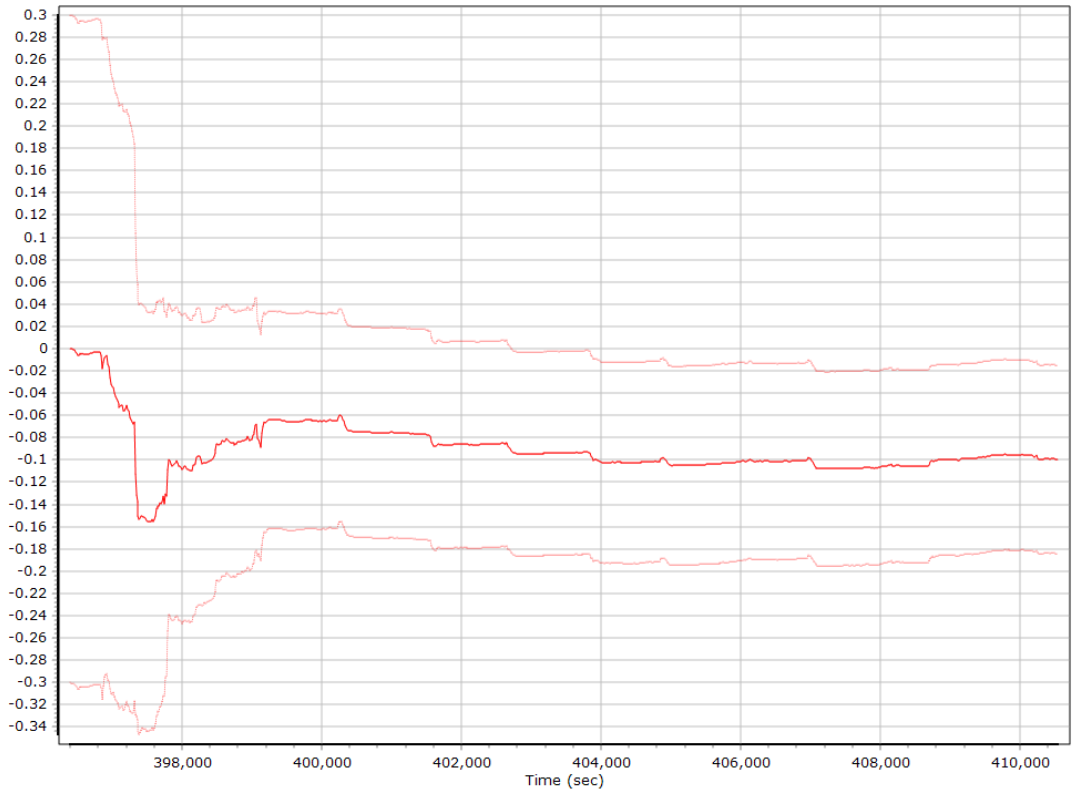

Smoothed Performance Metrics

Position Error RMS (m)

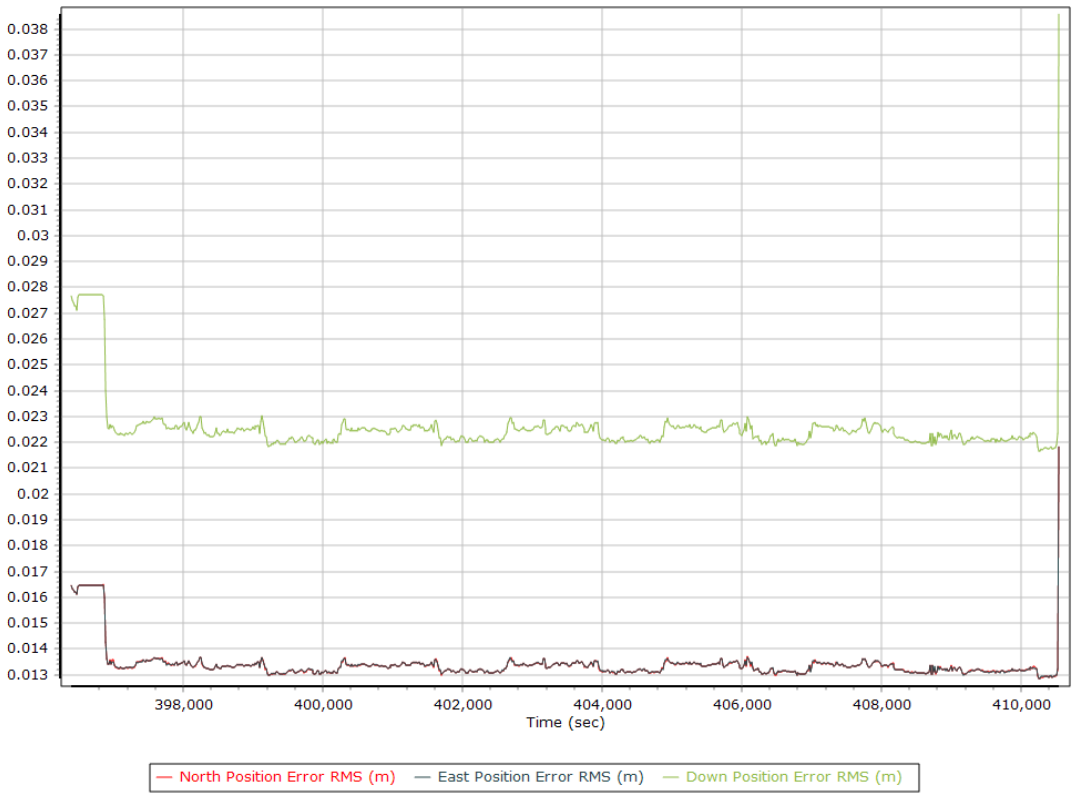

Velocity Error RMS (m/s)

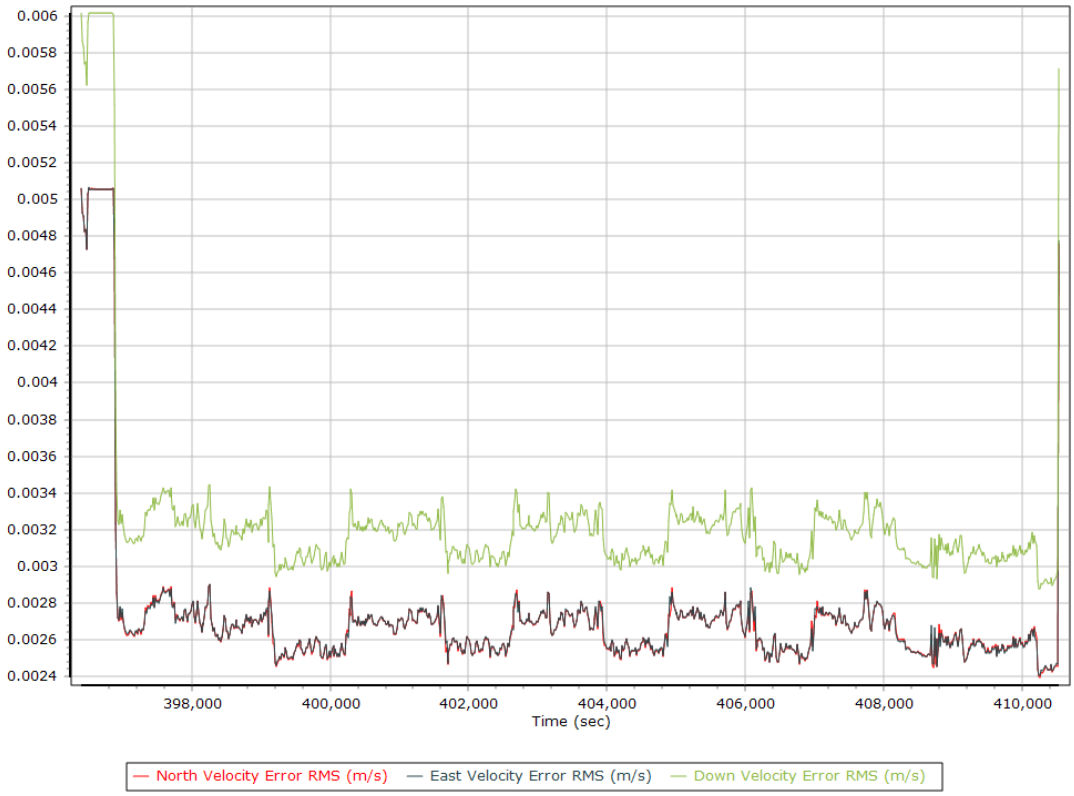

Roll/Pitch Error RMS (arc-min)

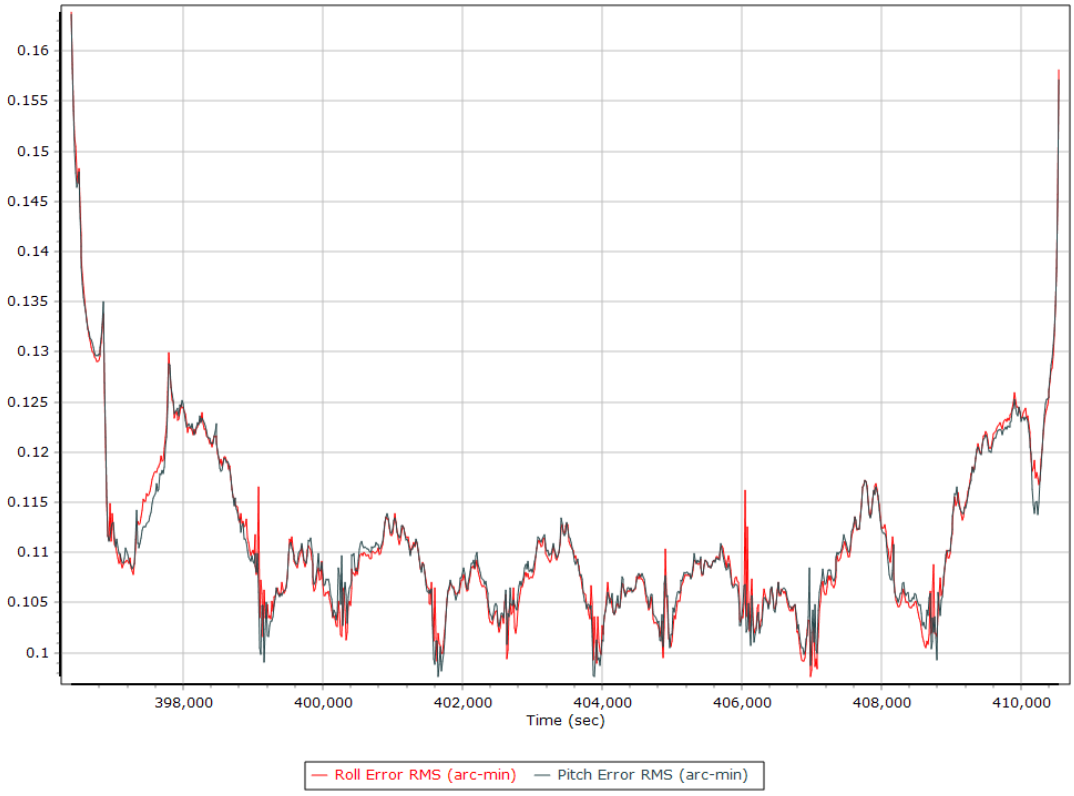

Heading Error RMS (arc-min)

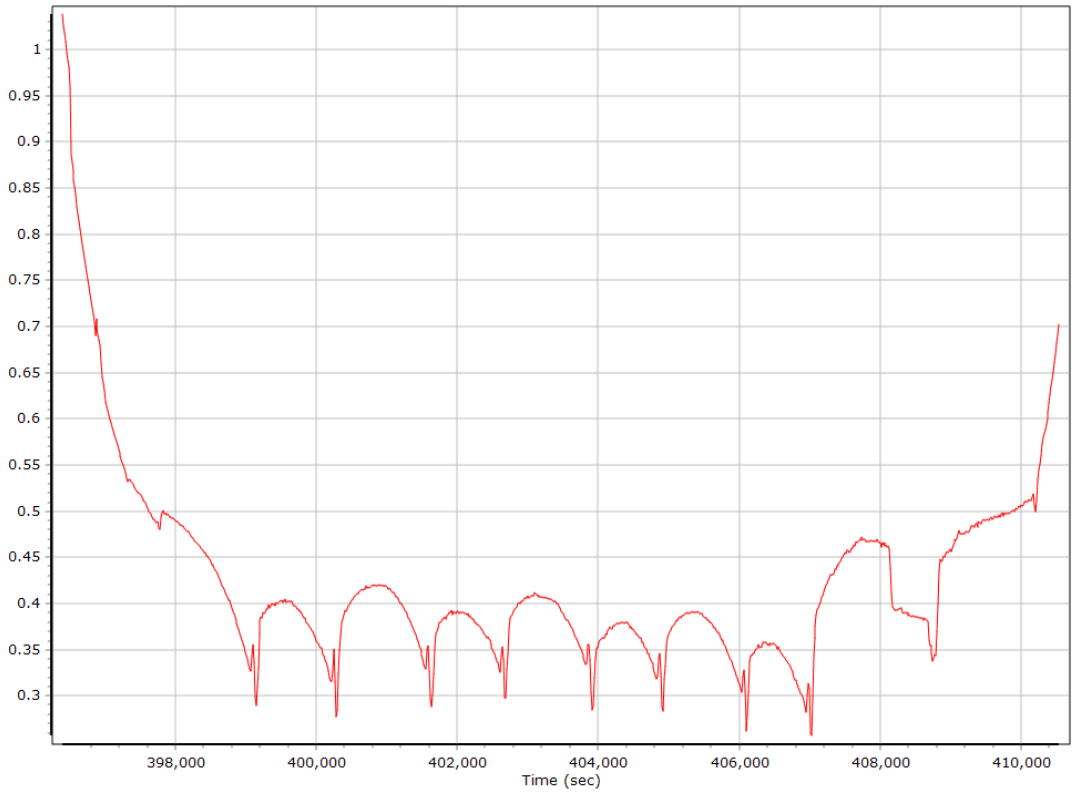

Forward Processed Performance Metrics

Position Error RMS (m)

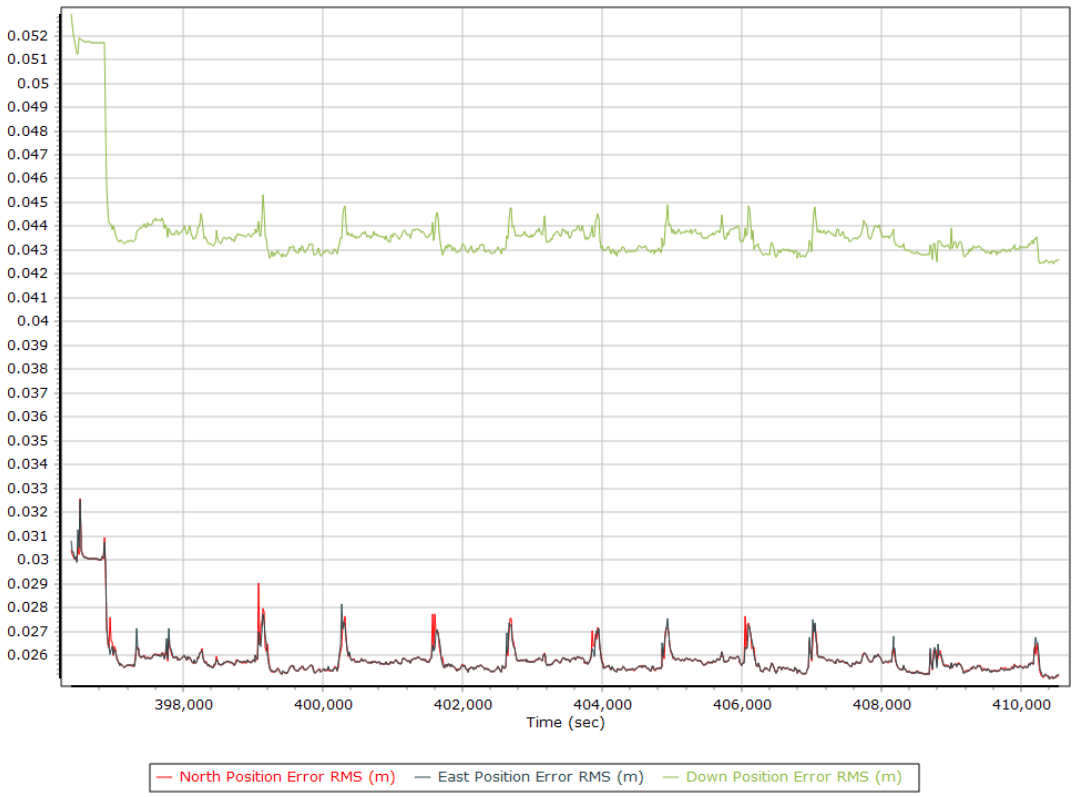

Velocity Error RMS (m/s)

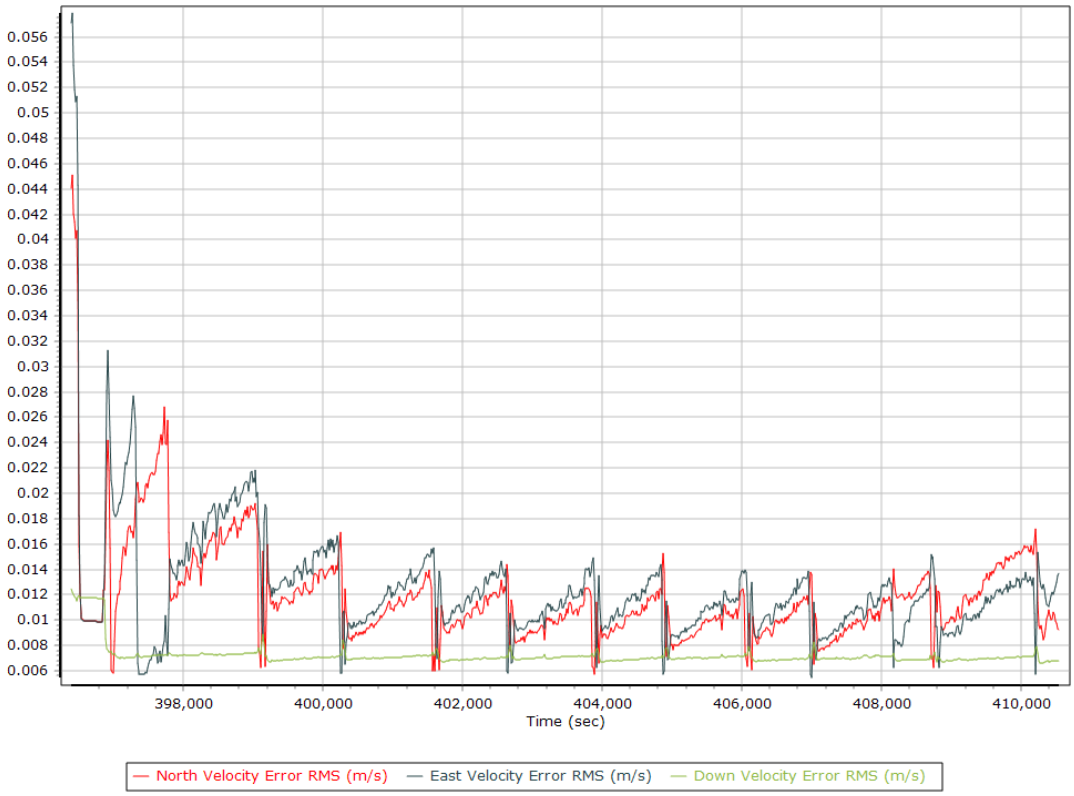

Roll/Pitch Error RMS (arc-min)

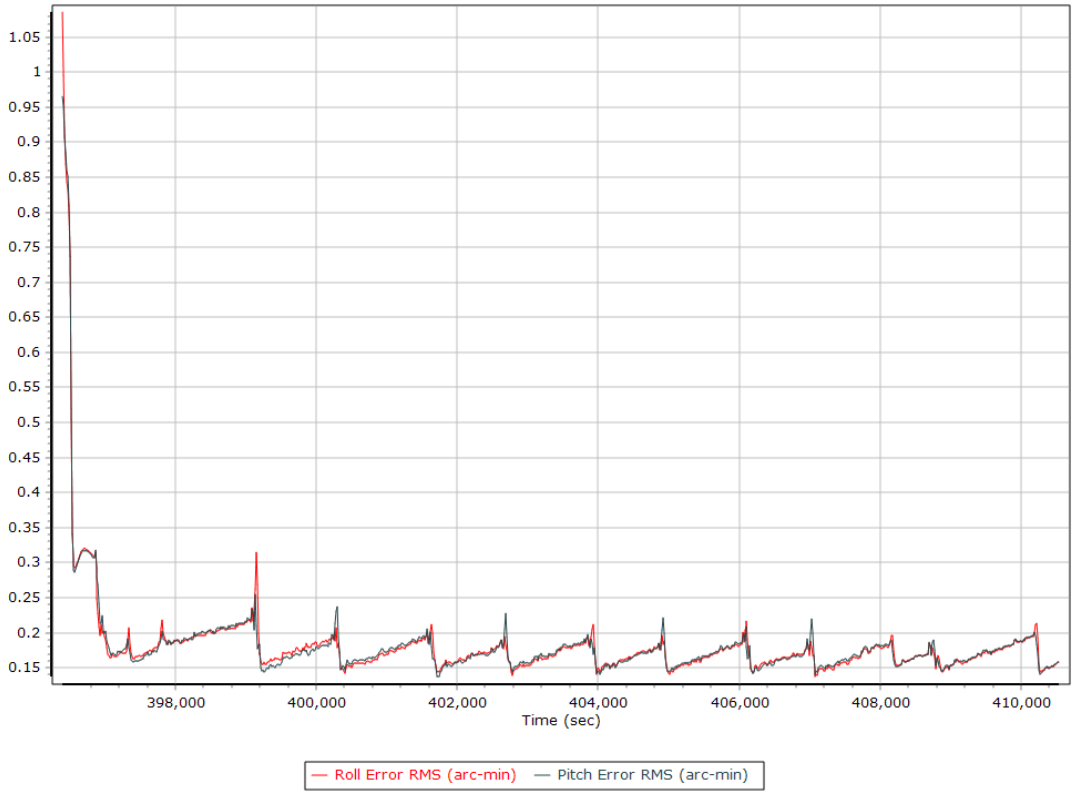

Heading Error RMS (arc-min)

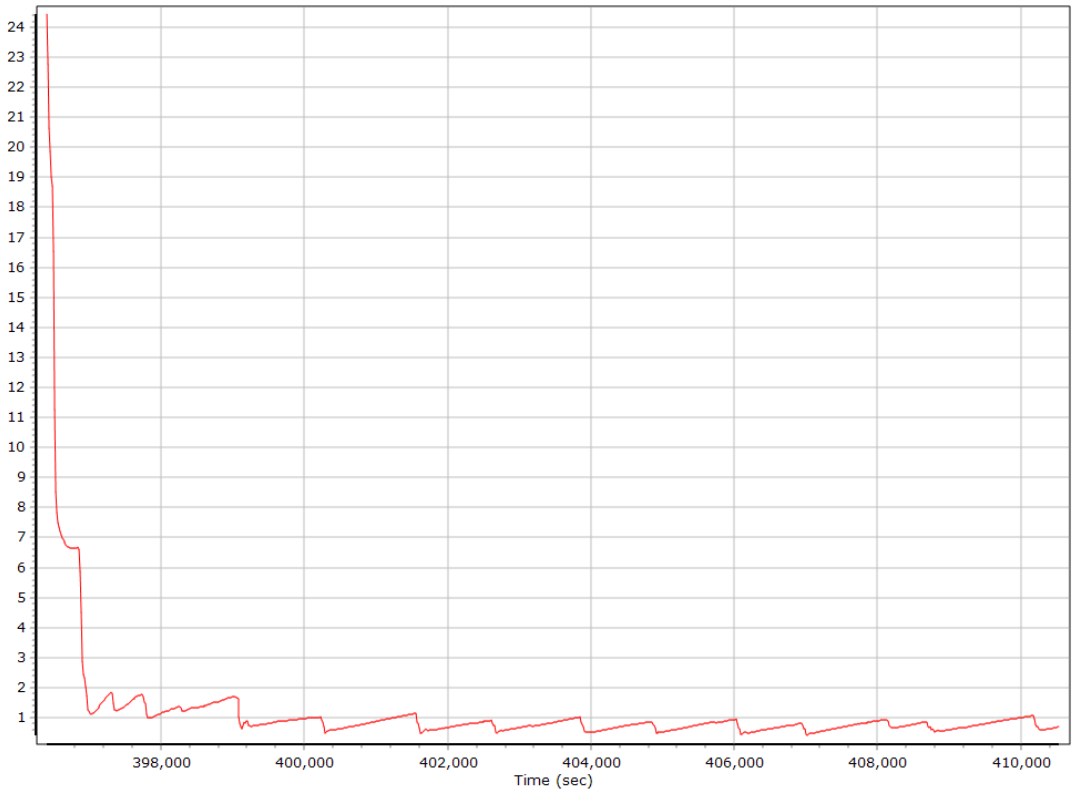

Forward Processed Solution Status

Processing Mode

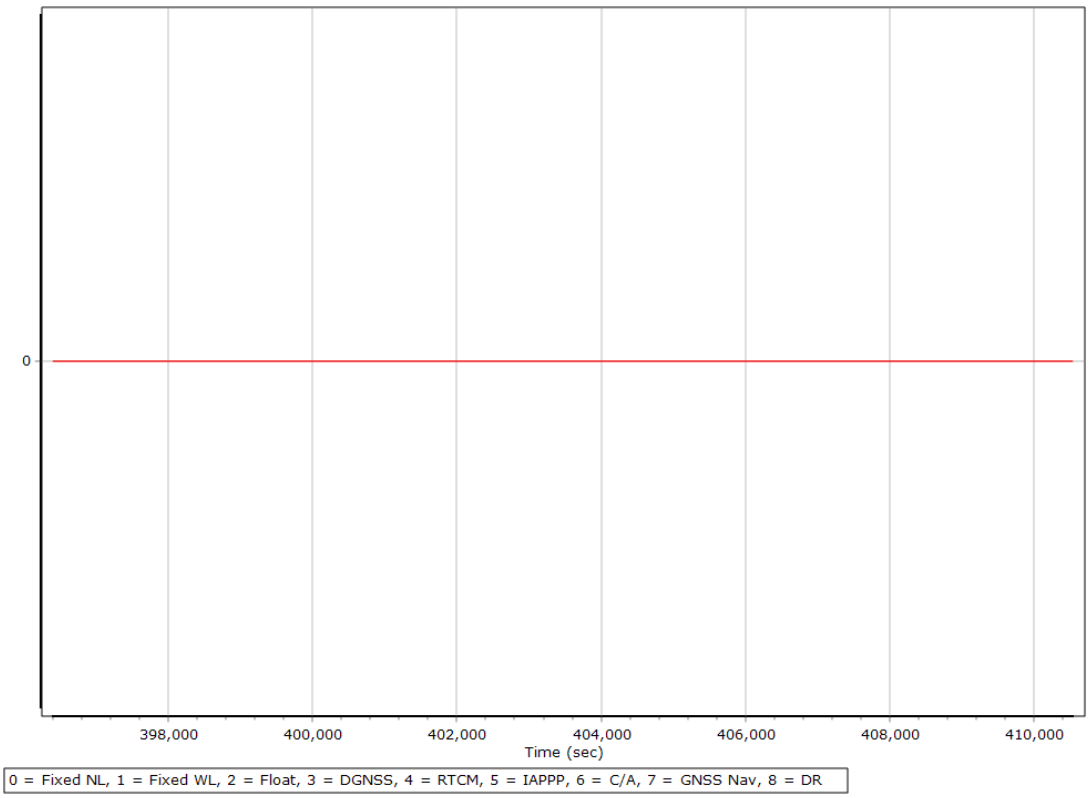

Number of Satellites

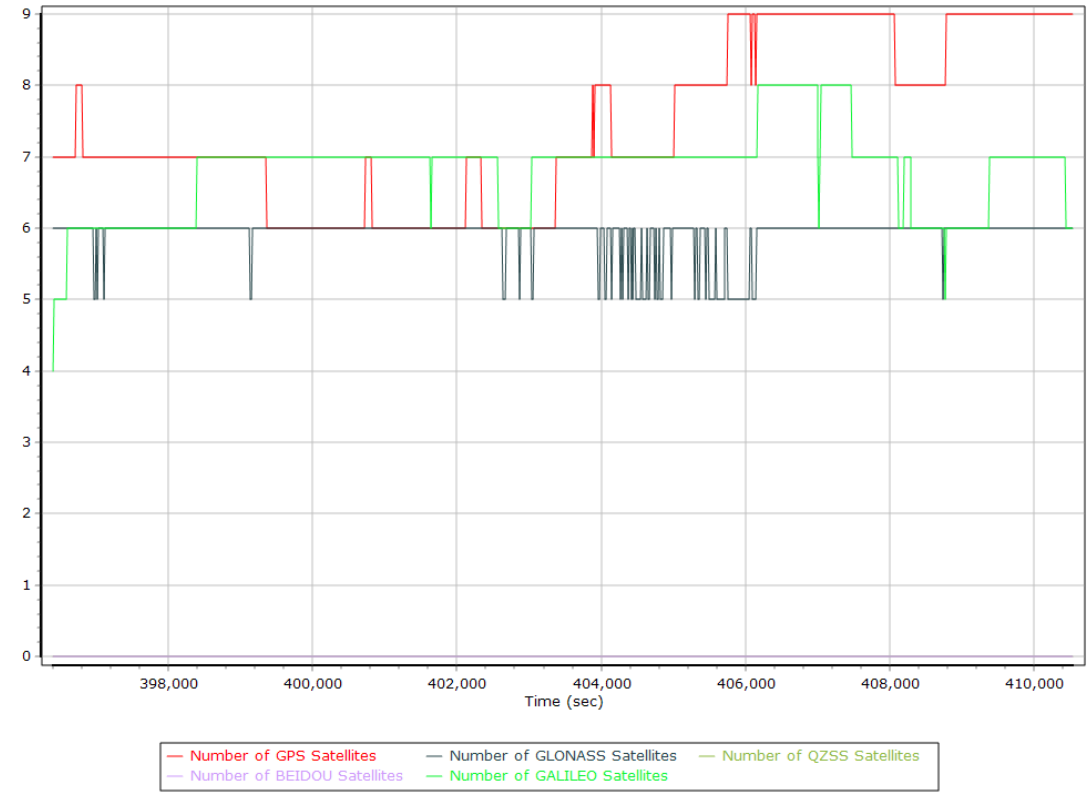
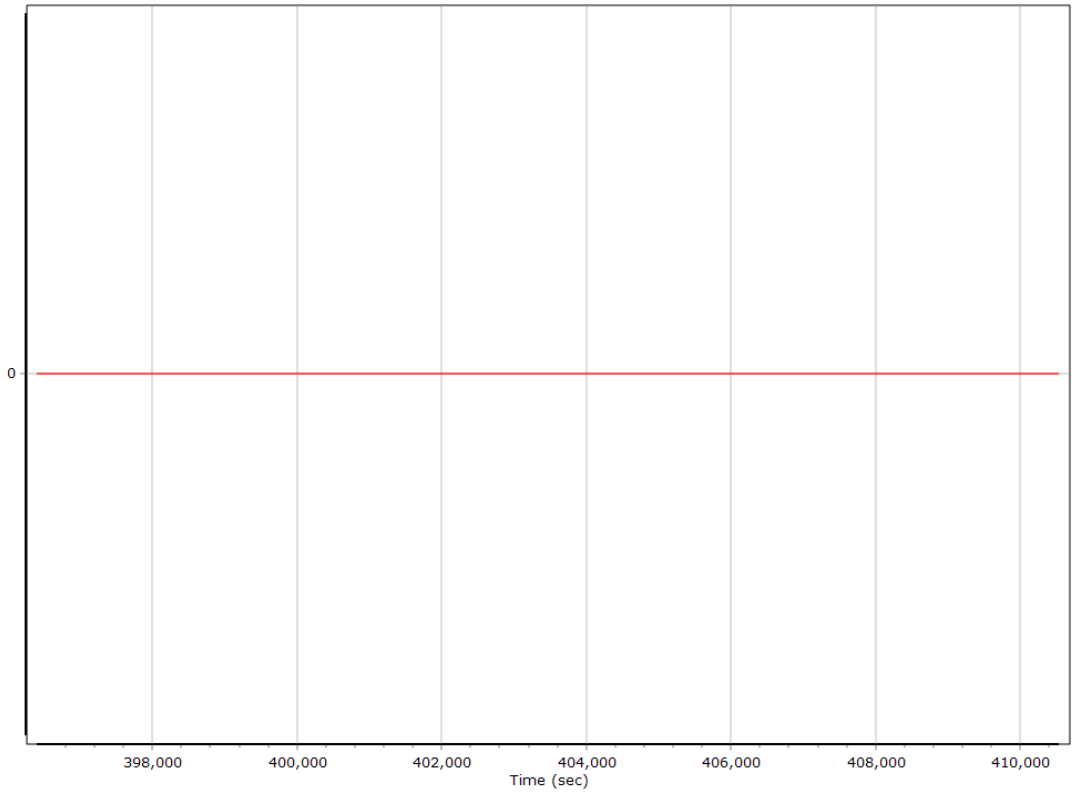
Baseline Length