General Information

Mission Information

Project name	2SU20304B_186
Processing date	2020-11-05 15:12:04
Mission date	2020-10-30 21:03:32
Mission duration	00:53:12.000
Processing mode	IN-Fusion PP-RTX

Rover Hardware Information

Product	POS AV 610 VER6 HW2.5-12
Serial number	S/N9642
IMU type	57
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
2SU20304B.484	POS Data
2SU20304B.485	POS Data
2SU20304B.486	POS Data
2SU20304B.487	POS Data
2SU20304B.488	POS Data
2SU20304B.489	POS Data
2SU20304B.490	POS Data
2SU20304B.491	POS Data

Input Files

File Name	File Type
Ephm3040.20g	GLONASS Broadcast Ephemeris
Ephm3040.20n	GPS Broadcast Ephemeris
Ephm3040.20g	GLONASS Broadcast Ephemeris
Ephm3040.20n	GPS Broadcast Ephemeris

Output Files

Filename	File type
sbet_2SU20304B_186.out	SBET Trajectory File

Rover Data Summary

First raw data file	2SU20304B.484		
Last raw data file	2SU20304B.491		
Start GPS week	2129		
Start time	507793.930 (10/30/2020 9:03:13 PM)		
End time	510987.546 (10/30/2020 9:56:27 PM)		
Start of fine alignment	507794.255 (10/30/2020 9:03:14 PM)		
Available subsystems	Primary GNSS, Gimbal, IMU		
POS Event Input	None		
Correction data	None		
IMU Installation Lever Arms & Mounting Angles			
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Raw Data QC

Raw IMU Import QC Summary

IMU data input file	imu_2SU20304B_186.dat
IMU data check log file	imudt_2SU20304B_186.log
IMU Records Processed	638696
Termination Status	Normal
IMU Anomalies	0

L1 Satellite Lock/Elevation

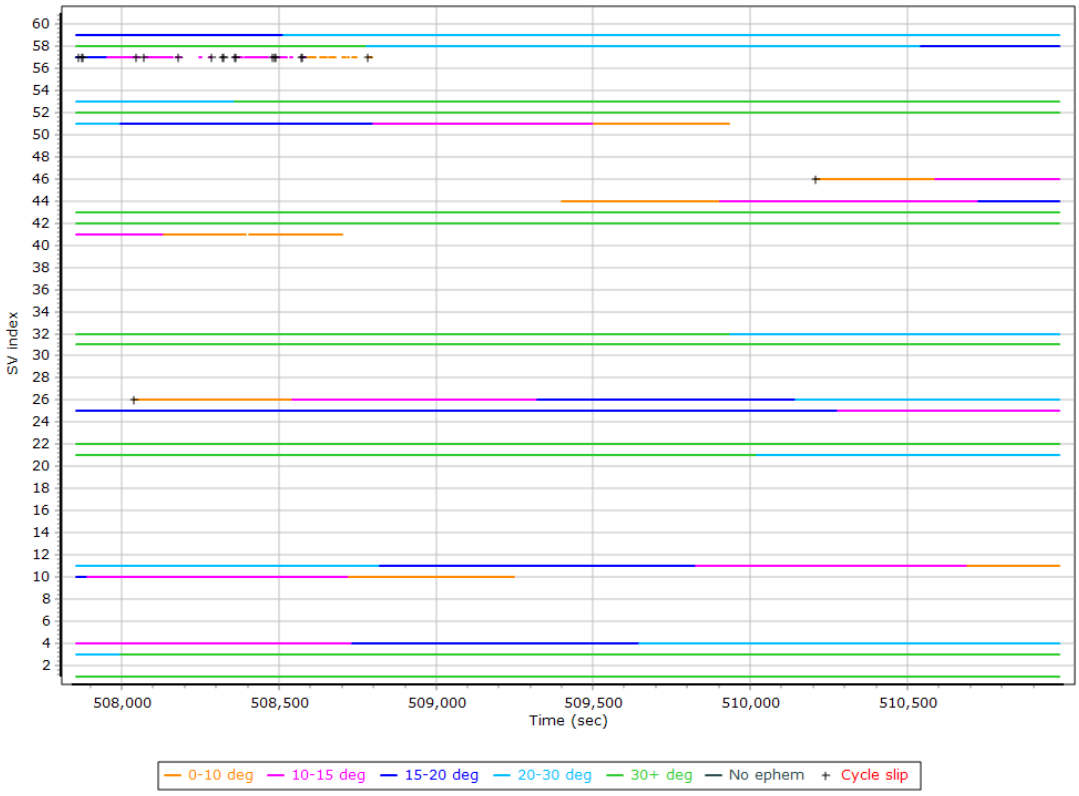

L2 Satellite Lock/Elevation

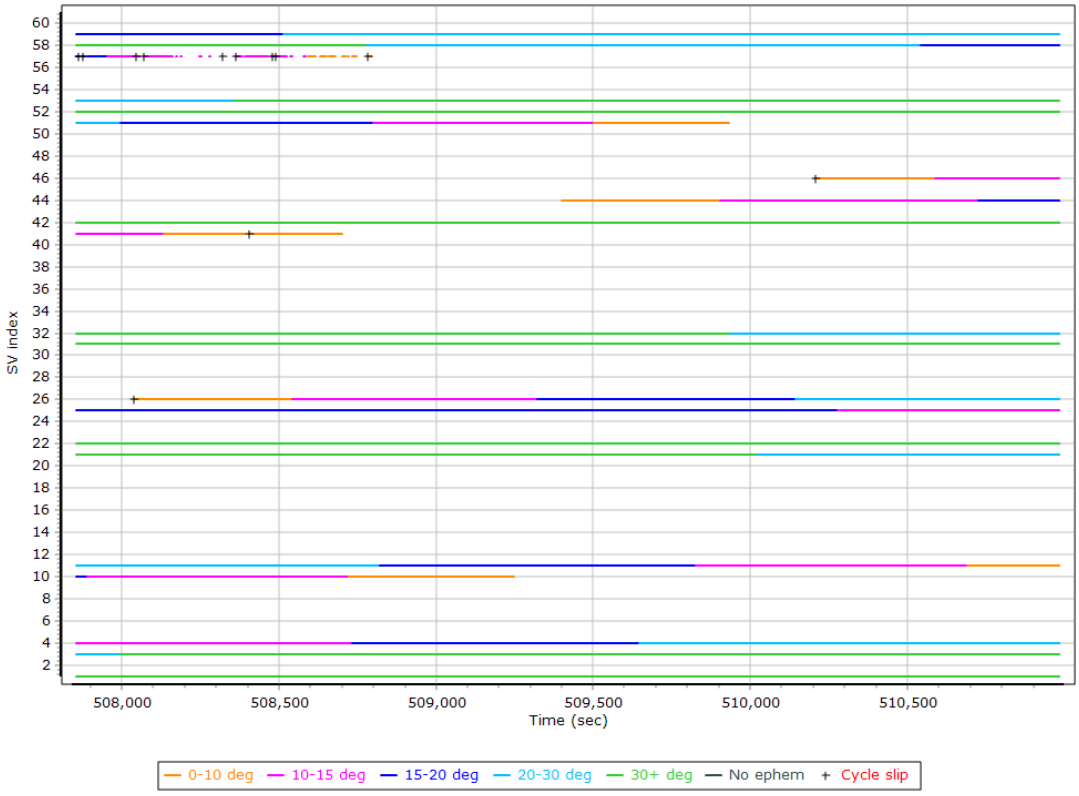

GPS L1 SNR

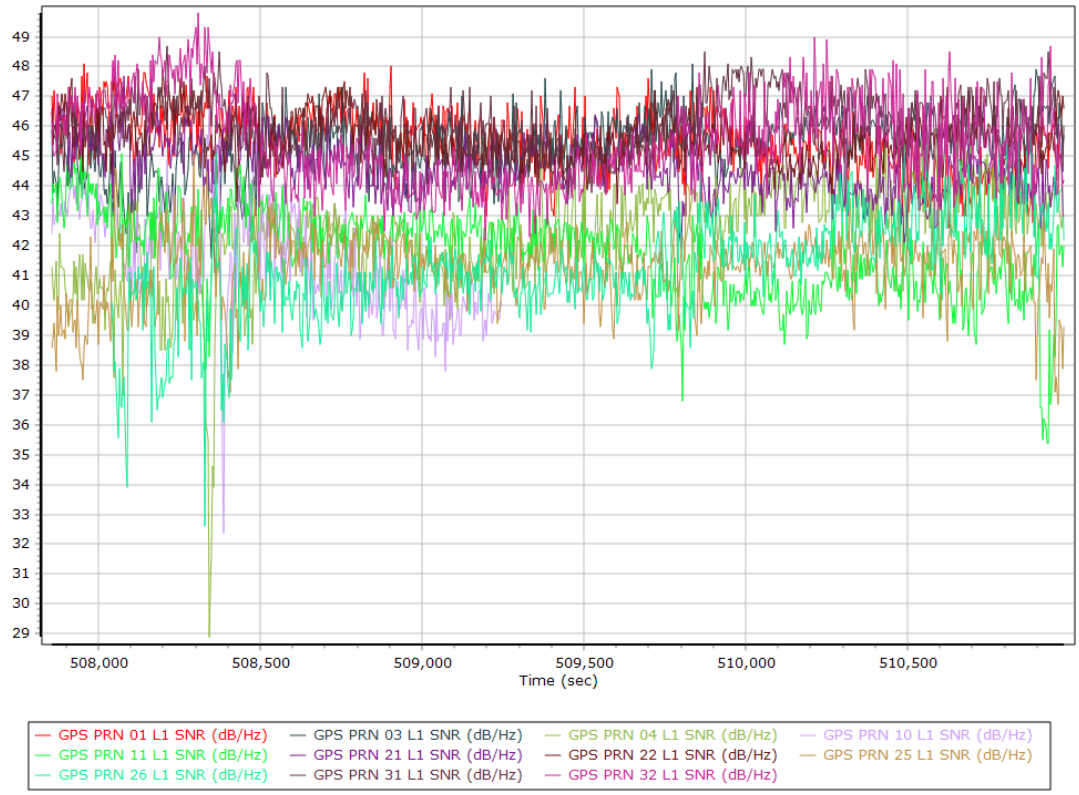

GPS L2 SNR

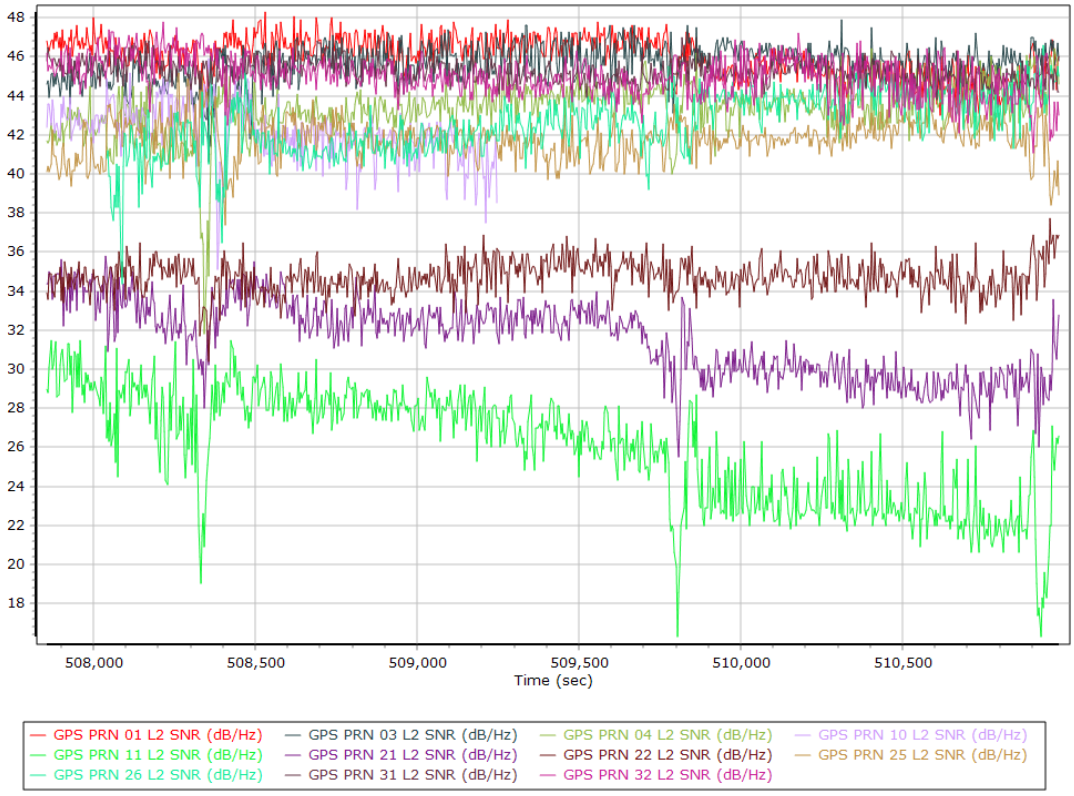

GLONASS L1 SNR

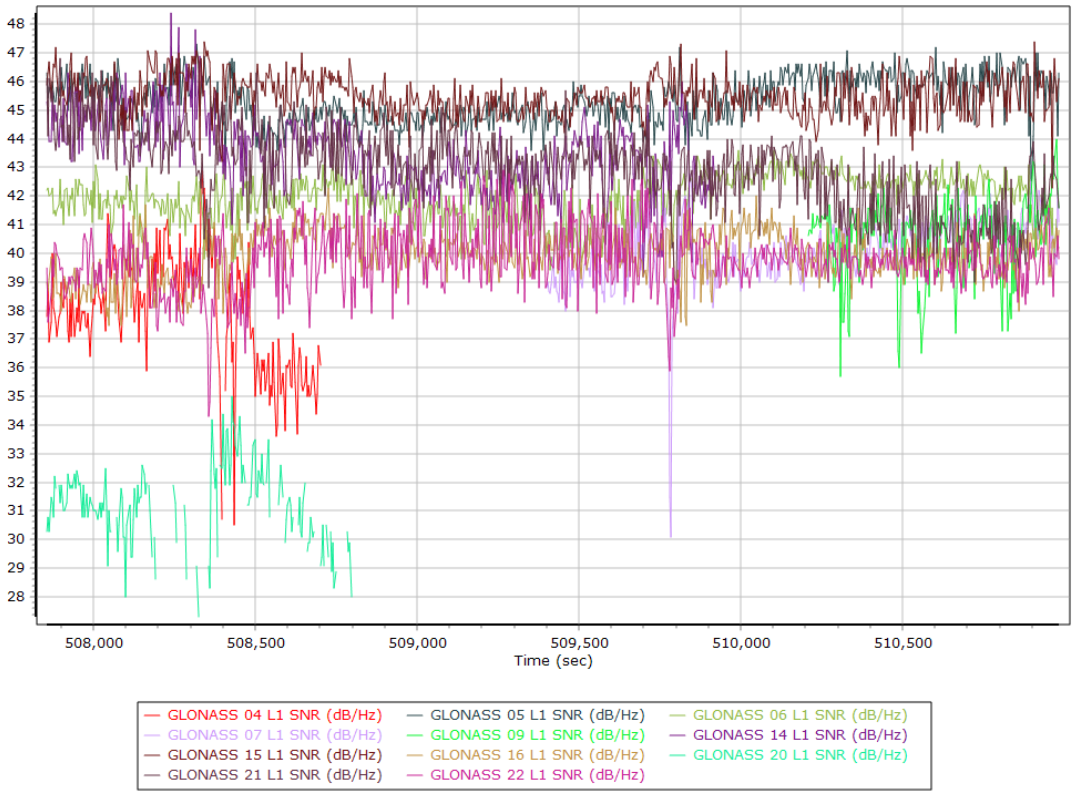

GLONASS L2 SNR

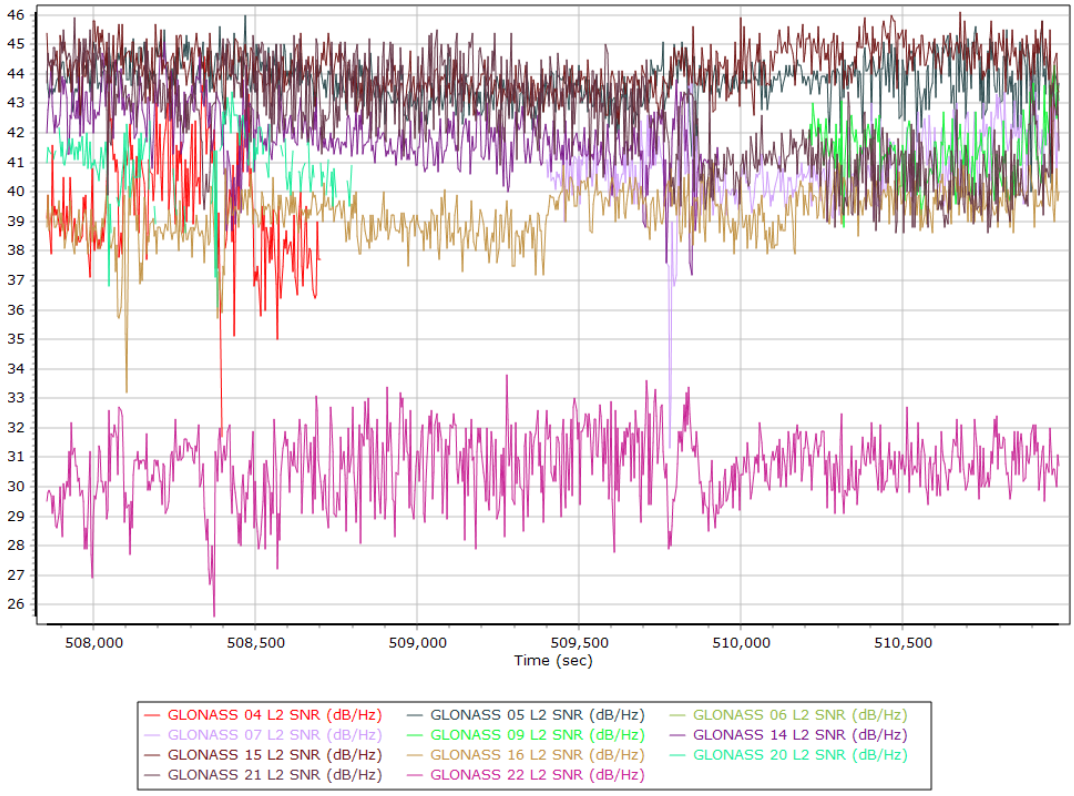

BEIDOU SNR

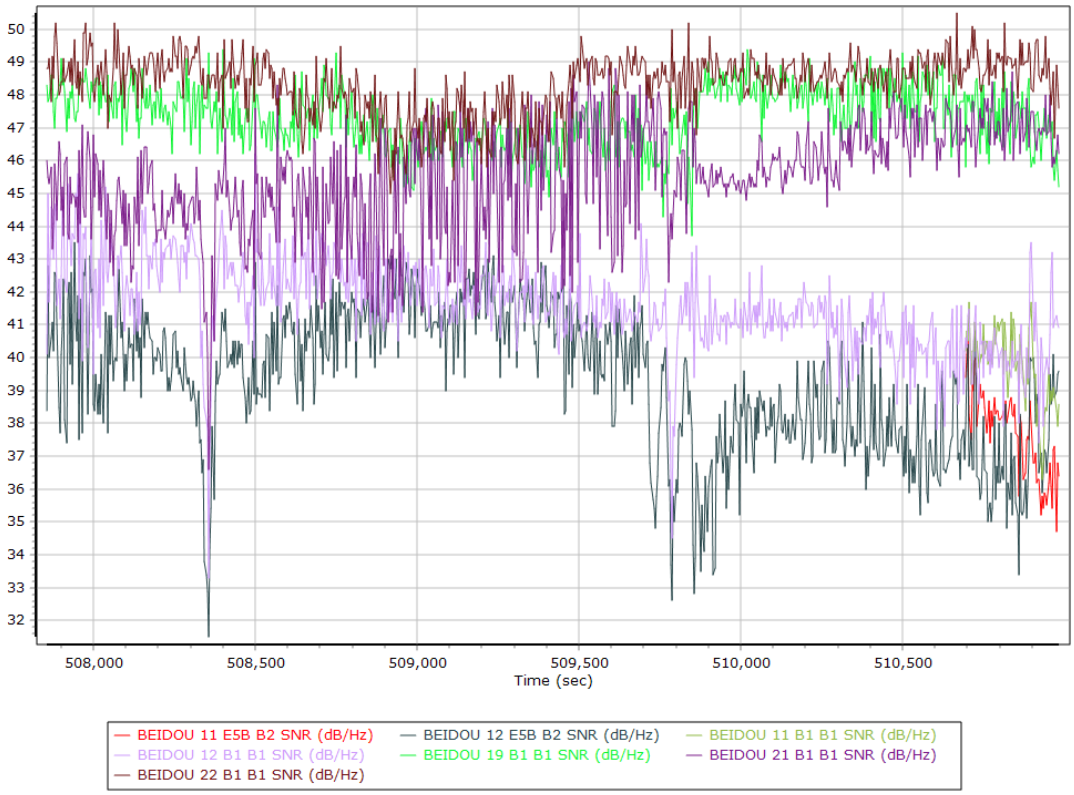

GALILEO SNR

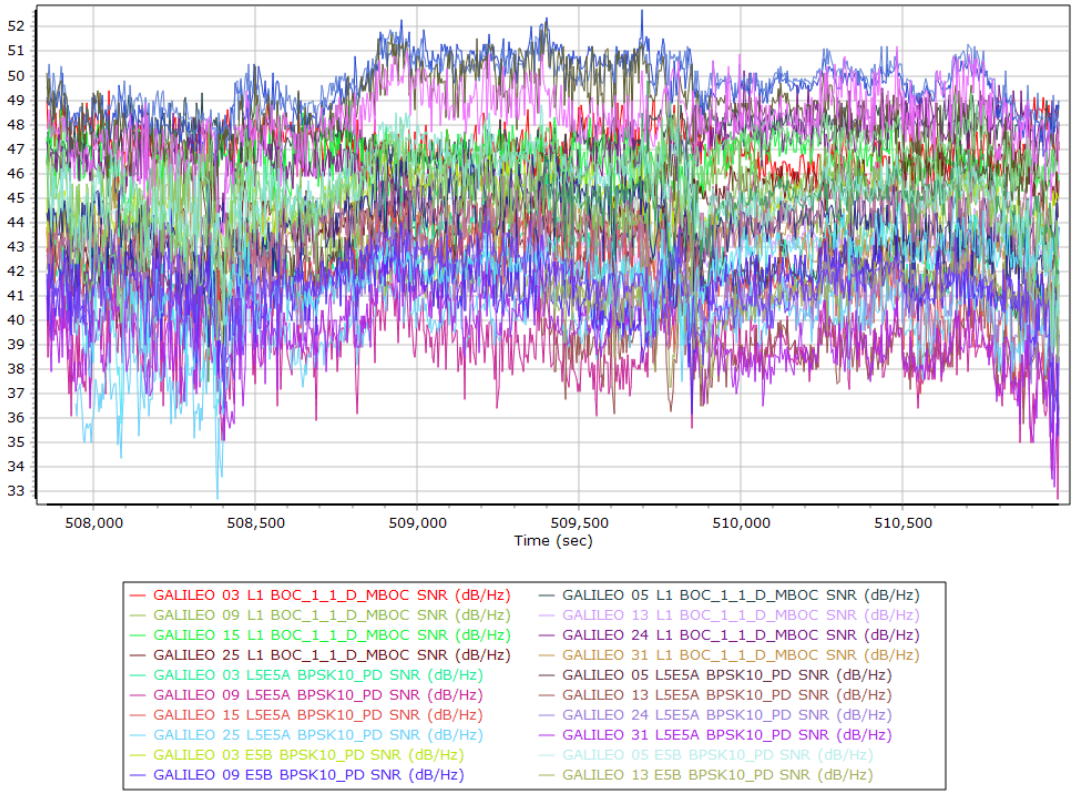
52
51
50
49
48
47
46
45
44
43
42
41
40
39
38
37
36
35
34
33
508,000
508,500
509,000
509,500
510,000
510,500
Time (sec)
GALILEO 03 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 05 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 09 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 13 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 15 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 24 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 25 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 31 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 03 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 05 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 09 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 13 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 15 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 24 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 25 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 31 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 03 E5B BPSK10_PD SNR (dB/Hz)
GALILEO 05 E5B BPSK10_PD SNR (dB/Hz)
GALILEO 09 E5B BPSK10_PD SNR (dB/Hz)
GALILEO 13 E5B BPSK10_PD SNR (dB/Hz)

Trajectory Information

Top View

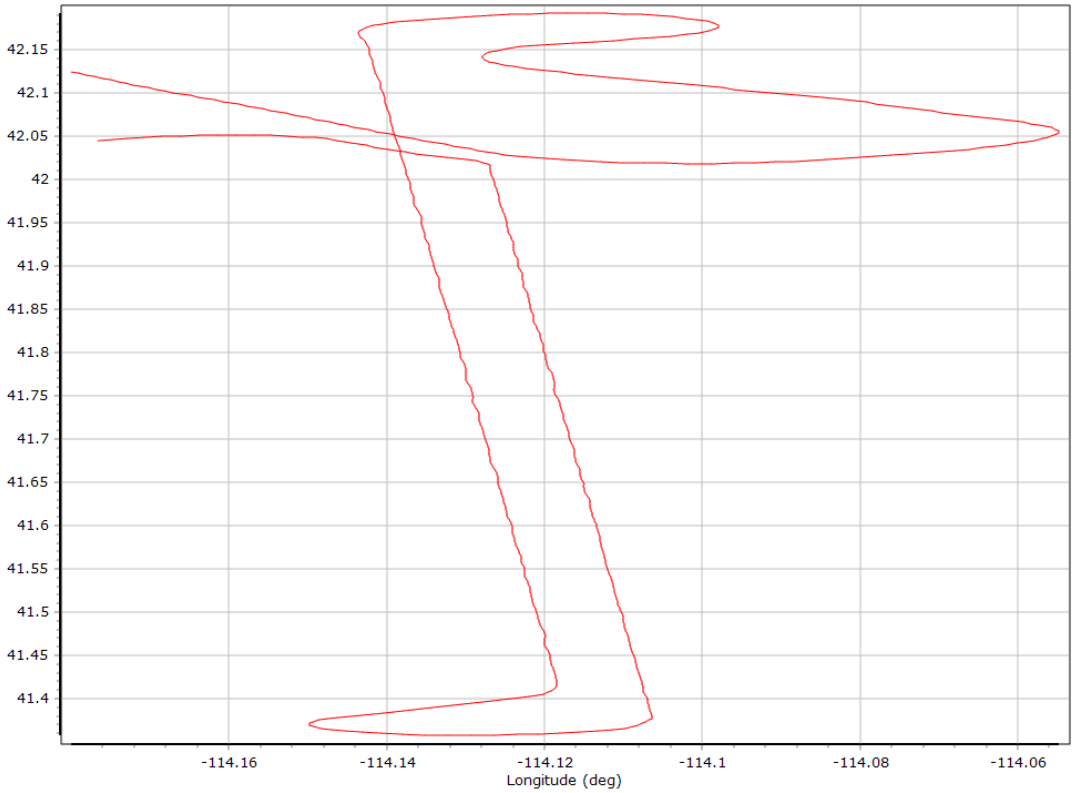

Altitude

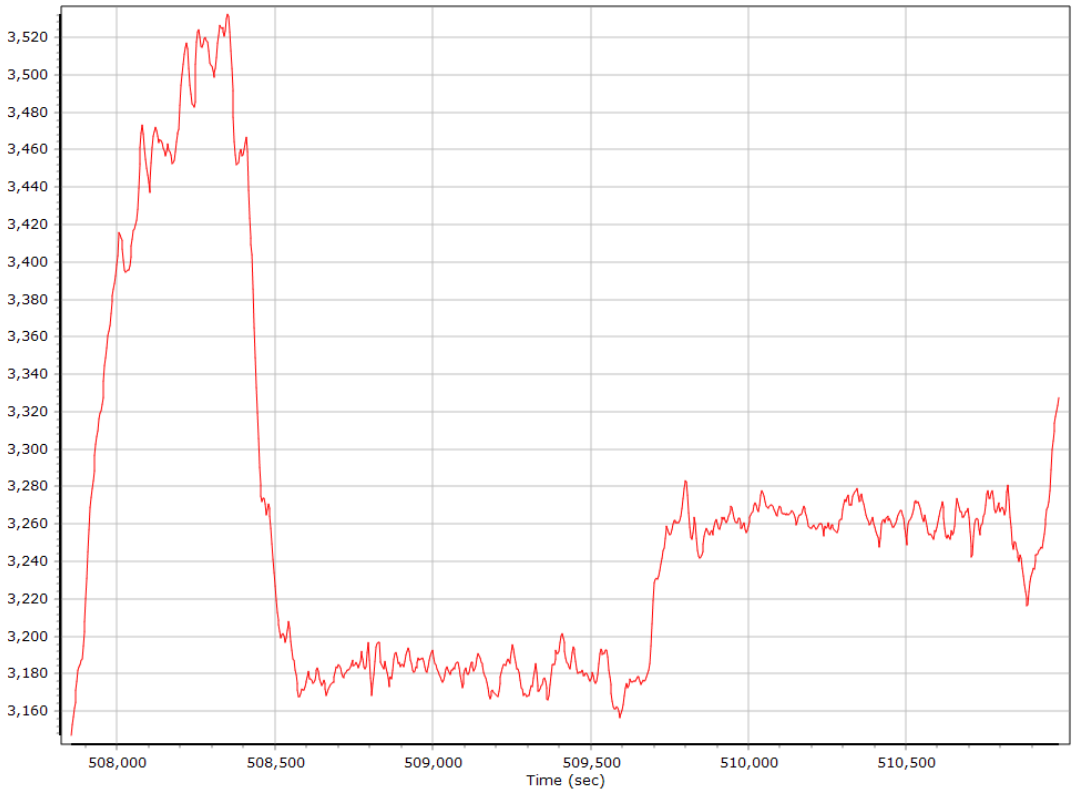

Roll/Pitch

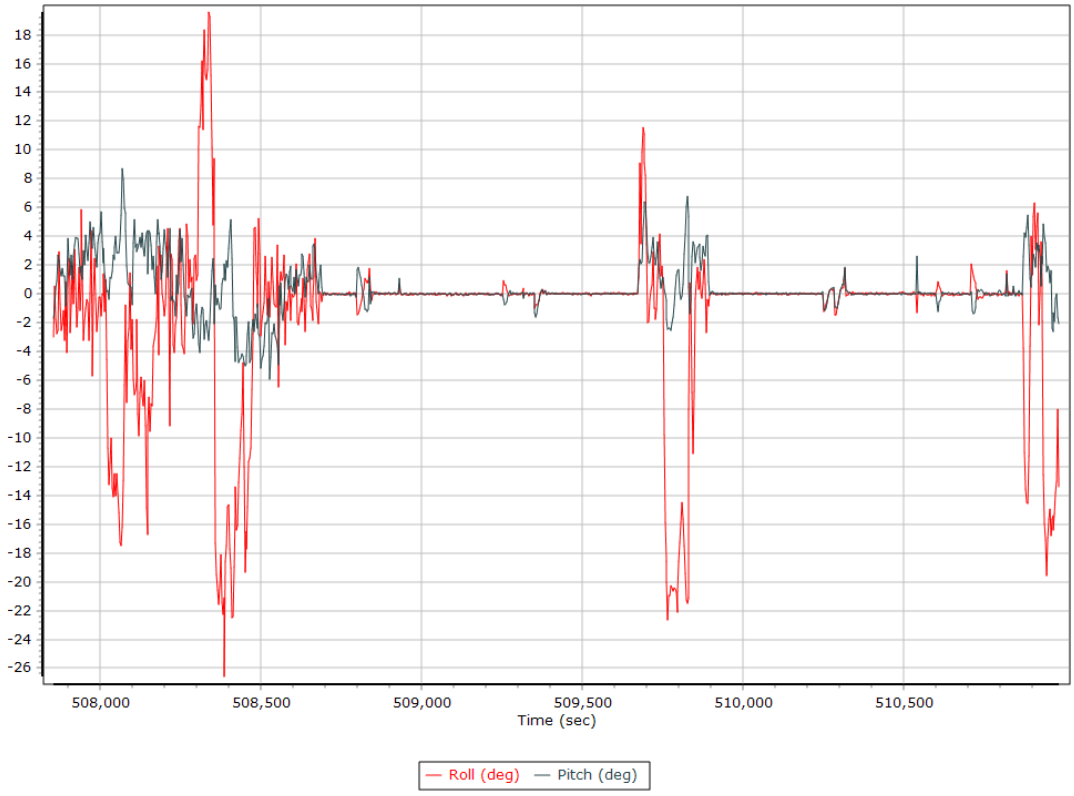

Heading

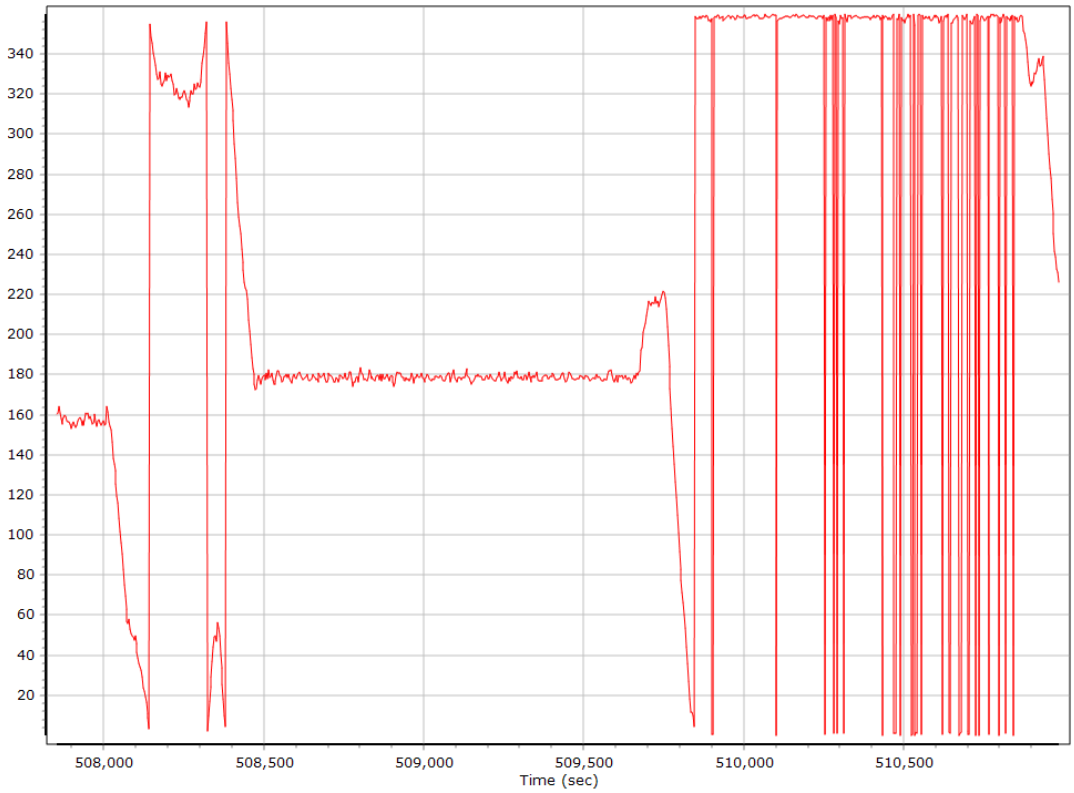

North/East Velocity

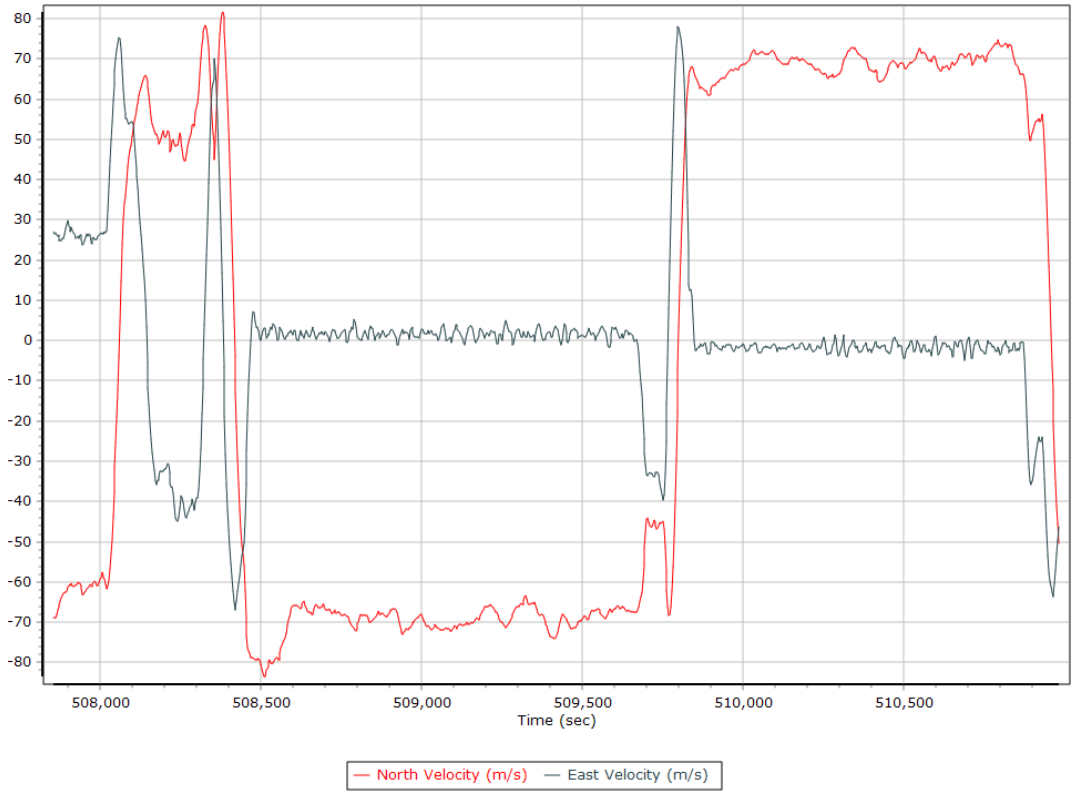

Down Velocity

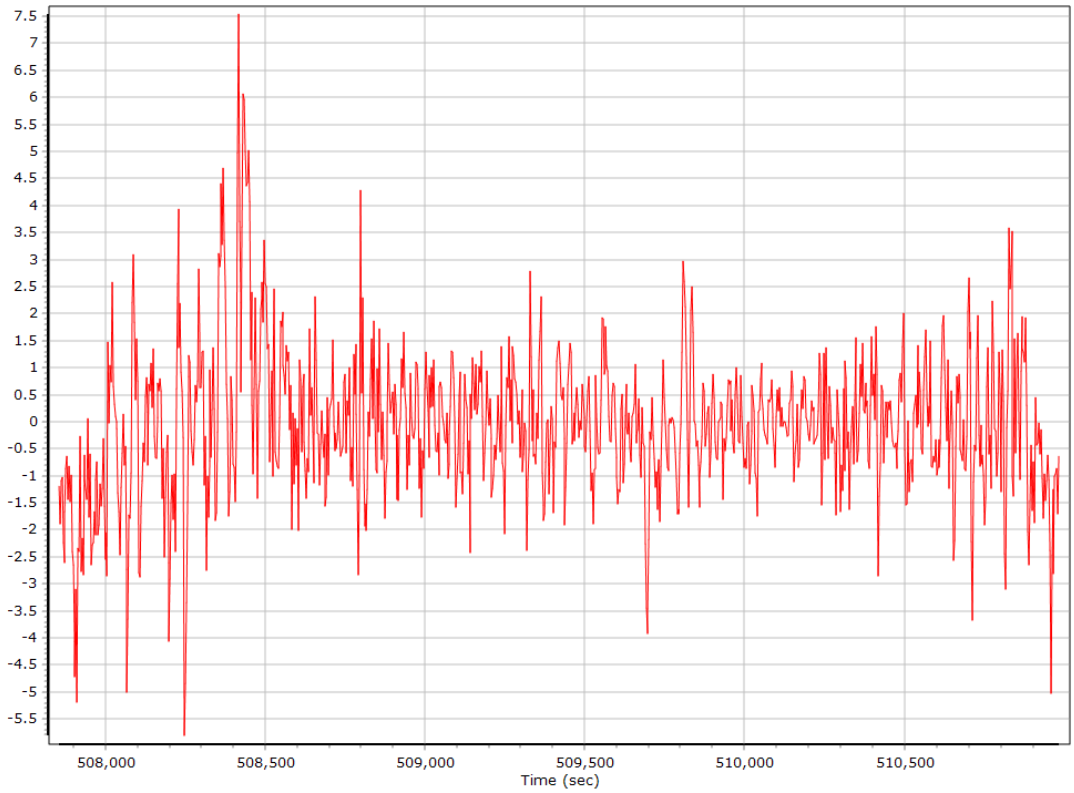

Total Speed

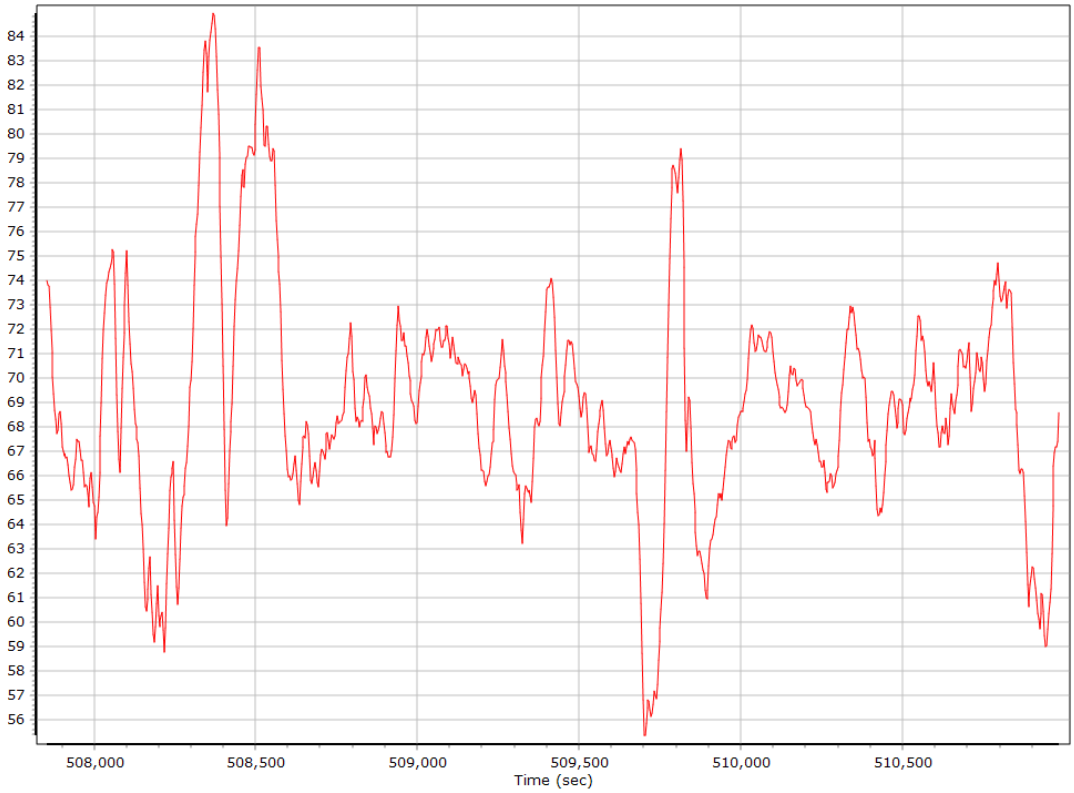

Ground Speed

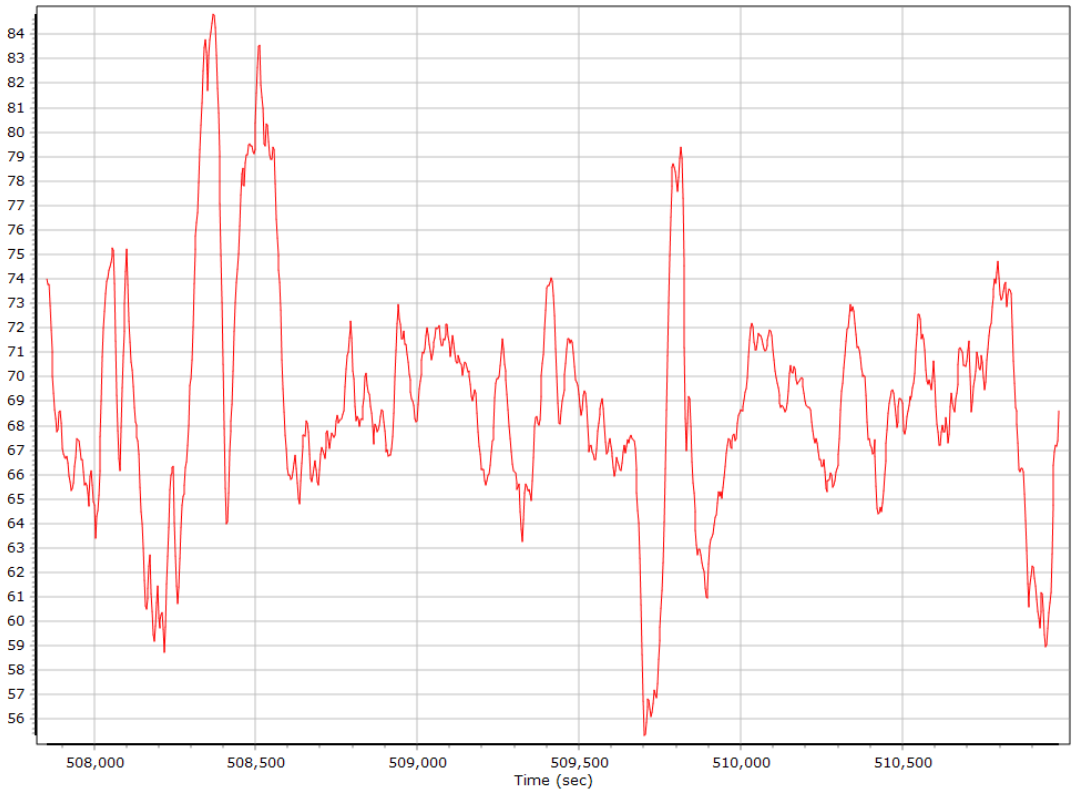

Body Acceleration

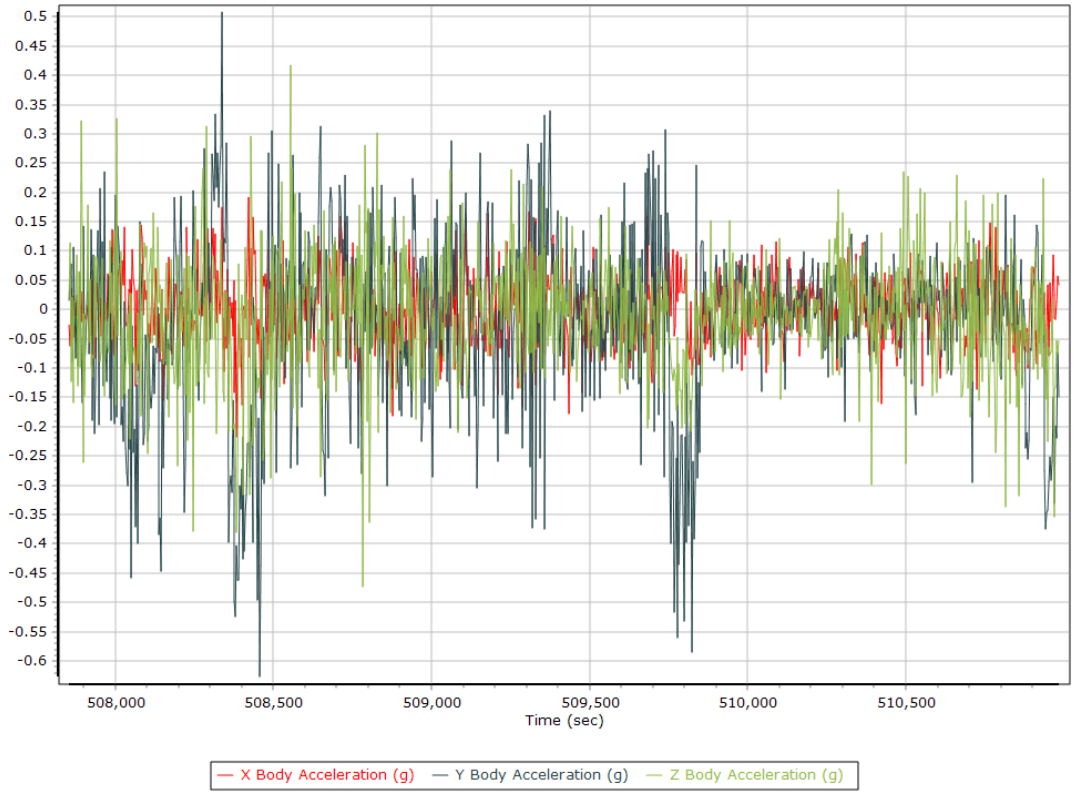

Total Body Acceleration

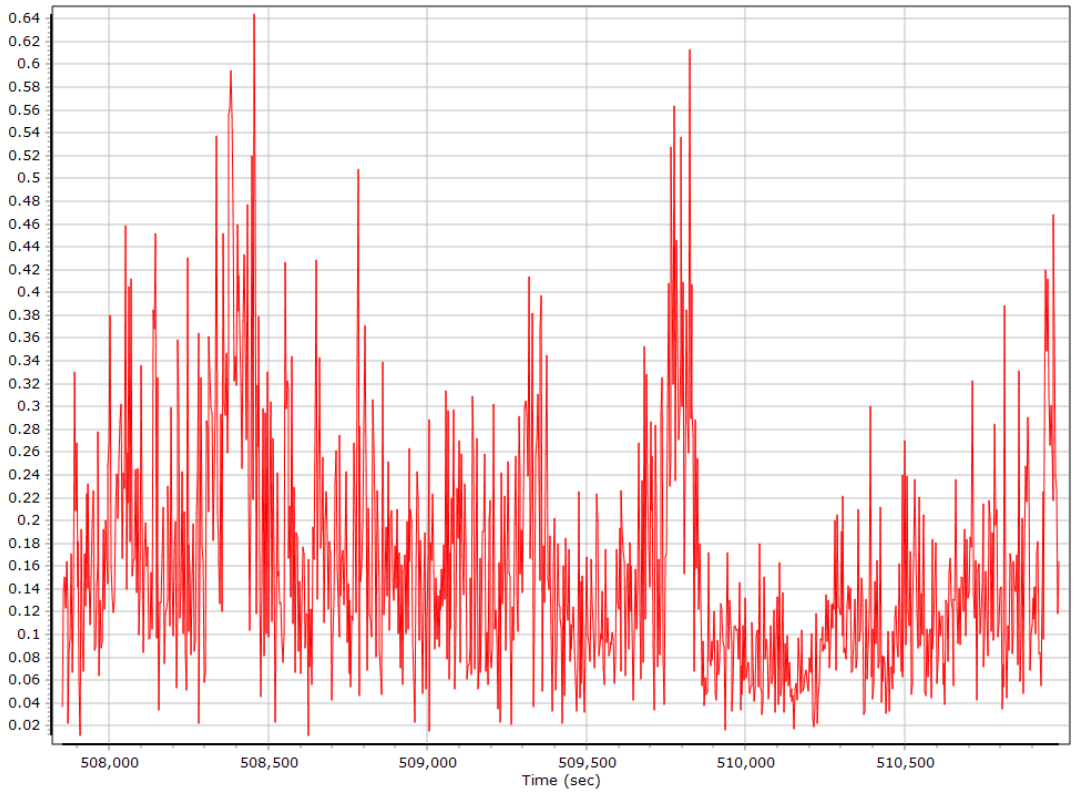

Body Angular Rate

GNSS QC

GNSS QC Statistics

Statistics	Min	Max	Mean
Baseline length (km)	0.00	0.00	
Number of GPS SV	8	10	9
Number of GLONASS SV	5	8	6
Number of QZSS SV	0	0	0
Number of BEIDOU SV	0	0	0
Number of GALILEO SV	6	8	7
Total number of SV	21	24	23
PDOP	0.99	1.30	1.11
QC Solution Gaps	1.00	1.00	
Solution Type	Fixed	Float	No solution
Epoch (sec)	3579.00	0.00	1.00
Percentage	99.97	0.00	0.03

Num SVs in solution

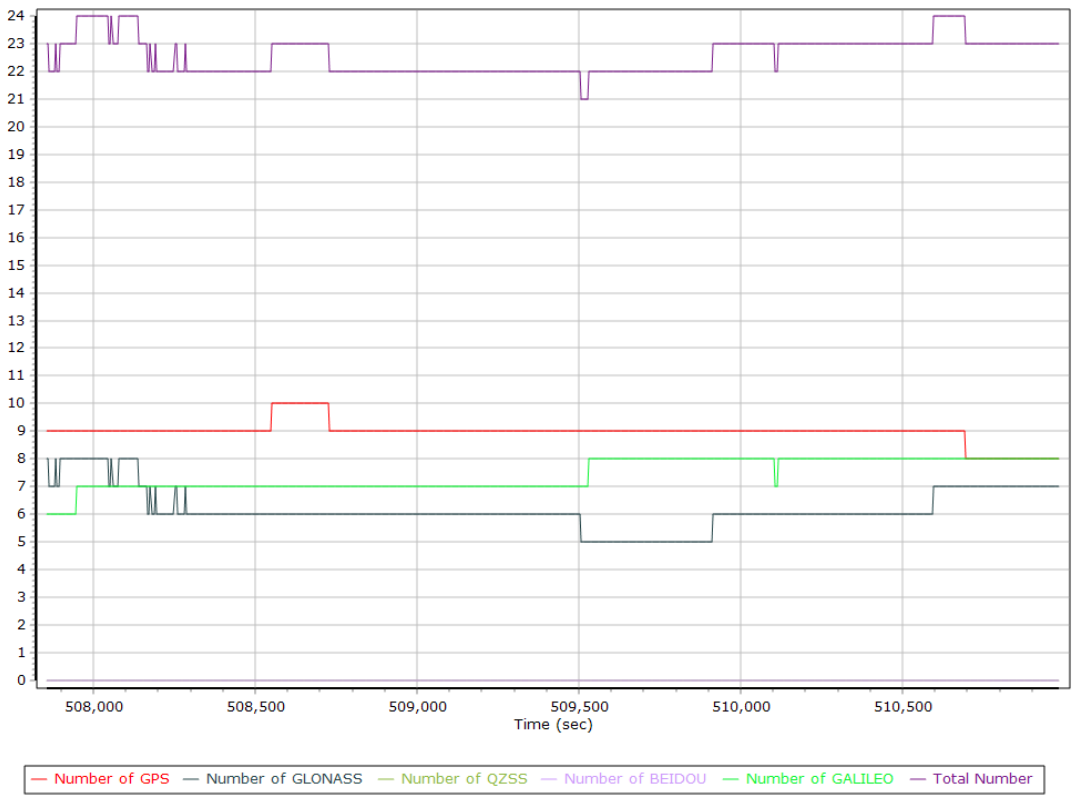

Forward/Reverse Separation

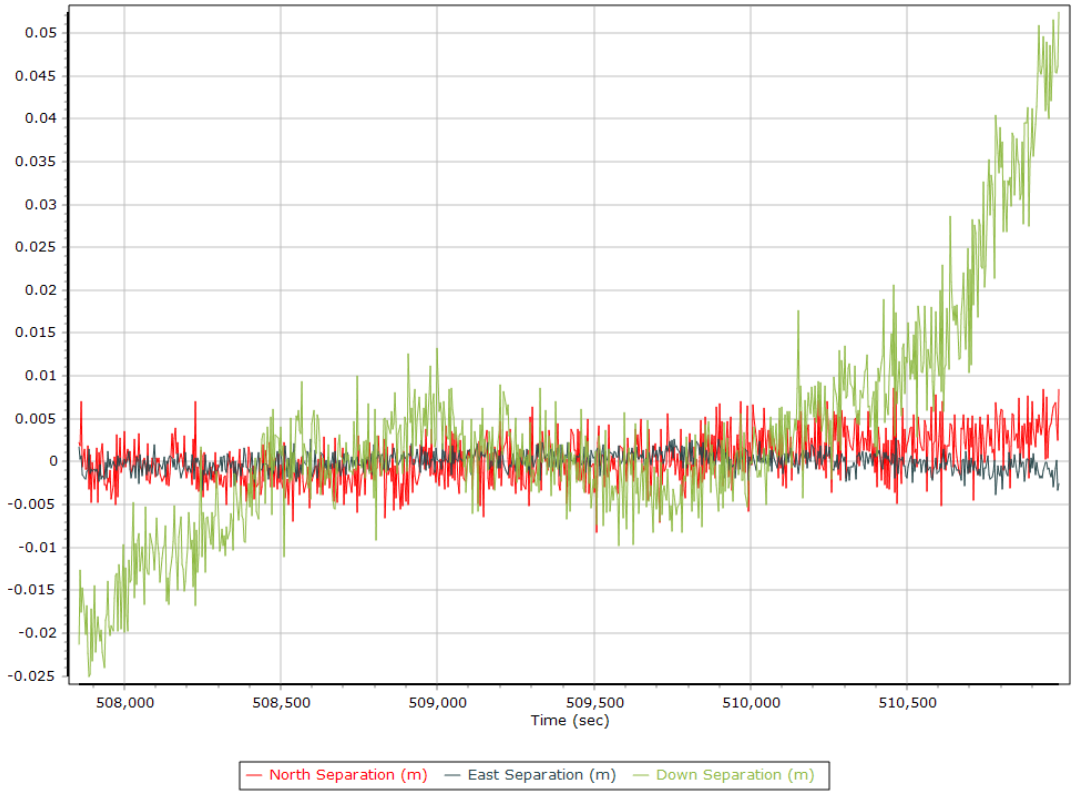

PDOP

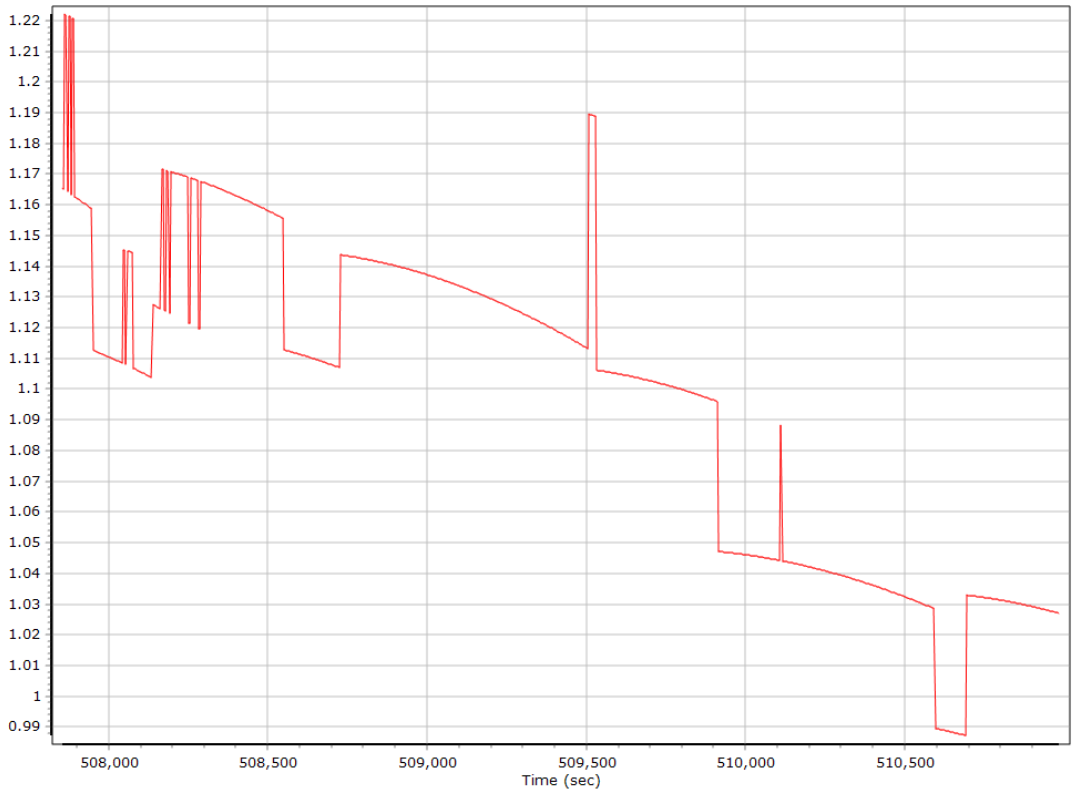

Estimated Position Accuracy

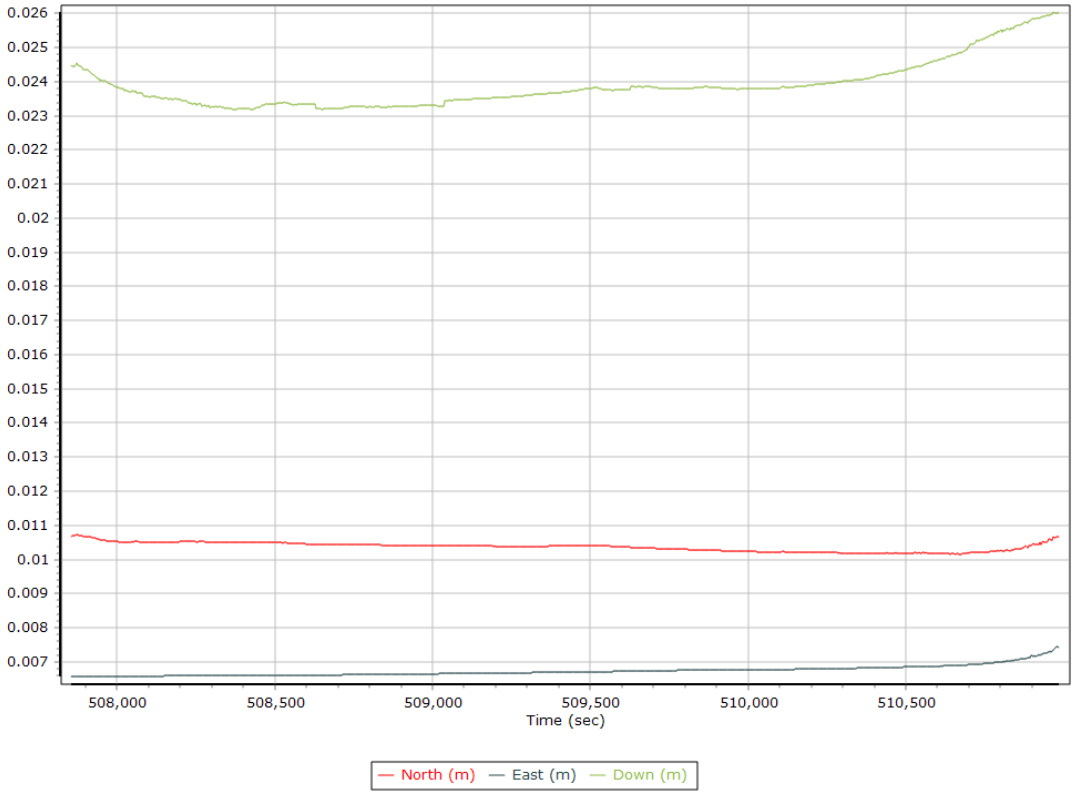

GPS Residuals

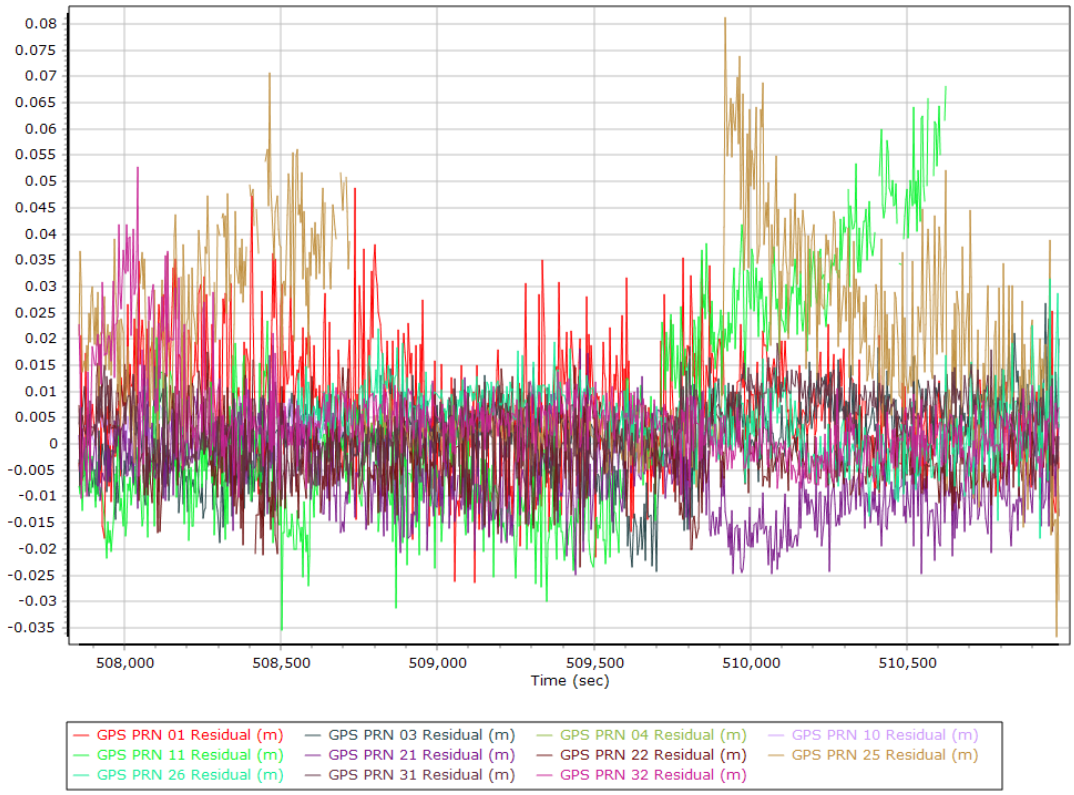

GLONASS Residuals

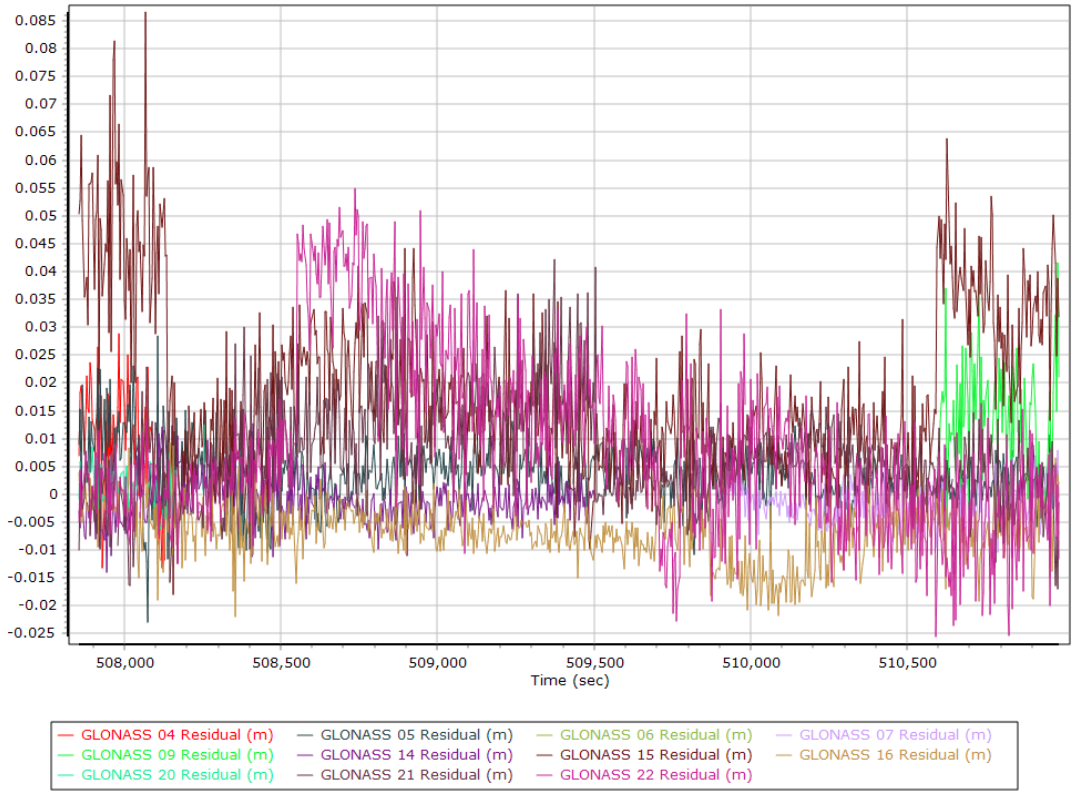

GALILEO Residuals

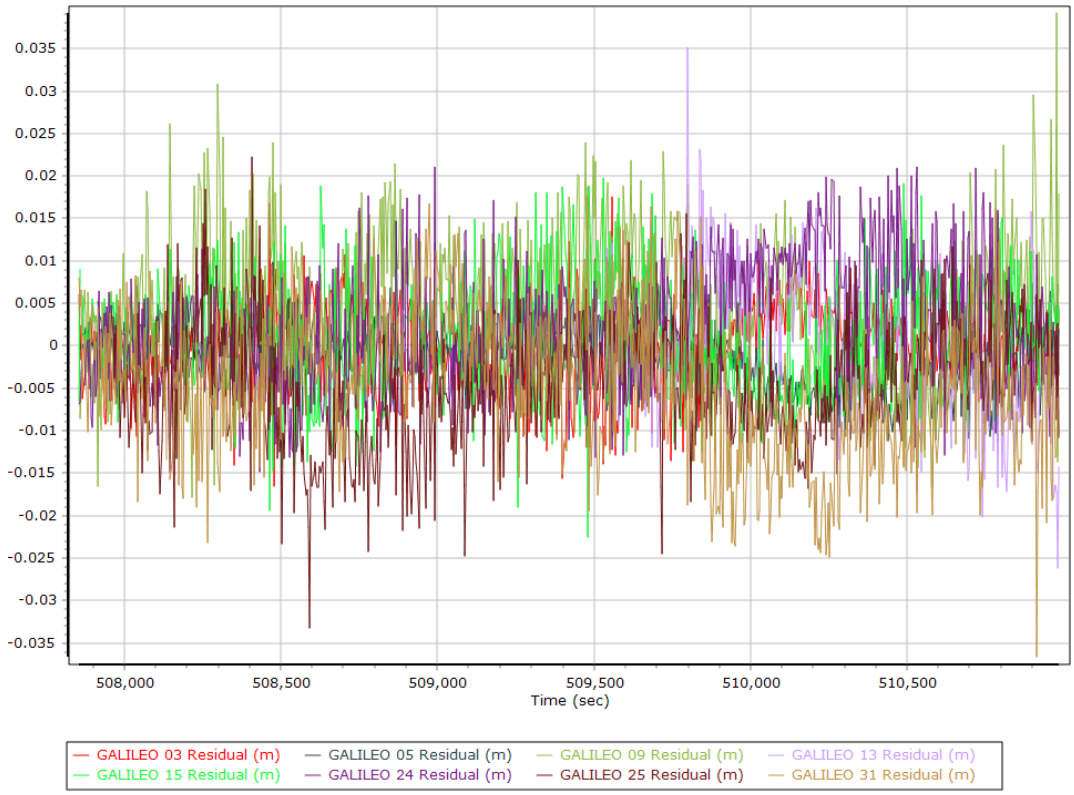

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion PP-RTX		
Stabilized mount	True		
Processing start time	507794.000 (10/30/2020 9:03:14 PM)		
Processing end time	510986.000 (10/30/2020 9:56:26 PM)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	0.287	0.144	-1.269
Gimbal to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm (m)

X Reference-Primary GNSS Lever Arm (m)

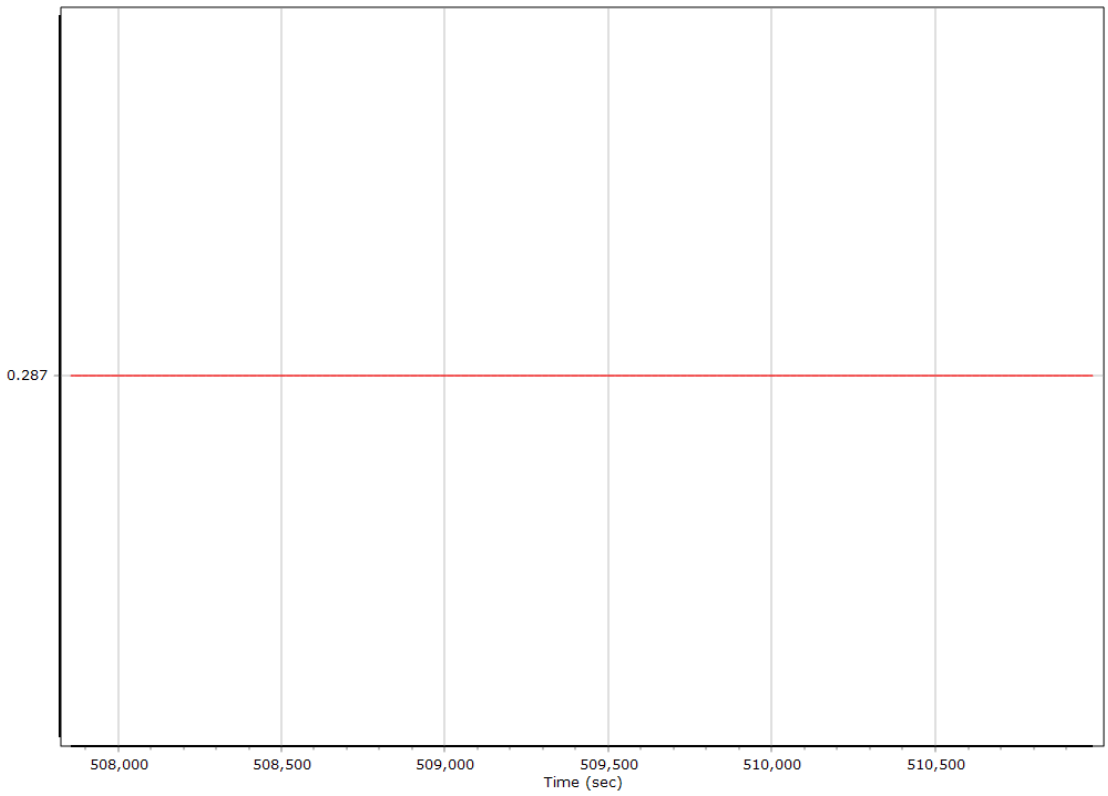

Y Reference-Primary GNSS Lever Arm (m)

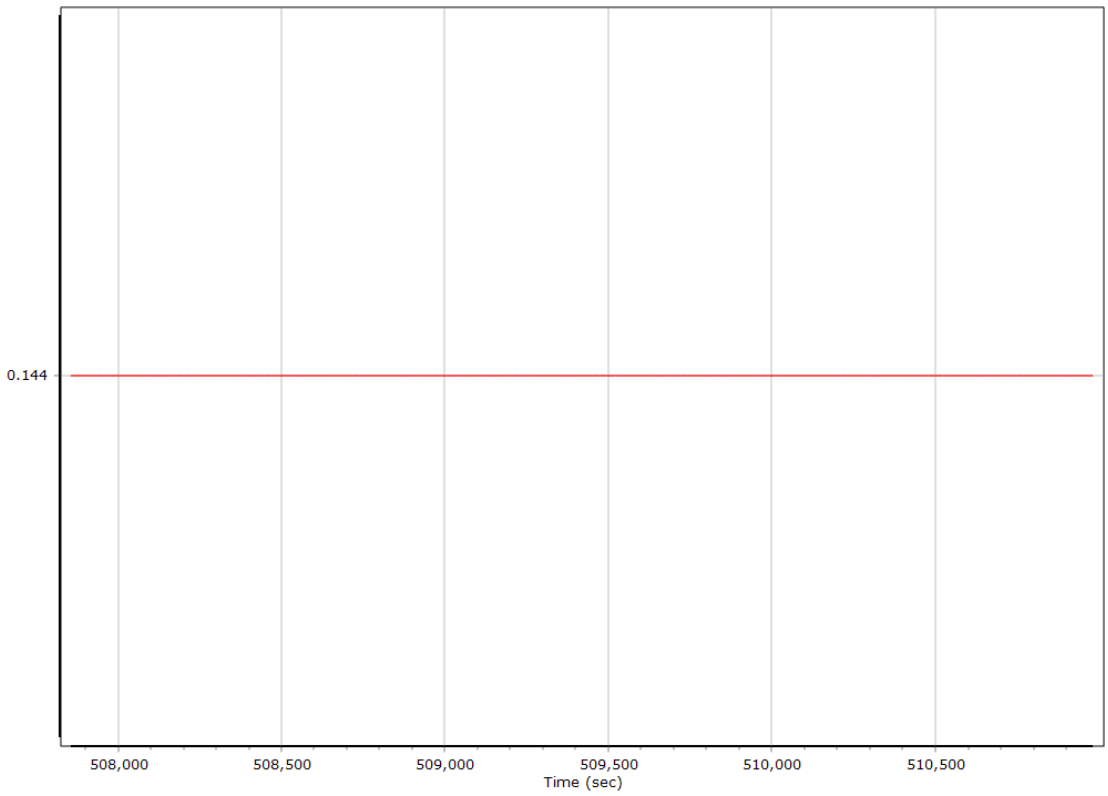

Z Reference-Primary GNSS Lever Arm (m)

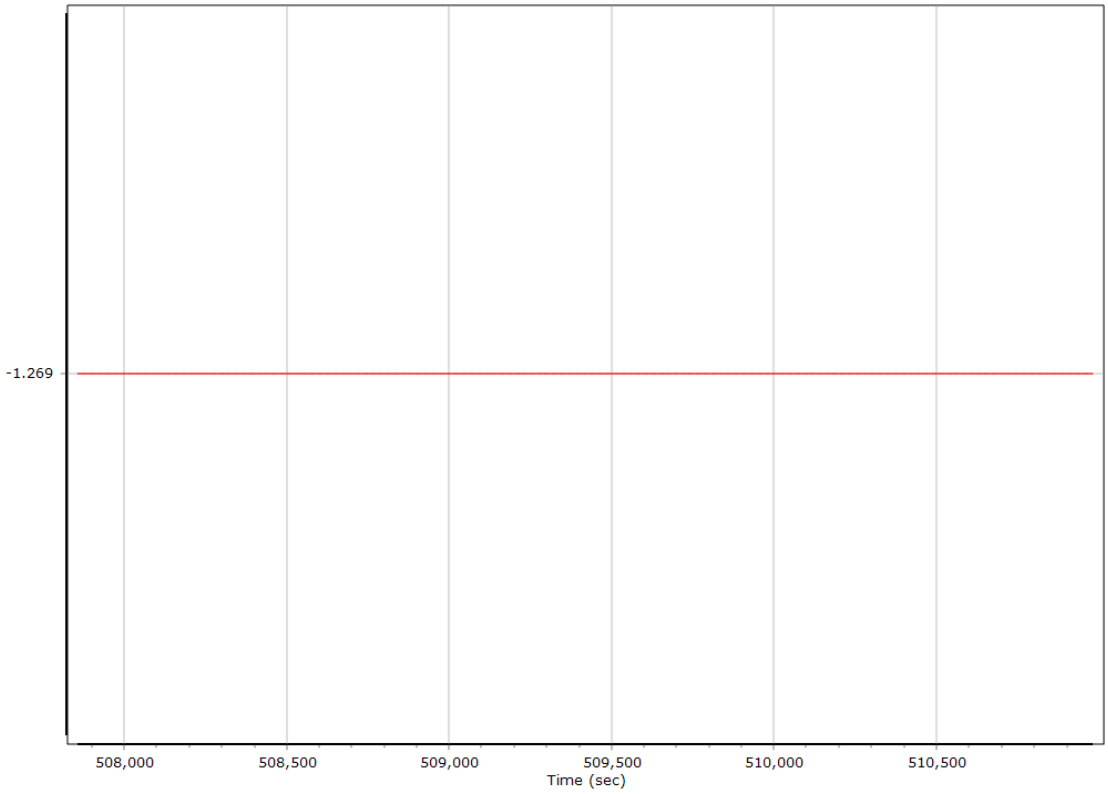

Reference-Primary GNSS Lever Arm Figure of Merit

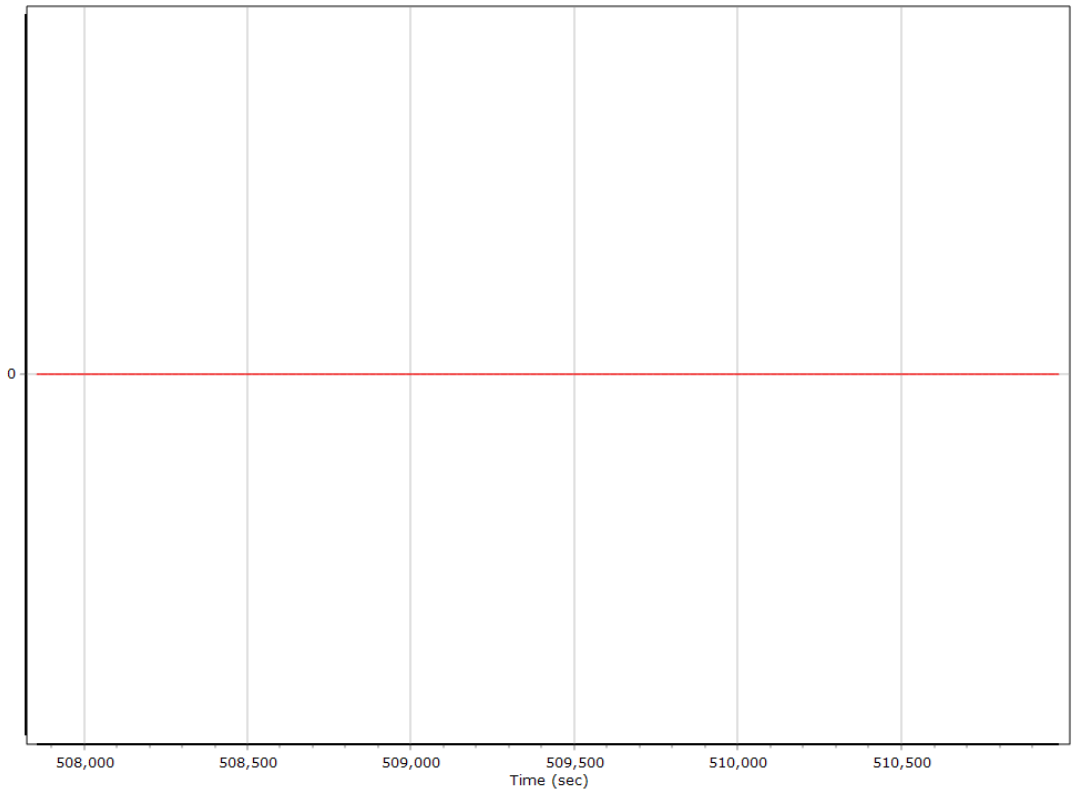

Smoothed IN-Fusion QC

Smoothed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

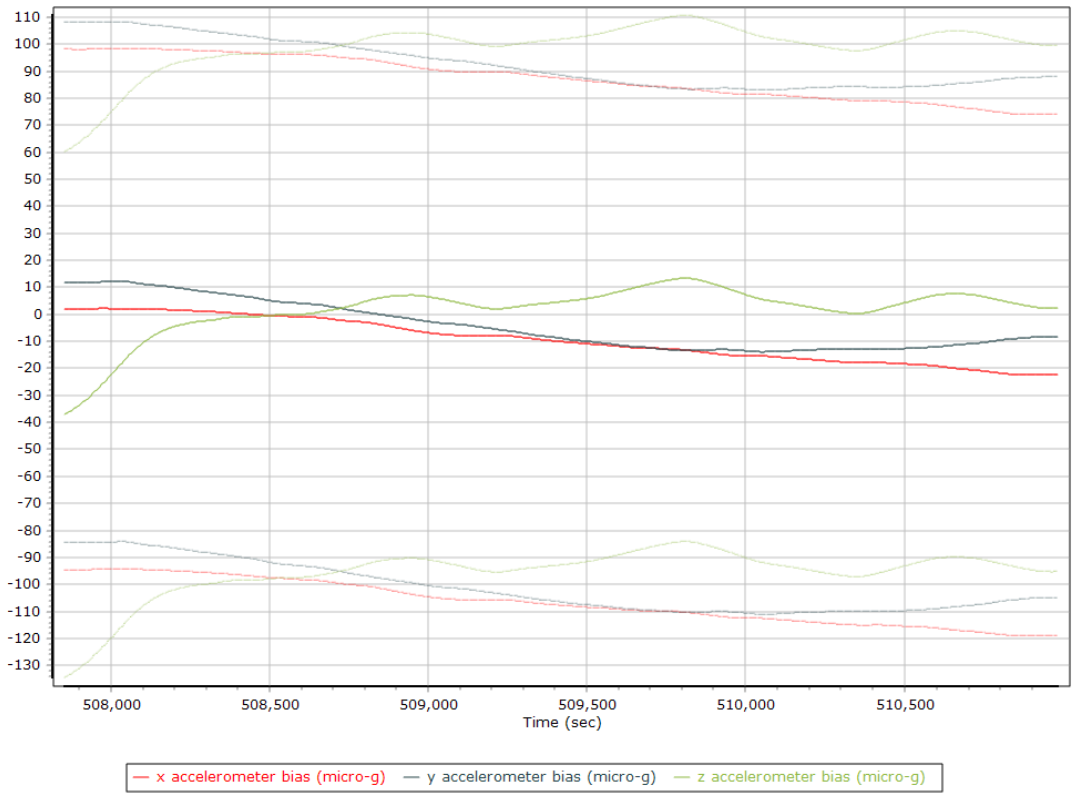

X Accelerometer Bias (micro-g)

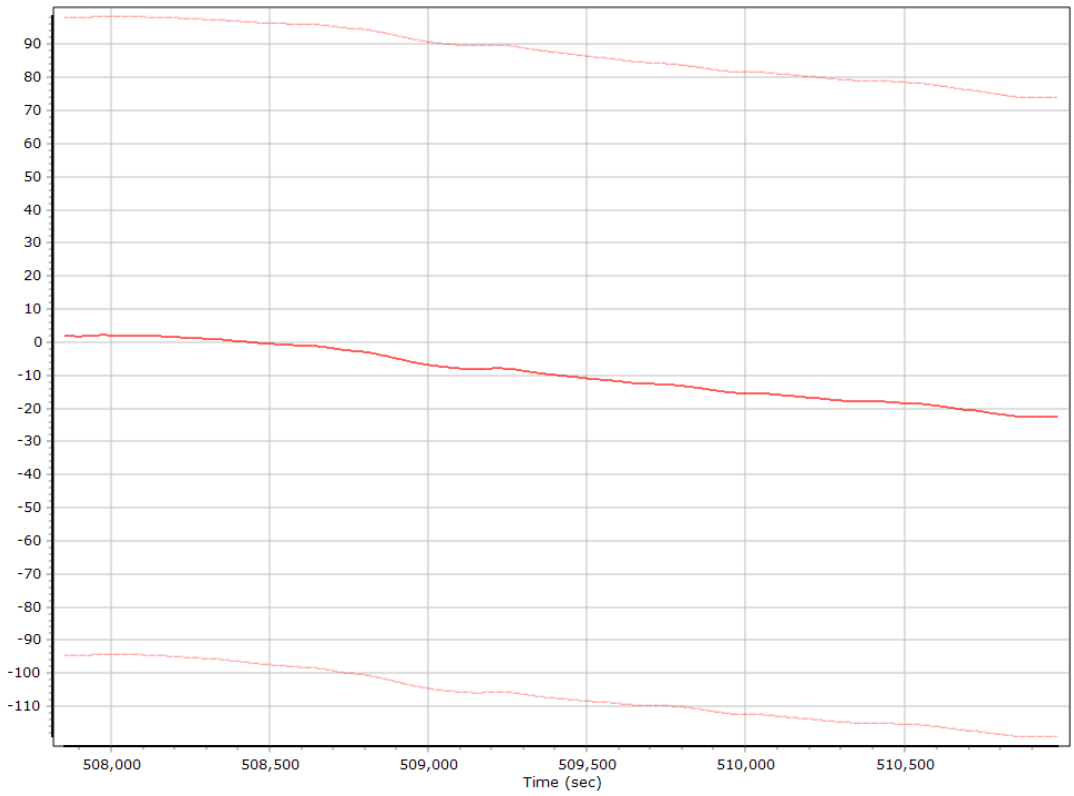

Y Accelerometer Bias (micro-g)

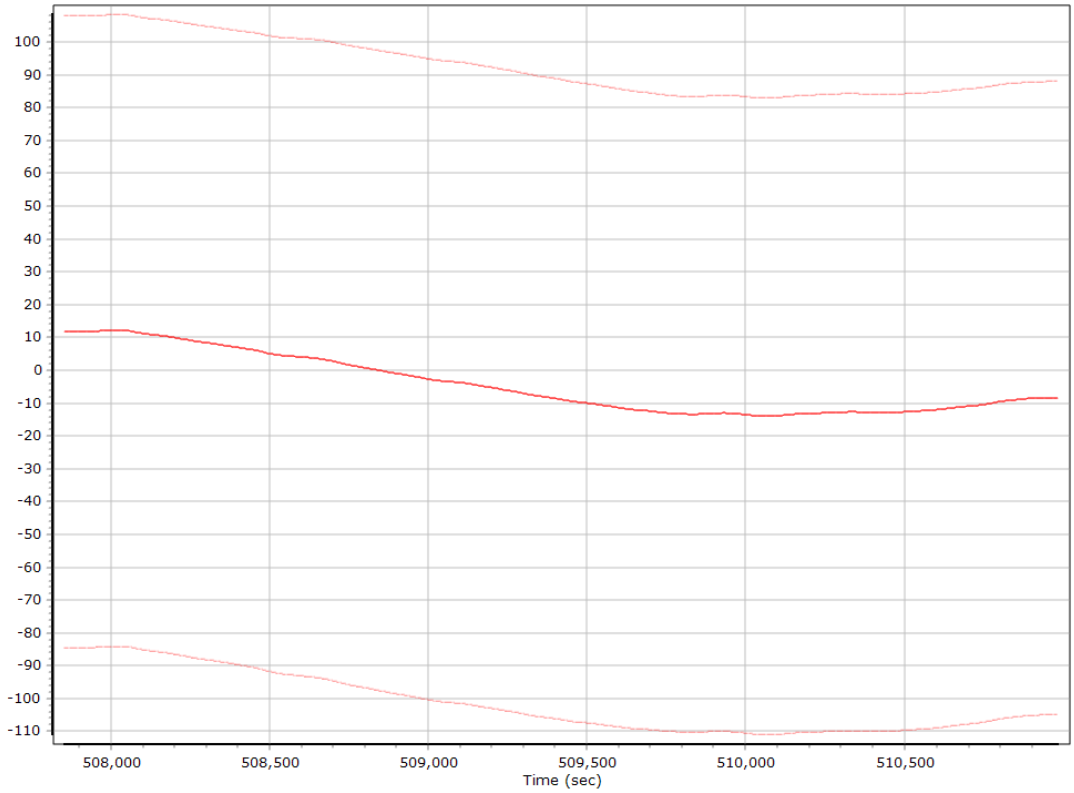

Z Accelerometer Bias (micro-g)

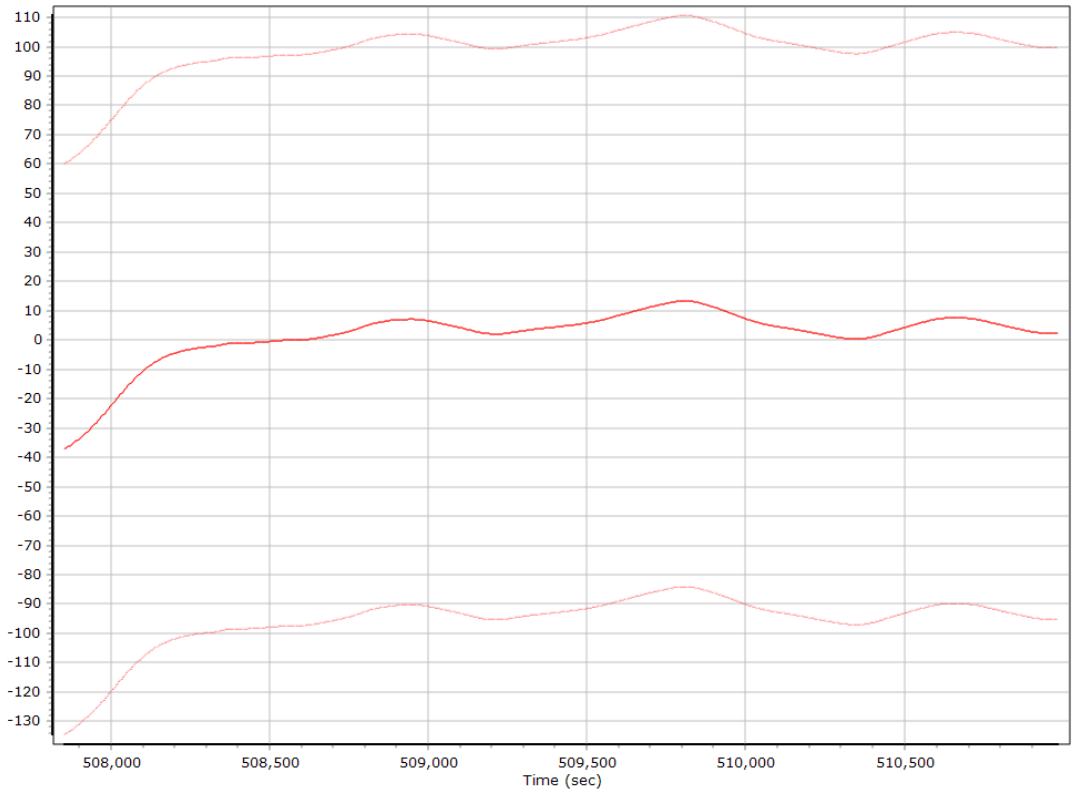

Accelerometer Scale Error (ppm)

X Accelerometer Scale Error (ppm)

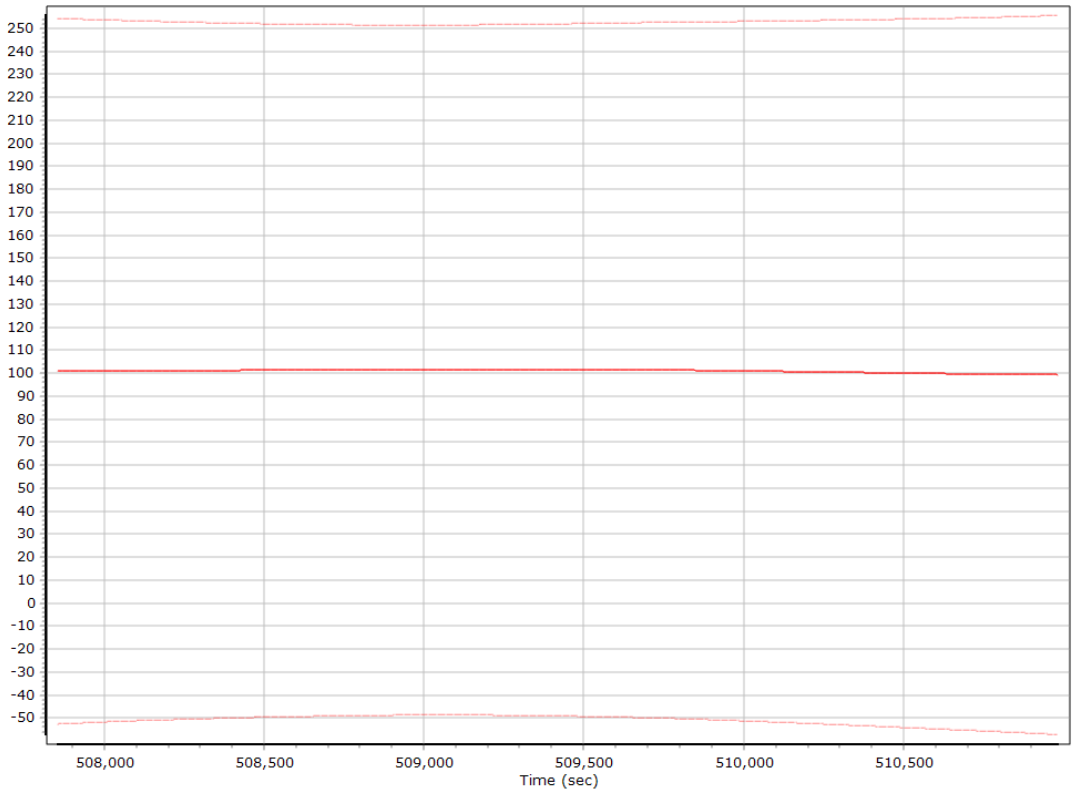

Y Accelerometer Scale Error (ppm)

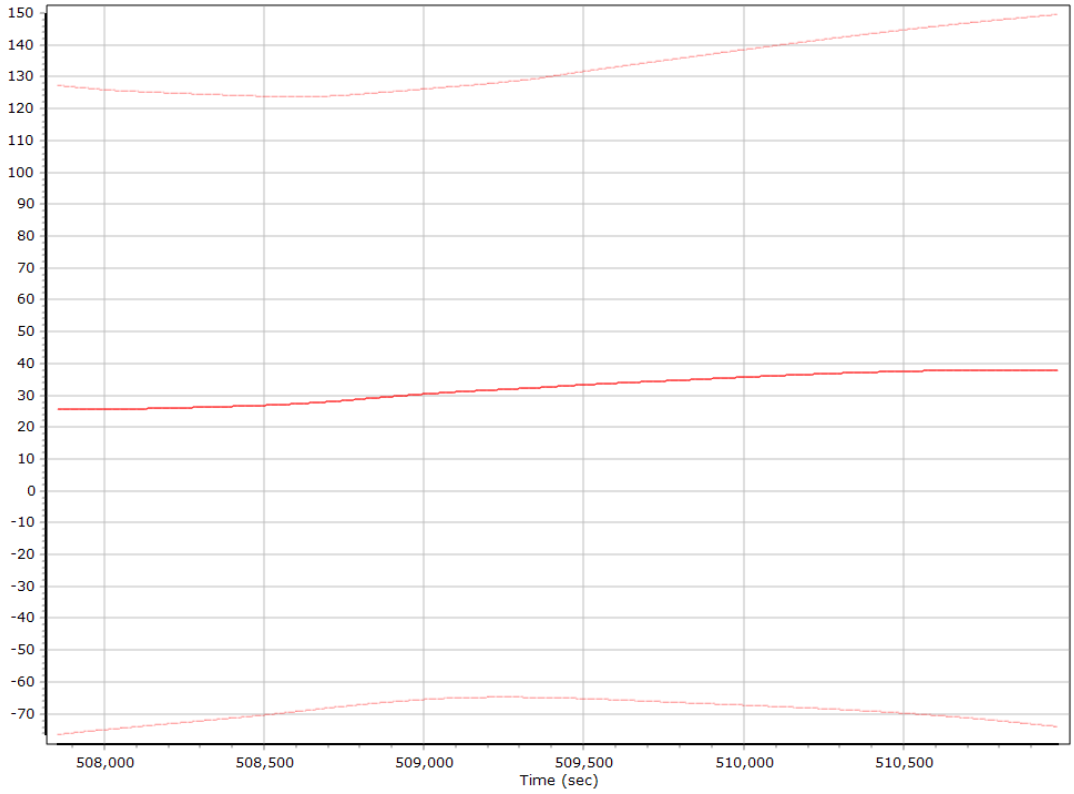

Z Accelerometer Scale Error (ppm)

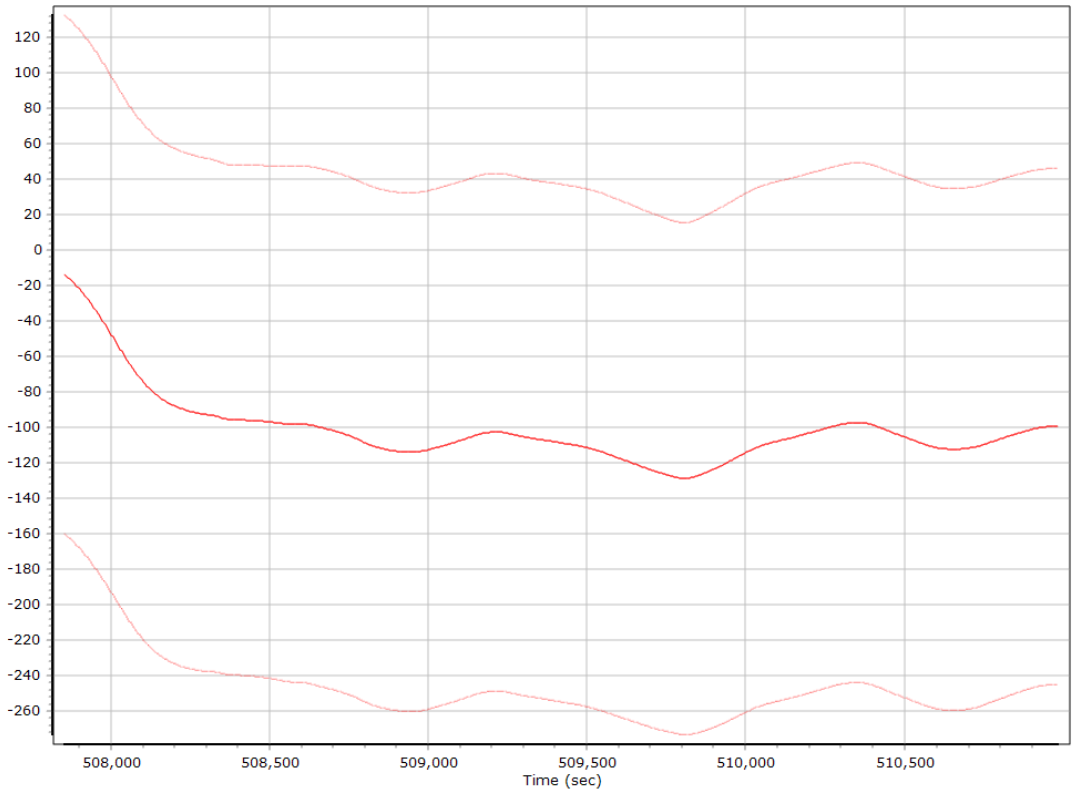

Gyro Bias (deg/h)

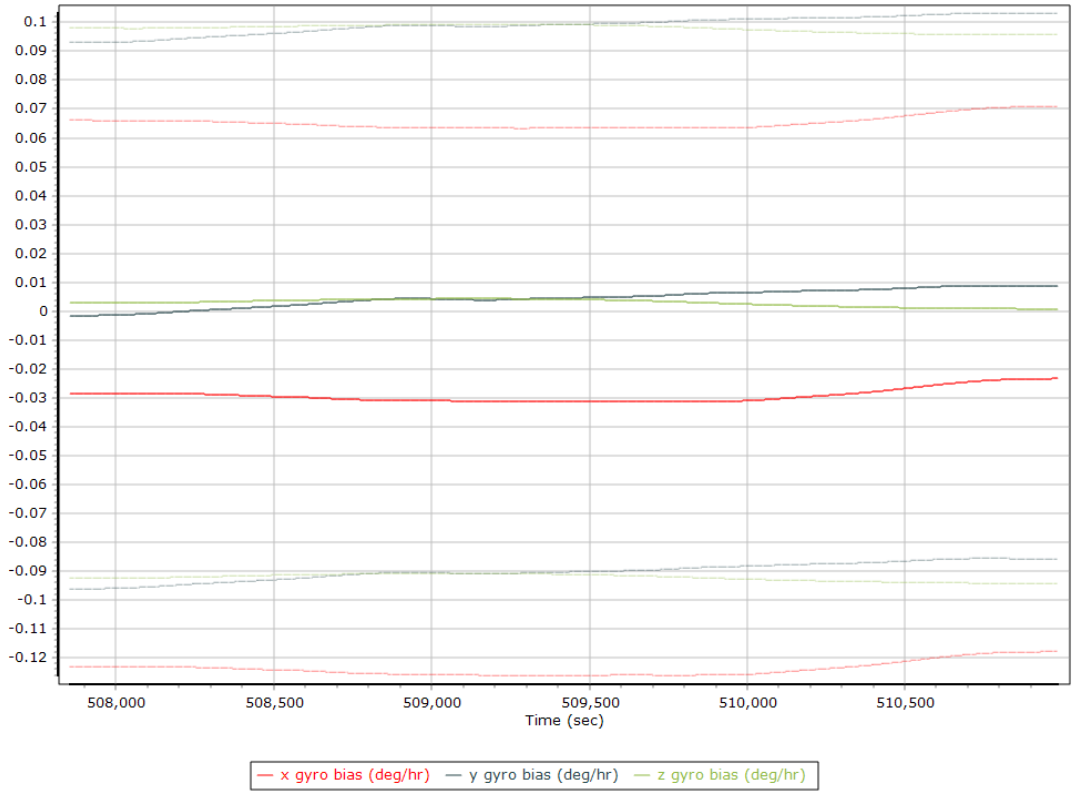

X Gyro Bias (deg/h)

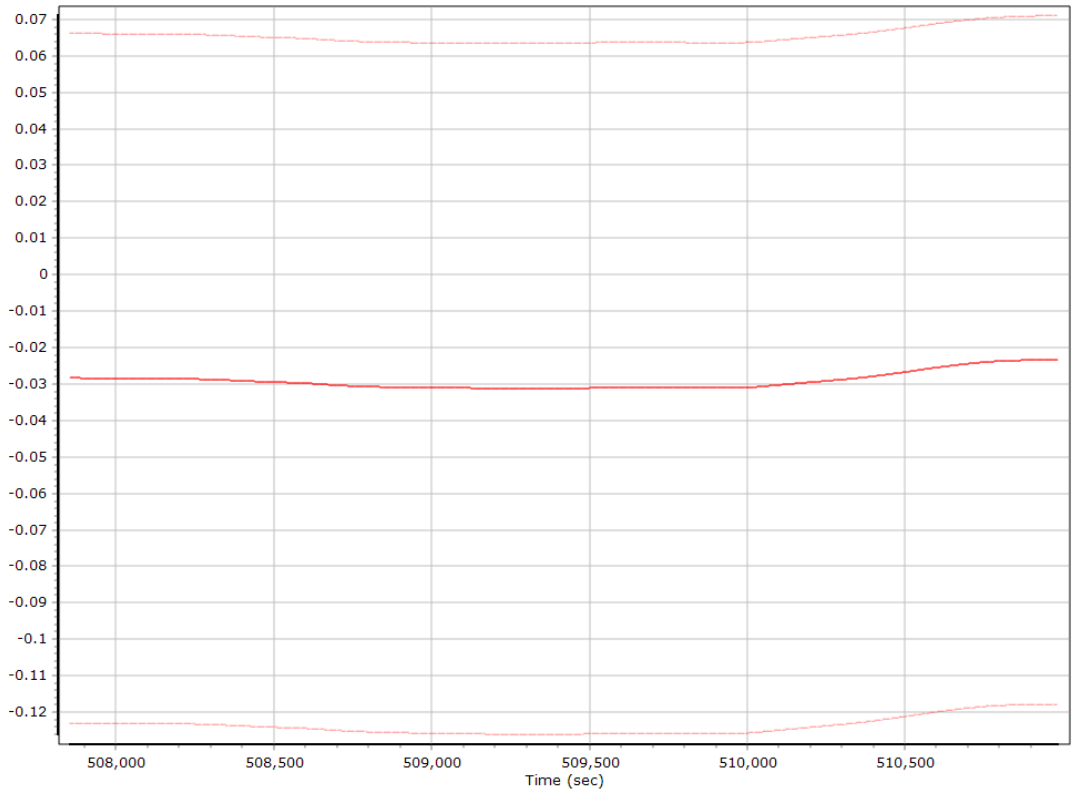

Y Gyro Bias (deg/h)

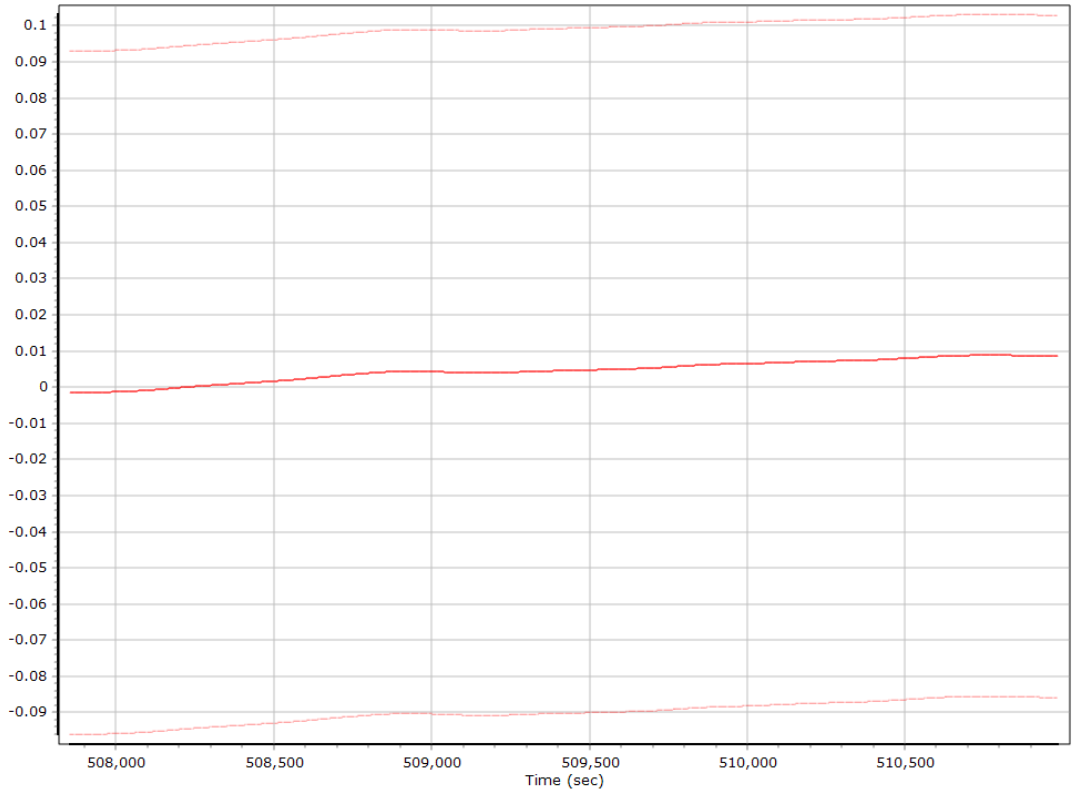

Z Gyro Bias (deg/h)

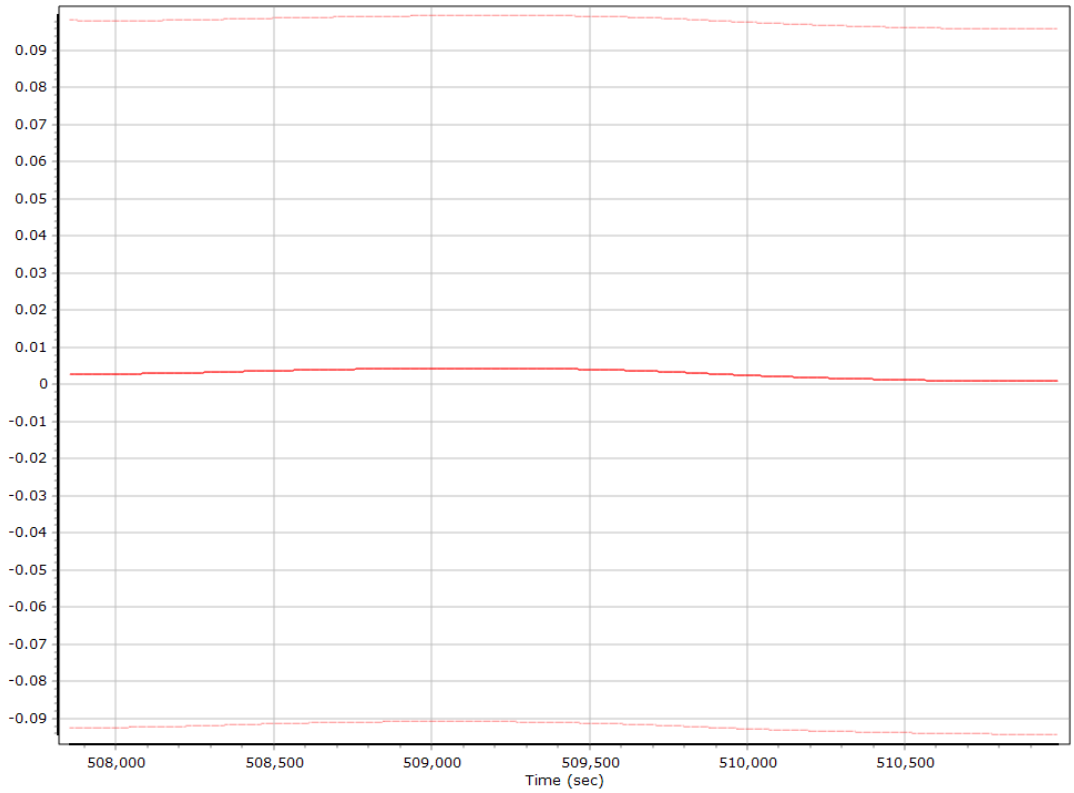

Gyro Scale Error (ppm)

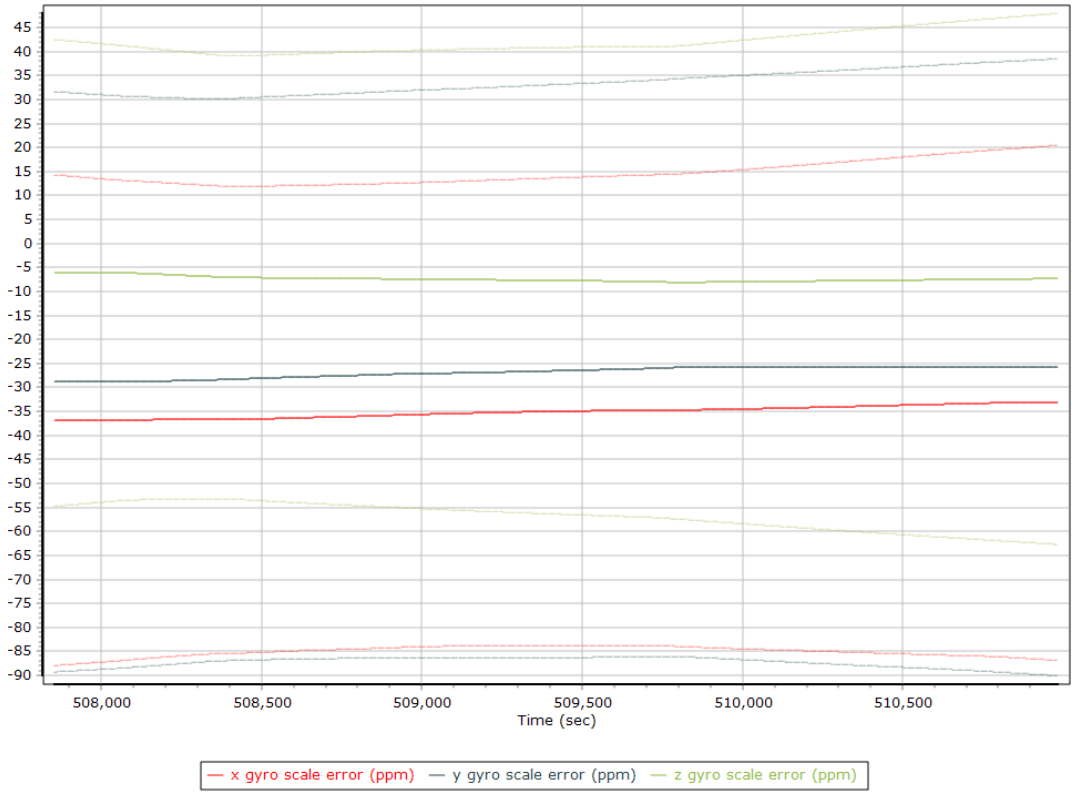

X Gyro Scale Error (ppm)

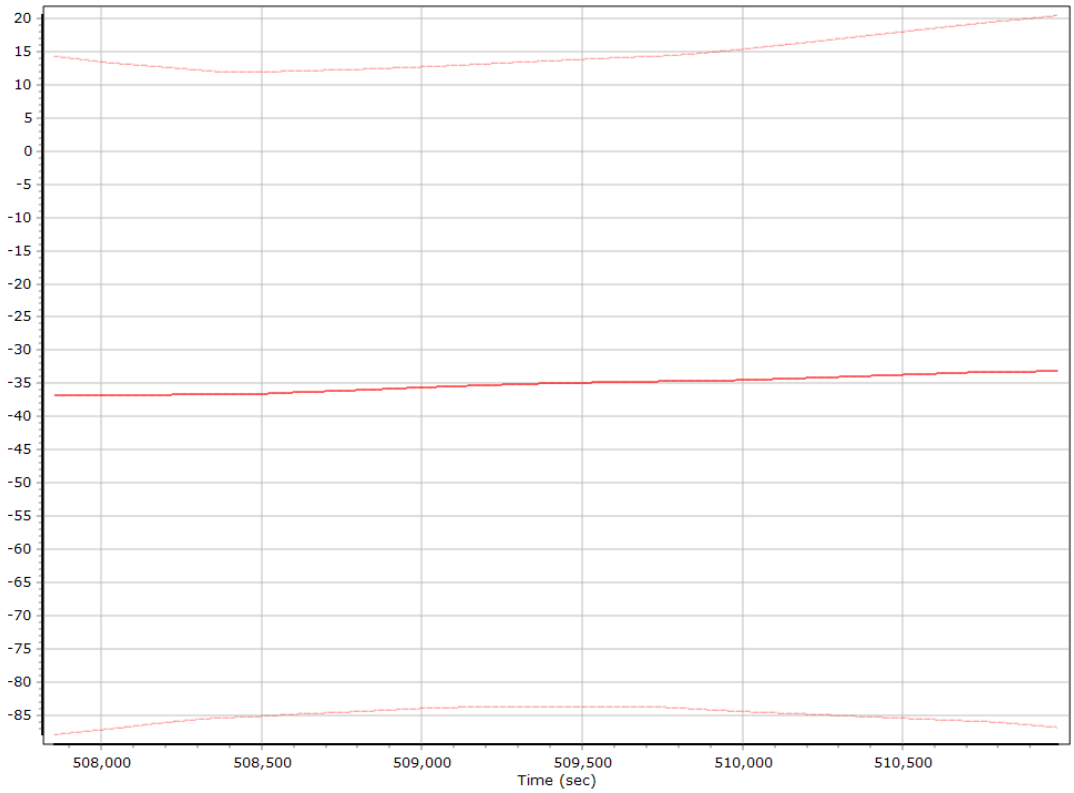

Y Gyro Scale Error (ppm)

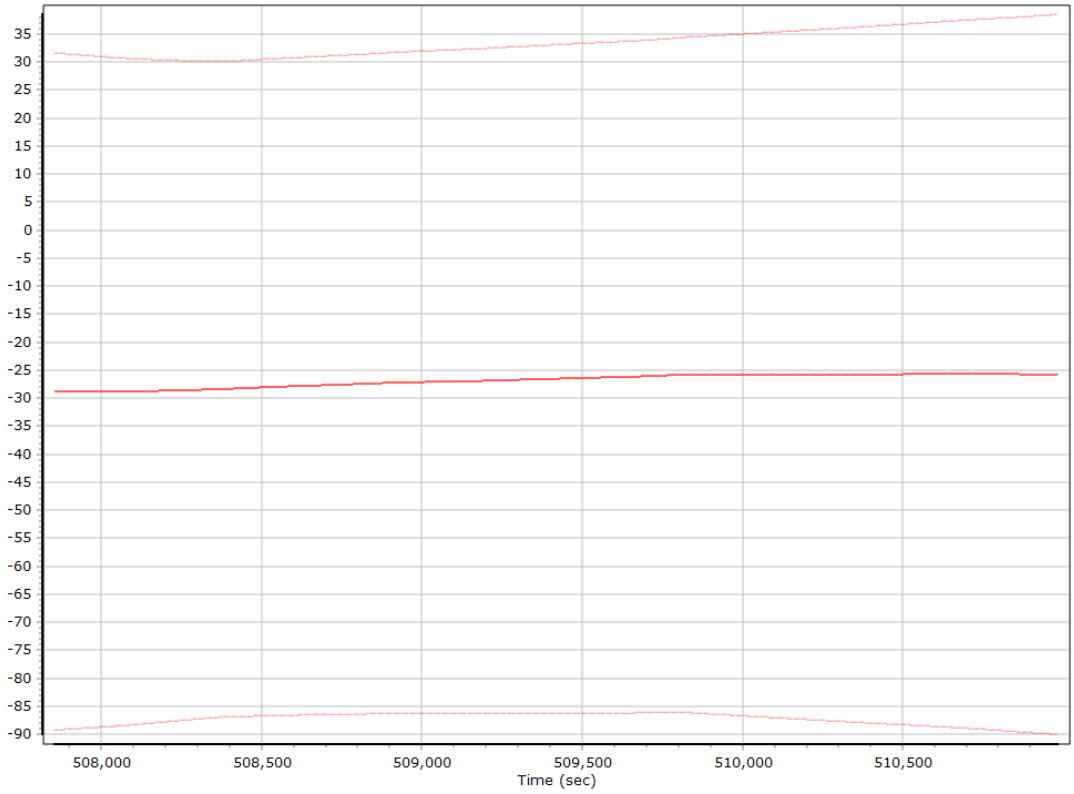

Z Gyro Scale Error (ppm)

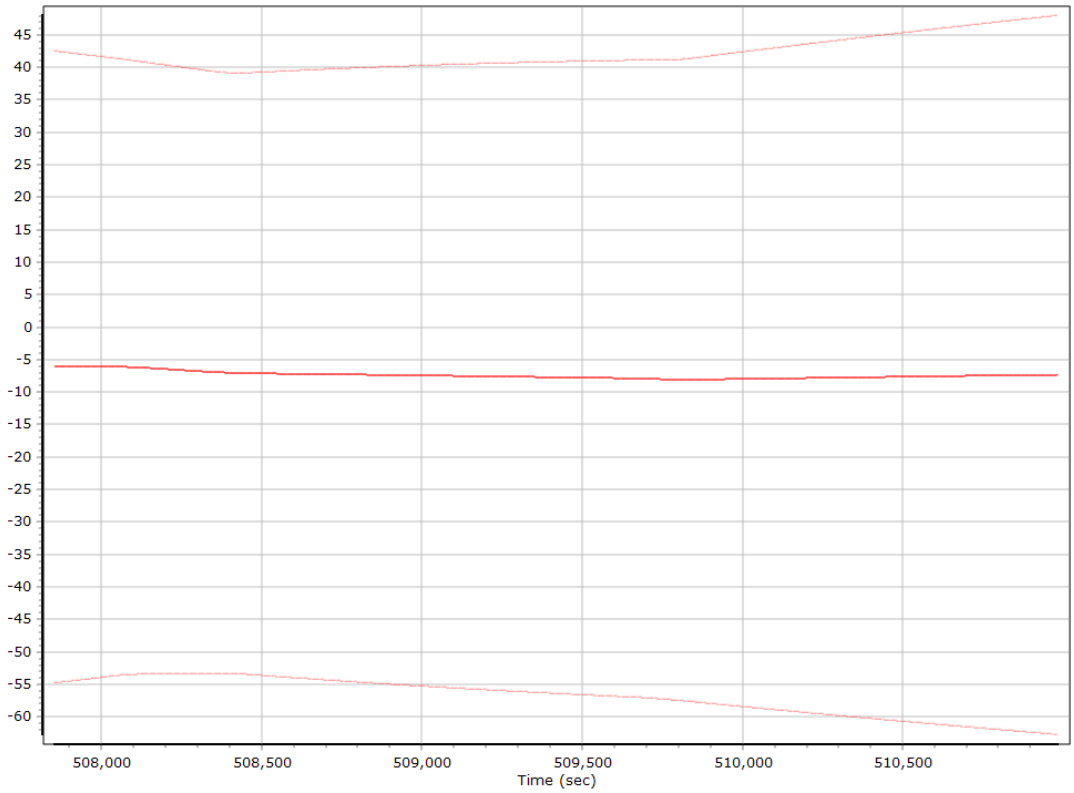

Smoothed Performance Metrics

Position Error RMS (m)

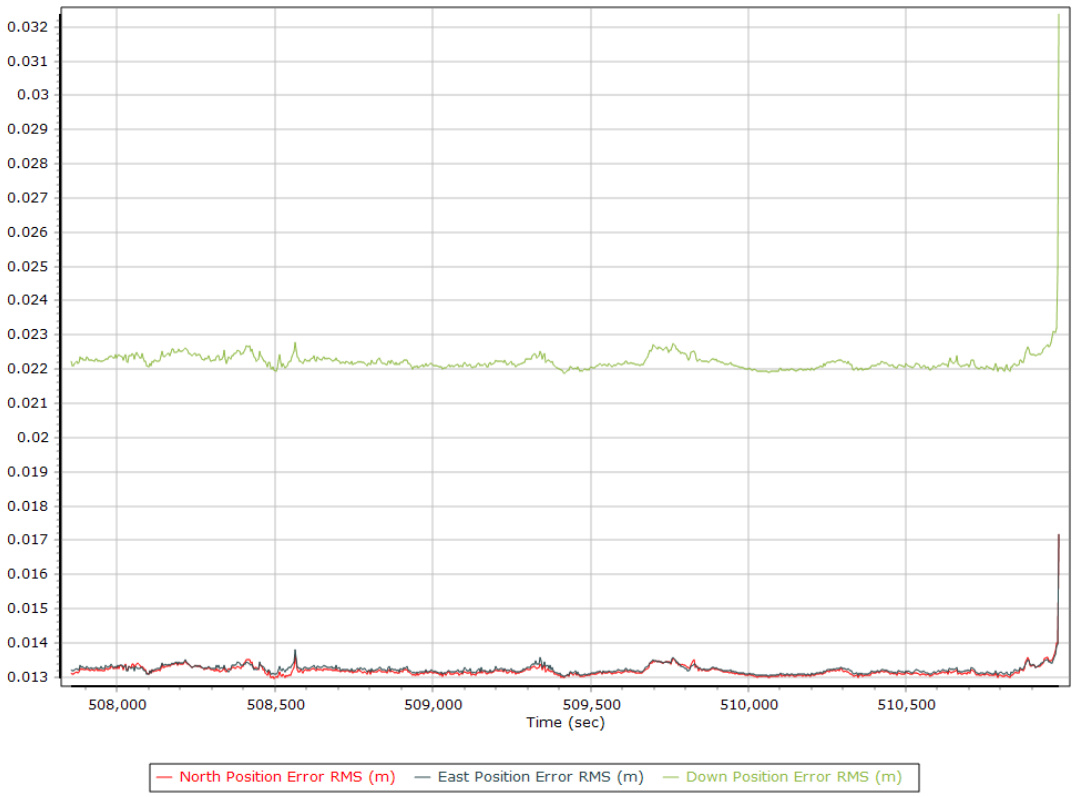

Velocity Error RMS (m/s)

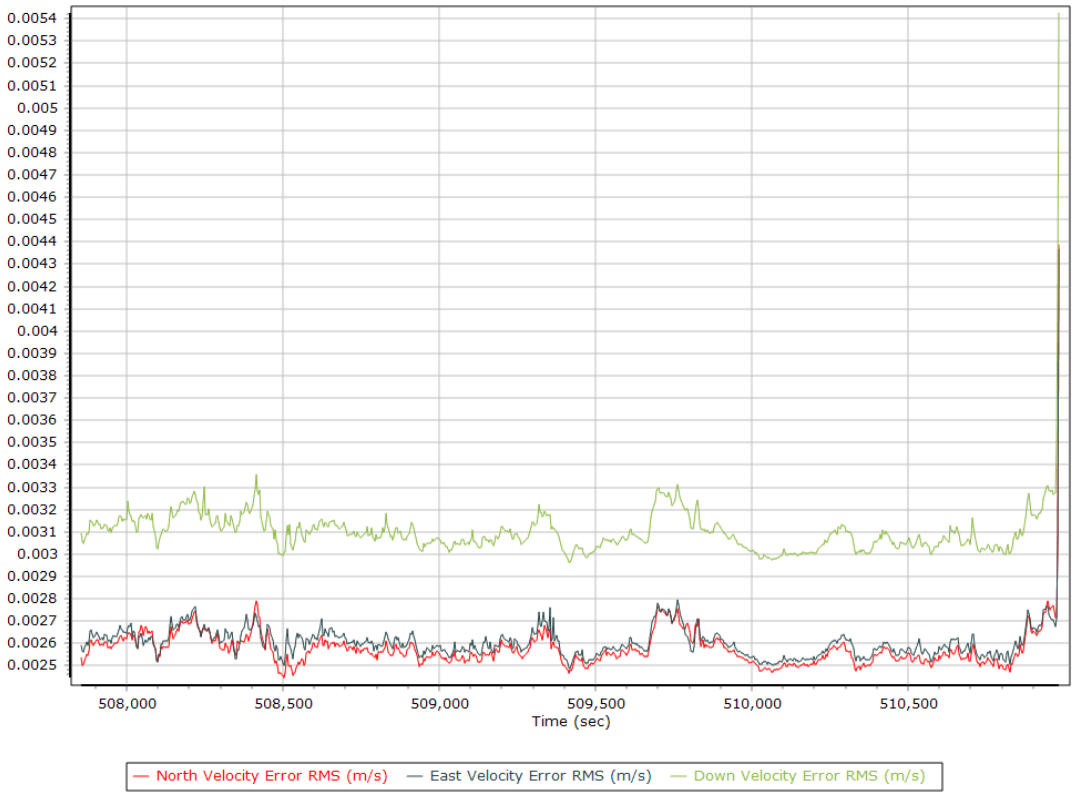

Roll/Pitch Error RMS (arc-min)

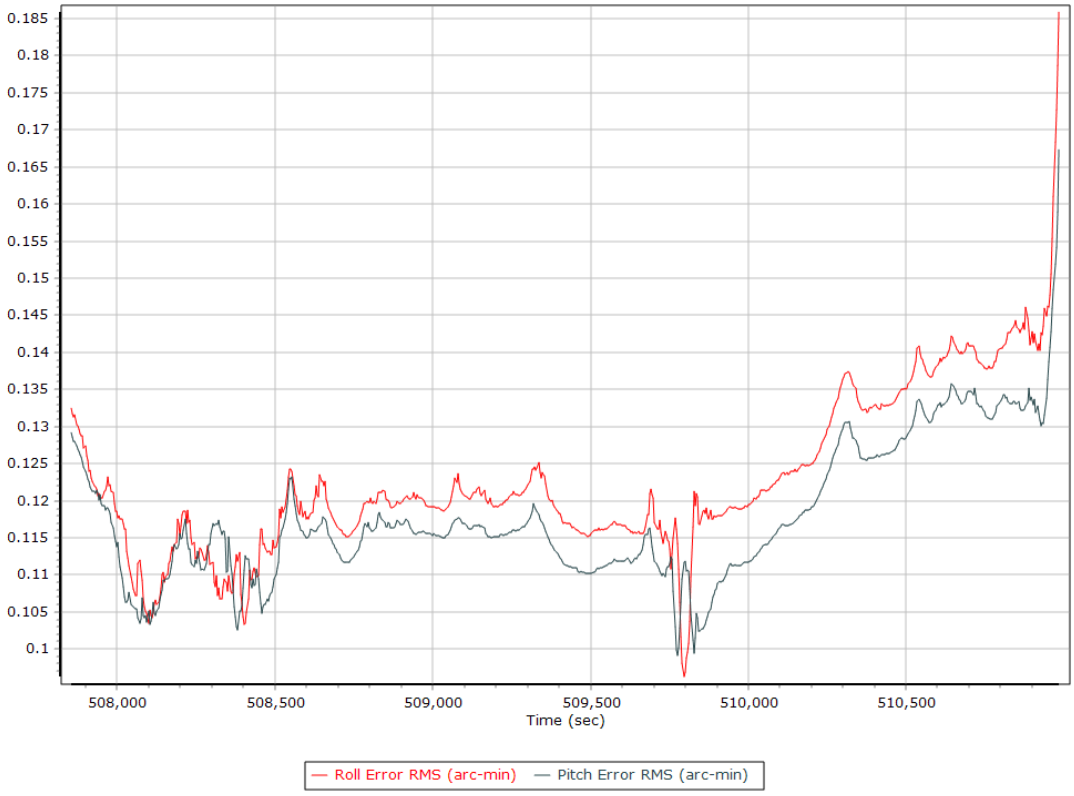
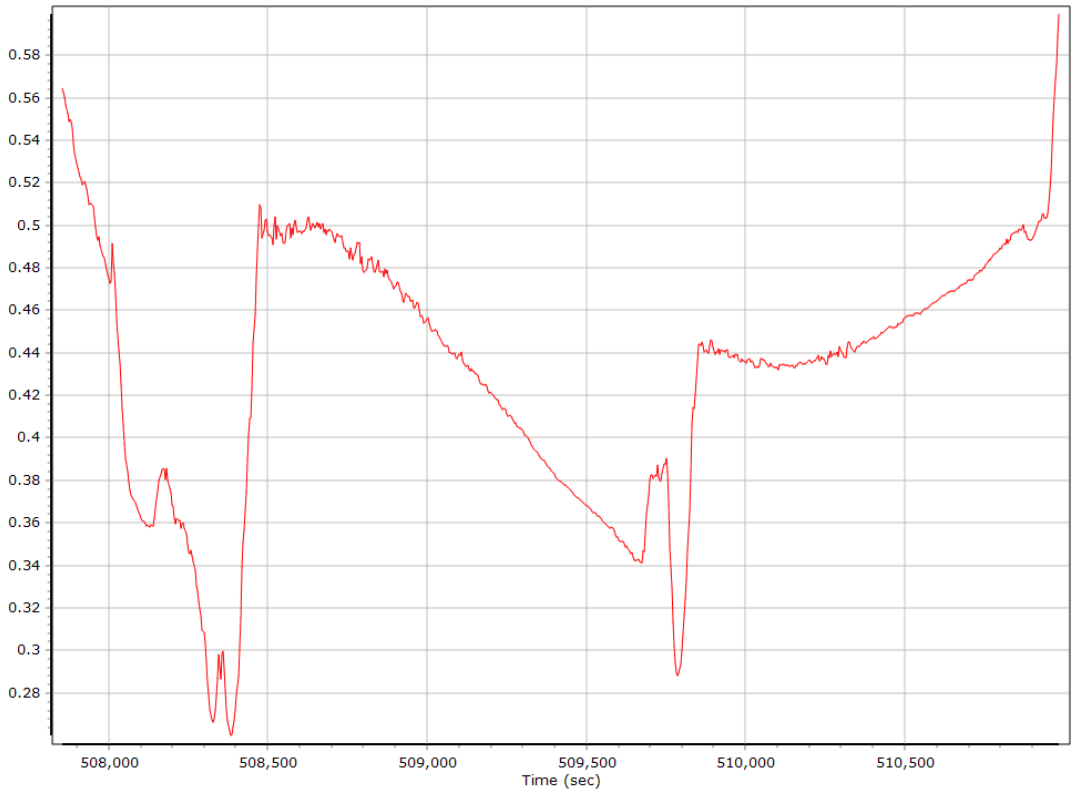
Heading Error RMS (arc-min)