General Information

Mission Information

Project name	2SU20325A_186
Processing date	2020-11-28 18:01:56
Mission date	2020-11-20 20:55:37
Mission duration	01:40:09.000
Processing mode	IN-Fusion PP-RTX

Rover Hardware Information

Product	POS AV 610 VER6 HW2.5-12
Serial number	S/N9642
IMU type	57
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
2SU20325A.093	POS Data
2SU20325A.094	POS Data
2SU20325A.095	POS Data
2SU20325A.096	POS Data
2SU20325A.097	POS Data
2SU20325A.098	POS Data
2SU20325A.099	POS Data
2SU20325A.100	POS Data
2SU20325A.101	POS Data
2SU20325A.102	POS Data
2SU20325A.103	POS Data
2SU20325A.104	POS Data
2SU20325A.105	POS Data
2SU20325A.106	POS Data
2SU20325A.107	POS Data

Input Files

File Name	File Type
Ephm3250.20g	GLONASS Broadcast Ephemeris
Ephm3250.20n	GPS Broadcast Ephemeris

Output Files

Filename	File type
sbet_2SU20325A_186.out	SBET Trajectory File
export_2SU20325A_186.out	Custom Smoothed BET Export Output

Rover Data Summary

First raw data file	2SU20325A.093		
Last raw data file	2SU20325A.107		
Start GPS week	2132		
Start time	507318.192 (11/20/2020 20:55:18)		
End time	513329.318 (11/20/2020 22:35:29)		
Start of fine alignment	507746.563 (11/20/2020 21:02:26)		
Available subsystems	Primary GNSS, Gimbal, IMU		
POS Event Input	None		
Correction data	None		
IMU Installation Lever Arms & Mounting Angles			
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Rover Data QC

Raw IMU Import QC Summary

IMU data input file	imu_2SU20325A_186.dat
IMU data check log file	imudt_2SU20325A_186.log
IMU Records Processed	1202133
Termination Status	Normal
IMU Anomalies	0

Primary Observables & Satellite Data

GPS/GLONASS L1 Satellite Lock/Elevation

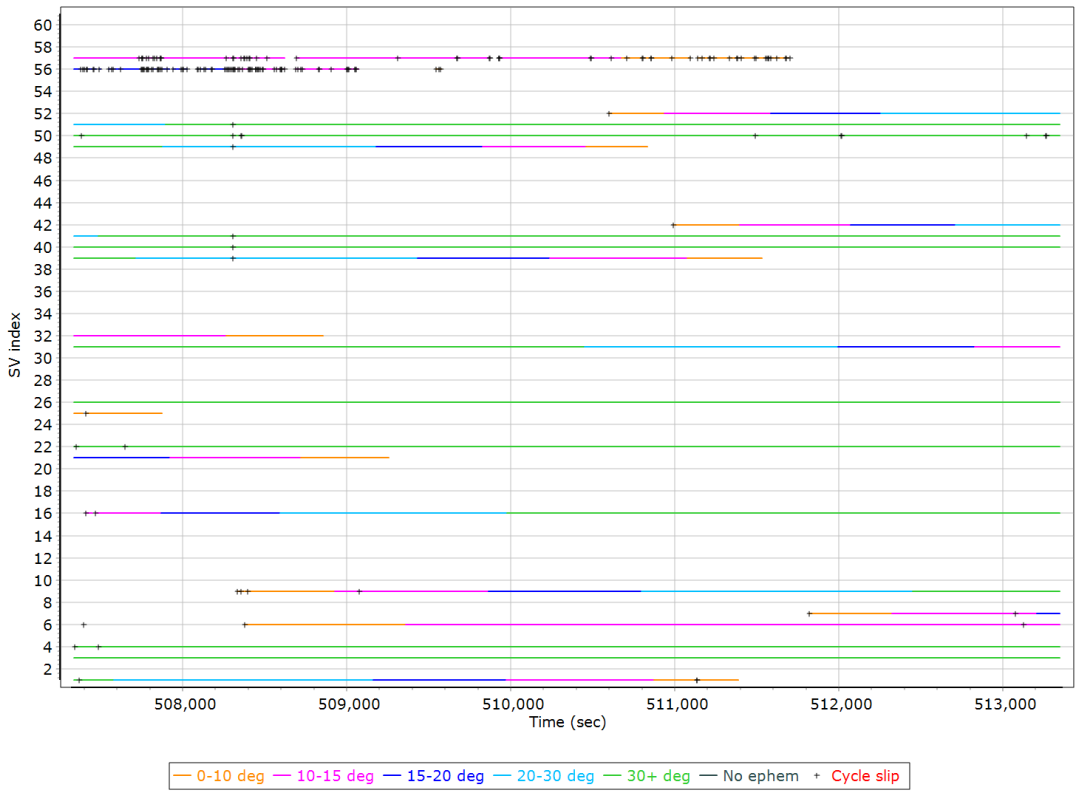

GPS L1 SNR

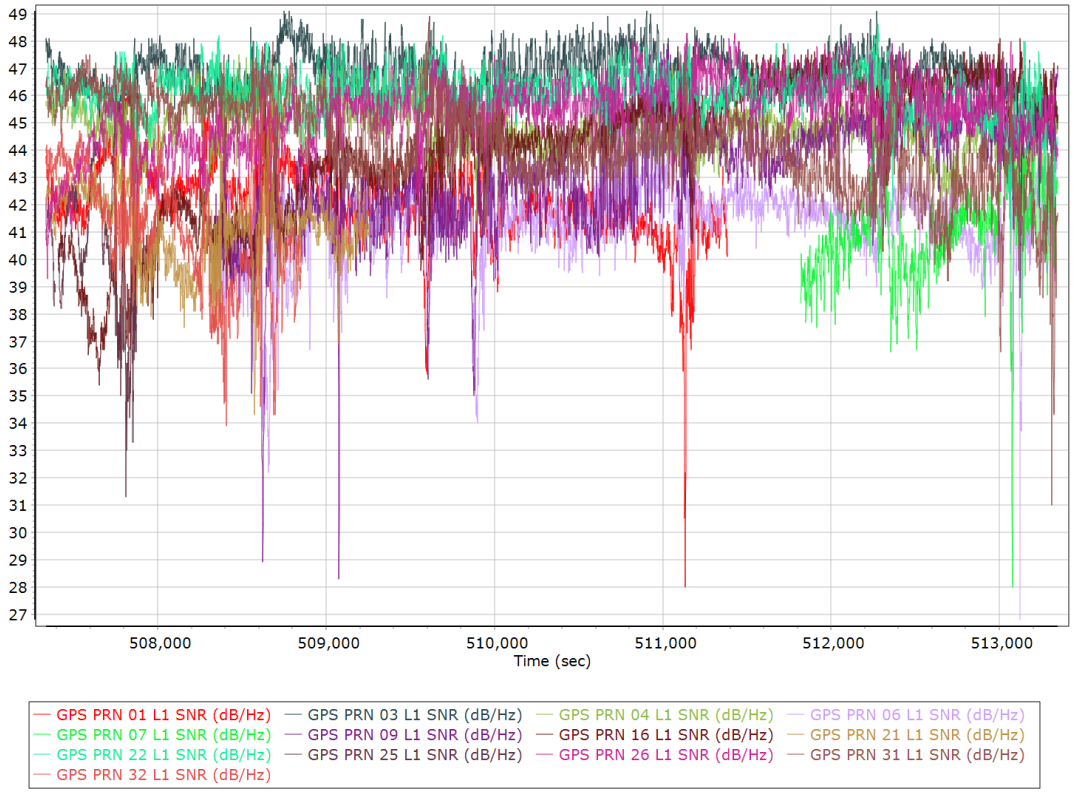

GLONASS L1 SNR

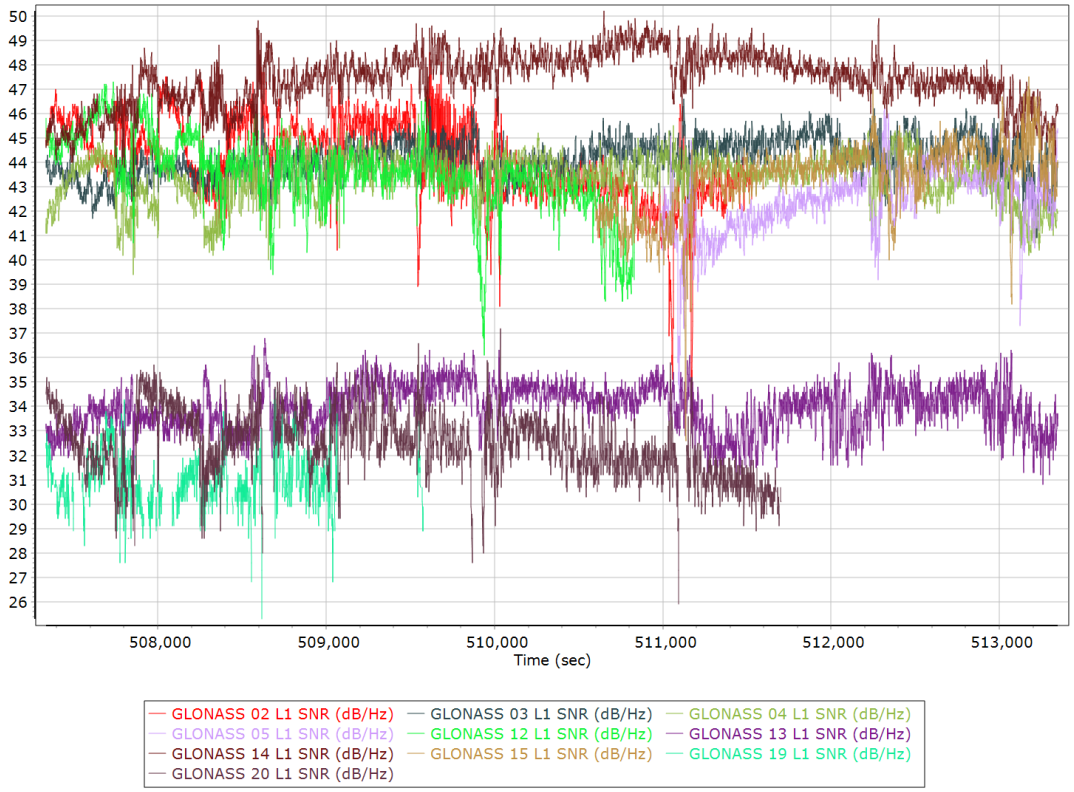

GPS/GLONASS L2 Satellite Lock/Elevation

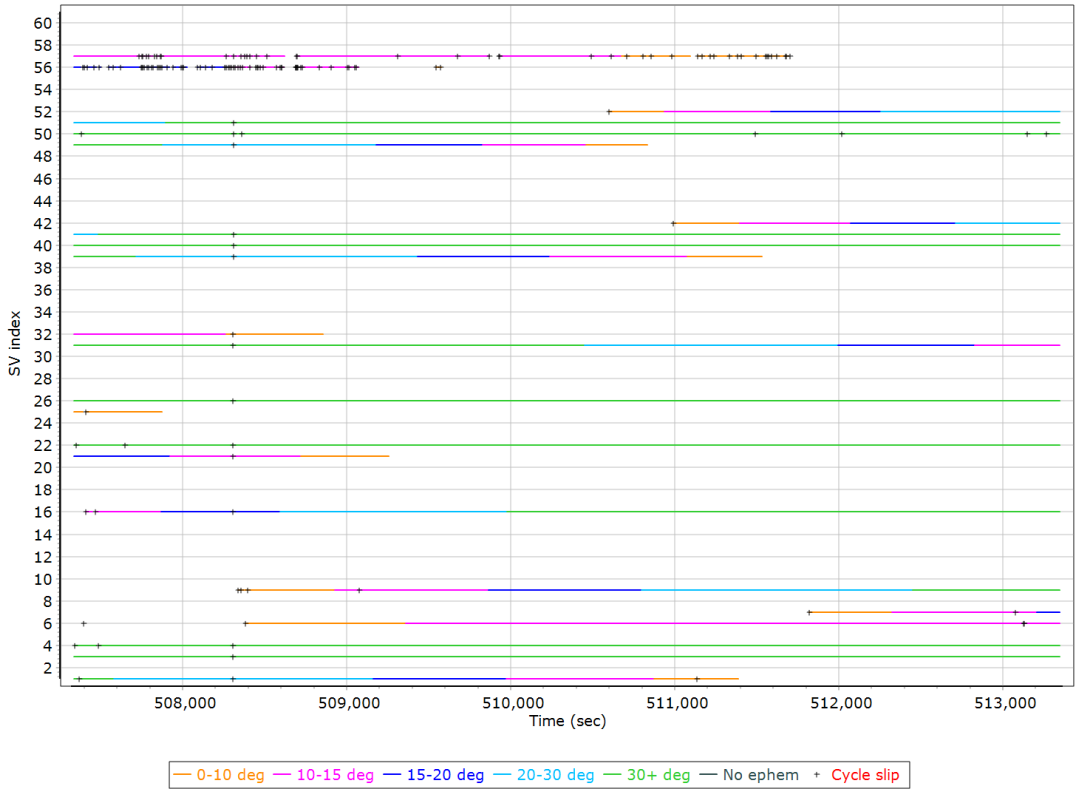

GPS L2 SNR

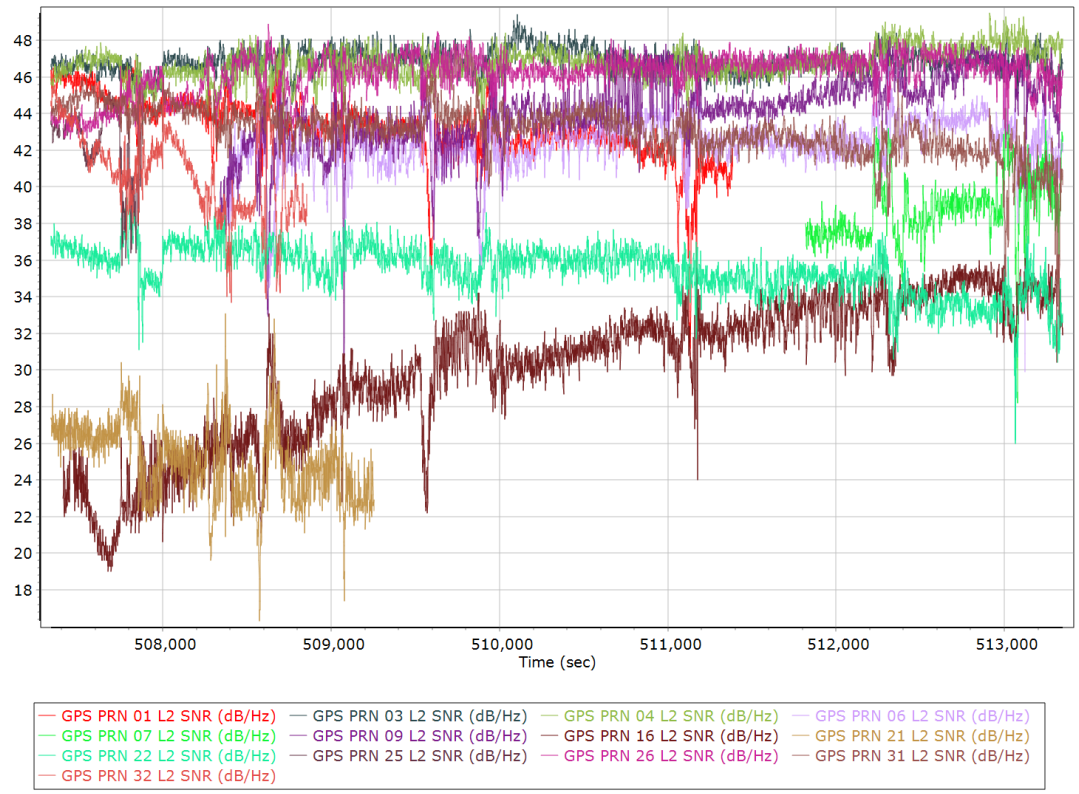

GLONASS L2 SNR

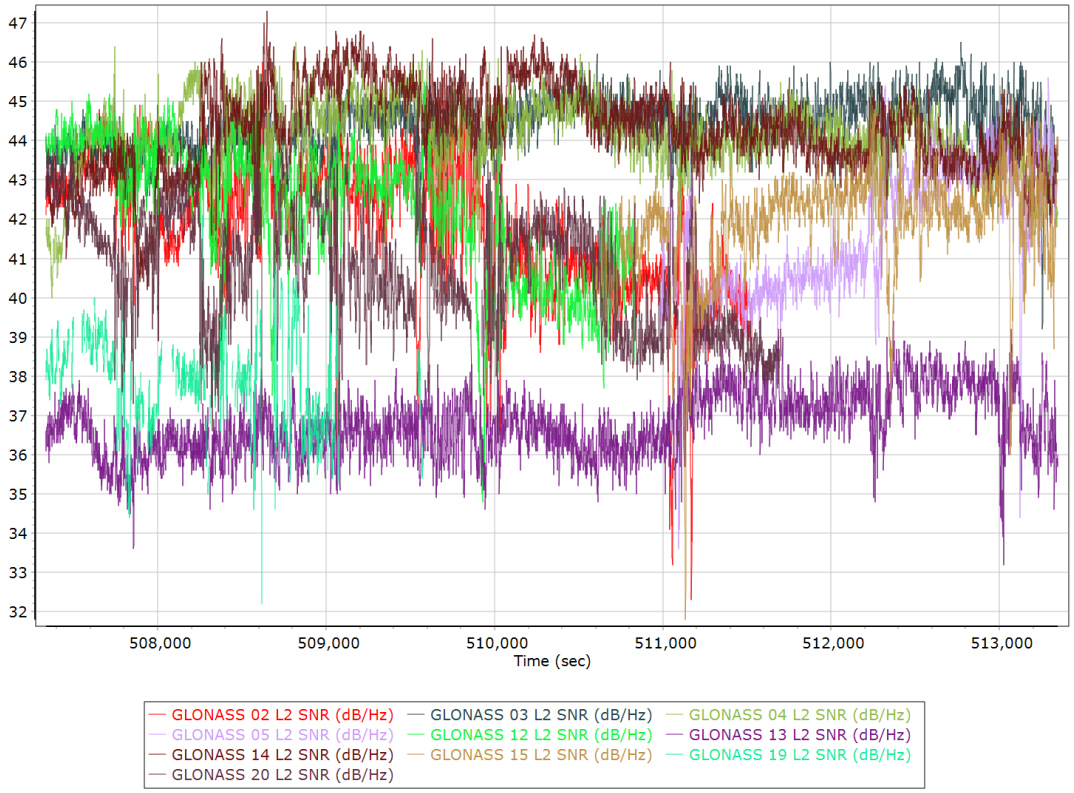

BEIDOU Satellite Lock/Elevation

BEIDOU SNR

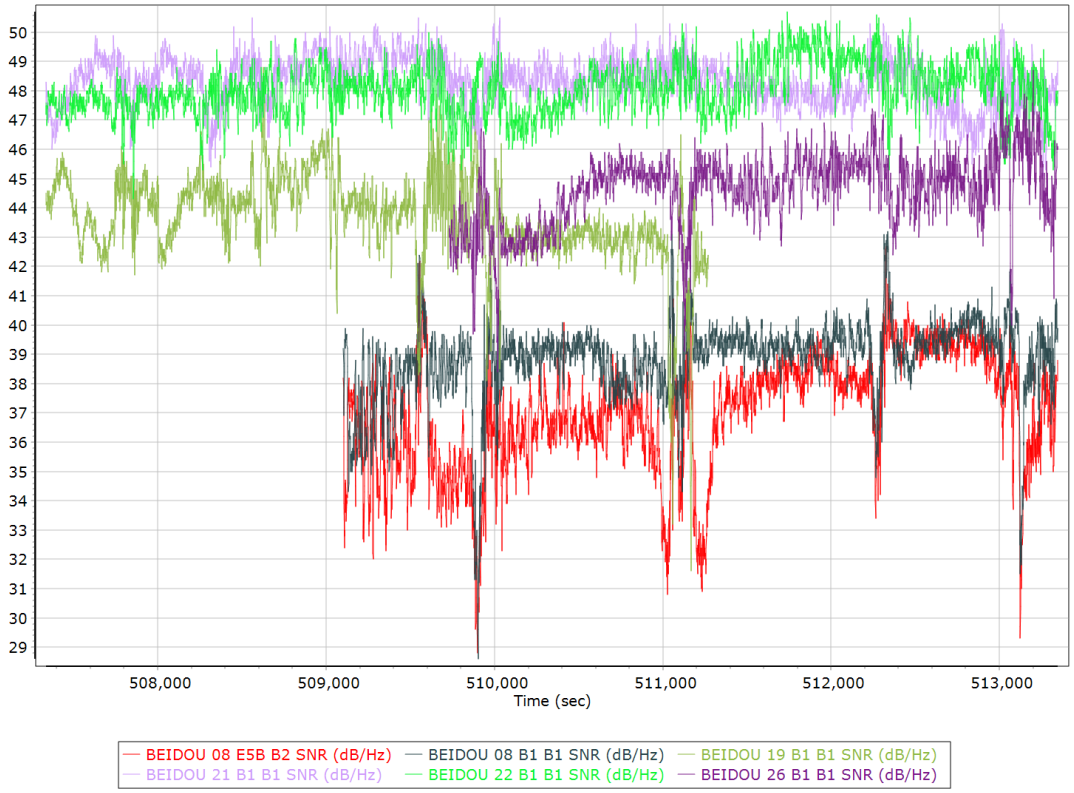

GALILEO Satellite Lock/Elevation

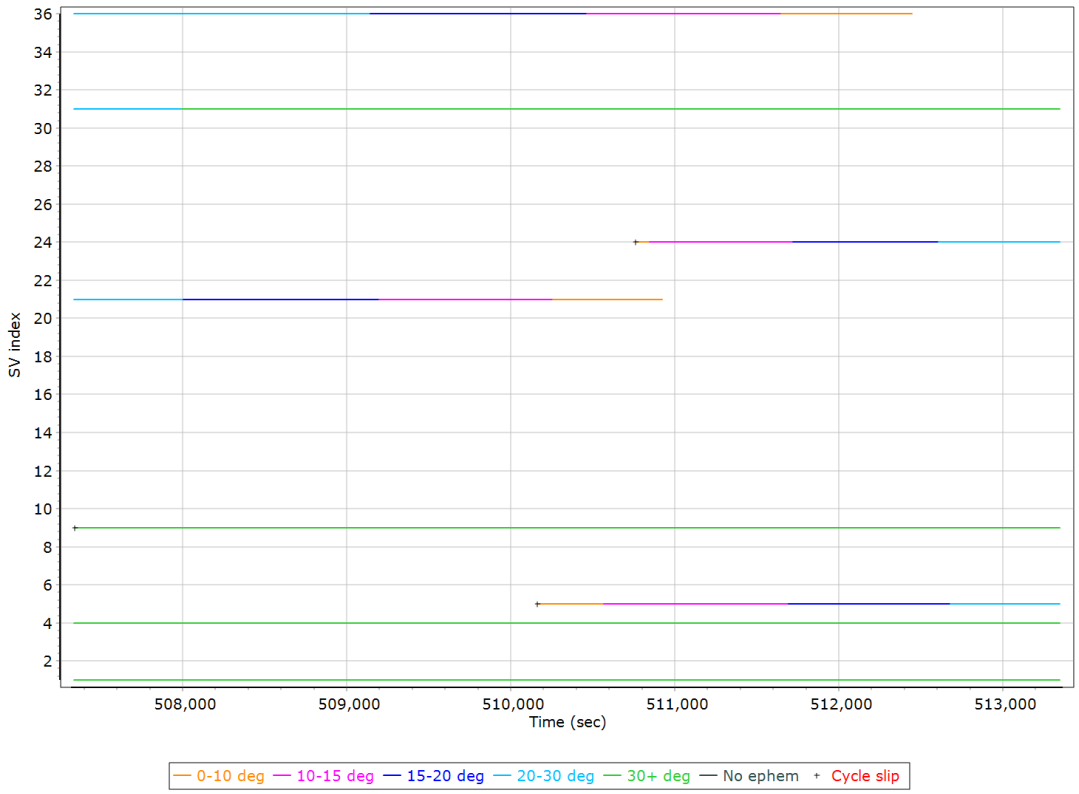

GALILEO SNR

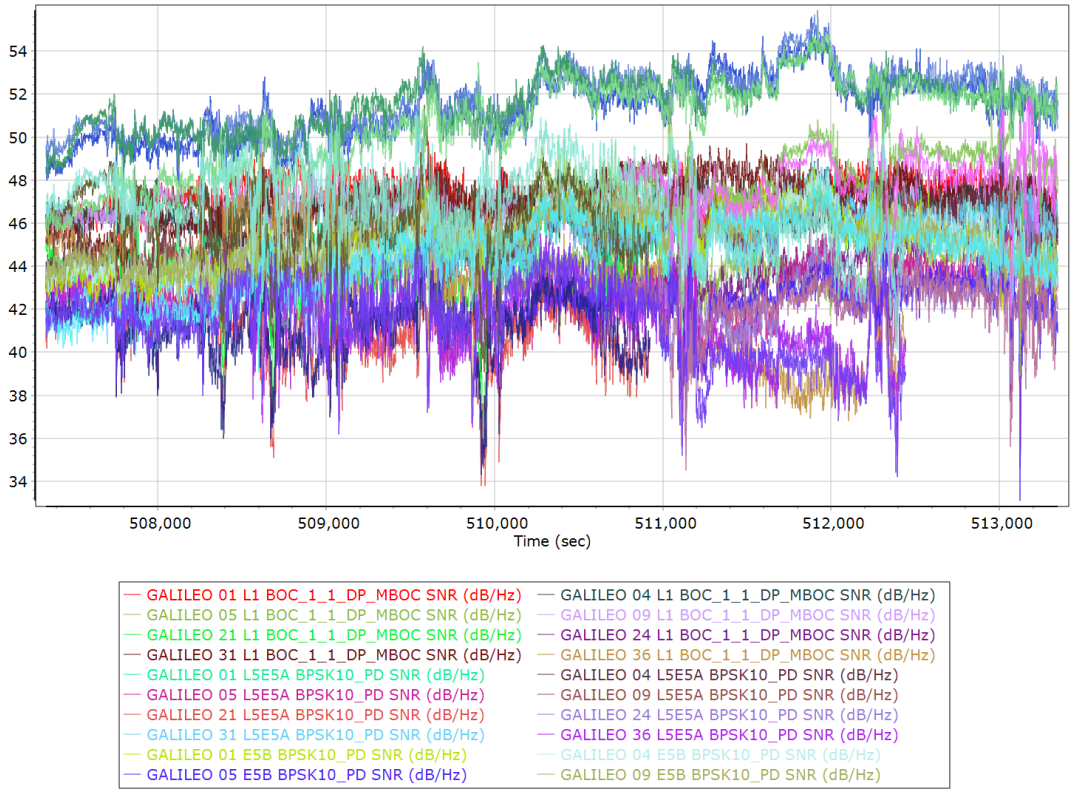
54
52
50
48
46
44
42
40
38
36
34
508,000
509,000
510,000
511,000
512,000
513,000
Time (sec)
GALILEO 01 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 04 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 05 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 09 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 21 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 24 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 31 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 36 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 01 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 04 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 05 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 09 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 21 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 24 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 31 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 36 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 01 E5B BPSK10_PD SNR (dB/Hz)
GALILEO 04 E5B BPSK10_PD SNR (dB/Hz)
GALILEO 05 E5B BPSK10_PD SNR (dB/Hz)
GALILEO 09 E5B BPSK10_PD SNR (dB/Hz)

Smoothed Trajectory Information

Top View

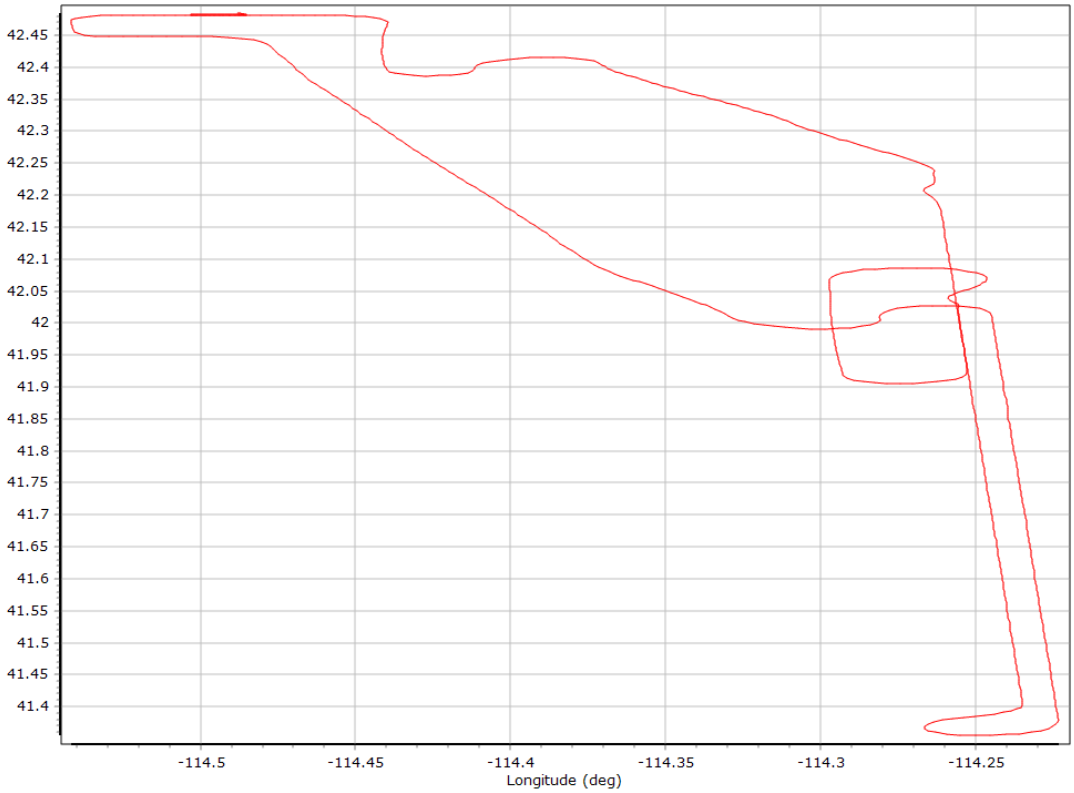

Altitude

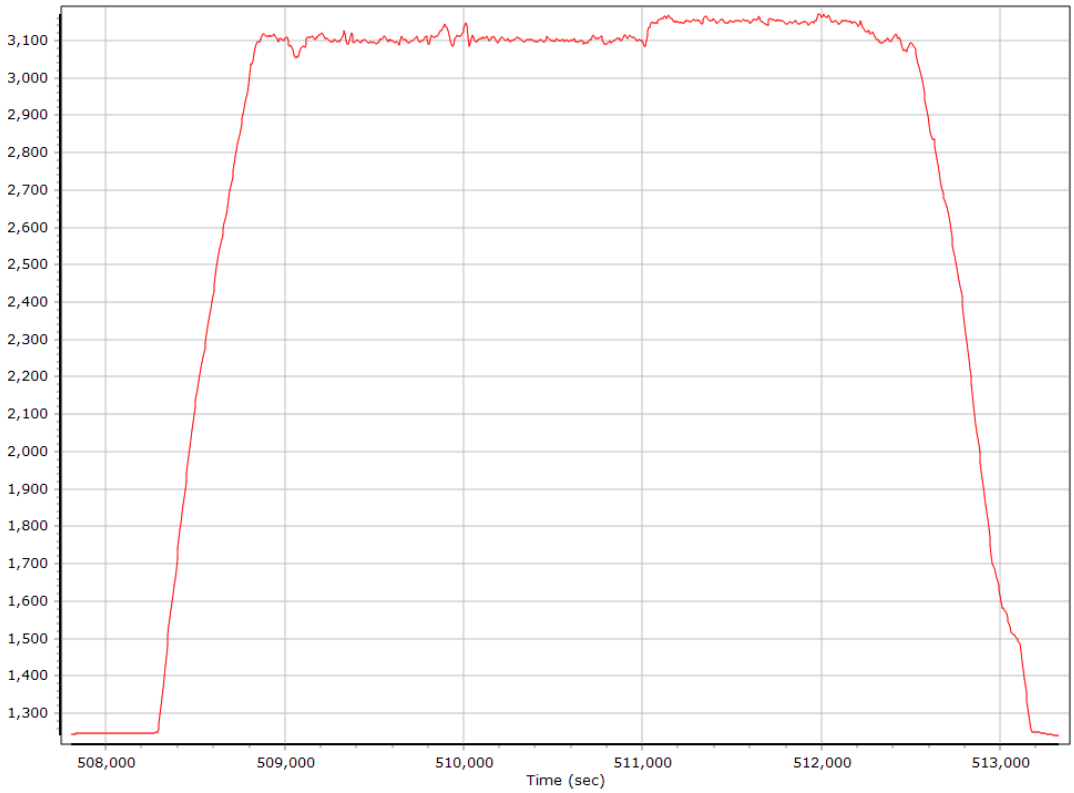

Roll/Pitch

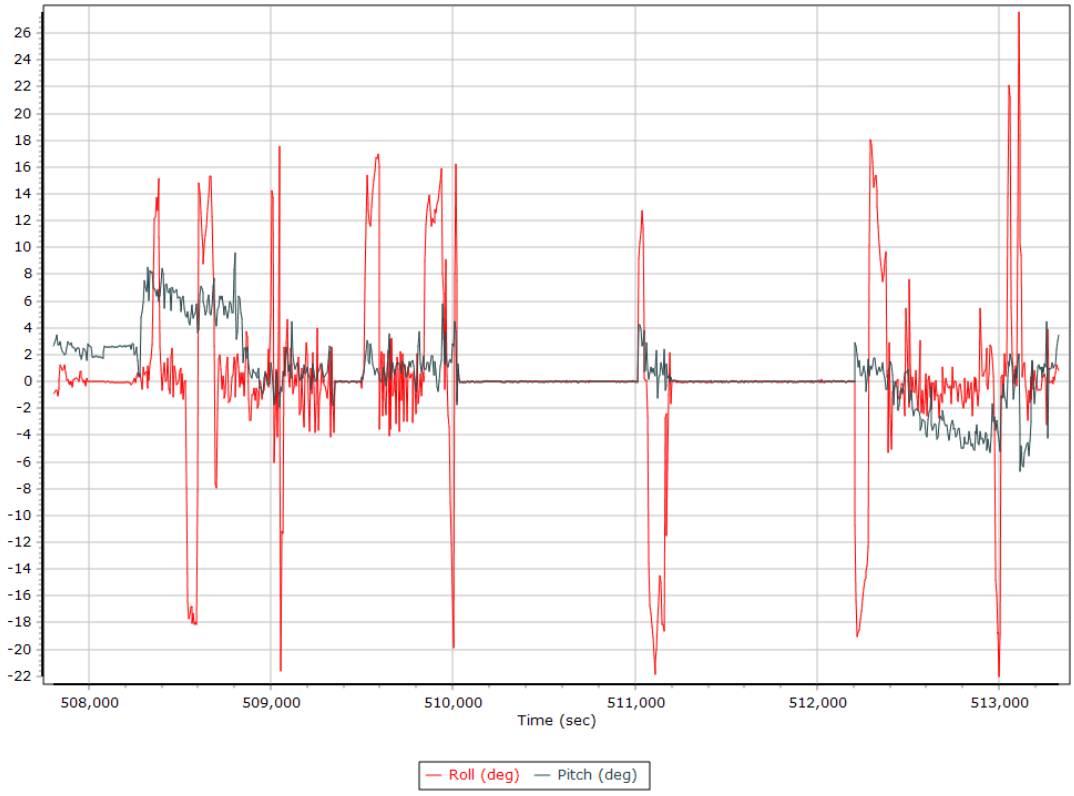

Heading

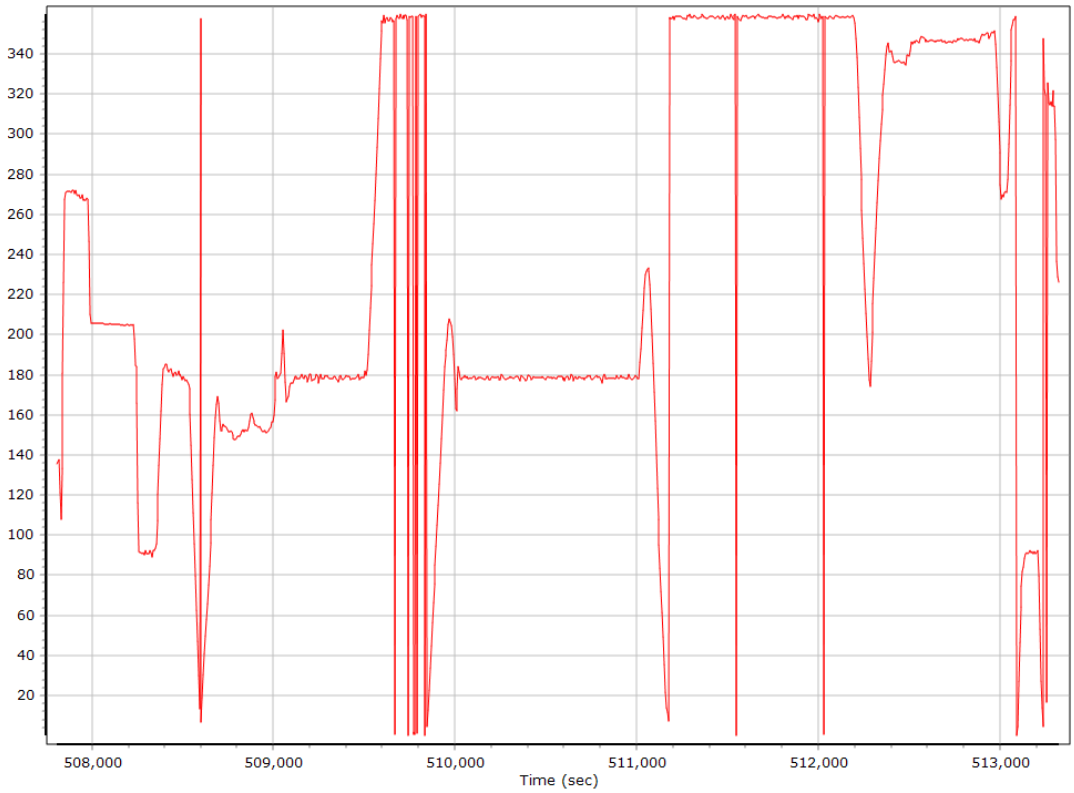

North/East Velocity

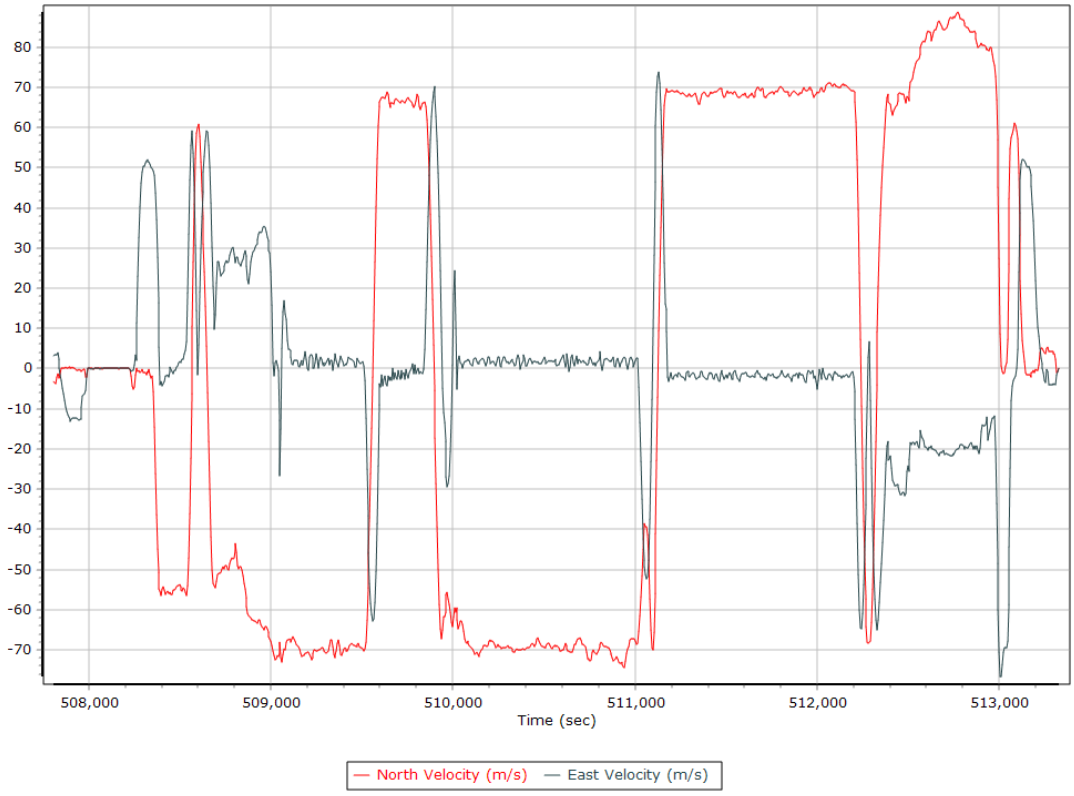

Down Velocity

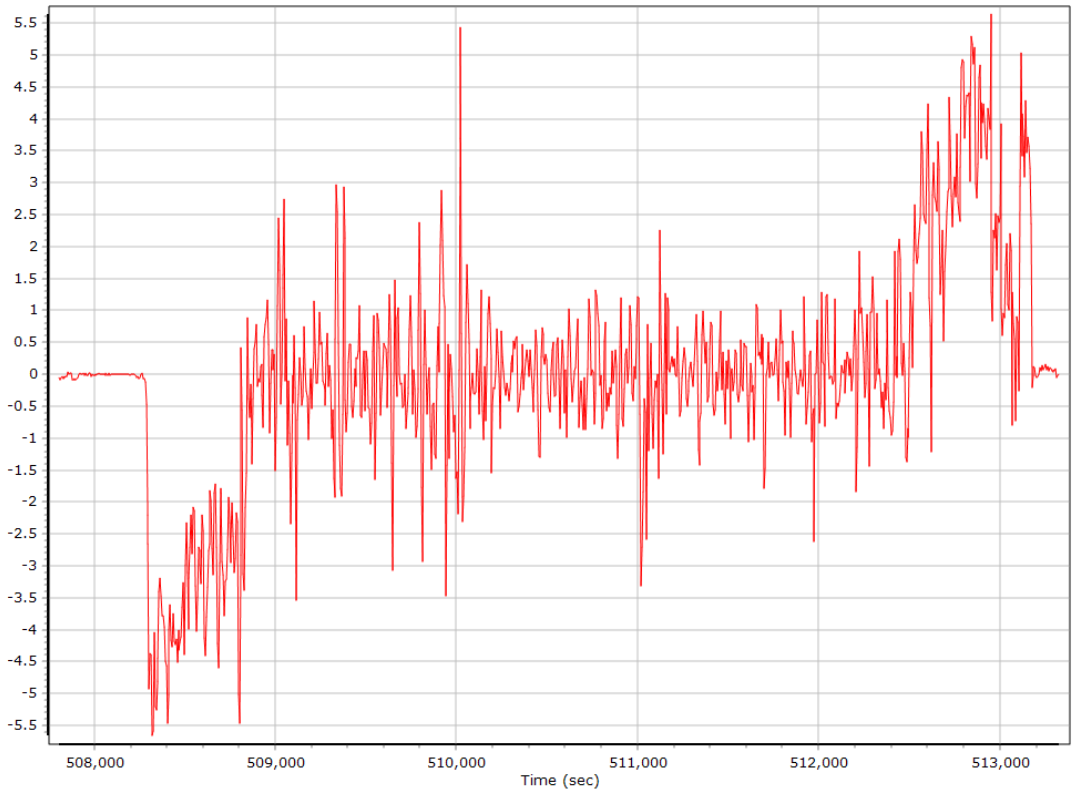

Total Speed

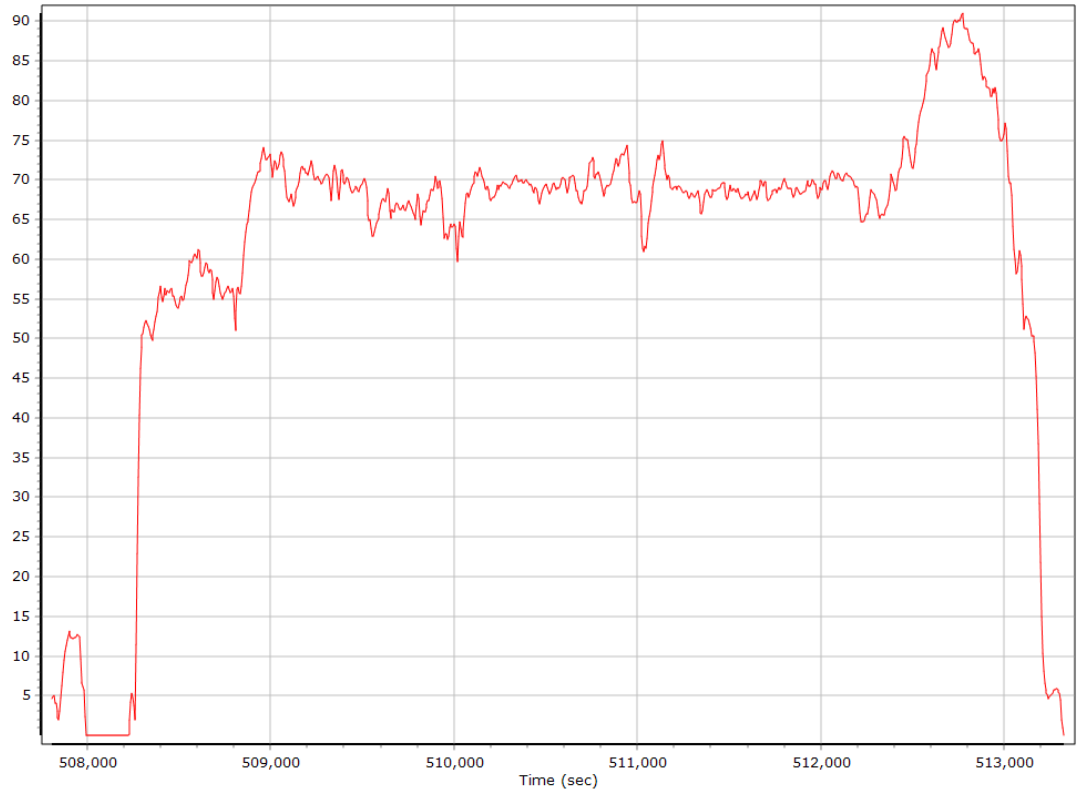

Ground Speed

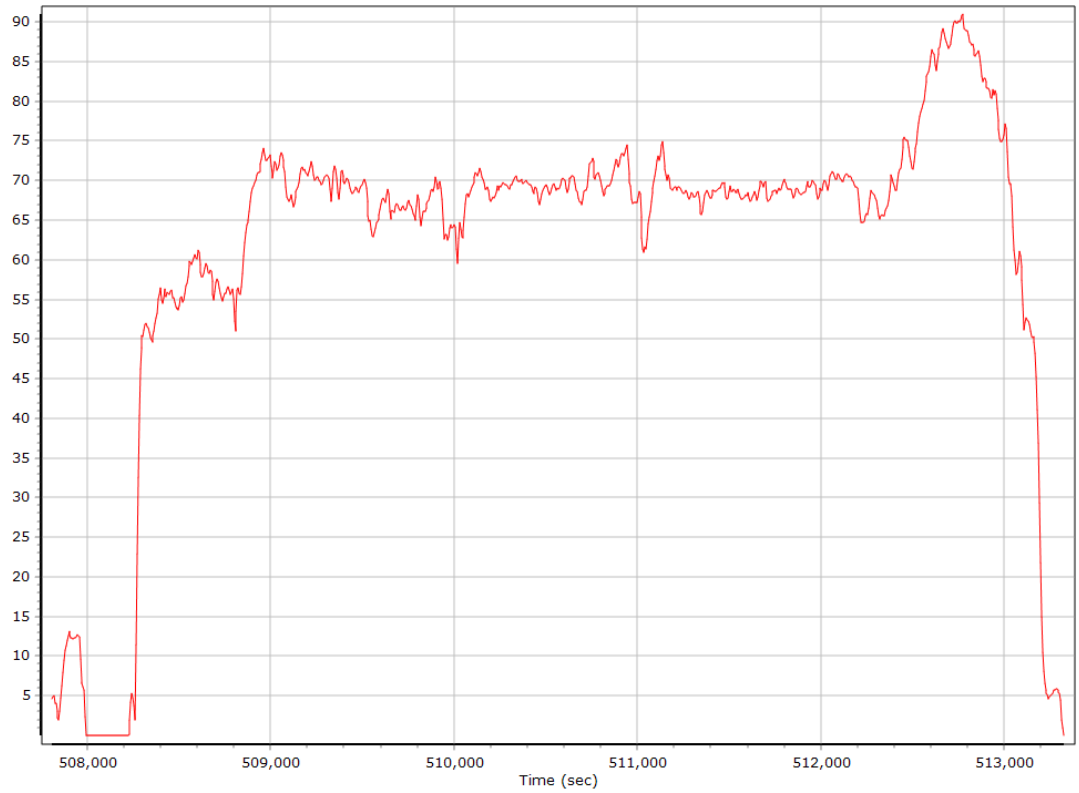

Body Acceleration

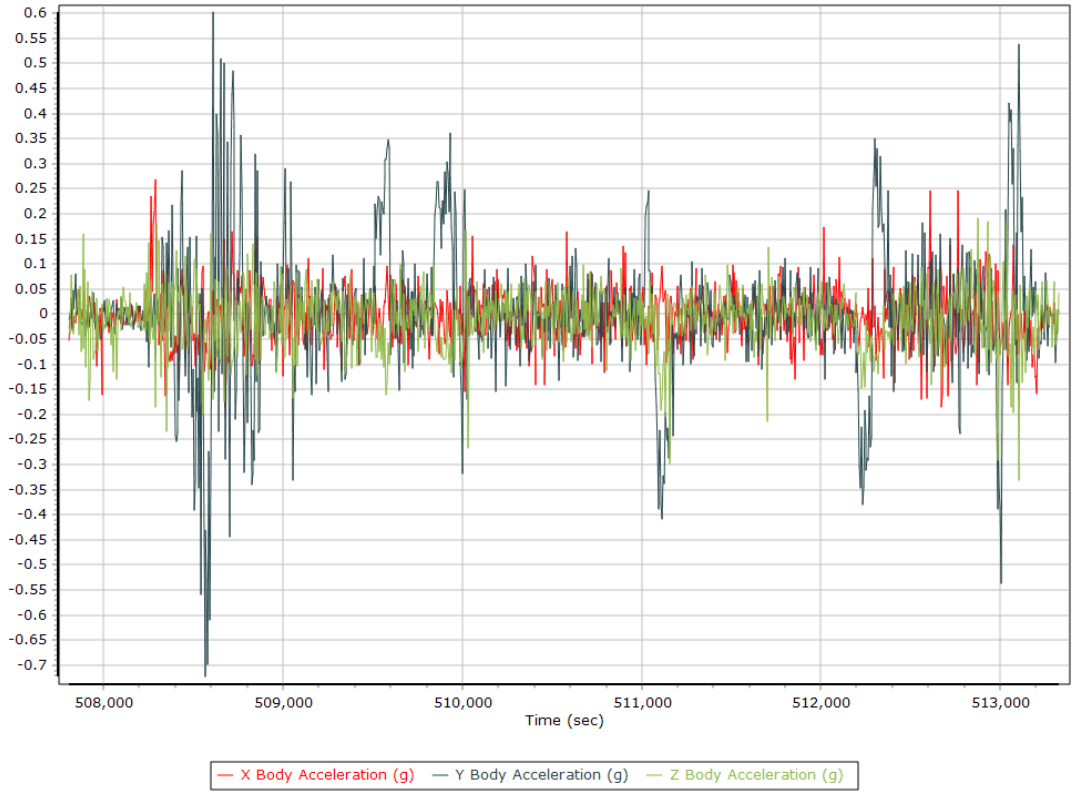

Total Body Acceleration

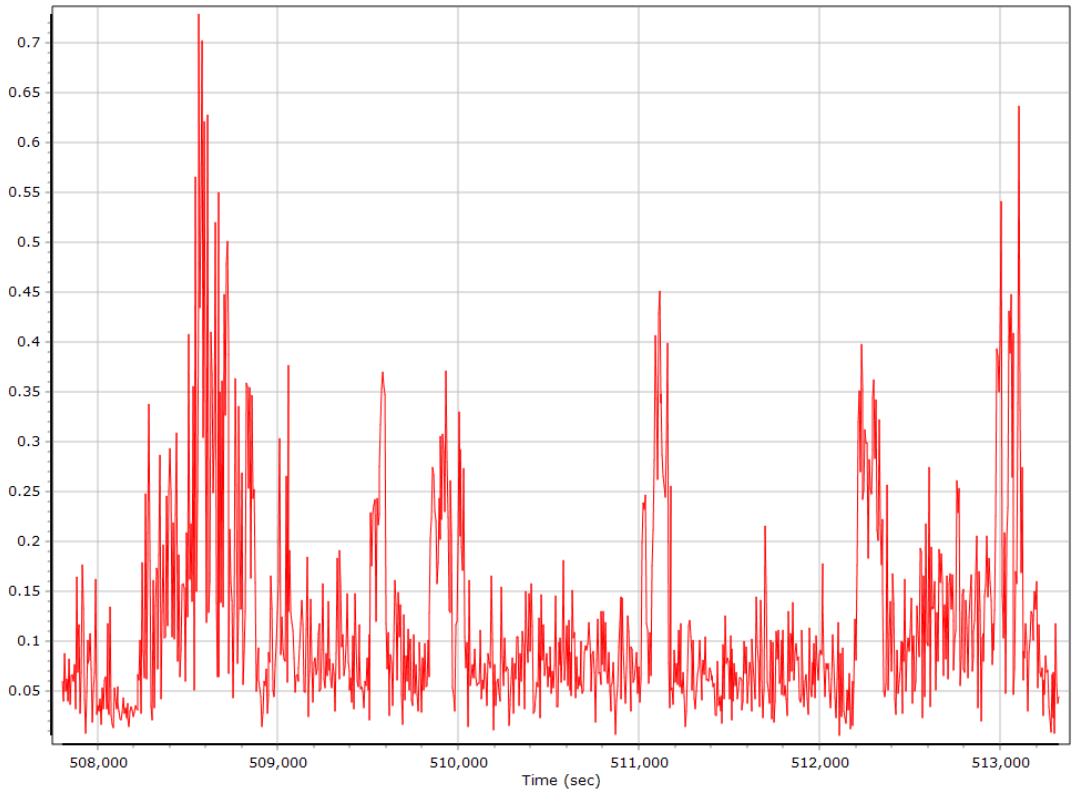

Body Angular Rate

Forward Processed Trajectory Information

Top View

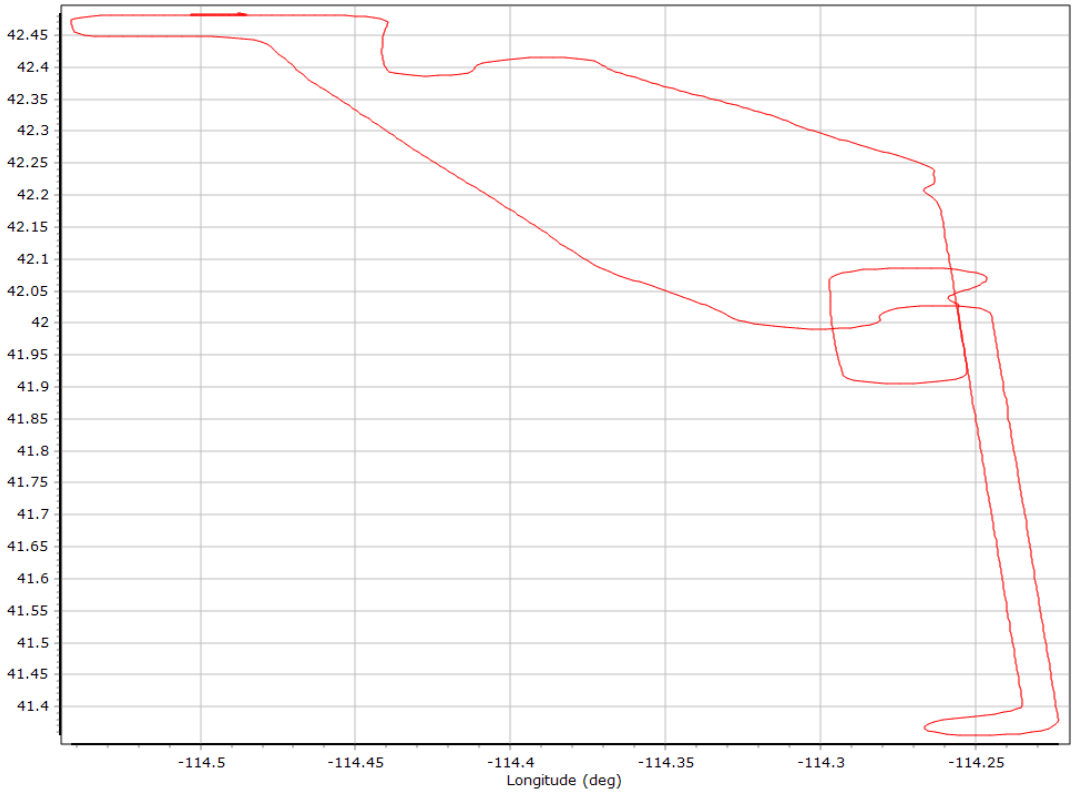

Altitude

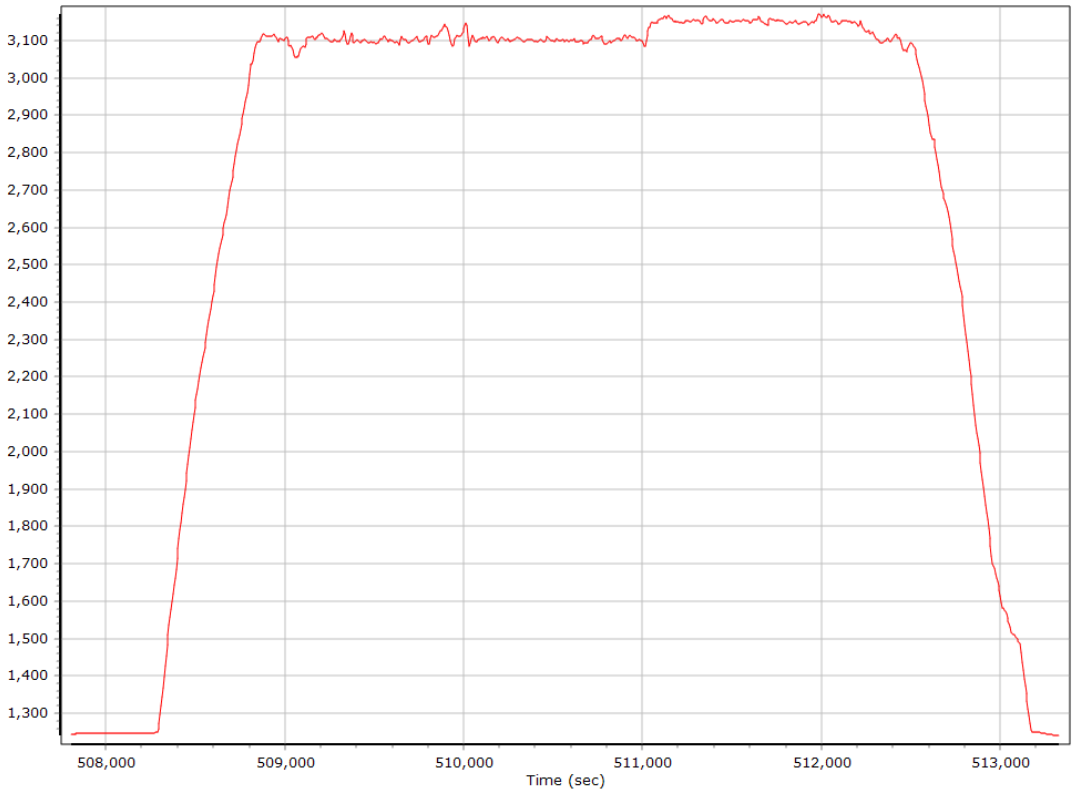

Roll/Pitch

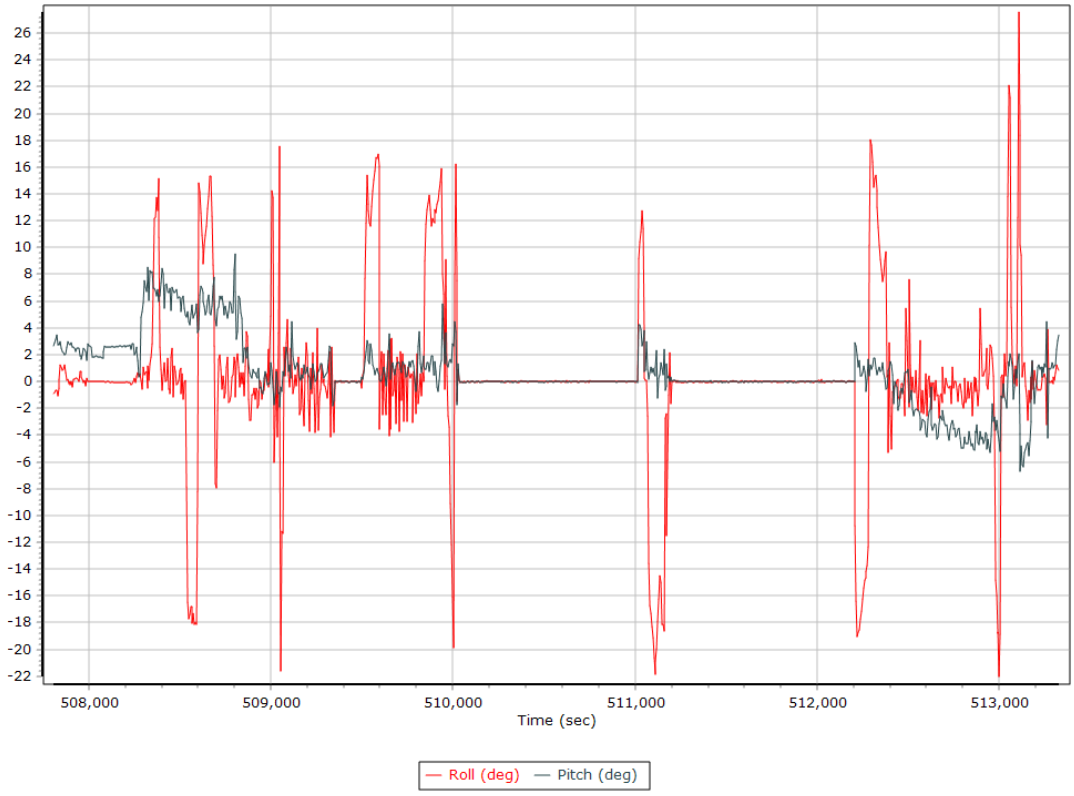

Heading

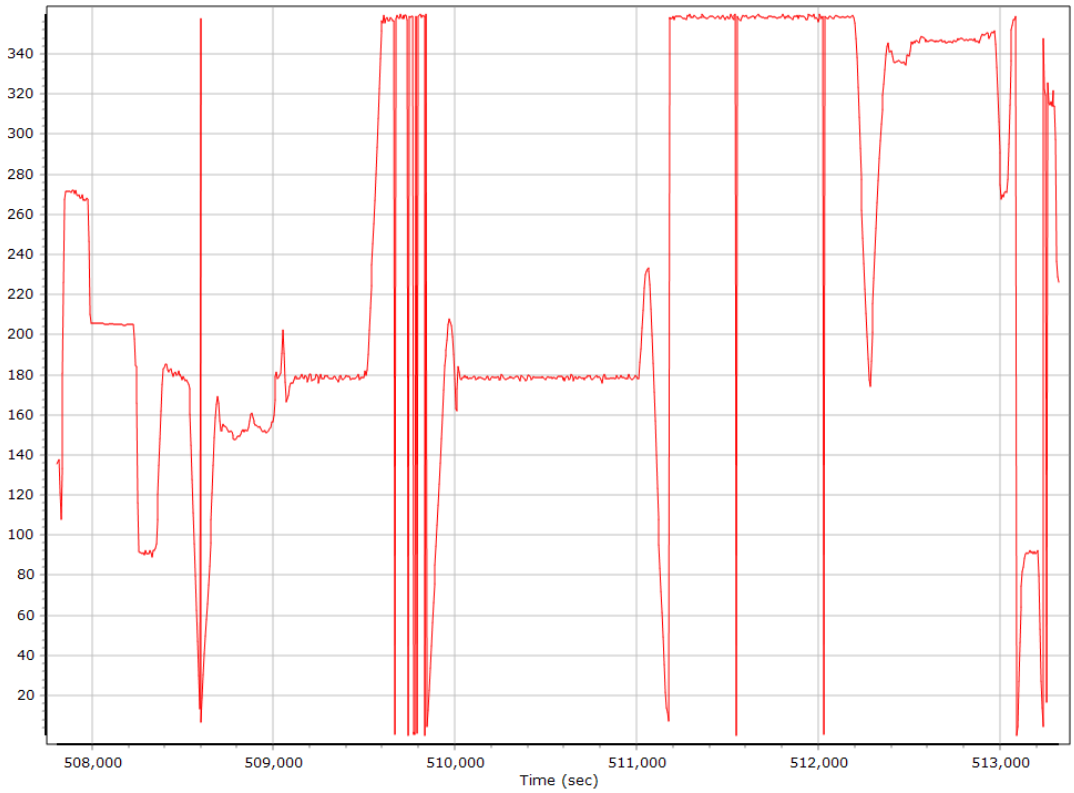

North/East Velocity

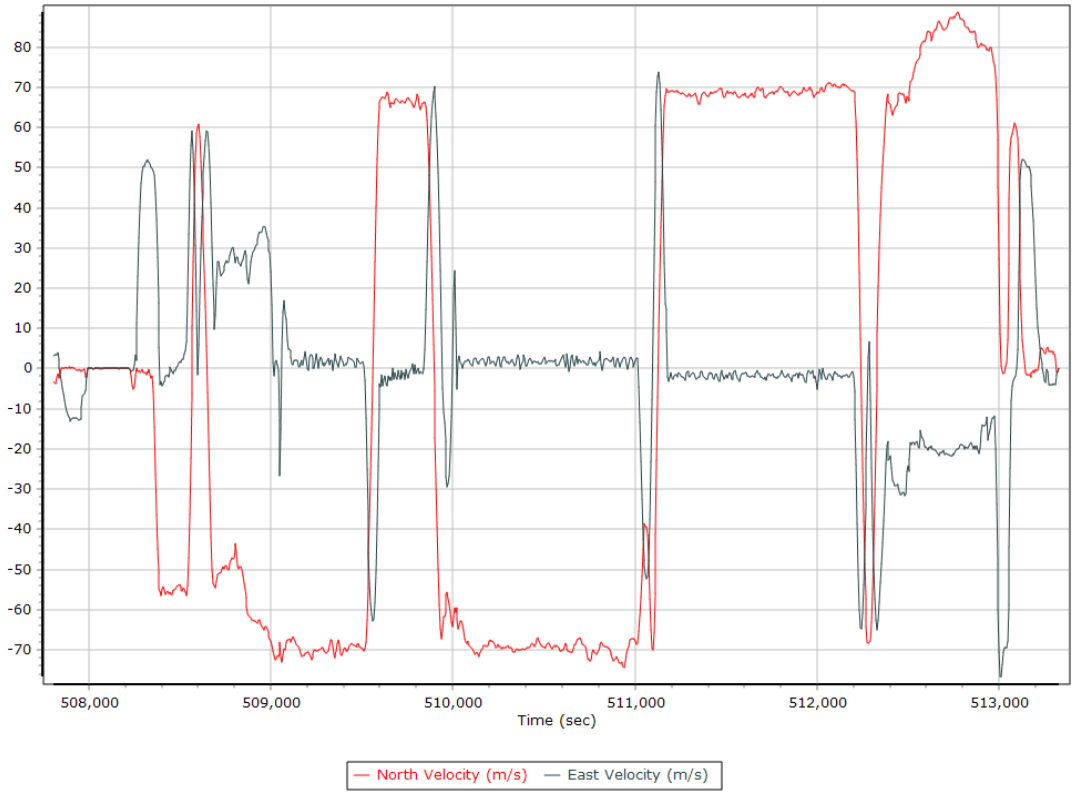

Down Velocity

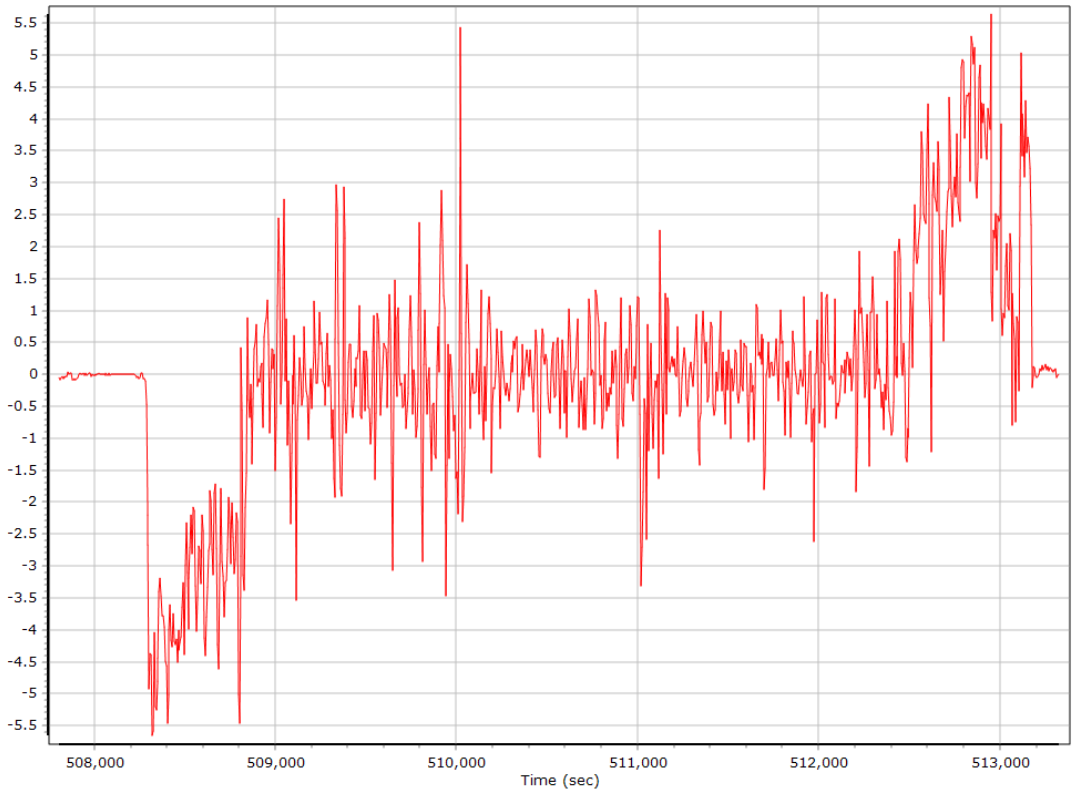

Total Speed

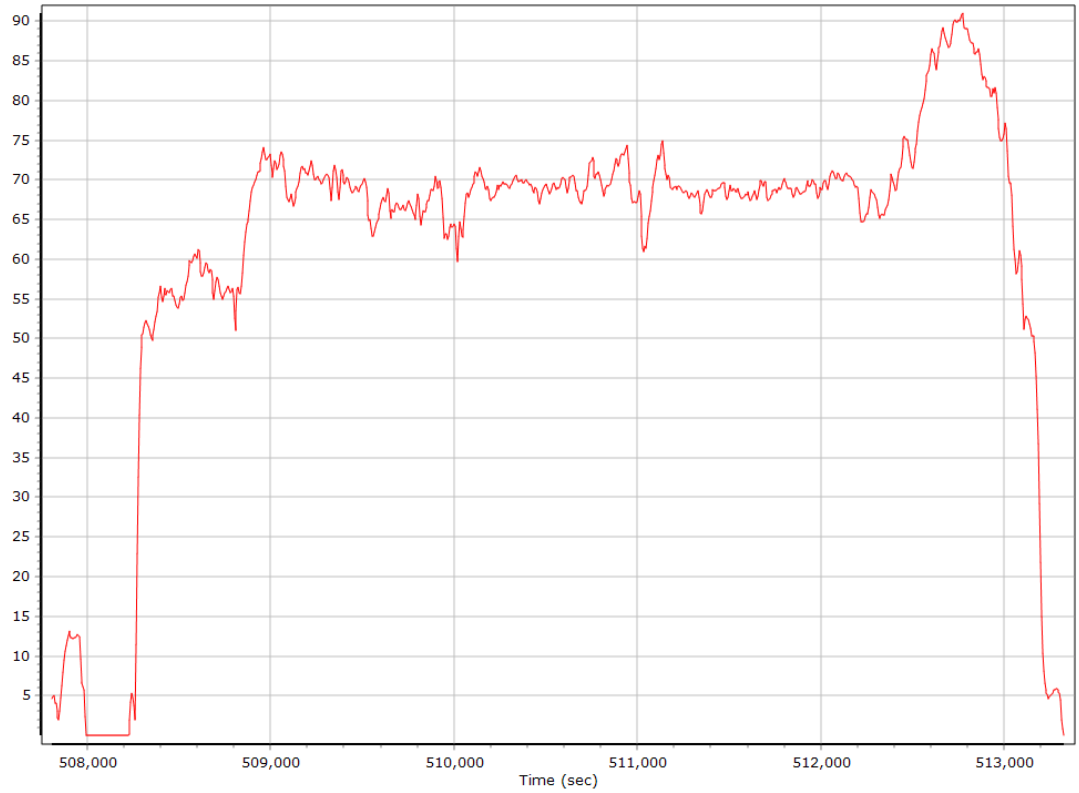

Ground Speed

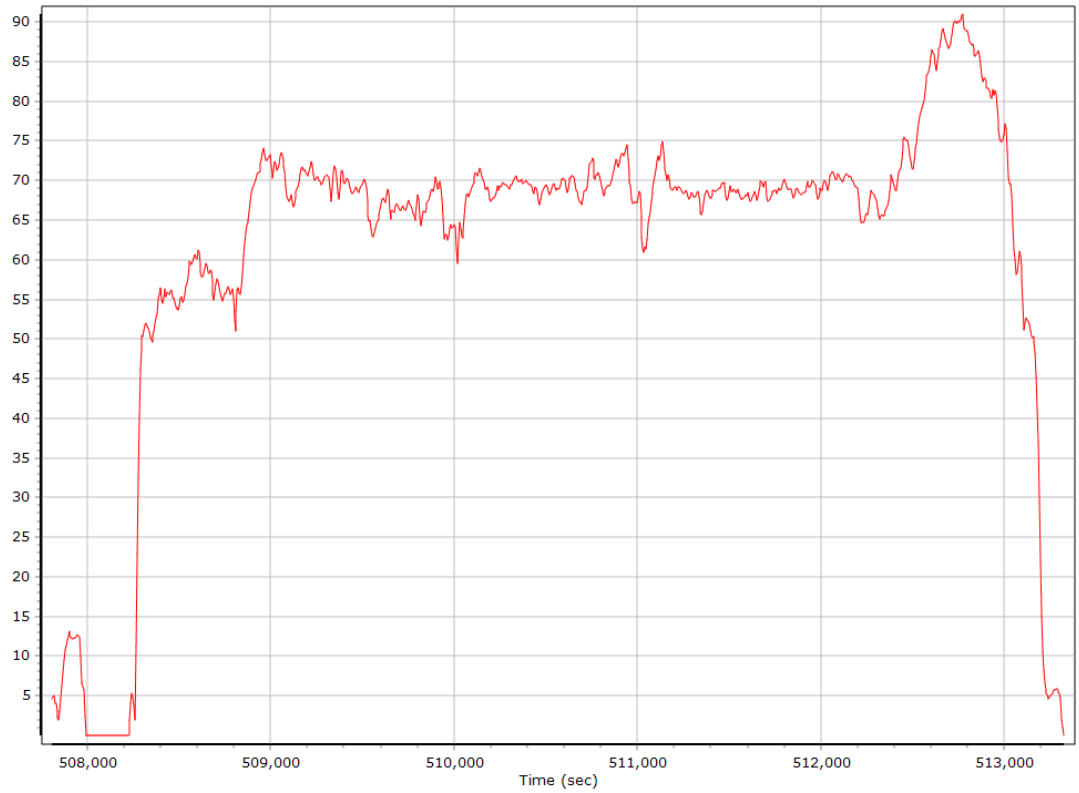

Body Acceleration

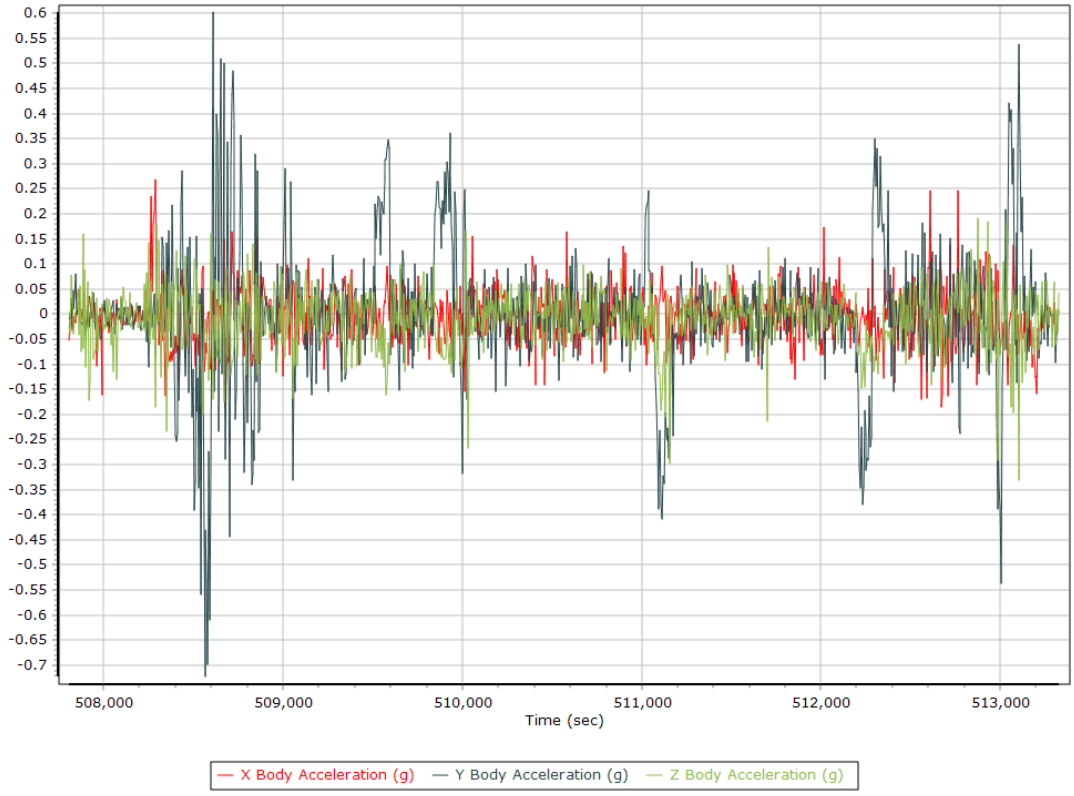

Total Body Acceleration

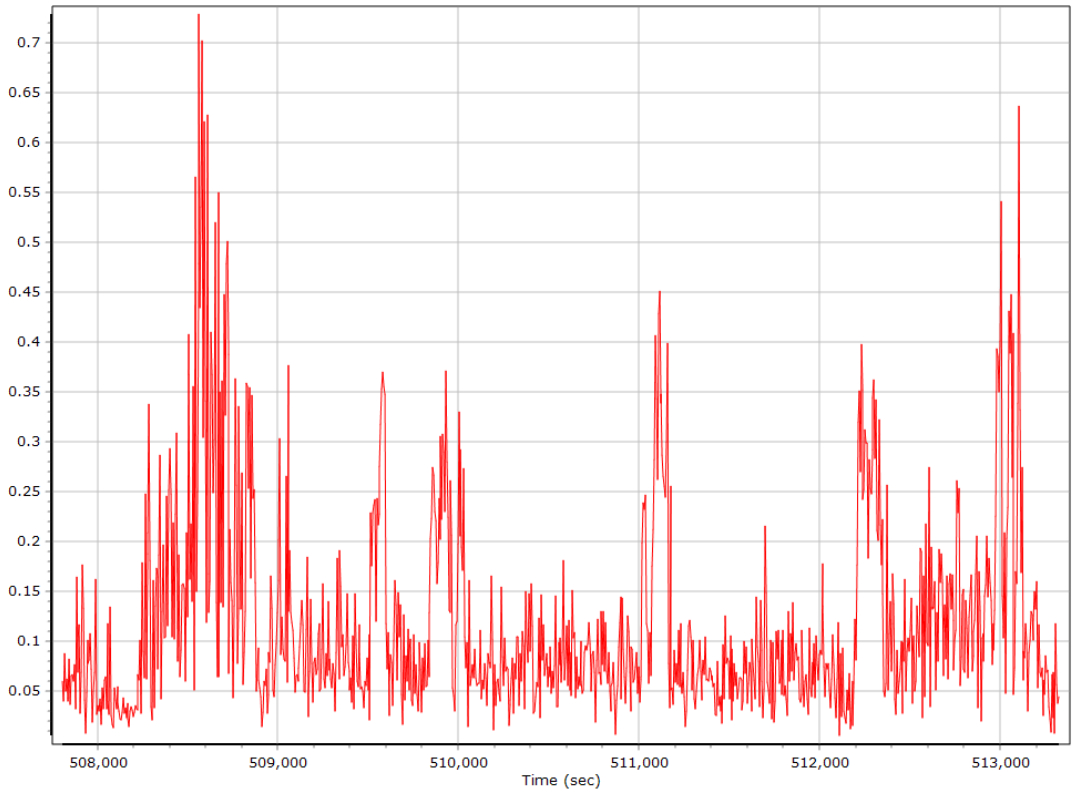

Body Angular Rate

GNSS QC

GNSS QC Statistics

Statistics	Min	Max	Mean
Baseline length (km)	0.00	0.00	
Number of GPS SV	7	9	9
Number of GLONASS SV	0	8	6
Number of QZSS SV	0	0	0
Number of BEIDOU SV	0	0	0
Number of GALILEO SV	5	7	6
Total number of SV	14	23	21
PDOP	0.99	1.48	1.11
QC Solution Gaps	0.00	0.00	
Solution Type	Fixed	Float	No solution
Epoch (sec)	5968.00	0.00	0.00
Percentage	100.00	0.00	0.00

Num SVs in solution

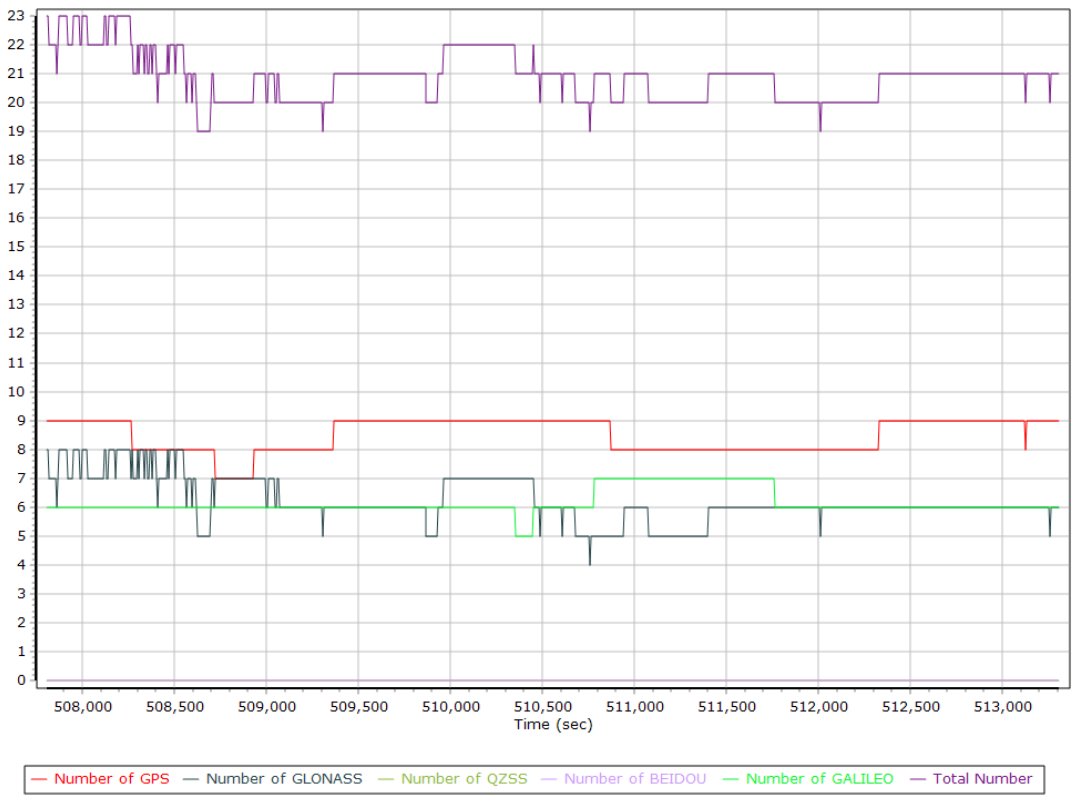

Forward/Reverse Separation

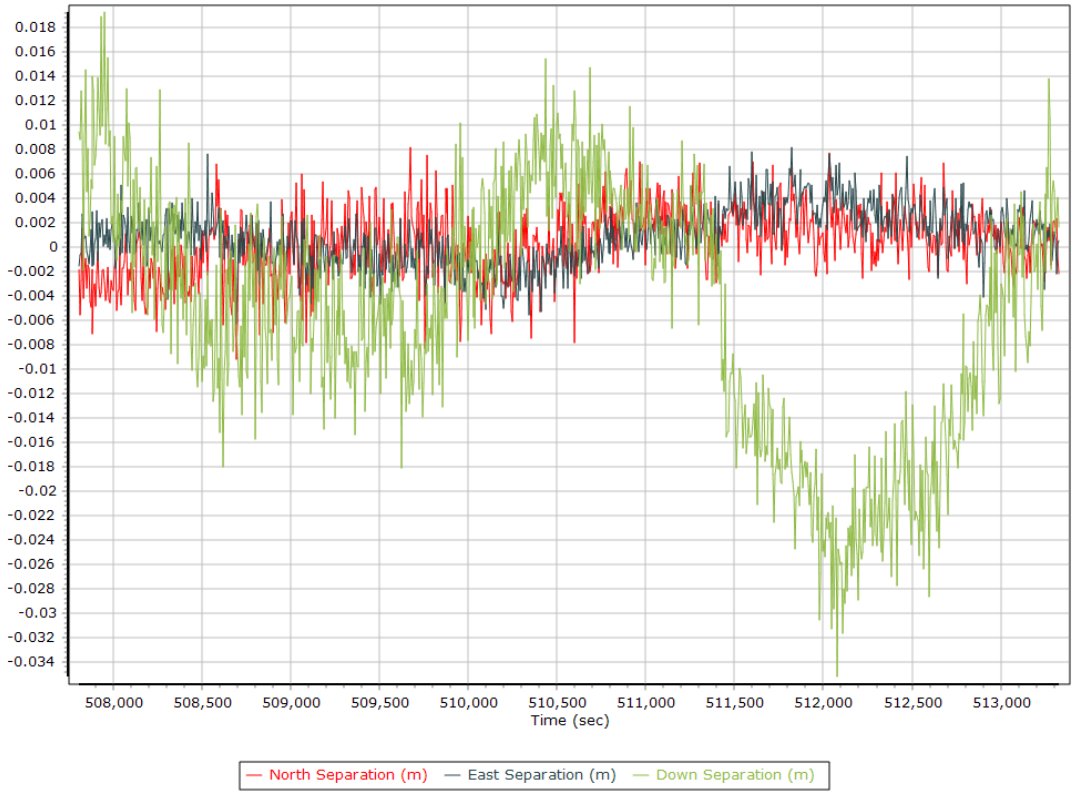

PDOP

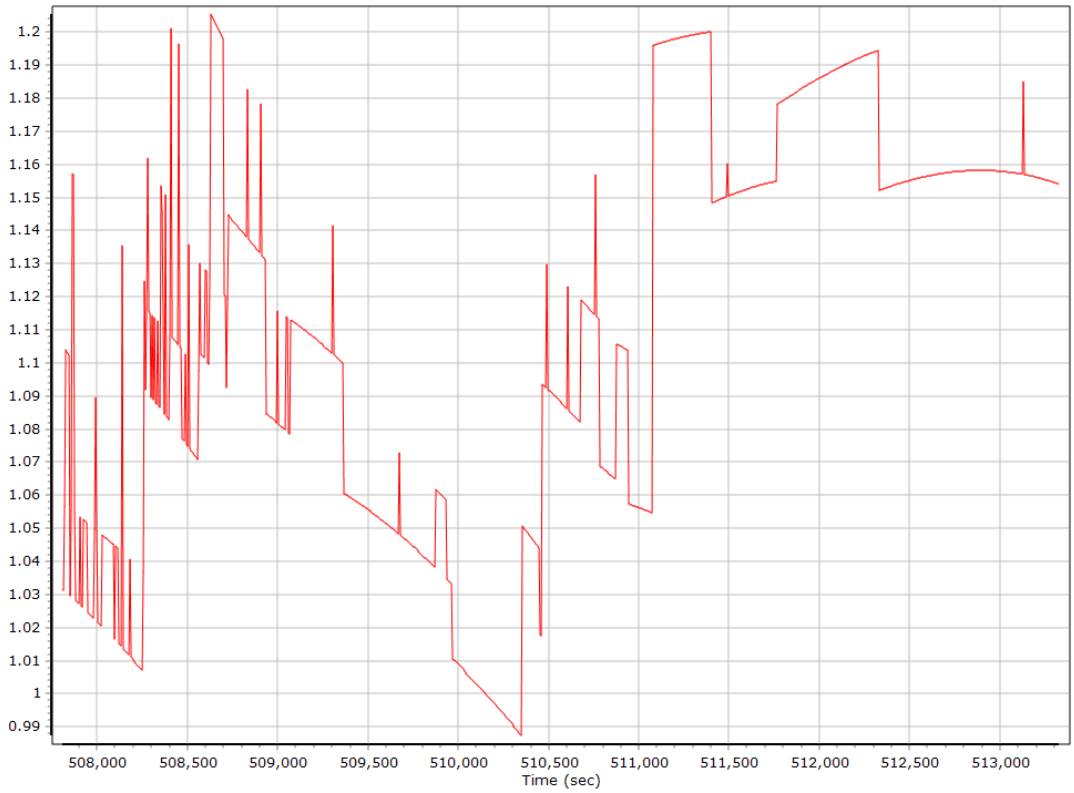

Estimated Position Accuracy

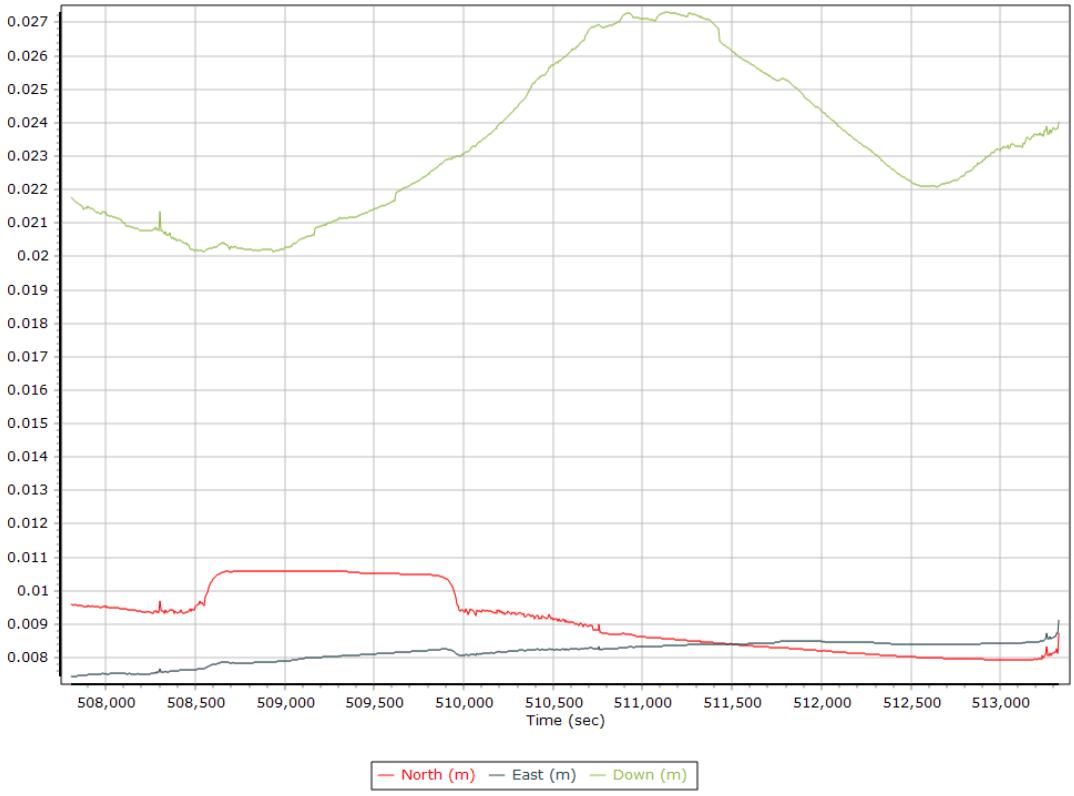

GPS Residuals

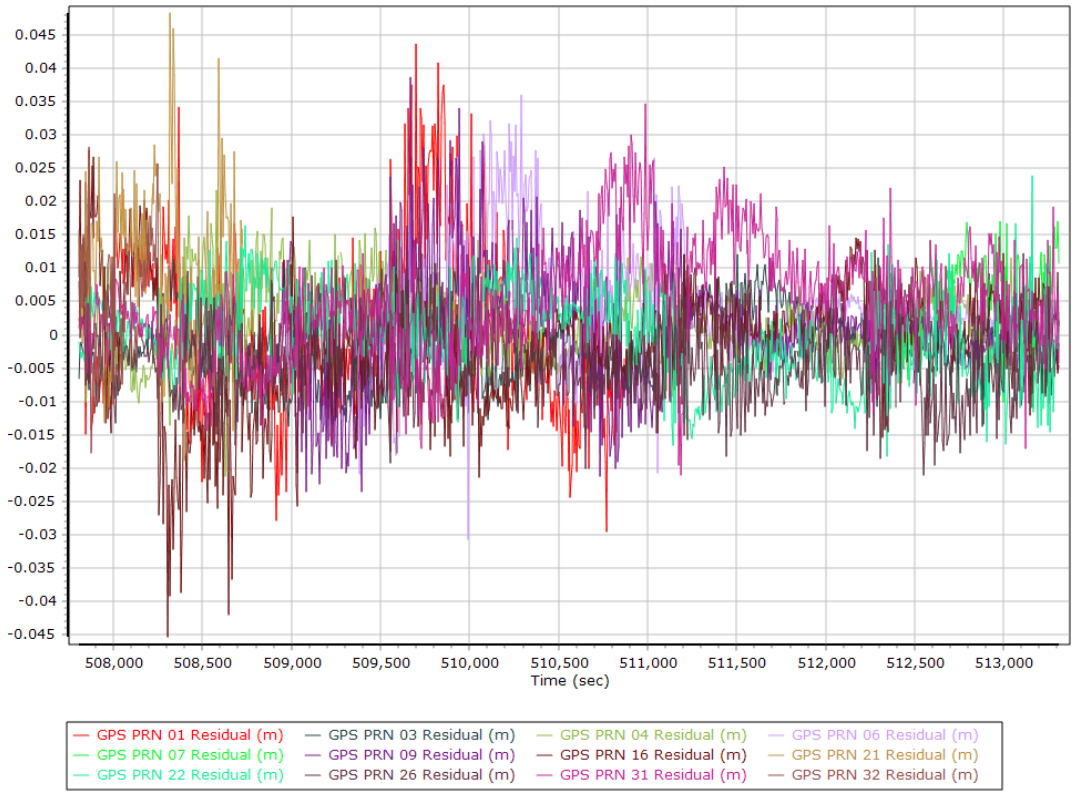

GLONASS Residuals

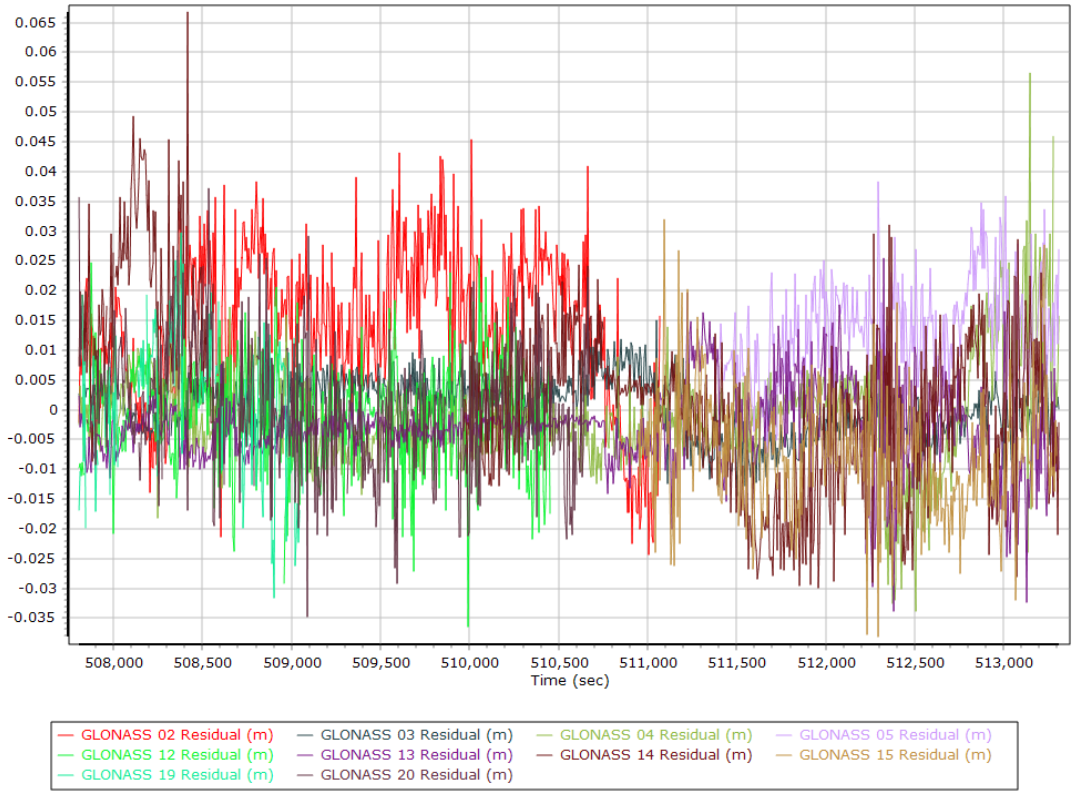

GALILEO Residuals

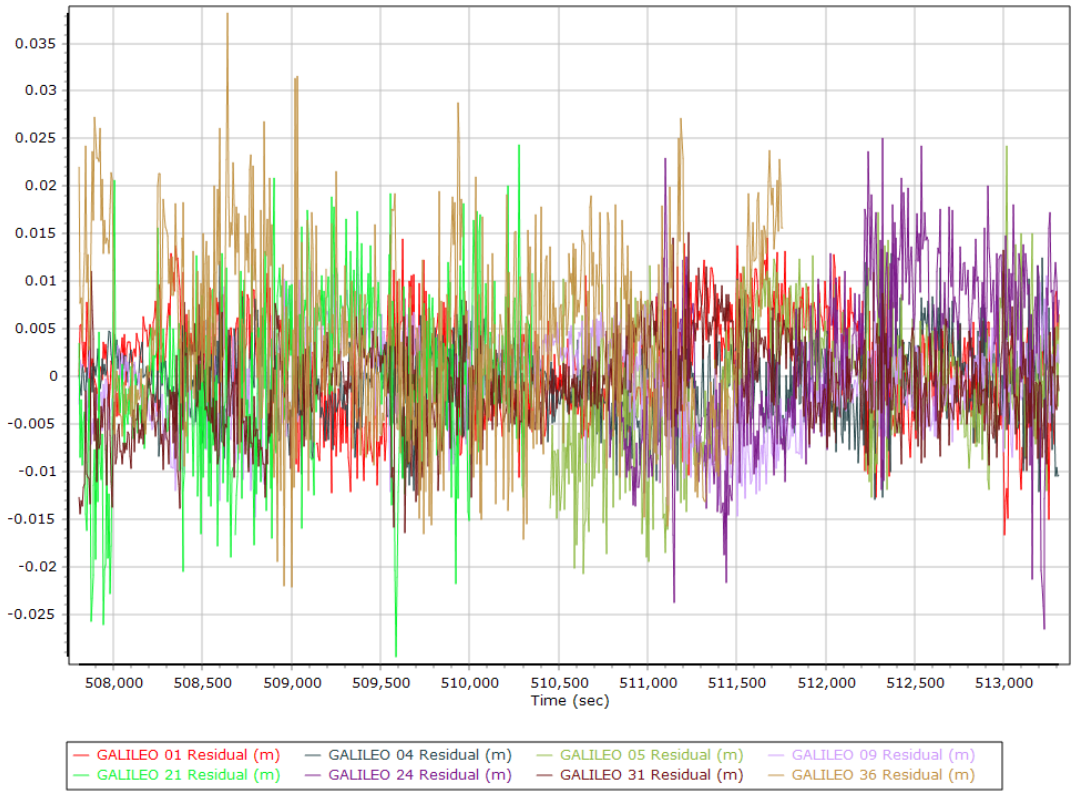

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion PP-RTX		
Stabilized mount	True		
Processing start time	507319.000 (11/20/2020 20:55:19)		
Processing end time	513328.000 (11/20/2020 22:35:28)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	0.287	0.144	-1.269
Gimbal to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm (m)

X Reference-Primary GNSS Lever Arm (m)

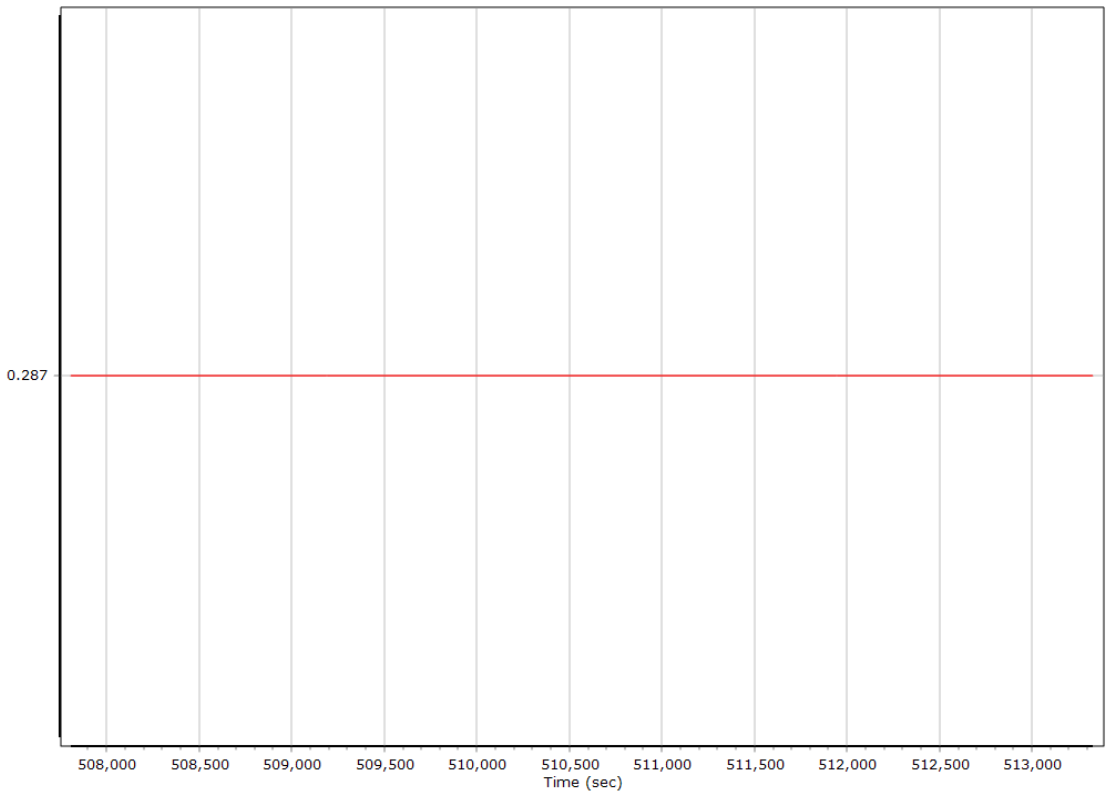

Y Reference-Primary GNSS Lever Arm (m)

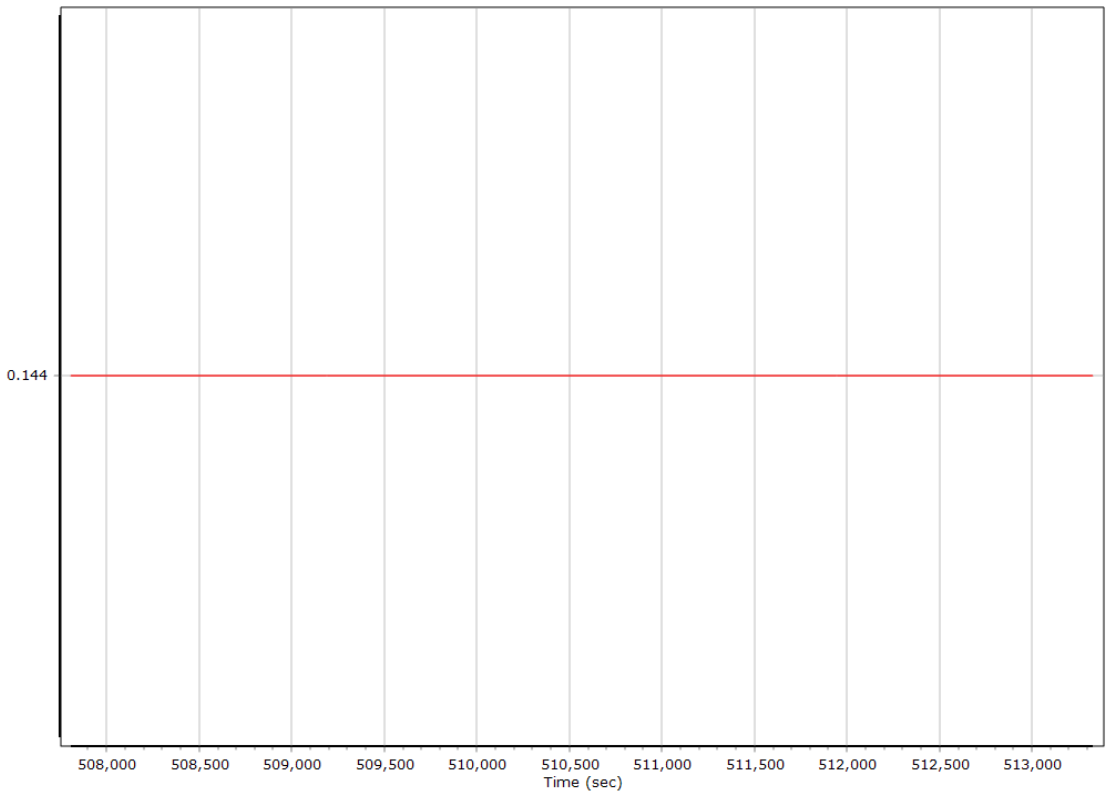

Z Reference-Primary GNSS Lever Arm (m)

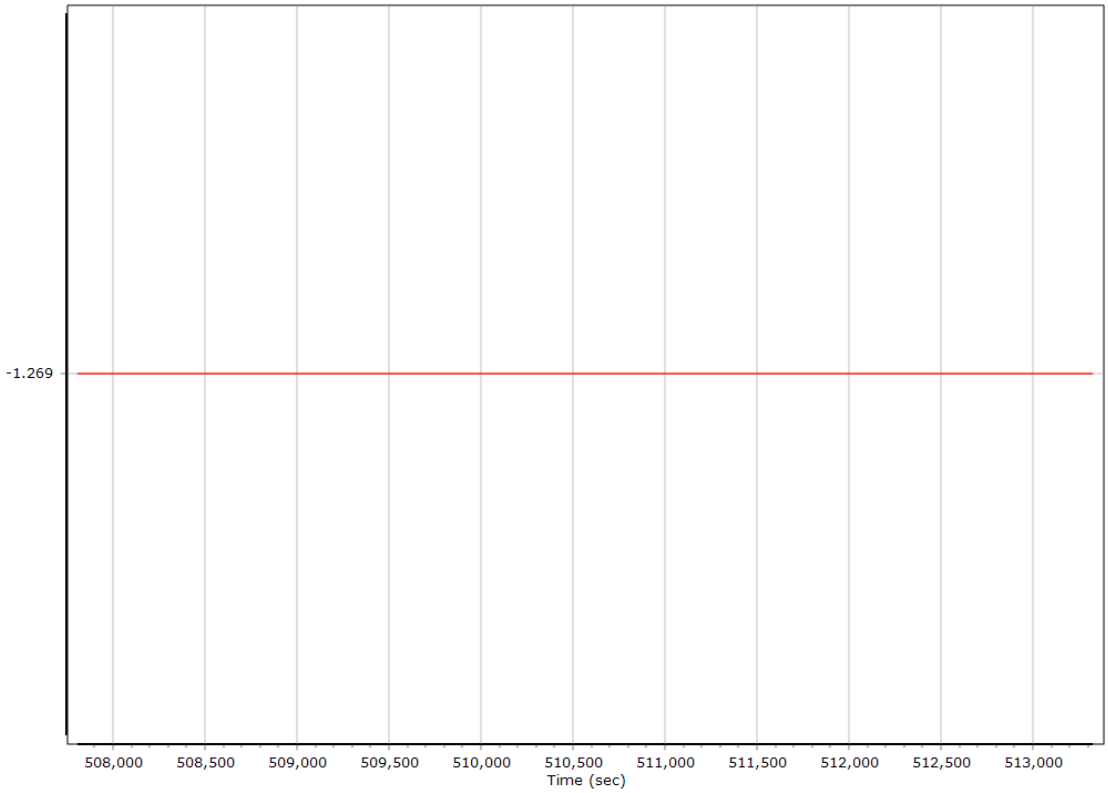

Reference-Primary GNSS Lever Arm Figure of Merit

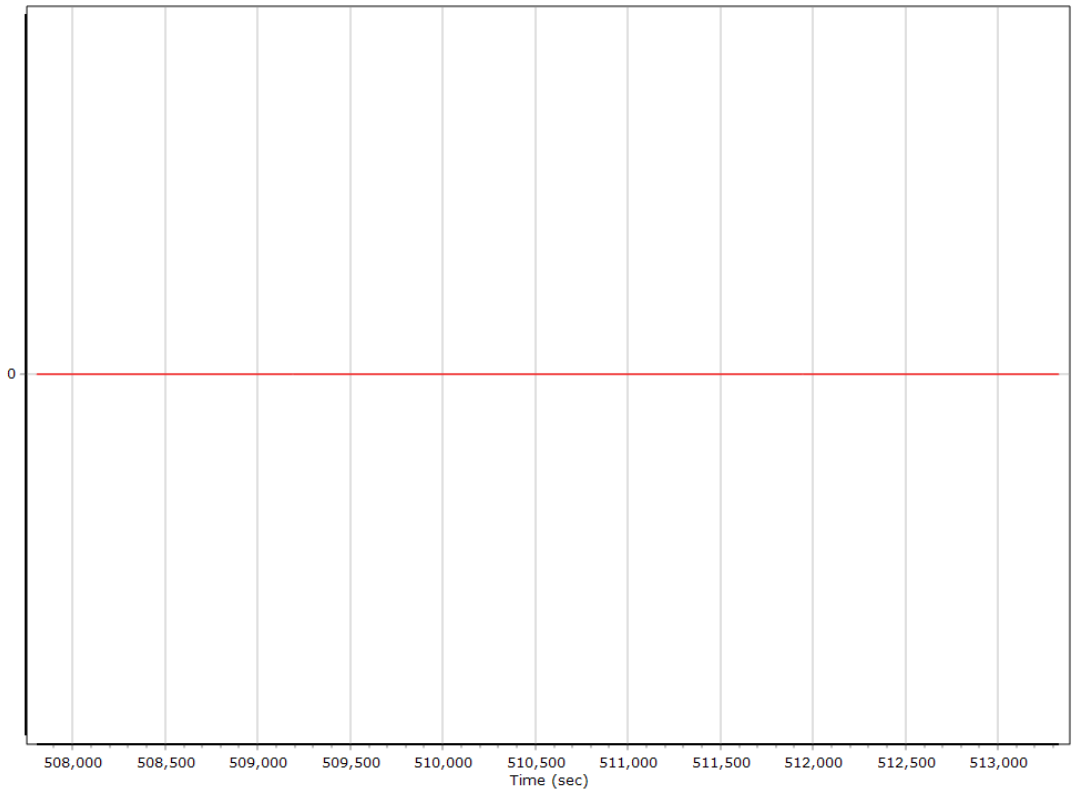

IN-Fusion QC

Forward Processed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

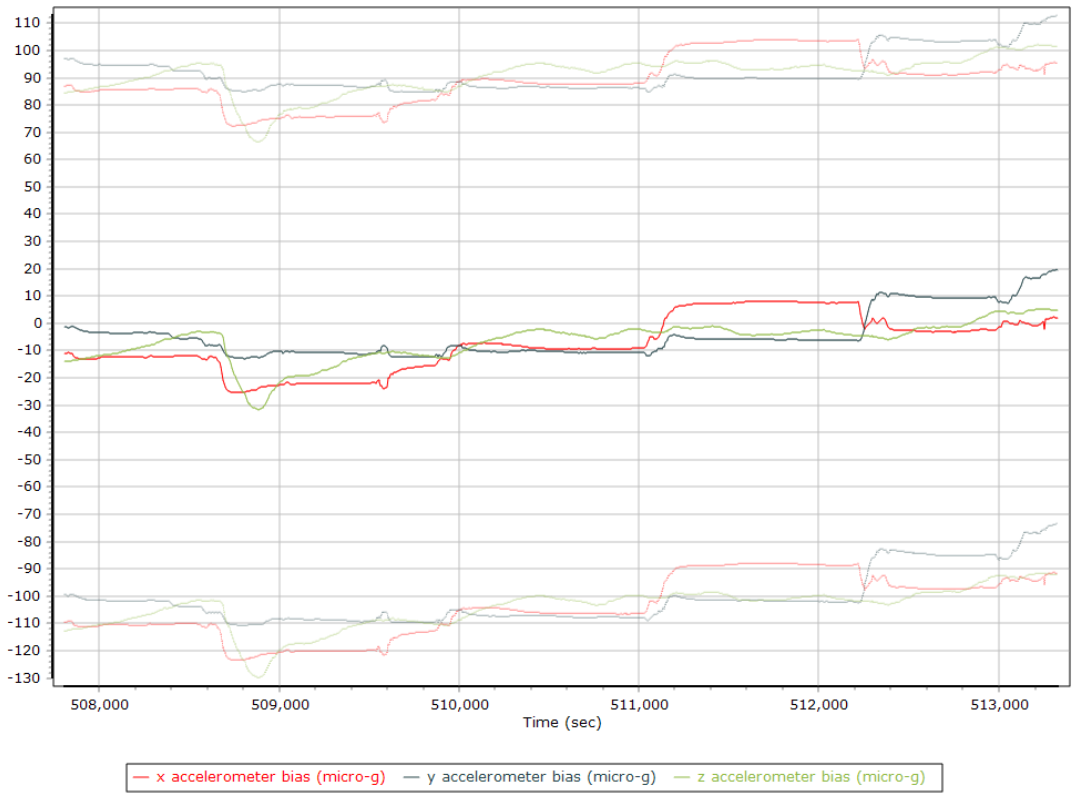

X Accelerometer Bias (micro-g)

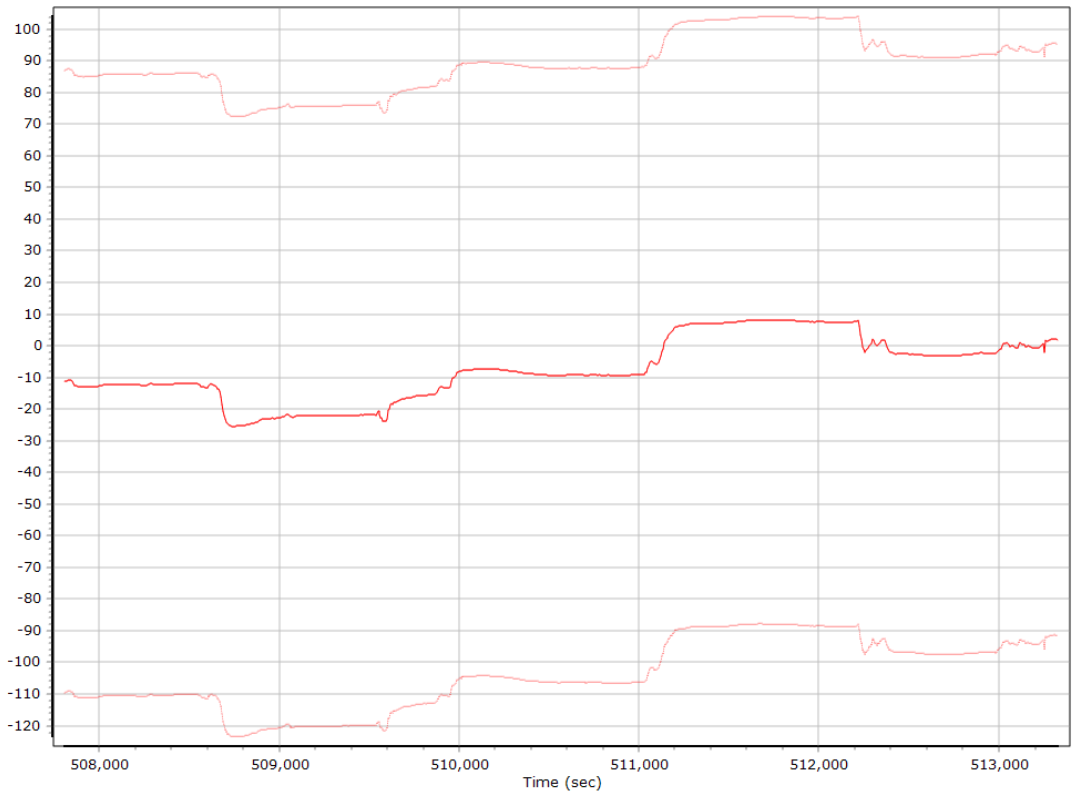

Y Accelerometer Bias (micro-g)

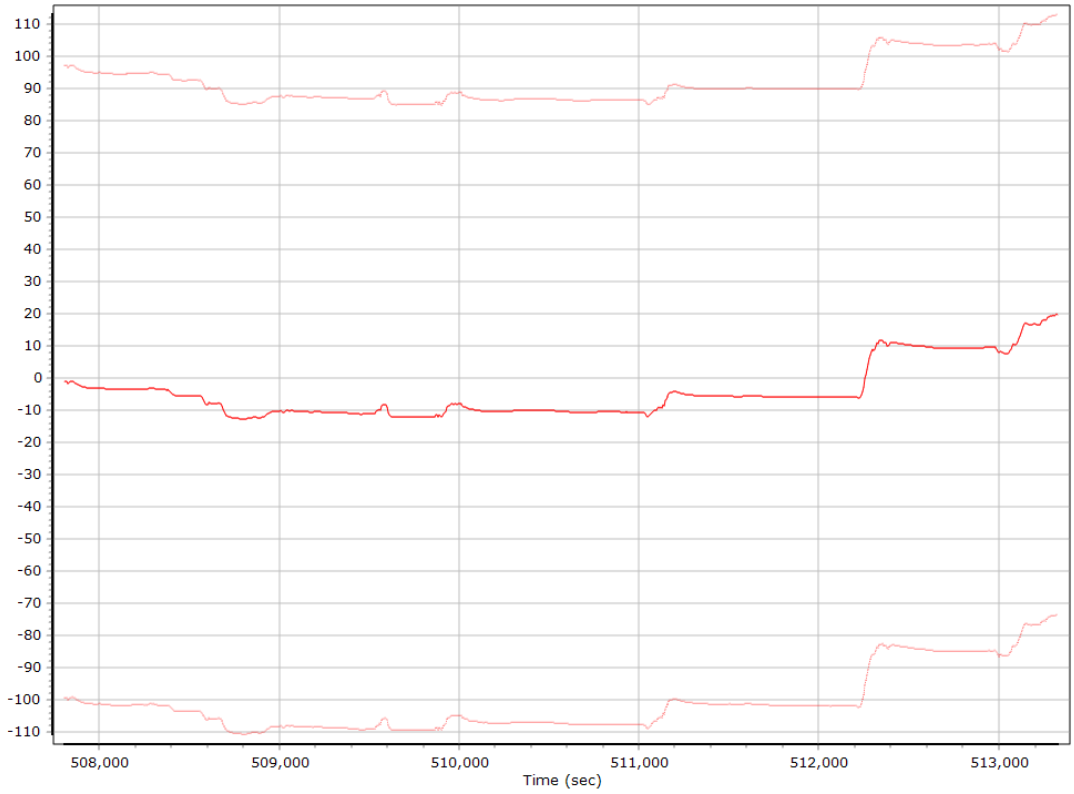

Z Accelerometer Bias (micro-g)

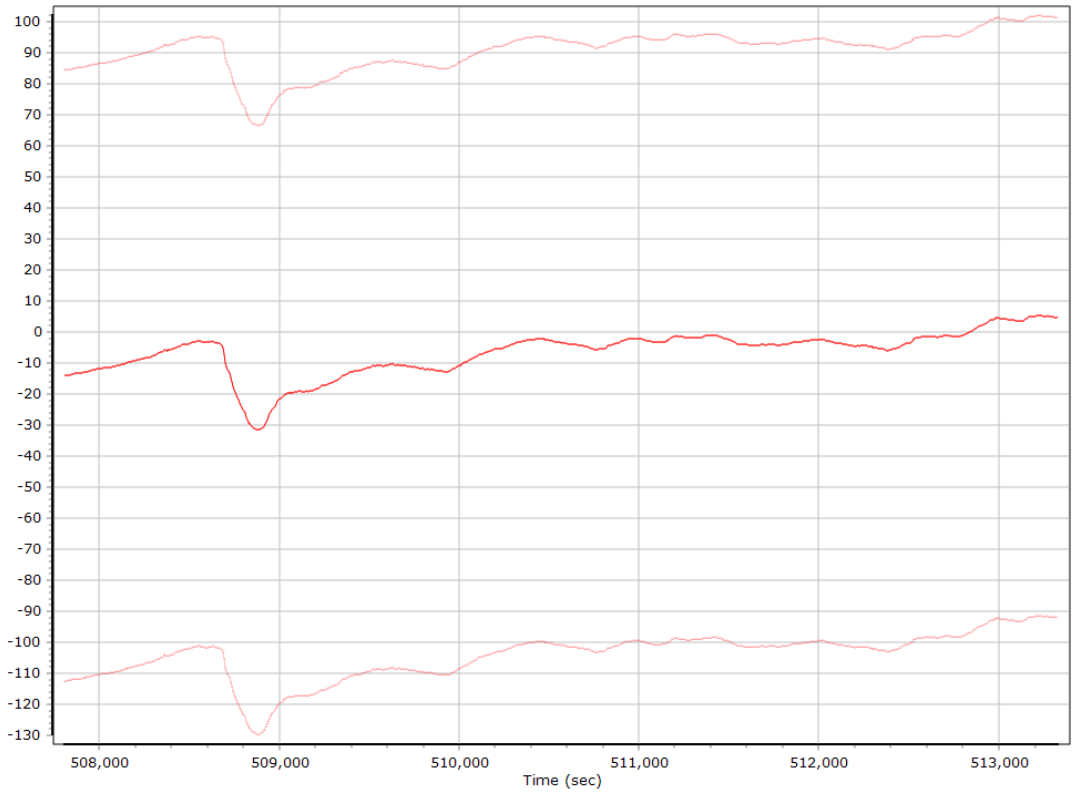

Accelerometer Scale Error (ppm)

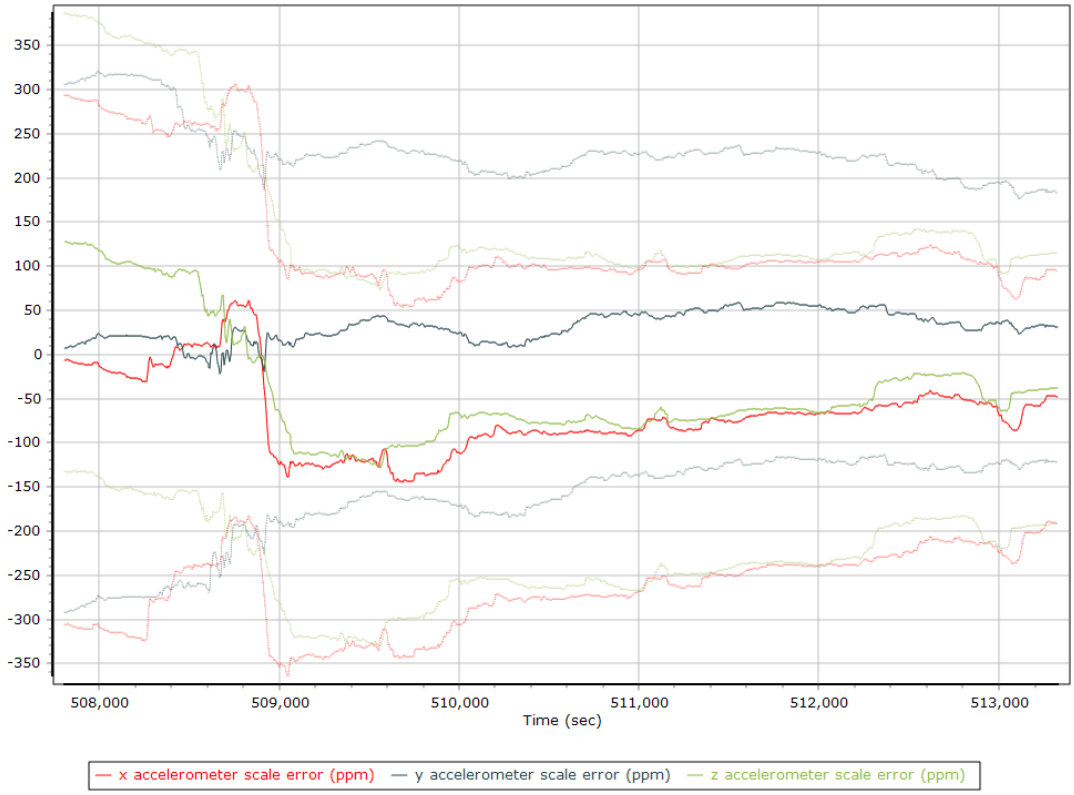

X Accelerometer Scale Error (ppm)

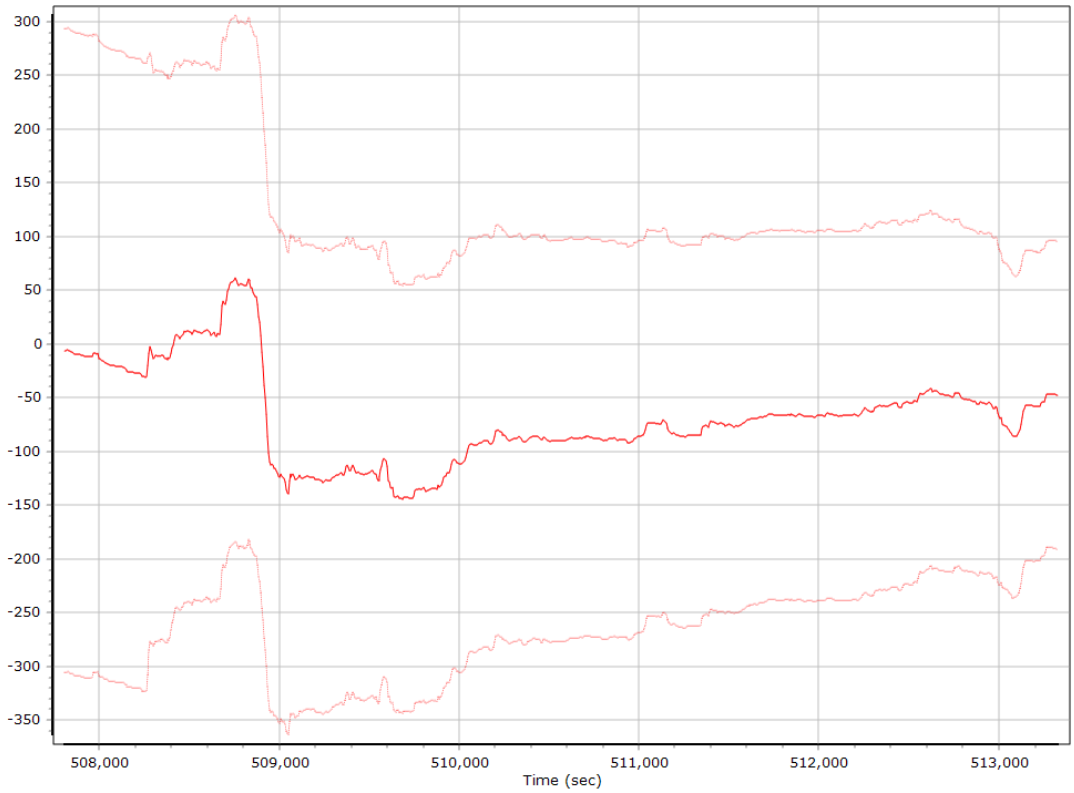

Y Accelerometer Scale Error (ppm)

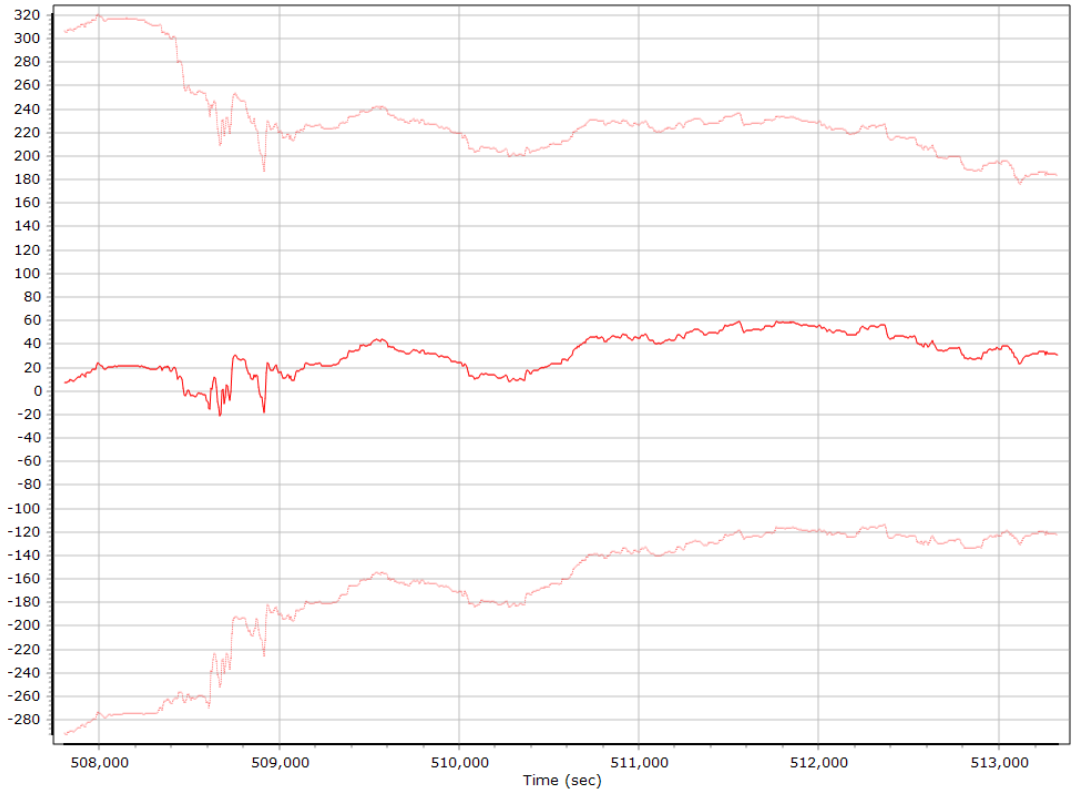

Z Accelerometer Scale Error (ppm)

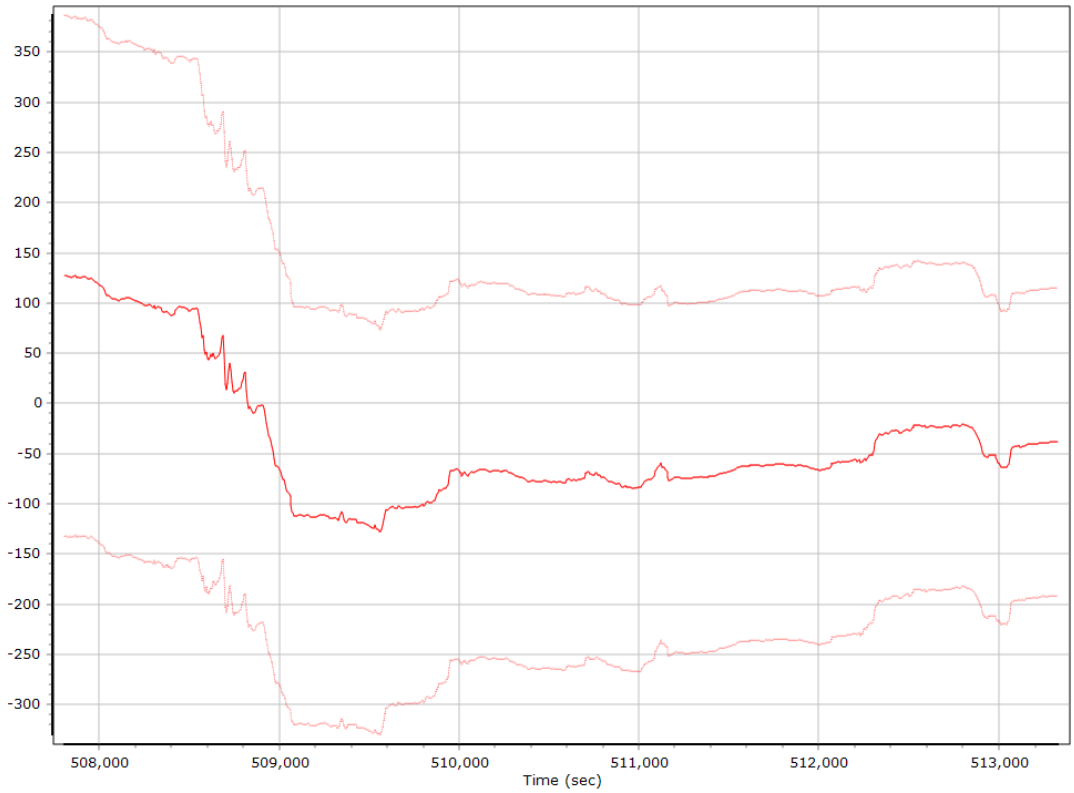

Gyro Bias (deg/h)

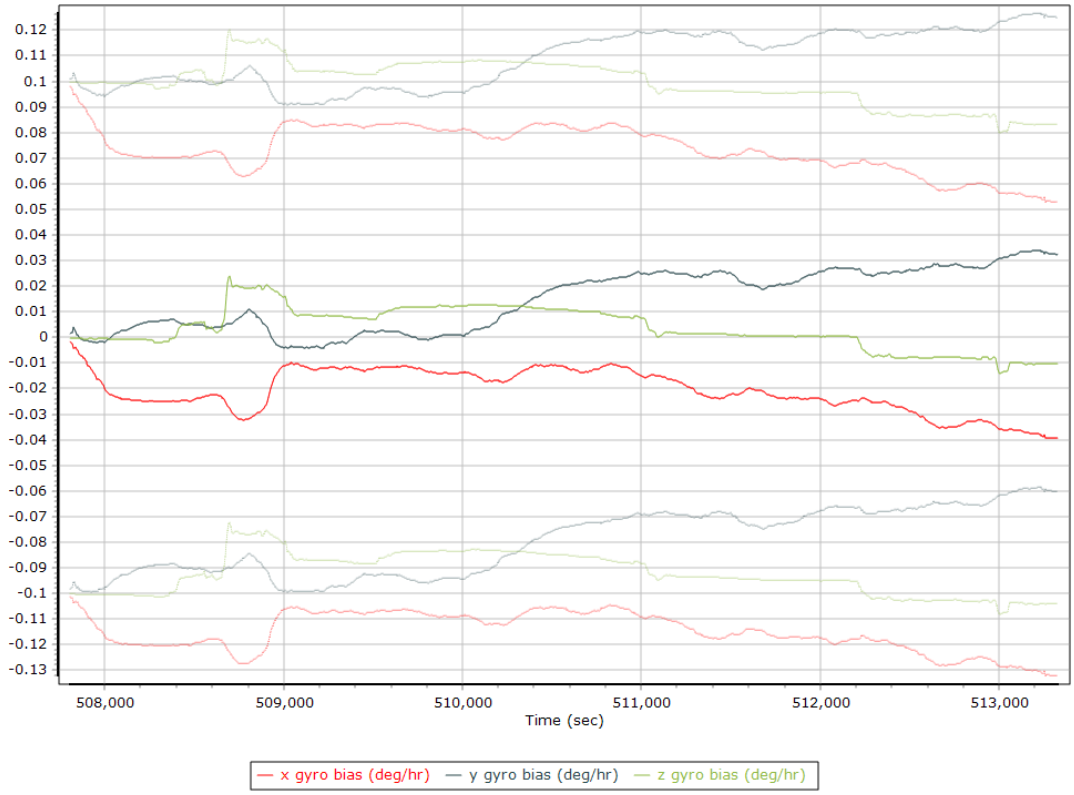

X Gyro Bias (deg/h)

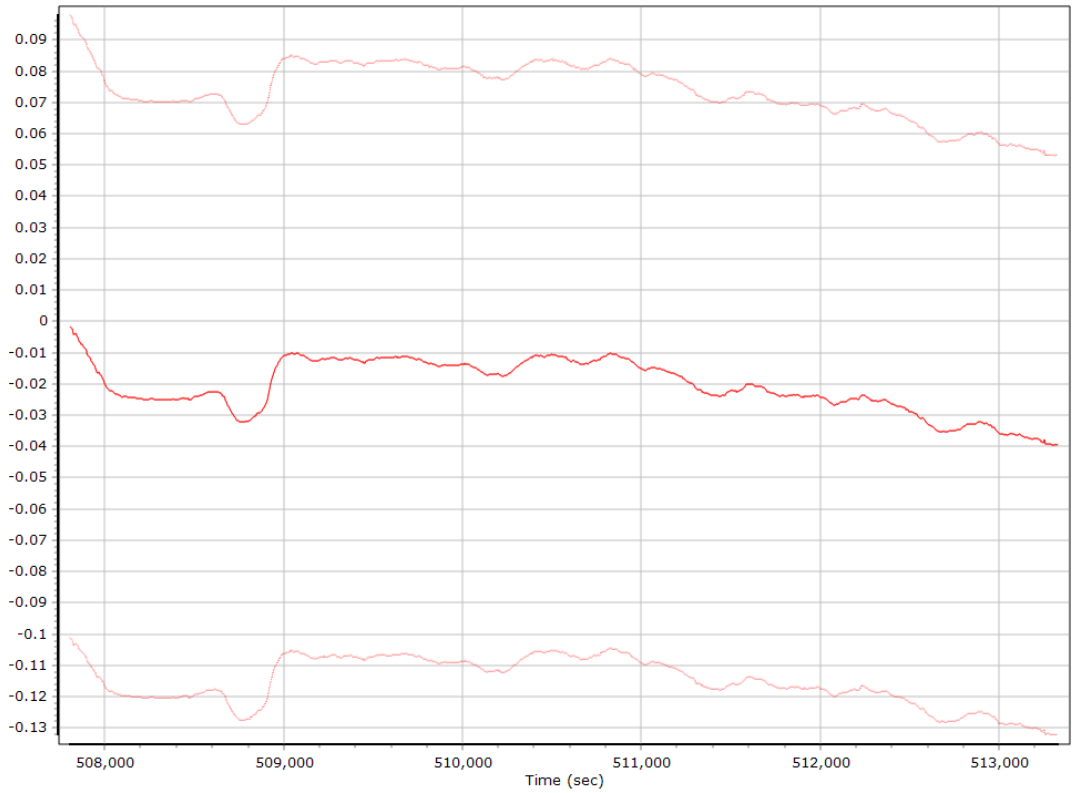

Y Gyro Bias (deg/h)

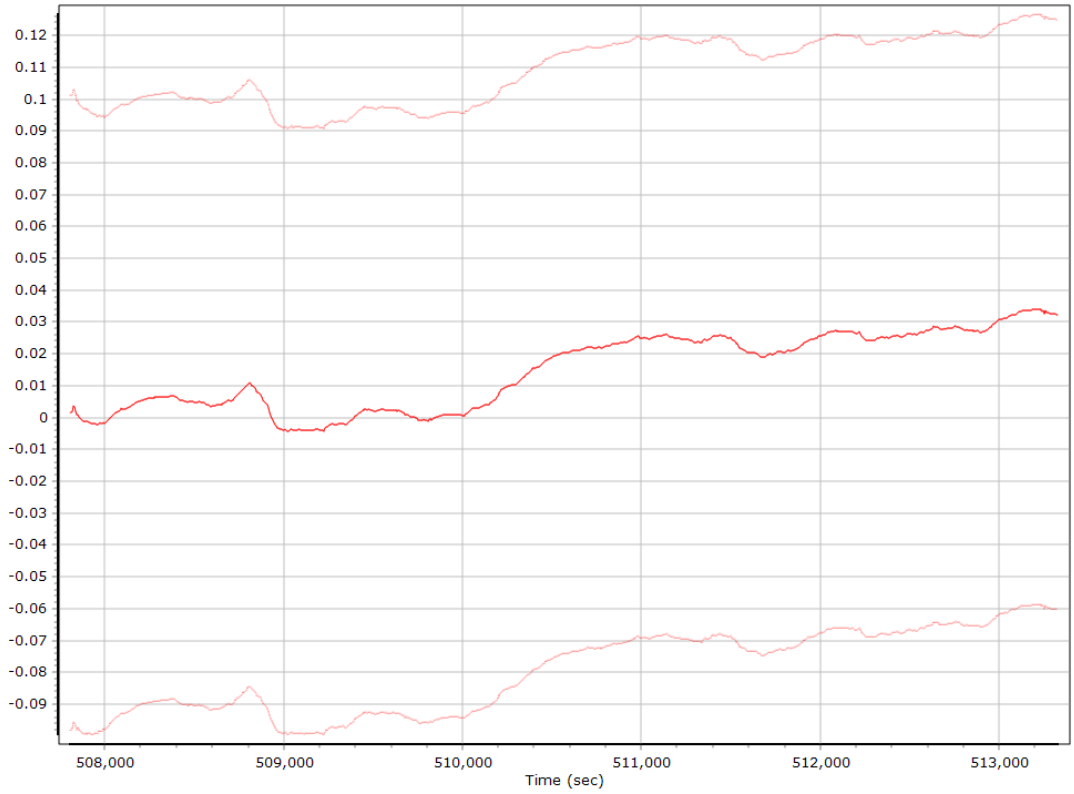

Z Gyro Bias (deg/h)

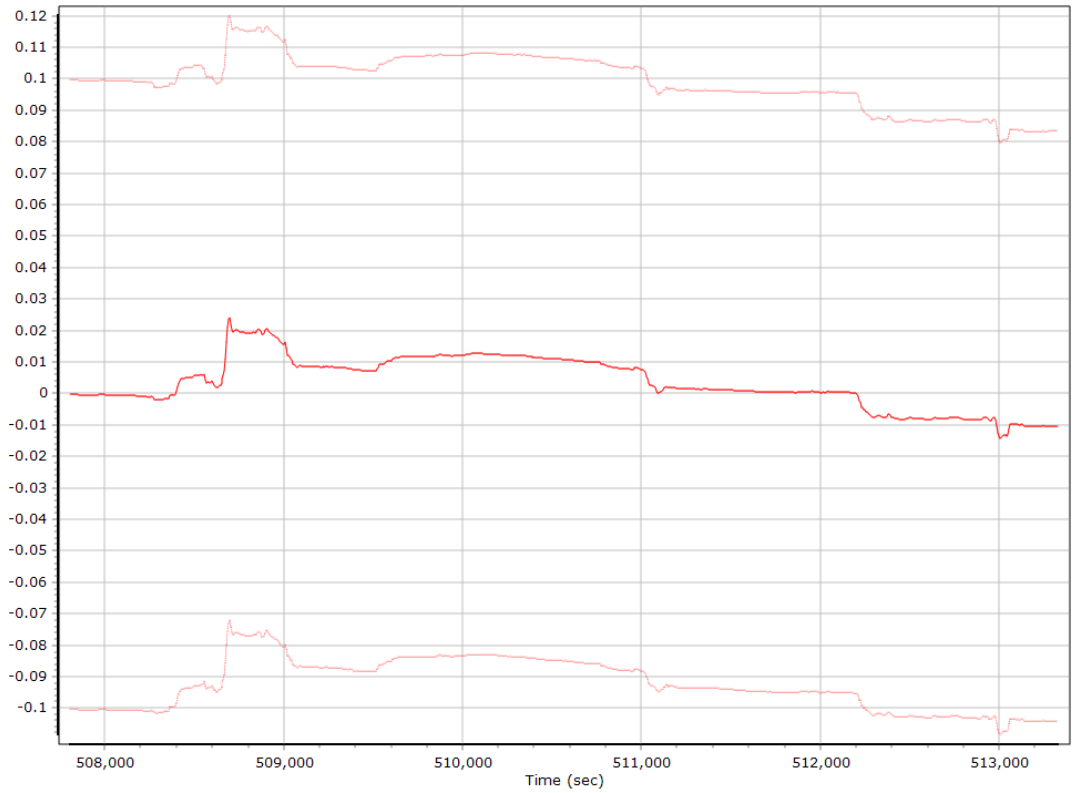

Gyro Scale Error (ppm)

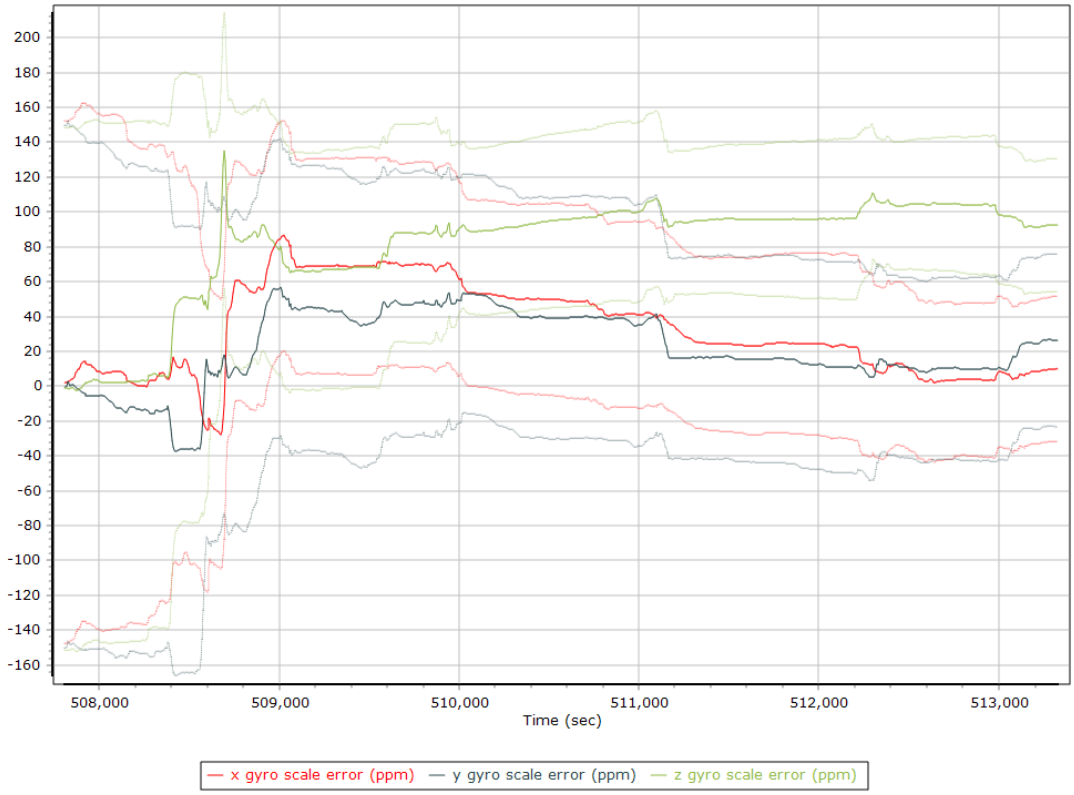

X Gyro Scale Error (ppm)

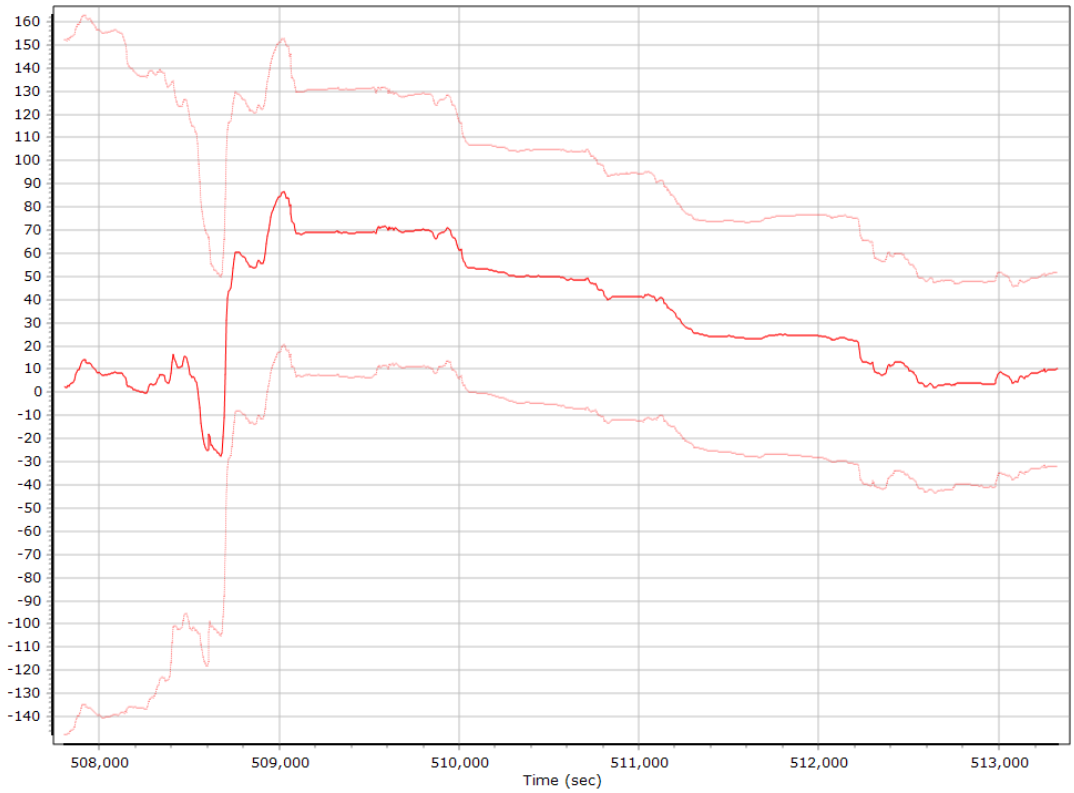

Y Gyro Scale Error (ppm)

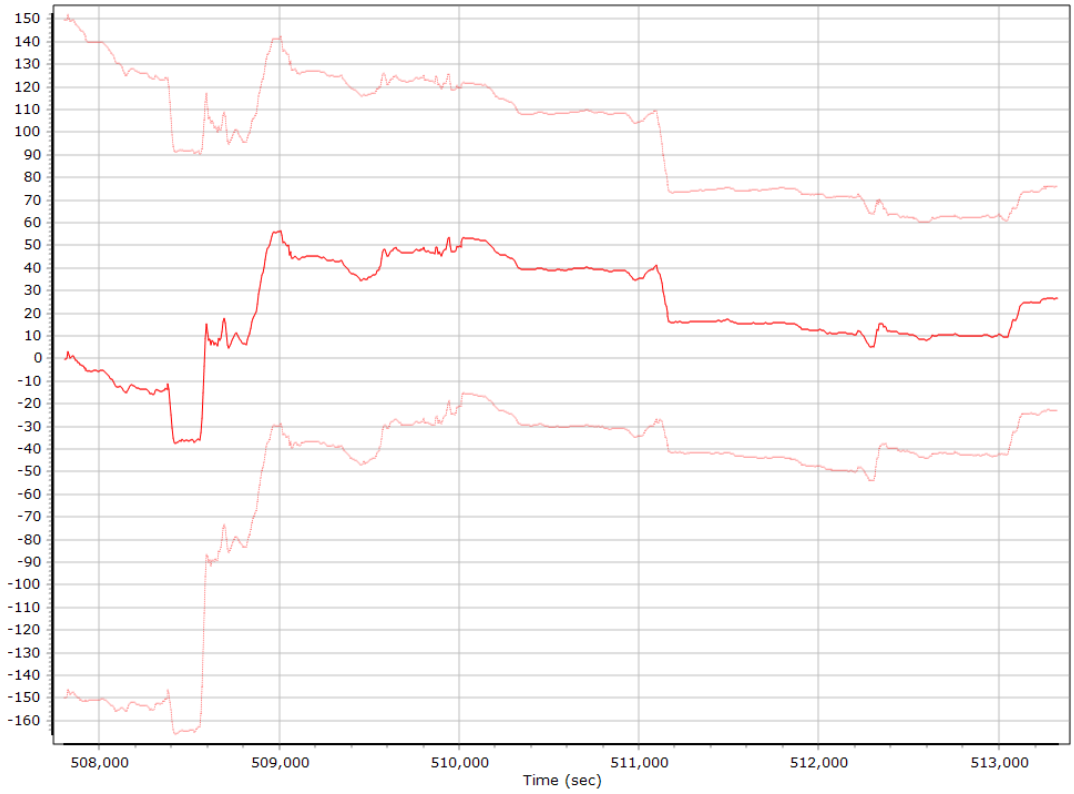

Z Gyro Scale Error (ppm)

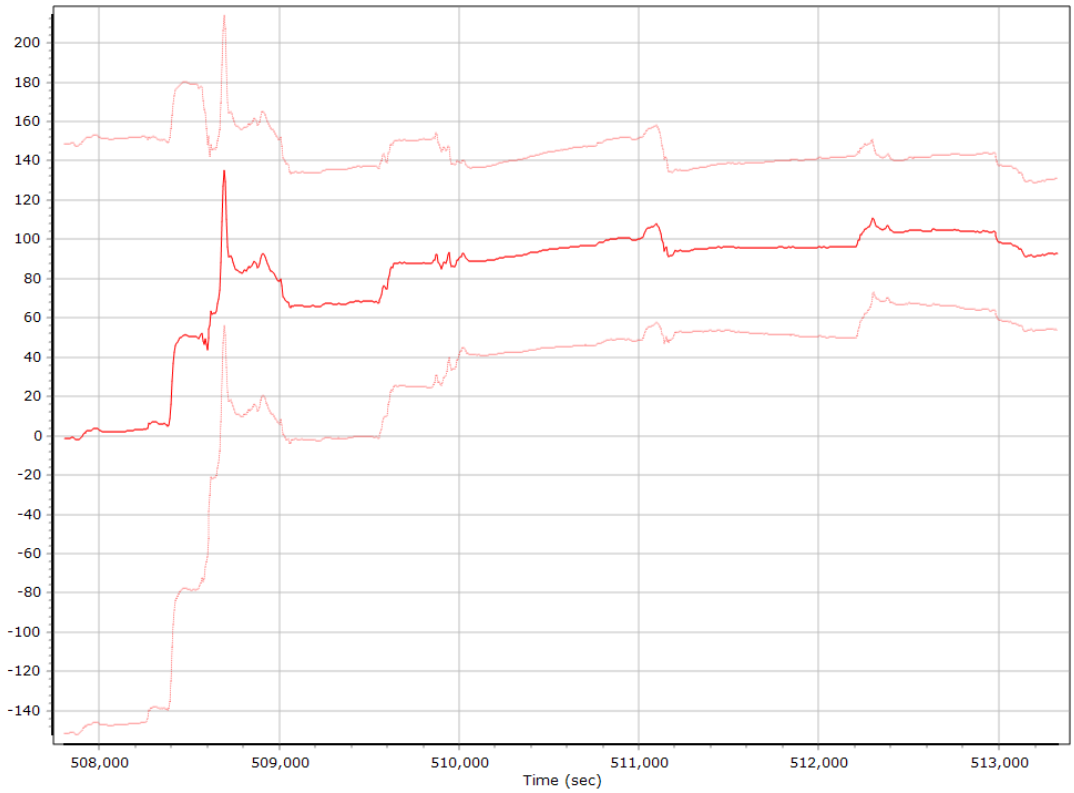

Forward Processed Estimated Constant Errors, Reference Frame

Accelerometer Bias (micro-g)

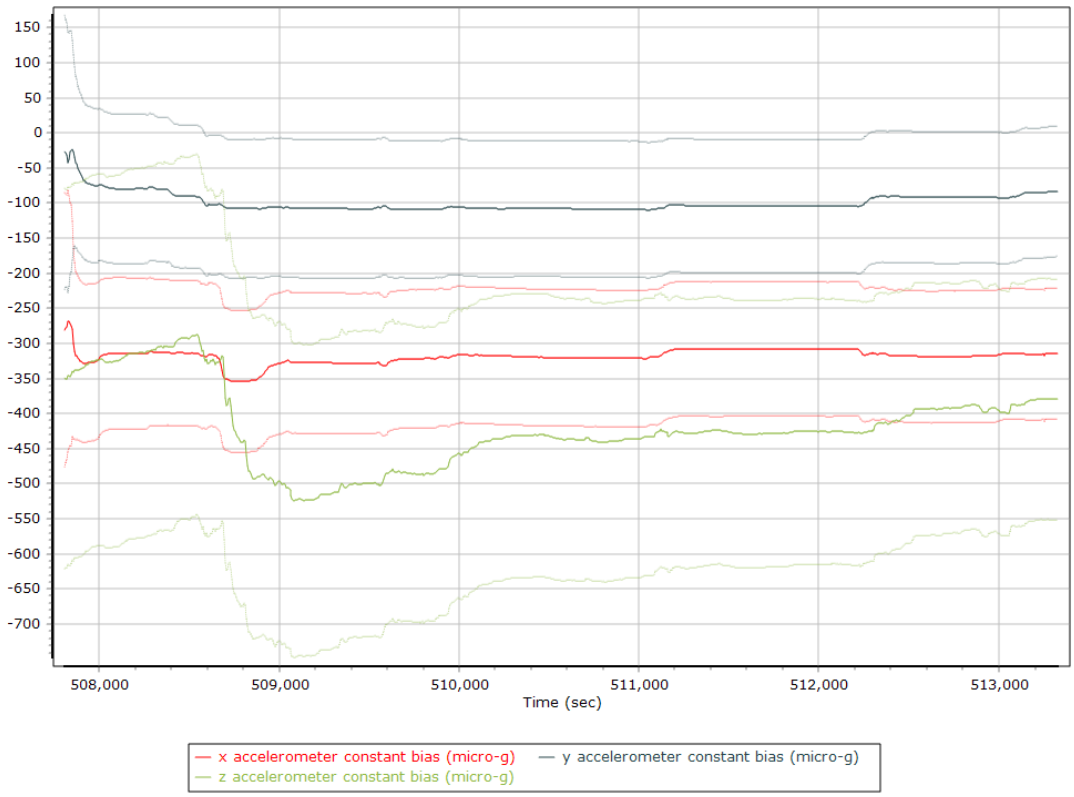

X Accelerometer Bias (micro-g)

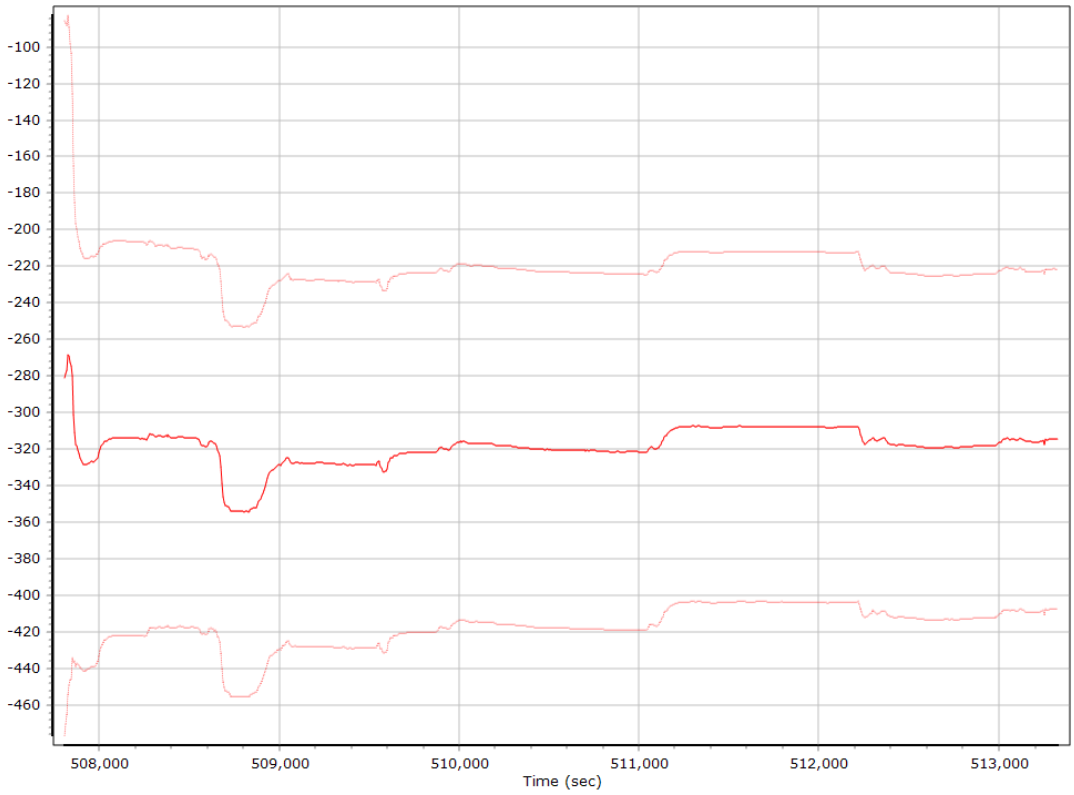

Y Accelerometer Bias (micro-g)

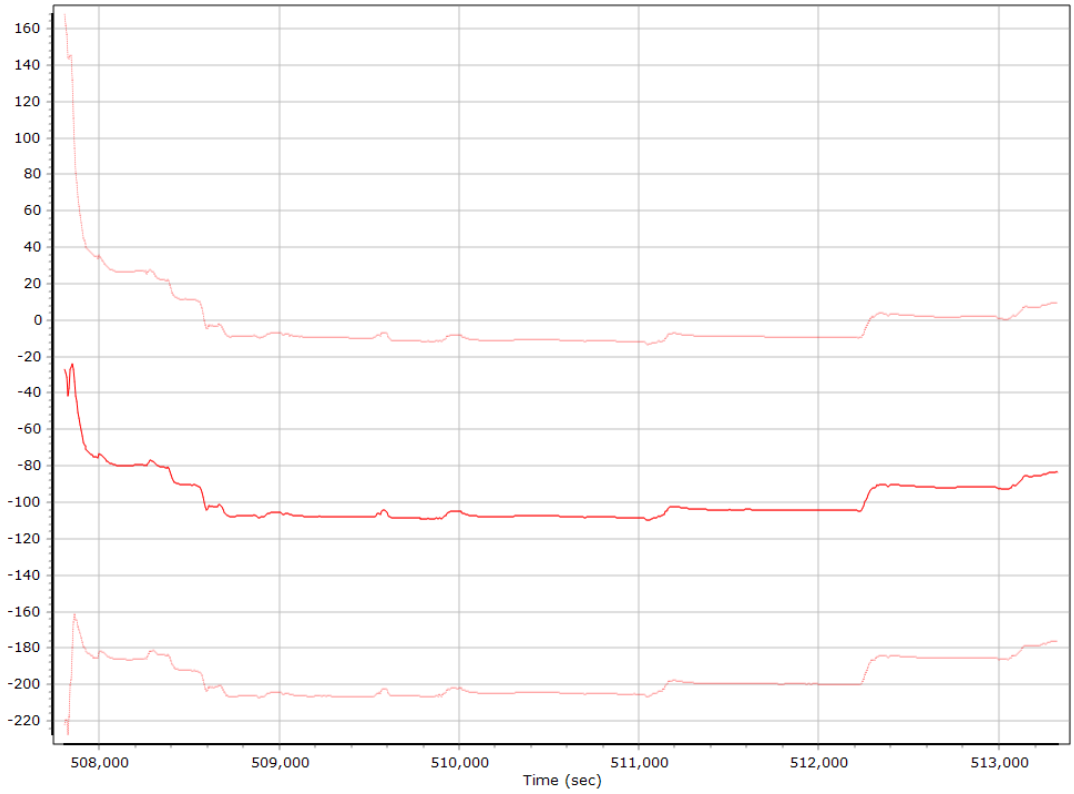

Z Accelerometer Bias (micro-g)

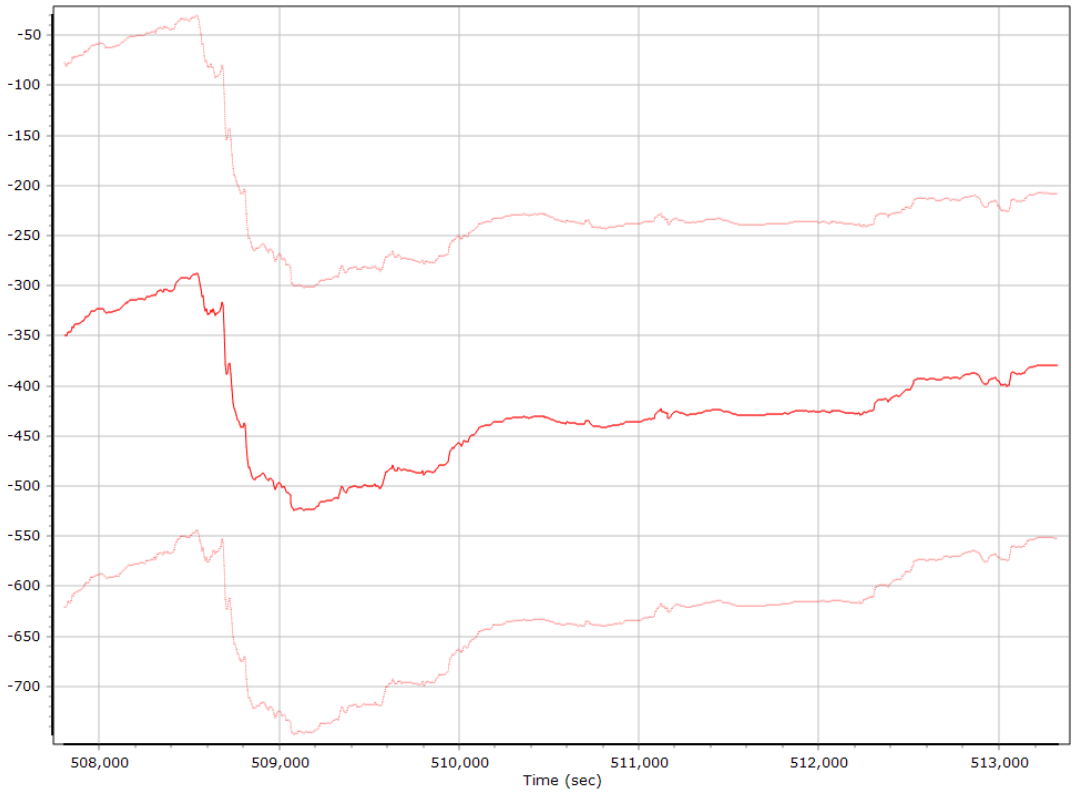

Gyro Bias (deg/h)

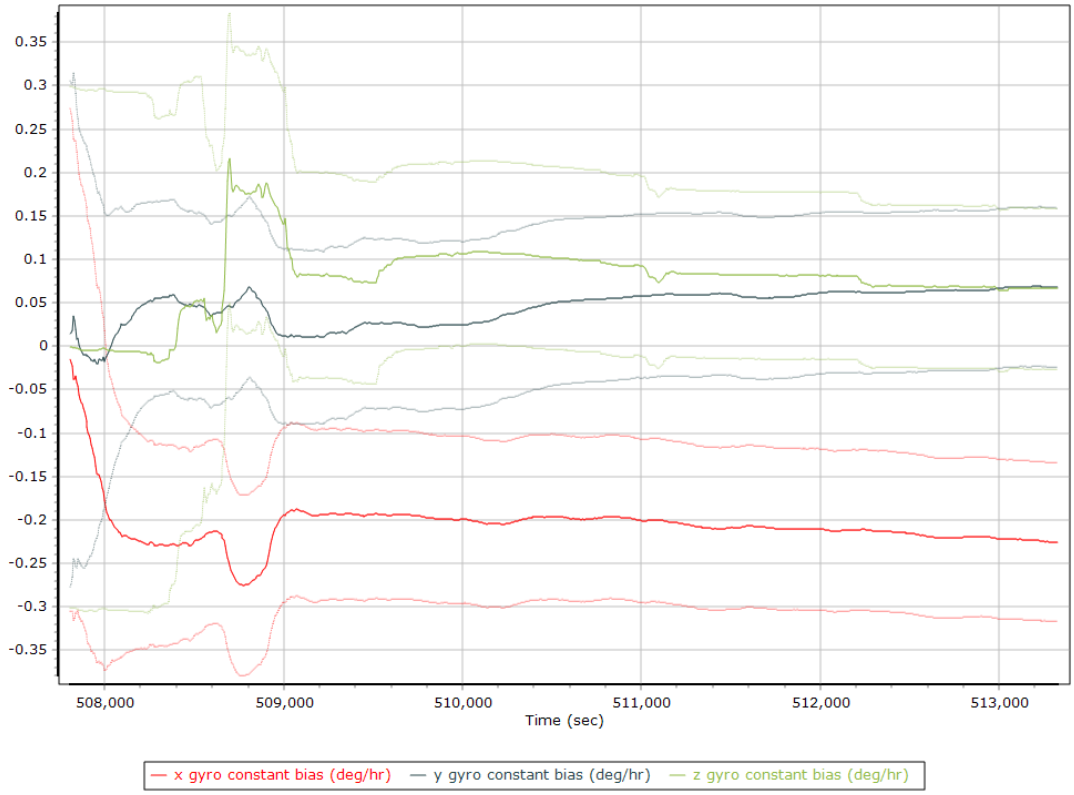

X Gyro Bias (deg/h)

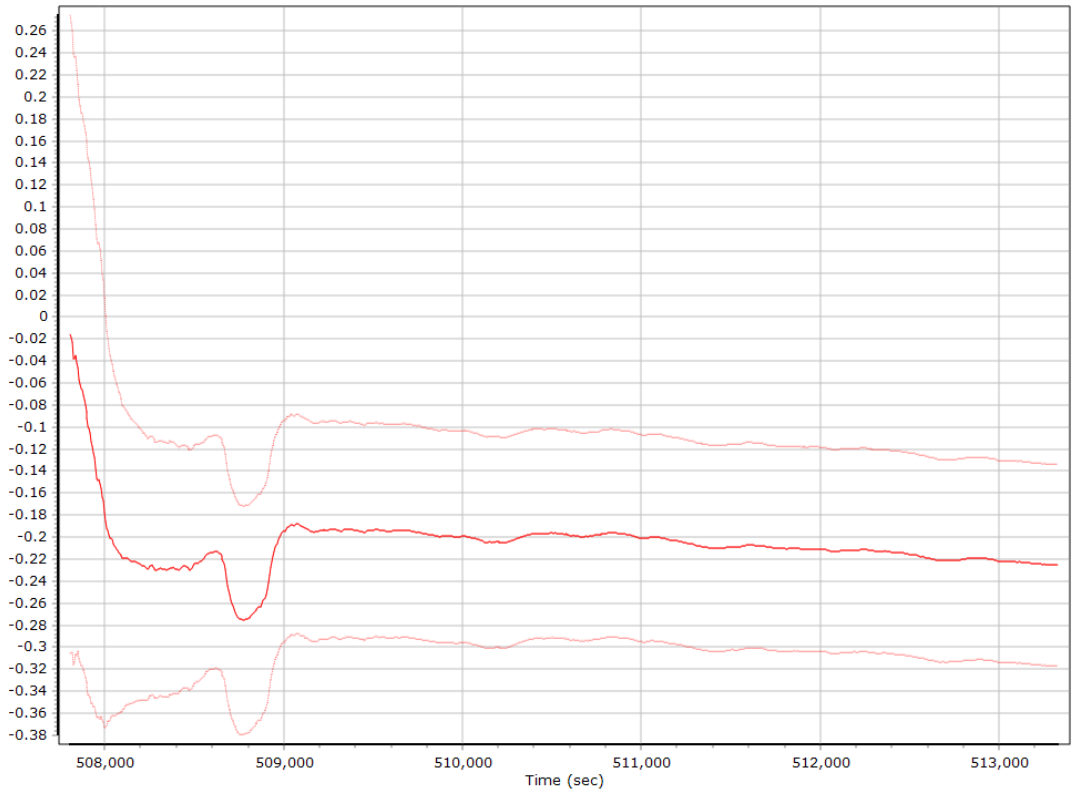

Y Gyro Bias (deg/h)

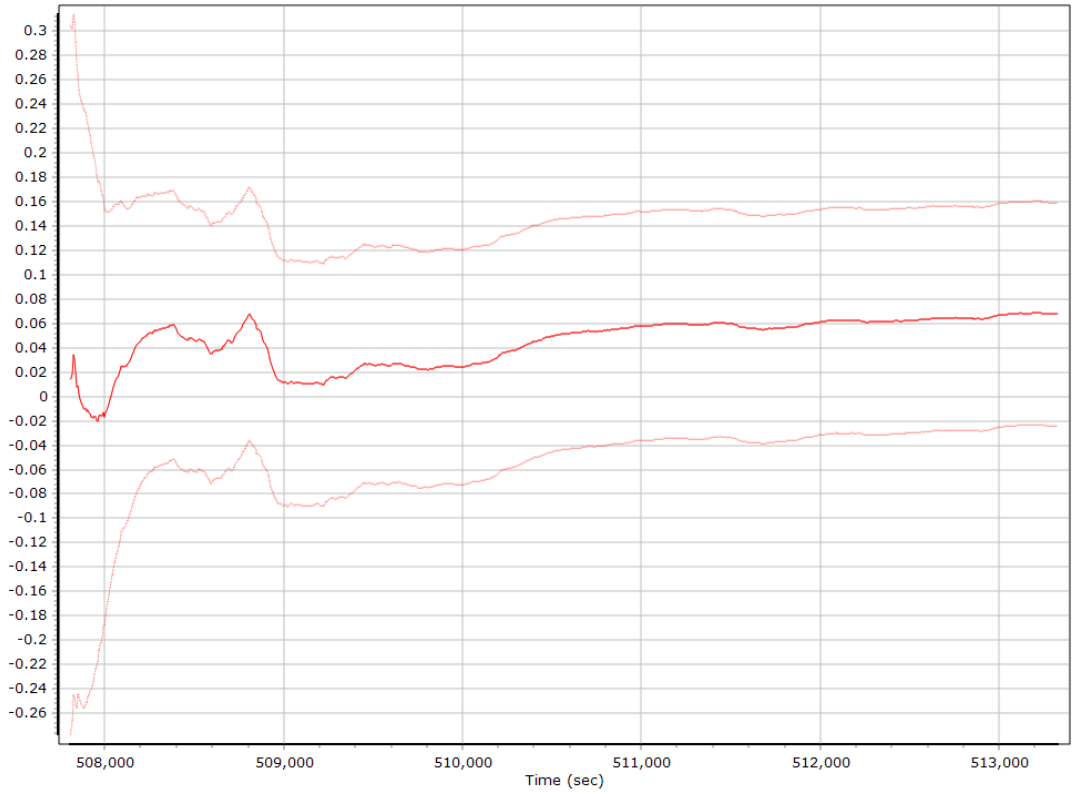

Z Gyro Bias (deg/h)

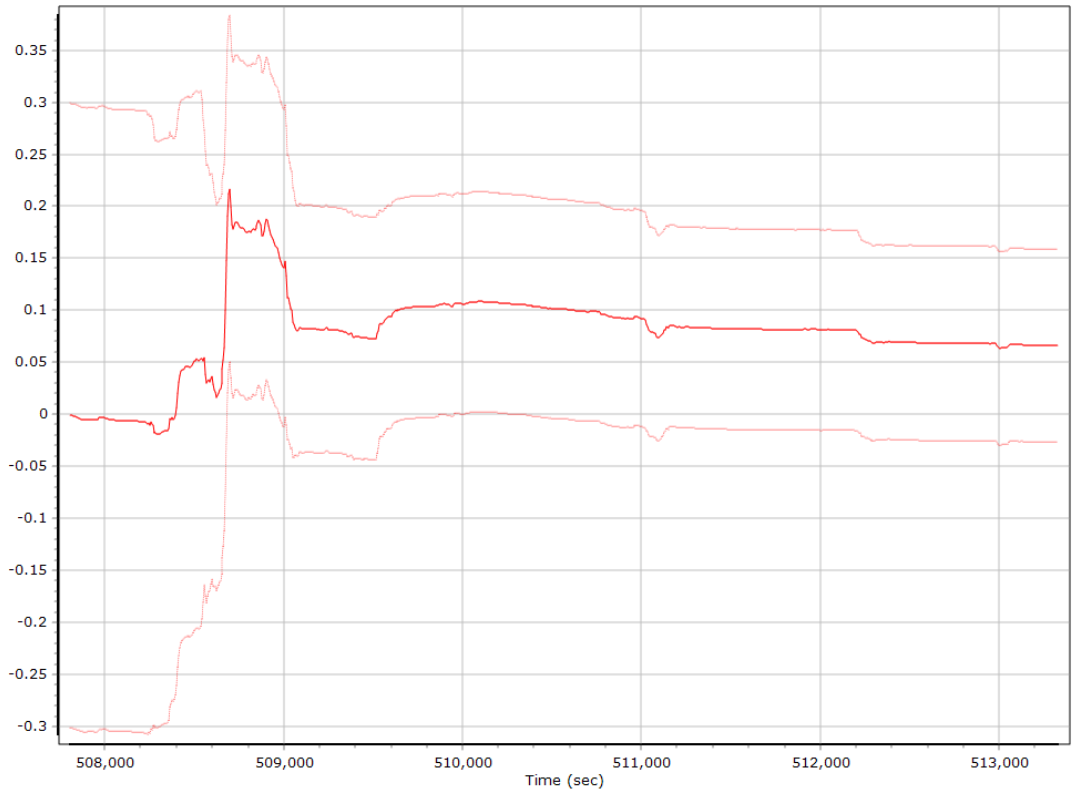

Smoothed Performance Metrics

Position Error RMS (m)

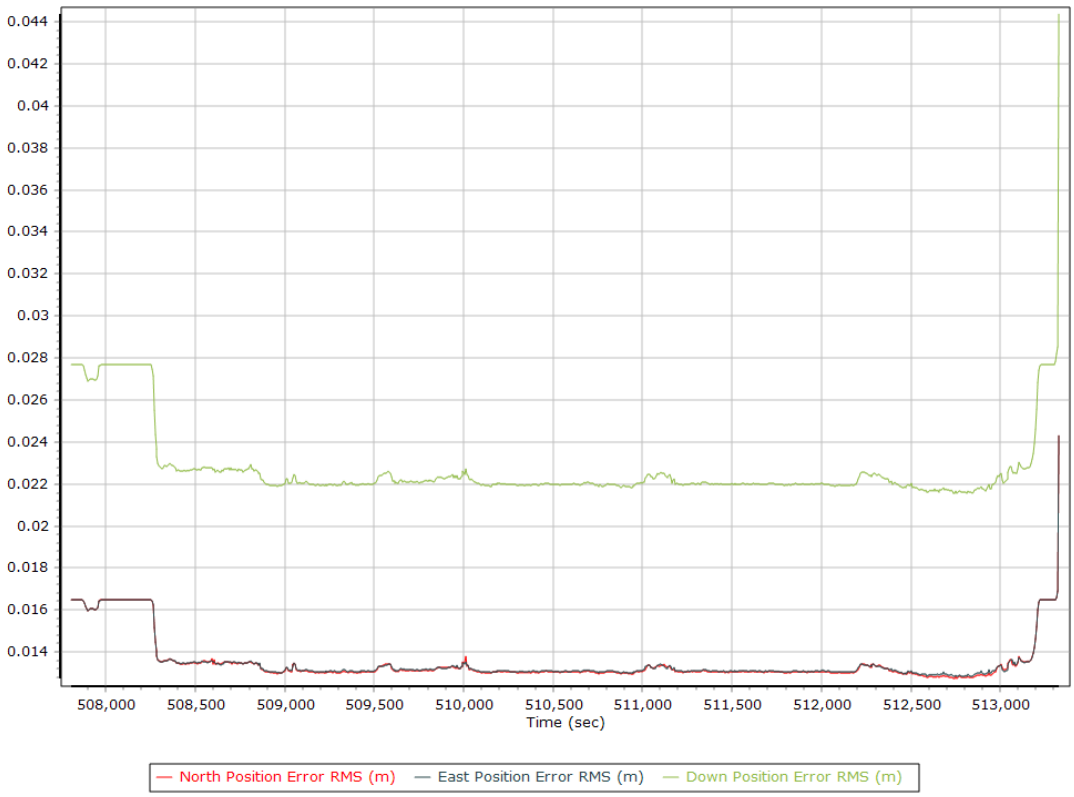

Velocity Error RMS (m/s)

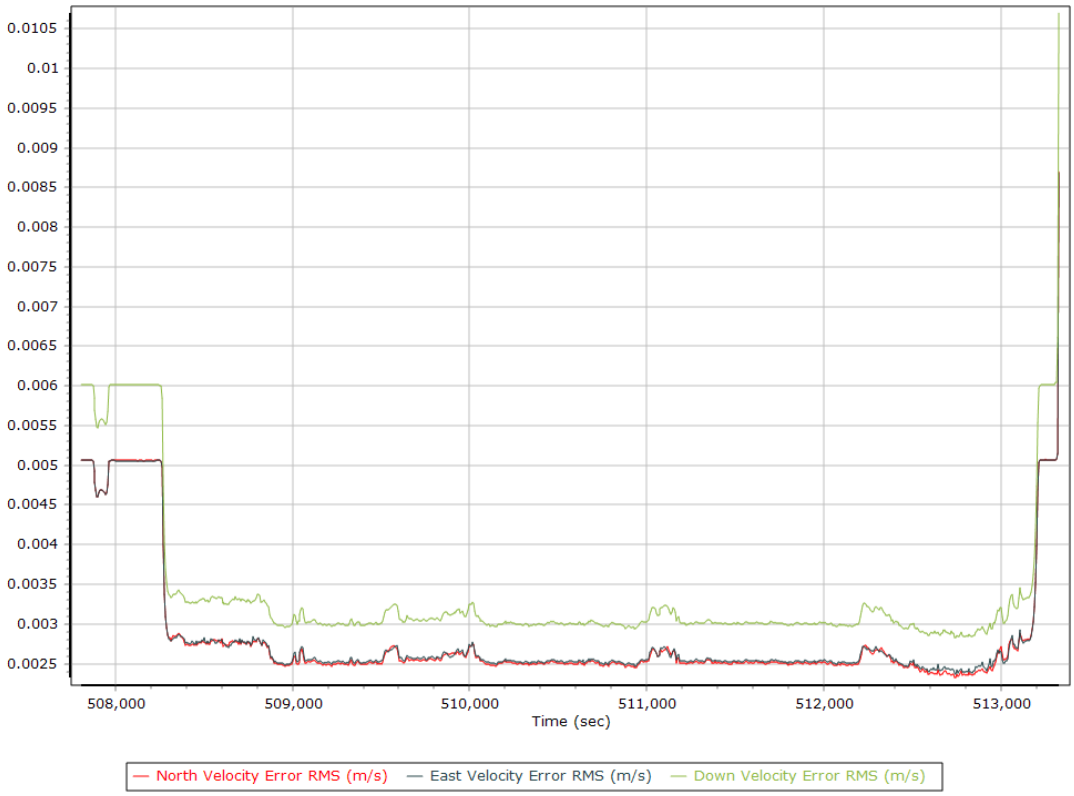

Roll/Pitch Error RMS (arc-min)

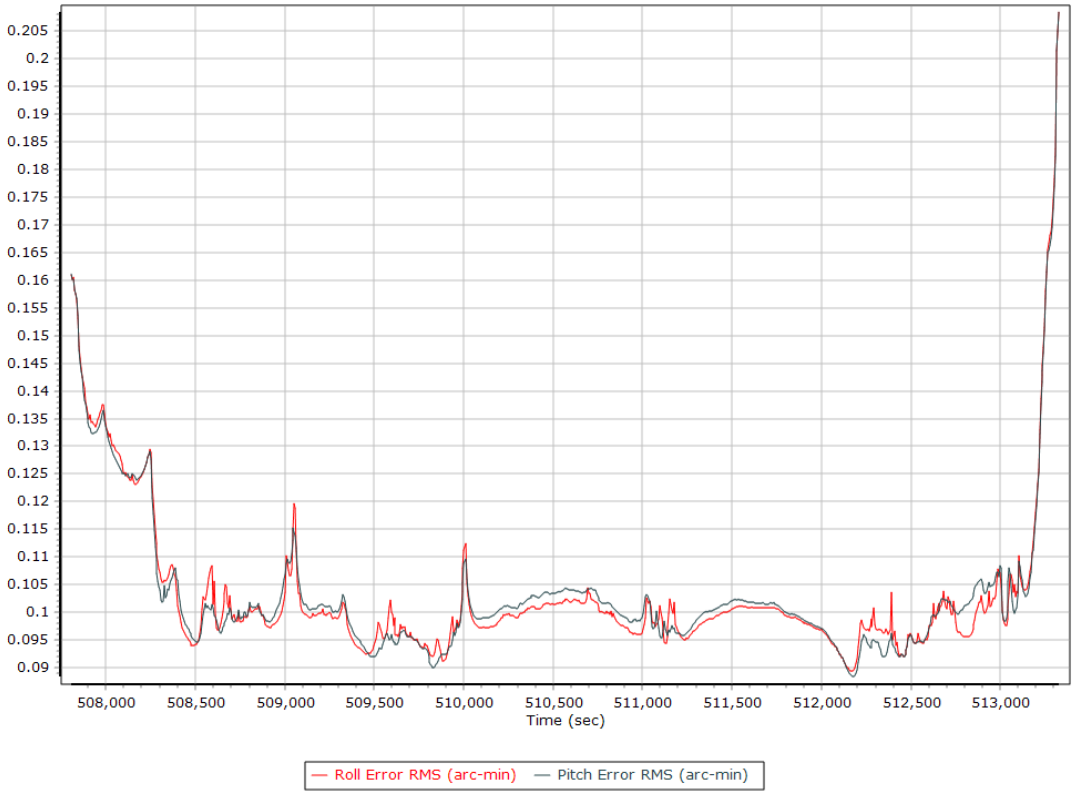

Heading Error RMS (arc-min)

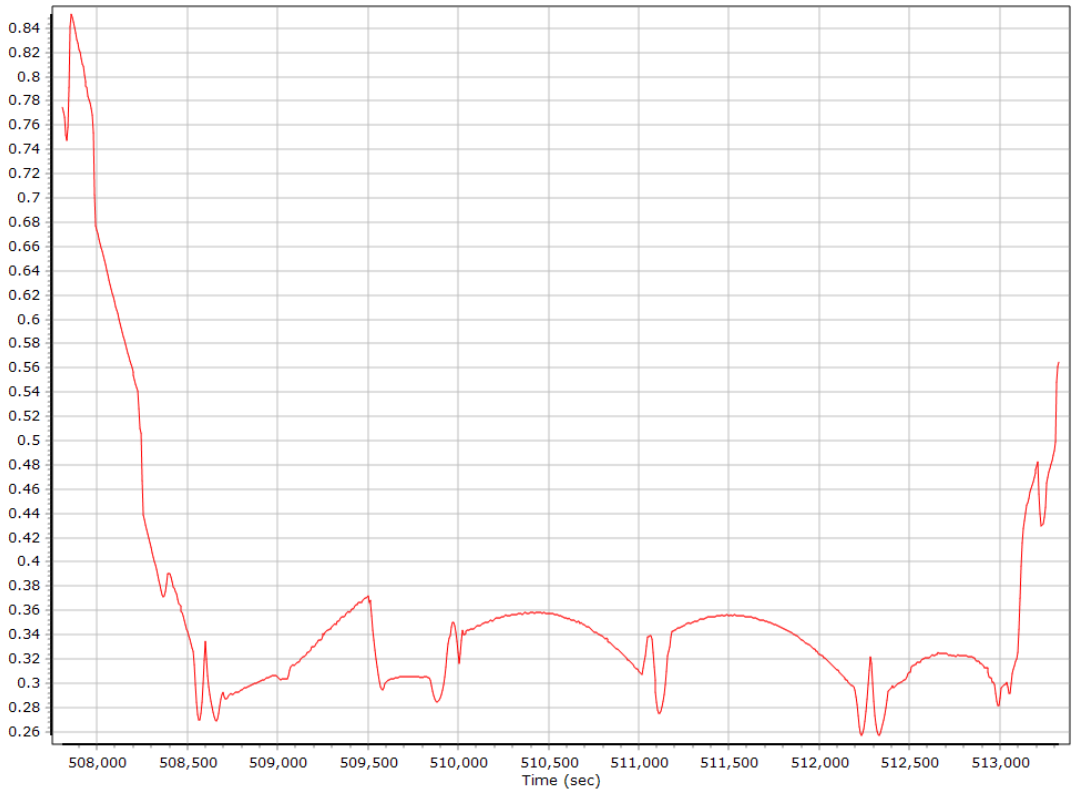

Forward Processed Performance Metrics

Position Error RMS (m)

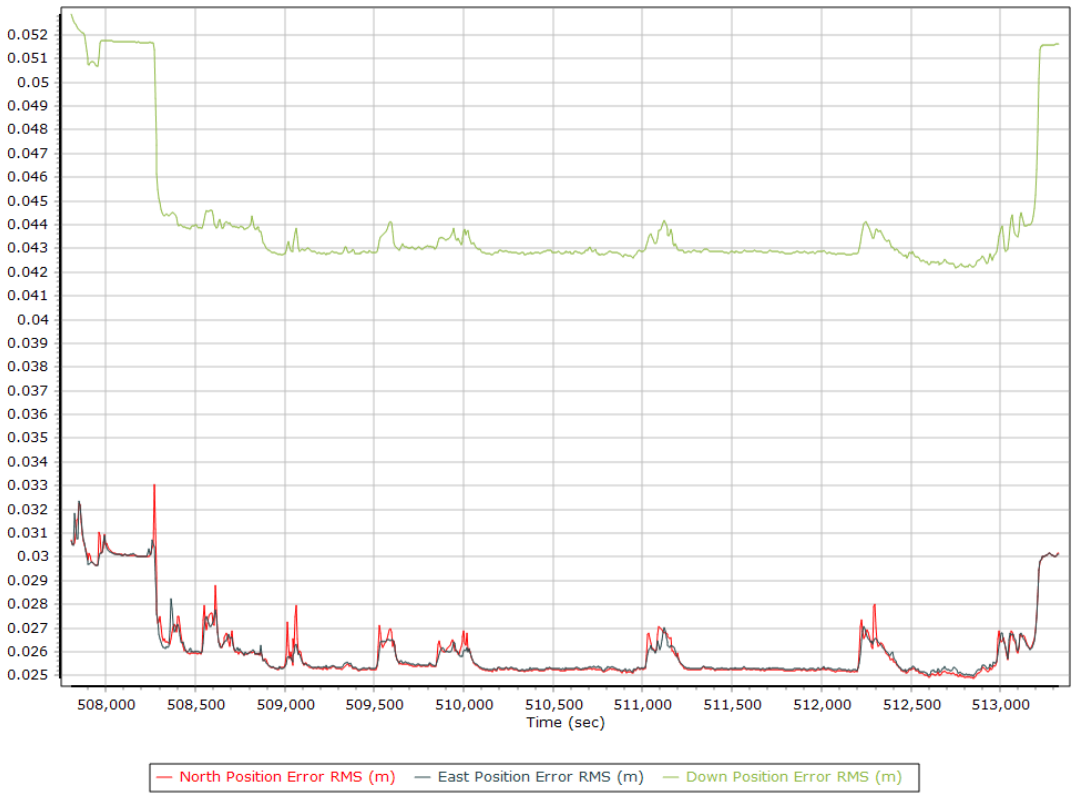

Velocity Error RMS (m/s)

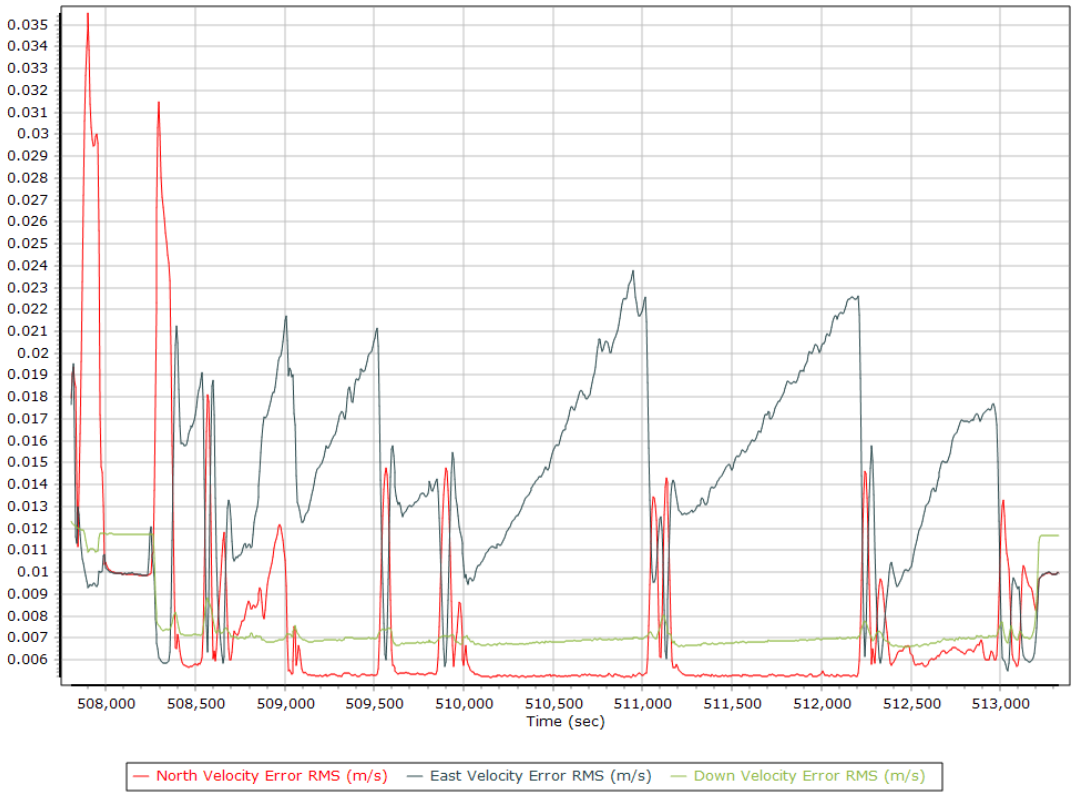

Roll/Pitch Error RMS (arc-min)

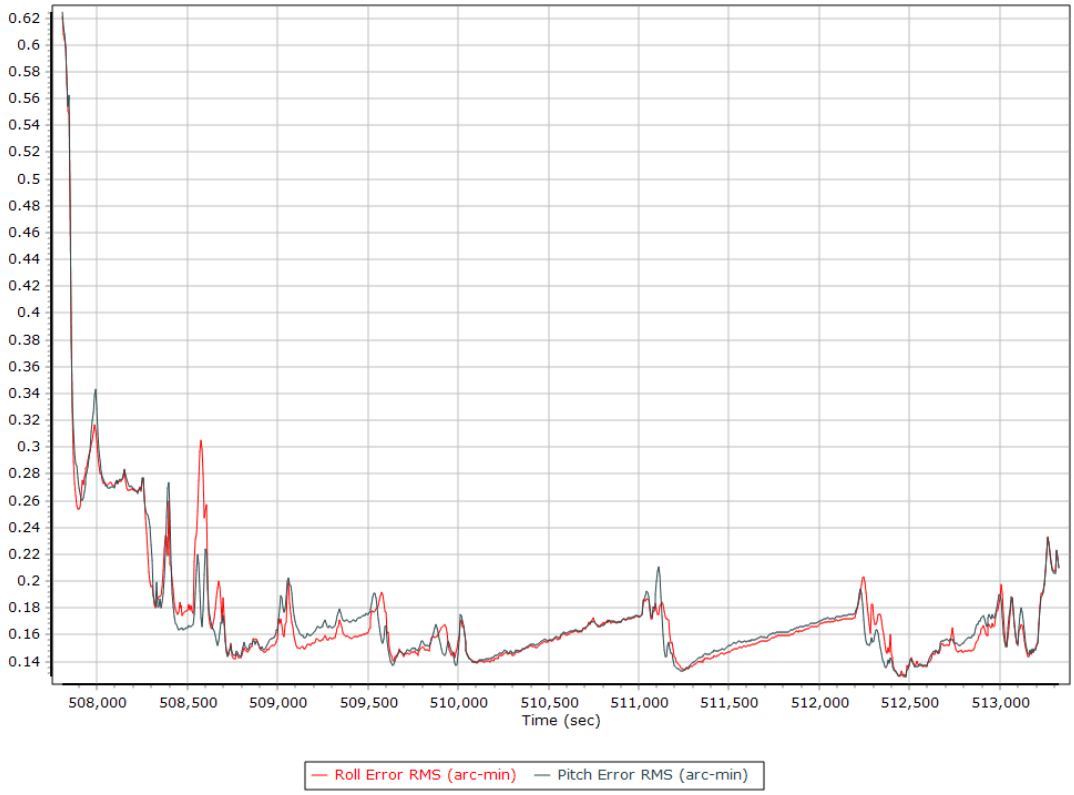

Heading Error RMS (arc-min)

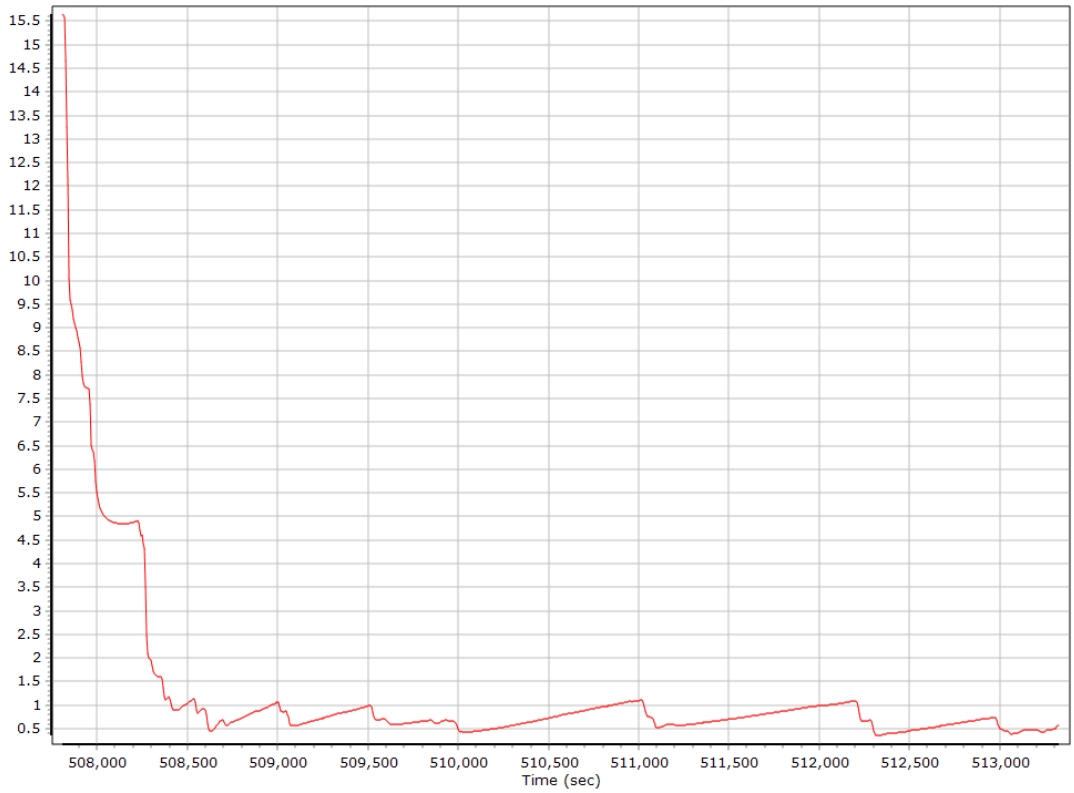

Forward Processed Solution Status

Processing Mode

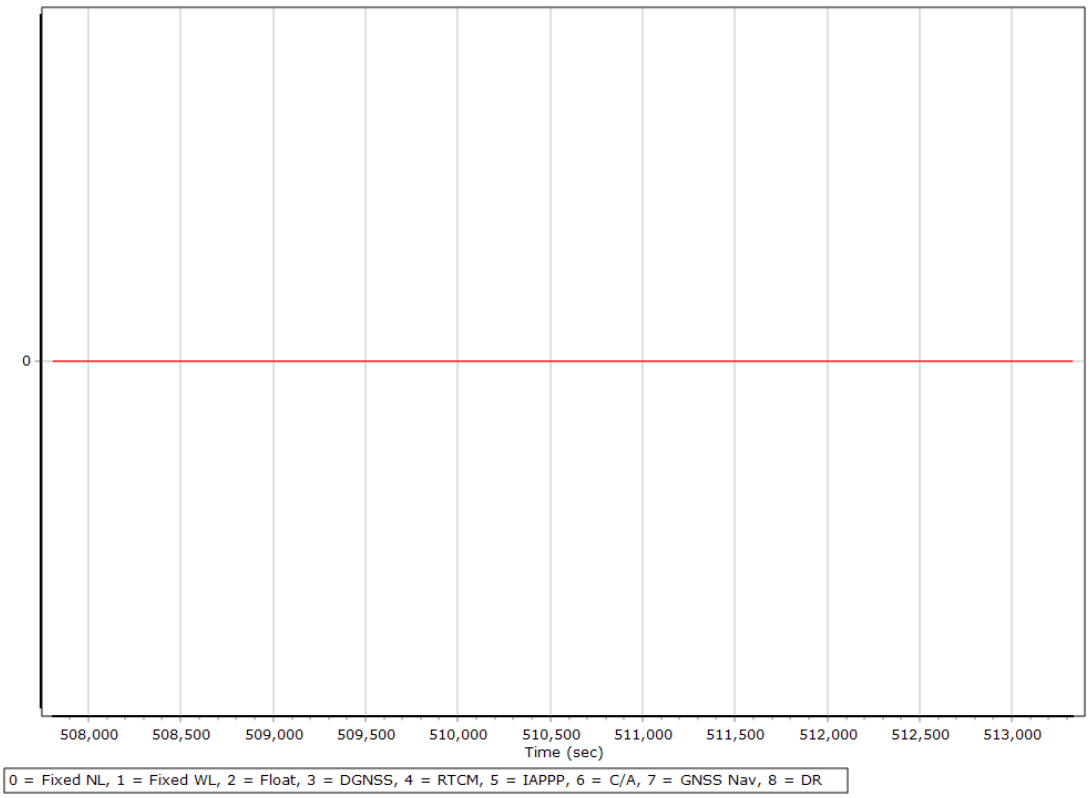

Number of Satellites

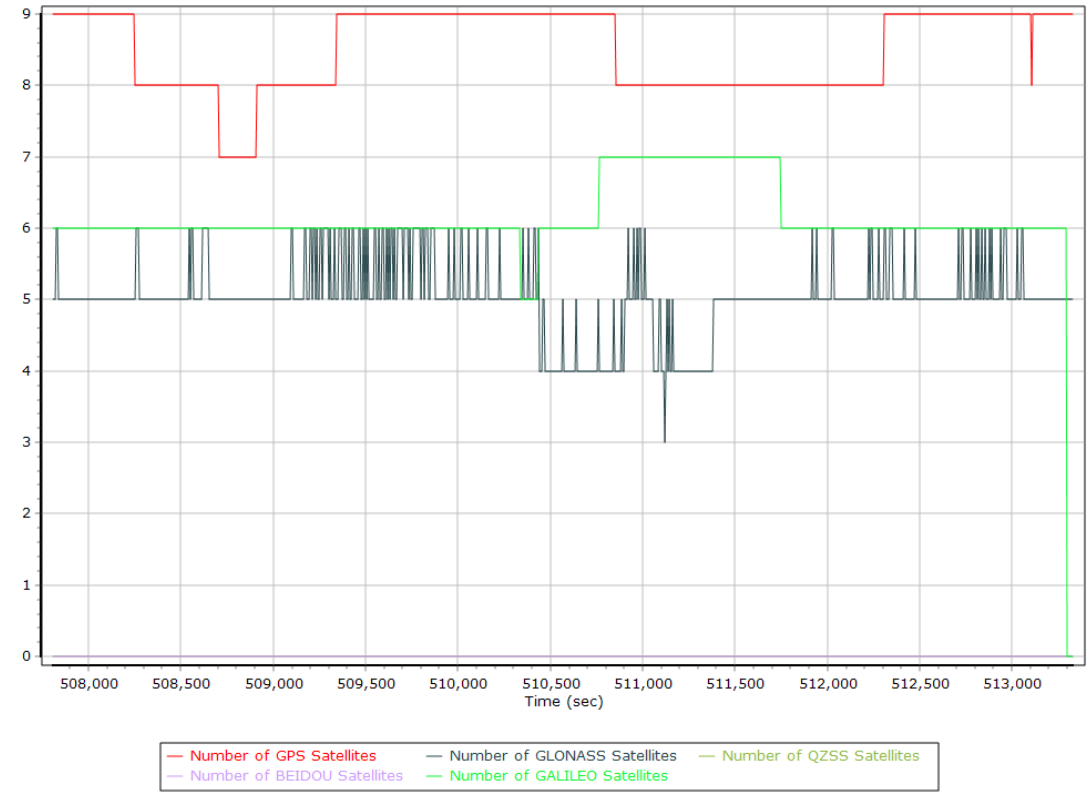

Baseline Length

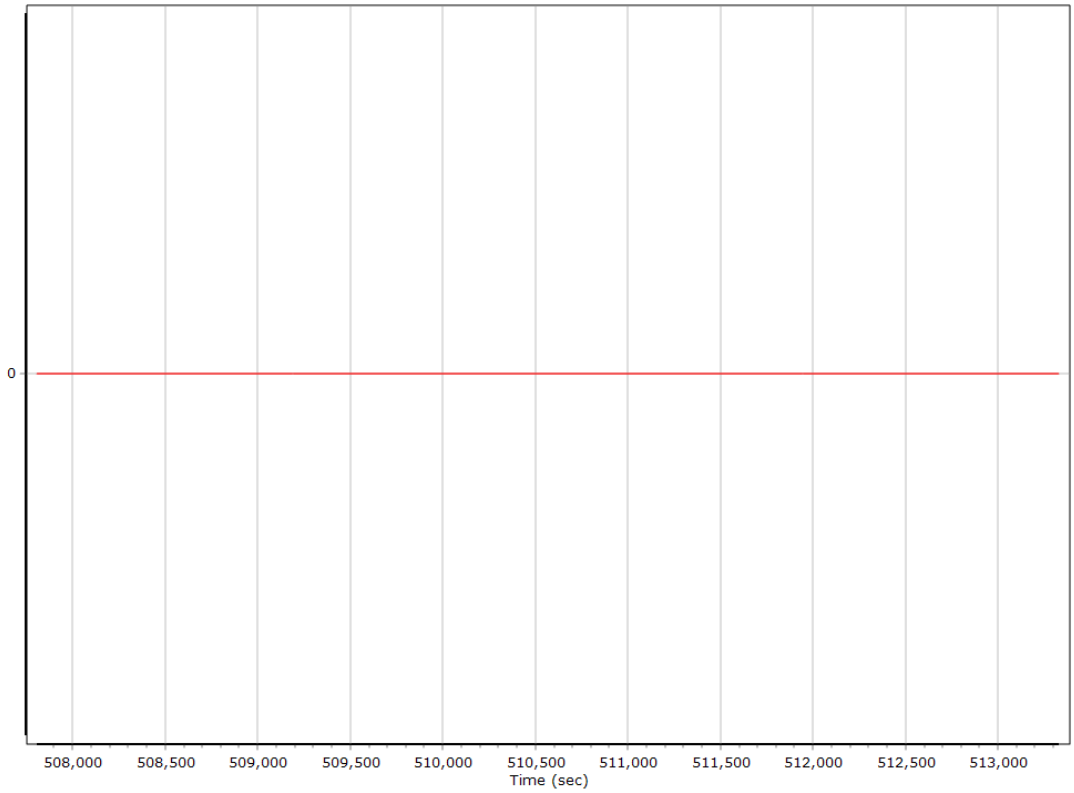

Export Summary

Export file	export_2SU20325A_186.out		
Export format	Custom Smoothed BET		
Solution in use	Post-processed		
Output rate	All Records		
Reference to Output lever arm (m)	0.000	0.000	0.000
Reference mounting angles (deg)	0.000	0.000	0.000
Output units (Coordinate / Lat & Lon)	Meter	Deg Decimal	
Export start time	507748.004 (11/20/2020 21:02:28)		
Export end time	513328.002 (11/20/2020 22:35:28)		
Height option	Ellipsoid Height		
WGS84 height flag	False		
Grid	Universal Transverse Mercator		
Zone	UTM North 11 (120W to 114W)		
Datum	NAD83 (2011)		
Ellipsoid	GRS 1980		
Local Transformation	NONE		
Target Epoch	2010		