




## LiDAR Quality Assessment Report

The USGS National Geospatial Technical Operations Center, Data Operations Branch is responsible for conducting reviews of all Light Detection and Ranging (LiDAR) point-cloud data and derived products delivered by a data supplier before it is approved for inclusion in the National Elevation Dataset. The USGS recognizes the complexity of LiDAR collection and processing performed by the data suppliers and has developed this Quality Assessment (QA) procedure to accommodate USGS collection and processing specifications with flexibility. The goal of this process is to assure LiDAR data are of sufficient quality for database population and scientific analysis. Concerns regarding the assessment of these data should be directed to the Chief, Data Operations Branch, 1400 Independence Road, Rolla, Missouri 65401.

### SD\_Missouri River Lidar Dewberry\_2016\_D16 - Block 8

NGTOC  
2018-06-18  
Sarah Klaas

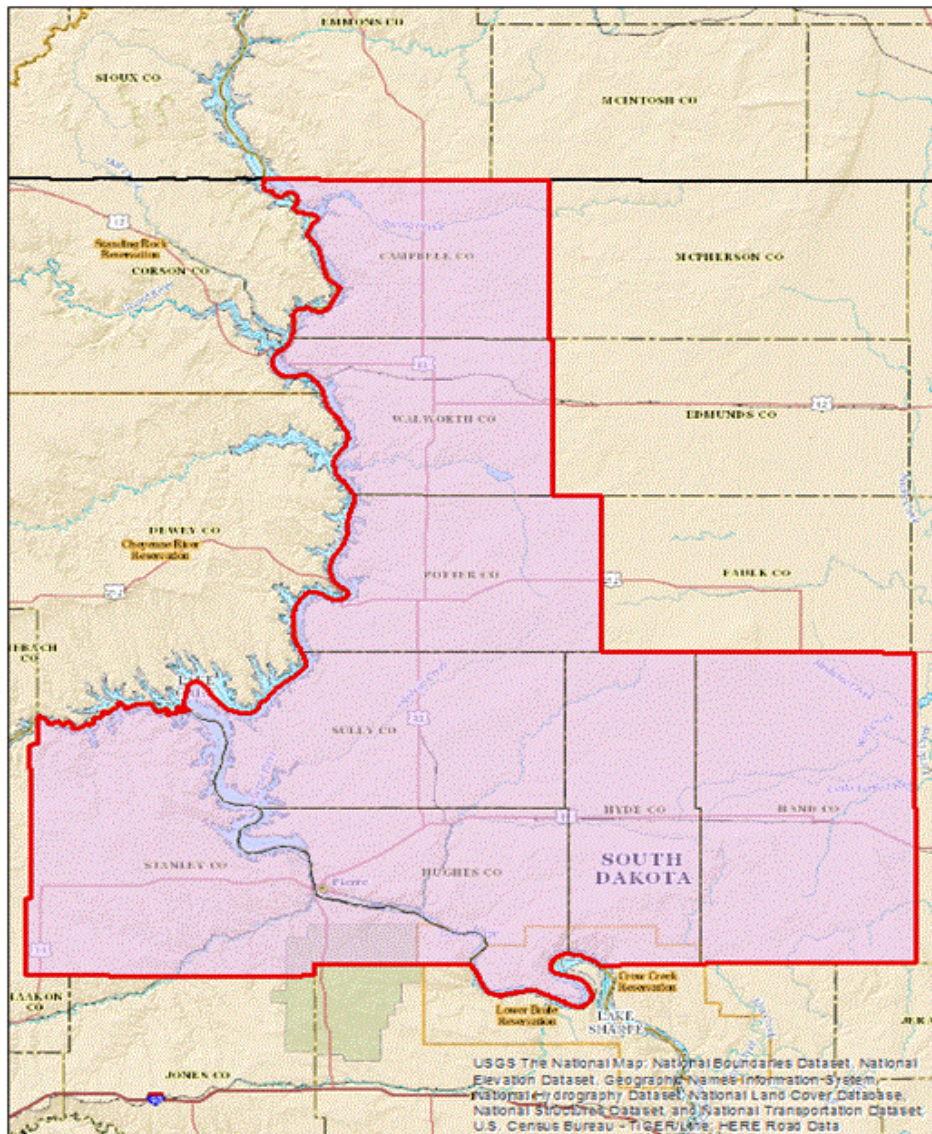

# Project Information

**Project:**

**Contractor:**

**Project Type:**  
GPSC

**Applicable Specification:**  
NGP LiDAR Base Specification V 1.2

**Project Points of Contact:**

Name:	Type:	Email:
Dan Vincent	CPT	dvinc@usgs.gov

REPORT QUALIFICATION SUMMARY:
<p><b>Task Order Overall:</b> Does Not Meet Requirements</p>
<p><b>Metadata:</b> 1 of 1 Reviews Accepted 0 Reviews Not Accepted</p>
<p><b>Vertical Accuracy:</b> 0 of 1 Reviews Accepted 1 Reviews Not Accepted</p>
<p><b>Swath/Raw LAS:</b> 0 of 1 Reviews Accepted 0 Reviews Not Accepted</p>
<p><b>Tiled/Classified LAS:</b> 0 of 1 Reviews Accepted 1 Reviews Not Accepted</p>
<p><b>Breakline:</b> 1 of 1 Reviews Accepted 0 Reviews Not Accepted</p>
<p><b>DEM(s):</b> 0 of 1 Reviews Accepted 1 Reviews Not Accepted</p>
<p><b>NED Review:</b> 1 of 1 DEM tile reviews recommended for NED 1/3rd 0 of 1 DEM tile reviews recommended for NED 1/9th</p>

**Project Subdivision:**

**List Subdivision:**

•  
of:

**Dates Collected Range:**

**Collection Start:**

**Collection End:**

**Project Aliases:**

**Licensing:**

Public Domain

**Project Description:**

This task is for a high resolution data set of Geiger-Mode lidar covering approximately 8104 square miles affecting Campbell, Walworth, Potter, Sully, Stanley, Hughes, Hyde and Hand counties in South Dakota.

## Review Information

Reviewer:  Date Delivered:

3rd Party QA Performed:  Date Assigned:

Action To Contractor Date:	Issue Description:	Return Date:
<input type="text" value="6/15/2018"/>	see report	<input type="text"/>

### Review Complete:

Dates Project Worked:

Start:

End:

## Project Materials Received

All project deliverables must be supplied according to collection and processing specifications. The USGS will postpone the QA process when any of the required deliverables are missing. When deliverables are missing, the Contracting Officer Technical Representative (COTR) will be contacted by the Elevation Section supervisor and informed of the problem. Processing will resume after the COTR has coordinated the deposition of remaining deliverables.

### METADATA

Deliverables	Delivered	XML Metadata	Required	Format	Quantity	Additional Details
Collection Report:	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<u>PDF</u>	<input type="text" value="1"/>	<input type="text"/>
Survey Report:	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<u>PDF</u>	<input type="text" value="1"/>	<input type="text"/>
Processing Report:	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<u>PDF</u>	<input type="text" value="1"/>	<input type="text"/>
QA/QC Report:	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<u>PDF</u>	<input type="text" value="1"/>	<input type="text"/>
Project Level XML Metadata:	<input type="checkbox"/>		<input type="checkbox"/>	XML	<input type="text"/>	<input type="text"/>
Project Extent:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>.shp</u>	<input type="text" value="1"/>	<input type="text"/>
Tile Scheme:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>.shp</u>	<input type="text" value="1"/>	<input type="text"/>
Control (Calibration) Points:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>.shp</u>	<input type="text" value="1"/>	<input type="text"/>

Check (Validation) Points:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>.shp</u>	<input type="text" value="1"/>	<input type="text"/>
Additional Comments:	<input type="text"/>					

**LIDAR DATA**

Deliverables	Delivered	XML Metadata	Required	Format	Quantity	Additional Details
Swath Data:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Select...	<input type="text"/>	<input type="text"/>
Classified/ Tiled Data:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>.las</u>	<input type="text" value="1,044"/>	<input type="text" value="Block 3"/>
Additional Comments:	<input type="text"/>					

**DERIVED DELIVERABLES**

Deliverables	Delivered	XML Metadata	Required	Format	Quantity	Additional Details
DEM Tiles:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>IMG</u>	<input type="text" value="1,044"/>	<input type="text" value="Block 3"/>
Breaklines:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>FGD</u>	<input type="text" value="1"/>	<input type="text" value="ESRI GDB"/>
Additional Comments:	<input type="text"/>					

**OTHER**

Additional Deliverables	Delivered	XML Metadata	Required	Format	Quantity	Additional Details
<input type="text" value="Intensity Imagery"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="text" value=".tif"/>	<input type="text" value="5,488"/>	<input type="text"/>
Additional Comments:	<input type="text"/>					

**Geographic Information**

Area Extent:  Sq. Miles

Tile Size:  Meters

DEM/DTM Grid Spacing:  Meters

Coordinate Reference System:

<input type="text"/>		
Projection:	<input type="text" value="Mercator"/>	
Horizontal Datum:	<input type="text" value="NAD83"/>	<input checked="" type="radio"/> Meters <input type="radio"/> U.S. Feet <input type="radio"/> Int'l Feet
Vertical Datum:	<input type="text" value="NAVD88"/>	<input checked="" type="radio"/> Meters <input type="radio"/> U.S. Feet <input type="radio"/> Int'l Feet

### THIS PROJECTION COORDINATE REFERENCE SYSTEM IS CONSISTENT ACROSS THE FOLLOWING DELIVERABLES

- |  |   |
|--|---|
| <input checked="" type="checkbox"/> Project Extent                   | <input checked="" type="checkbox"/> Tiled/Classified XML Metadata |
| <input checked="" type="checkbox"/> Project Extent XML Metadata      | <input checked="" type="checkbox"/> Tiled/Classified LiDAR        |
| <input checked="" type="checkbox"/> Project Tile Scheme              | <input checked="" type="checkbox"/> DEM(s)                        |
| <input checked="" type="checkbox"/> Project Tile Scheme XML Metadata | <input checked="" type="checkbox"/> DEM XML Metadata              |
| <input checked="" type="checkbox"/> Control Points                   | <input checked="" type="checkbox"/> Breakline(s)                  |
| <input checked="" type="checkbox"/> Control Points XML Metadata      | <input checked="" type="checkbox"/> Breakline XML Metadata        |
| <input checked="" type="checkbox"/> Checkpoints                      |   |
| <input checked="" type="checkbox"/> Checkpoint XML Metadata          |   |

Additional  
Comments:

## Collection Information

Quality Level: 1

Configured Nominal Pulse Spacing:

Meters

Additional Comments:

## Metadata Review **Accepted**

Vendor provided metadata files have been parsed using 'mp' metadata parser. Any errors generated by the parser are documented below for reference and/or corrective action.

Parser can be found @ <http://geo-nsdi.er.usgs.gov/validation/>

**The Project Extent XML Metadata parsed without errors.**

Check if 'Best Use' metadata for NED:

**The Project Tile Scheme XML Metadata parsed without errors.**

Check if 'Best Use' metadata for NED:

**The Control Point XML Metadata parsed without errors.**

Check if 'Best Use' metadata for NED:

**The Check Point XML Metadata parsed without errors.**

Check if 'Best Use' metadata for NED:

**The Classified XML Metadata parsed without errors.**Check if 'Best Use' metadata for NED: **The DEM XML Metadata parsed without errors.**Check if 'Best Use' metadata for NED: **The Breakline XML Metadata parsed without errors.**Check if 'Best Use' metadata for NED: Additional  
Comments:

\*Note: Metadata lists Gail Dunn as the CPT point of contact but gives Dan Vincent's contact information

**Based on this review, the USGS accepts the xml metadata provided.**

End of Metadata Review

**Vertical Accuracy Review Not Accepted**

ASPRS recommends that checkpoint surveys be used to verify the vertical accuracy of LiDAR data sets. Checkpoints are to be collected by an independent survey firm licensed in the particular state(s) where the project is located. While subjective, checkpoints should be well distributed throughout the dataset. National Standards for Spatial Data Accuracy (NSSDA) guidance states that checkpoints may be distributed more densely in the vicinity of important features and more sparsely in areas that are of little or no interest. Checkpoints should be distributed so that points are spaced at intervals of at least ten percent of the diagonal distance across the dataset and at least twenty percent of the points are located in each quadrant of the dataset.

NSSDA and ASPRS require that a minimum of twenty checkpoints (thirty is preferred) are collected for each major land cover category represented in the LiDAR data. Checkpoints should be selected on flat terrain, or on uniformly sloping terrain in all directions from each checkpoint. They should not be selected near severe breaks in slope, such as bridge abutments, edges of roads, or near river bluffs. Checkpoints are an important component of the USGS QA process. There is the presumption that the checkpoint surveys are error free and the discrepancies are attributable to the LiDAR dataset supplied.

For this dataset, USGS checked the spatial distribution of checkpoints with an emphasis on the bare-earth (open terrain) points; the number of points per class; the methodology used to collect these points; and the relationship between the data supplier and checkpoint collector. When independent control data are available, USGS has incorporated this into the analysis.

**Required Vertical Accuracy** Yes  No**REQUIRED NON-VEGETATED VERTICAL ACCURACY FOR SWATH AND DEM FILES**Required Unit: Required # of checkpoints: Required RMSEz: Required Vertical Accuracy (RMSEz \*  
95th CI) **REQUIRED VEGETATED VERTICAL ACCURACY FOR DEM FILES**Required Unit:



Required # of checkpoints:

Required Vertical Accuracy (@ 95th percentile)

Additional Required Vertical Accuracy Information:

## Reported Vertical Accuracy

Yes  No

### REPORTED NON-VEGETATED VERTICAL ACCURACY FOR SWATH LIDAR FILES

Reported Unit:

Reported # of checkpoints:

Reported RMSEz:

Reported Vertical Accuracy (RMSEz \* 95th CI)

### REPORTED NON-VEGETATED VERTICAL ACCURACY FOR DEM FILES

Reported Unit:

Reported # of checkpoints:

Reported RMSEz:

Reported Vertical Accuracy (RMSEz \* 95th CI)

### REPORTED VEGETATED VERTICAL ACCURACY FOR DEM FILES

Reported Unit:

Reported # of checkpoints:

Reported Vertical Accuracy (95th percentile)

Additional Reported Vertical Accuracy Information:

## Reviewed Vertical Accuracy

Yes  No

**CHECKPOINT REVIEW**

Checkpoints are well distributed?

Enough checkpoints for task order?

Checkpoints meet USGS LiDAR base-spec in quantity and quality?

**REVIEWED NON-VEGETATED VERTICAL ACCURACY FOR SWATH LIDAR FILES**

Reviewed Unit:

Reviewed # of checkpoints:

Reviewed RMSEz:

Reviewed Vertical Accuracy (RMSEz \* 95th CI)

**REVIEWED NON-VEGETATED VERTICAL ACCURACY FOR DEM FILES**

Reviewed Unit:

Reviewed # of checkpoints:

Reviewed RMSEz:

Reviewed Vertical Accuracy (RMSEz \* 95th CI)

**REVIEWED VEGETATED VERTICAL ACCURACY**


Required Unit:

Required # of checkpoints:

Reviewed Vertical Accuracy (95th percentile)


Checkpoint Distribution Image



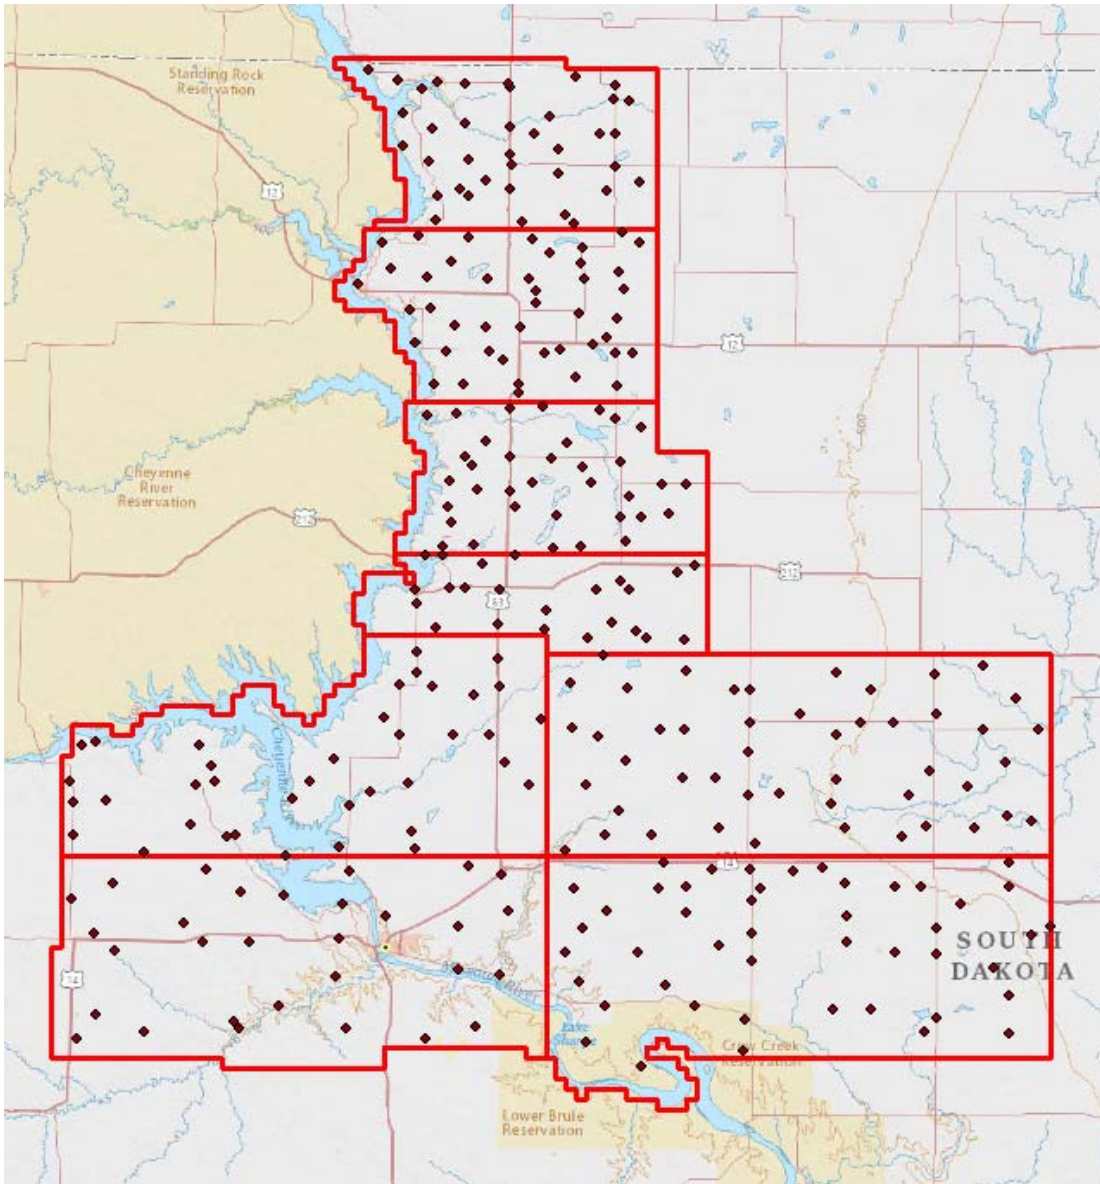



Vertical Accuracy Results:

VVA testing failed to meet USGS specifications. Three of the worst points are pictured below, showing the checkpoint below the ground surface.

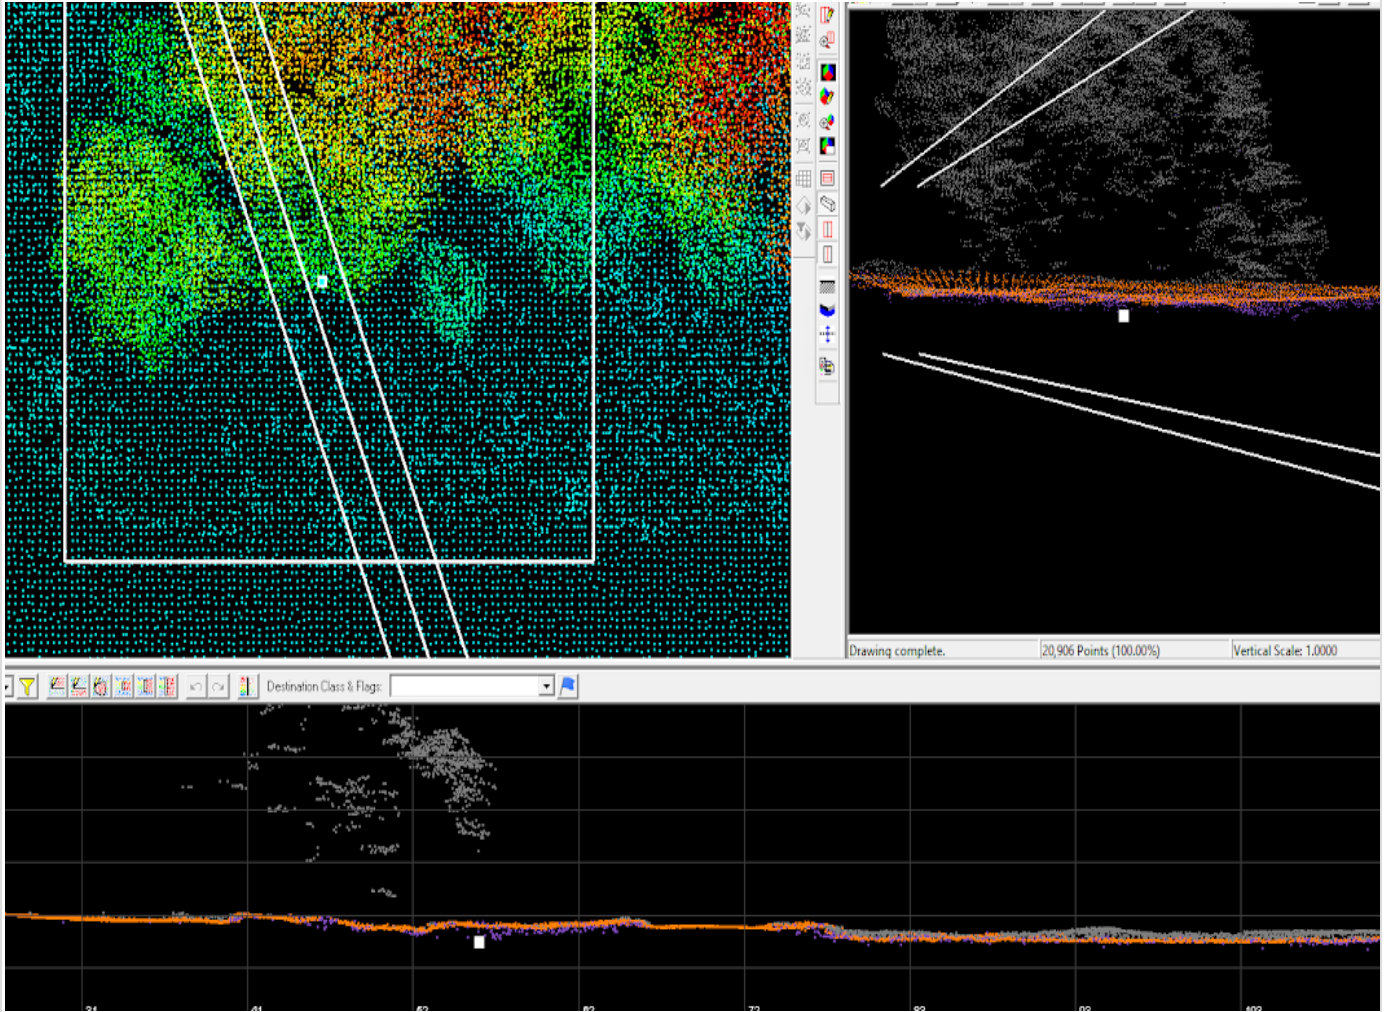




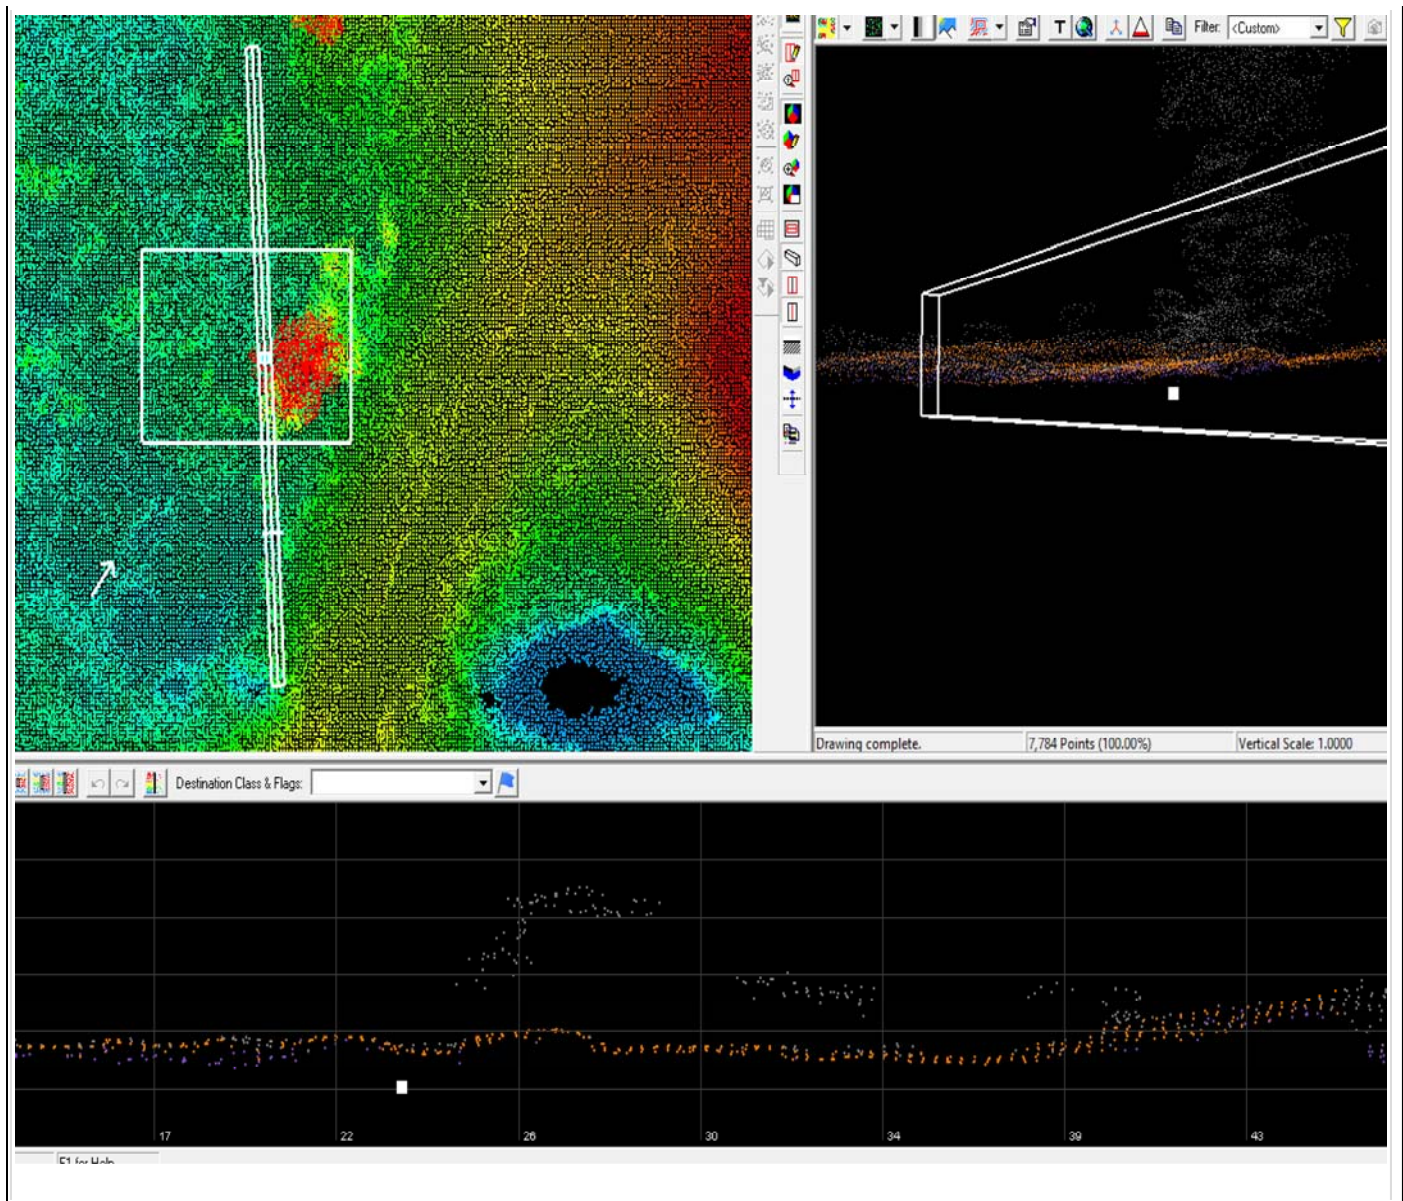

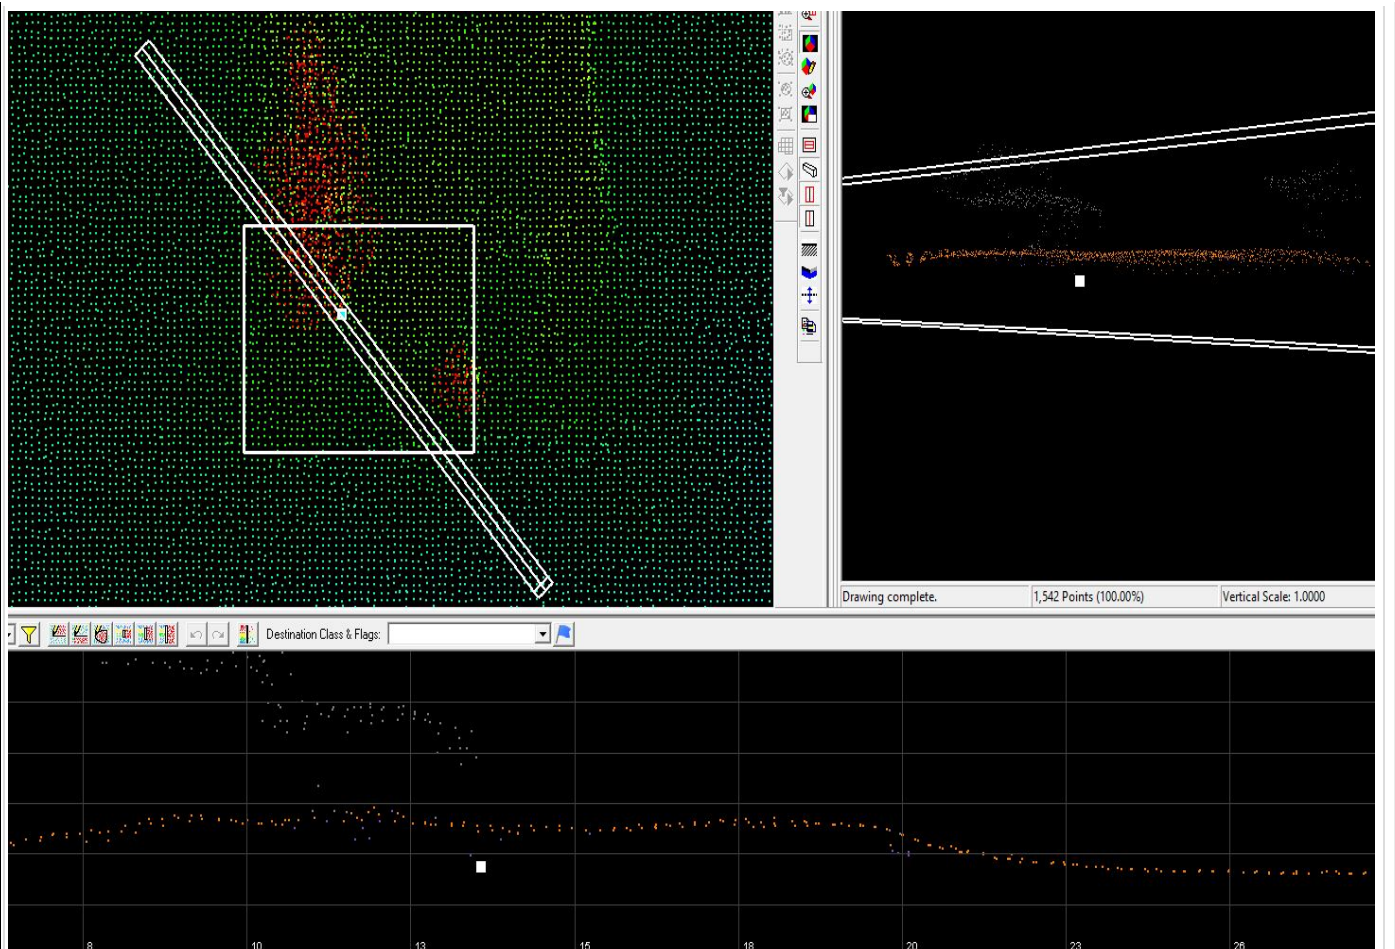

**NVA point 171 was removed from DEM vertical testing. It was found that this point was in an area of data void which was causing a dz value of -1.**

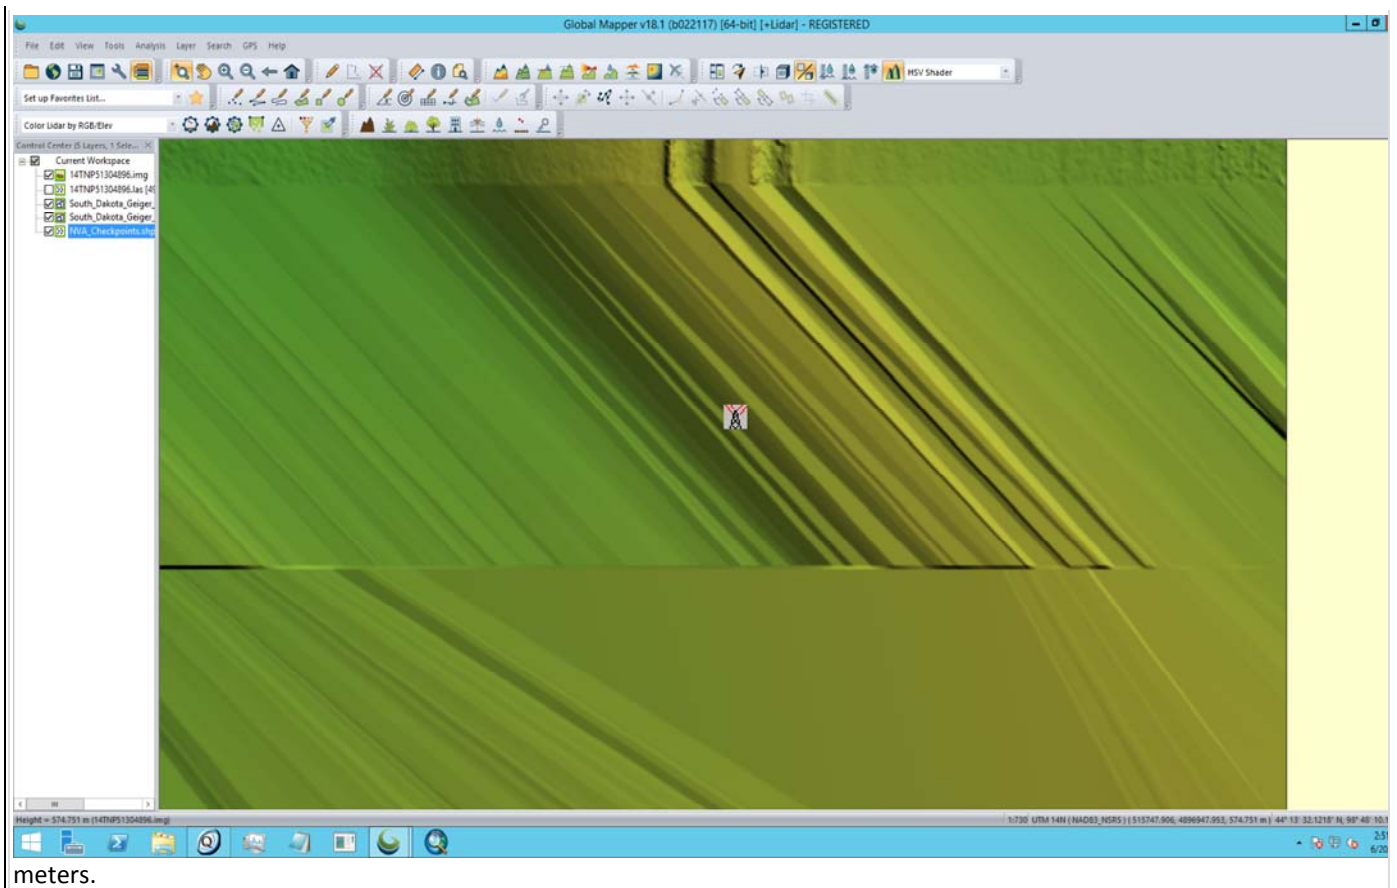

meters.

*Additional Reviewed  
Vertical Accuracy  
Information:*

Swath NVA was tested on the classified point cloud

Points not tested for classified NVA are due to las files having the incorrect global encoder that could not be loaded into the same layer as the majority of the files in ArcMap

Based on this review, the USGS does not accept the vertical accuracy.

End of Vertical Accuracy Review

## Raw-Swath LiDAR Review

LAS swath files or raw unclassified LiDAR data are reviewed to assess the quality control used by the data supplier during collection. Furthermore, LAS swath data are checked for positional accuracy. The data supplier should have calculated the Non-Vegetated Vertical Accuracy using ground control checkpoints measured in clear open terrain (see *Vertical Accuracy Review Section*).

Review Required:  Yes  No *Not Delivered*

## Tiled/Classified LiDAR Review **Not Accepted**

Classified LAS tile files are used to build digital terrain models using the points classified as ground. Therefore, it is important that the classified LAS are of sufficient quality to ensure that the derivative product accurately represents the landscape that was measured. Classified LAS Tiles are comprised as follows, "all project swaths, returns, and collected points, fully calibrated, adjusted to ground, and classified and cut, by tiles, excluding calibration swaths, cross-ties, and other swaths not used, or intended to be used, in product generation".

Review Required:  Yes  No

### **CLASSIFIED LIDAR TILE CHARACTERISTICS**

*Separate folder for classified/tiled LiDAR files*

LAS Version: 1.4

Point Record Format: 6

If specified, \*.wpr files for full waveform data have been provided: Not Required



- Classified LAS tile files conform to project tiling scheme
- Quantity of classified LAS tile files conforms to project tiling scheme
- Classified LAS tile files do not overlap
- Classified LAS tile files are uniform in size
- Correct and properly formatted georeference information is included in all LAS file headers, including the use of OGC 2001 Well Known Text (WKT).
- Adjusted GPS time used with the global encoder id set to 1


Global Encoder is set to 17

- Classified LAS tile files have no points classified as '12' (Overlap) and correctly use overlap bit.
- Point classifications are limited to the standard values listed below:


Code	Description	Used
1	Processed, but unclassified	<input checked="" type="checkbox"/>
2	Bare-earth/Ground	<input checked="" type="checkbox"/>
7	Noise (low, manually identified, if needed)	<input checked="" type="checkbox"/>
8	Model key points	<input type="checkbox"/>
9	Water	<input checked="" type="checkbox"/>
10	Ignored ground (breakline proximity)	<input checked="" type="checkbox"/>
11	Withheld (if the "Withheld Bit" is not implemented in the processing software)	<input type="checkbox"/>
17	Bridges	<input checked="" type="checkbox"/>
18	Noise (high, manually identified, if needed)	<input checked="" type="checkbox"/>

Additional comments:

Noise and ground points in an agricultural field with probable vegetation. (6/18/18)

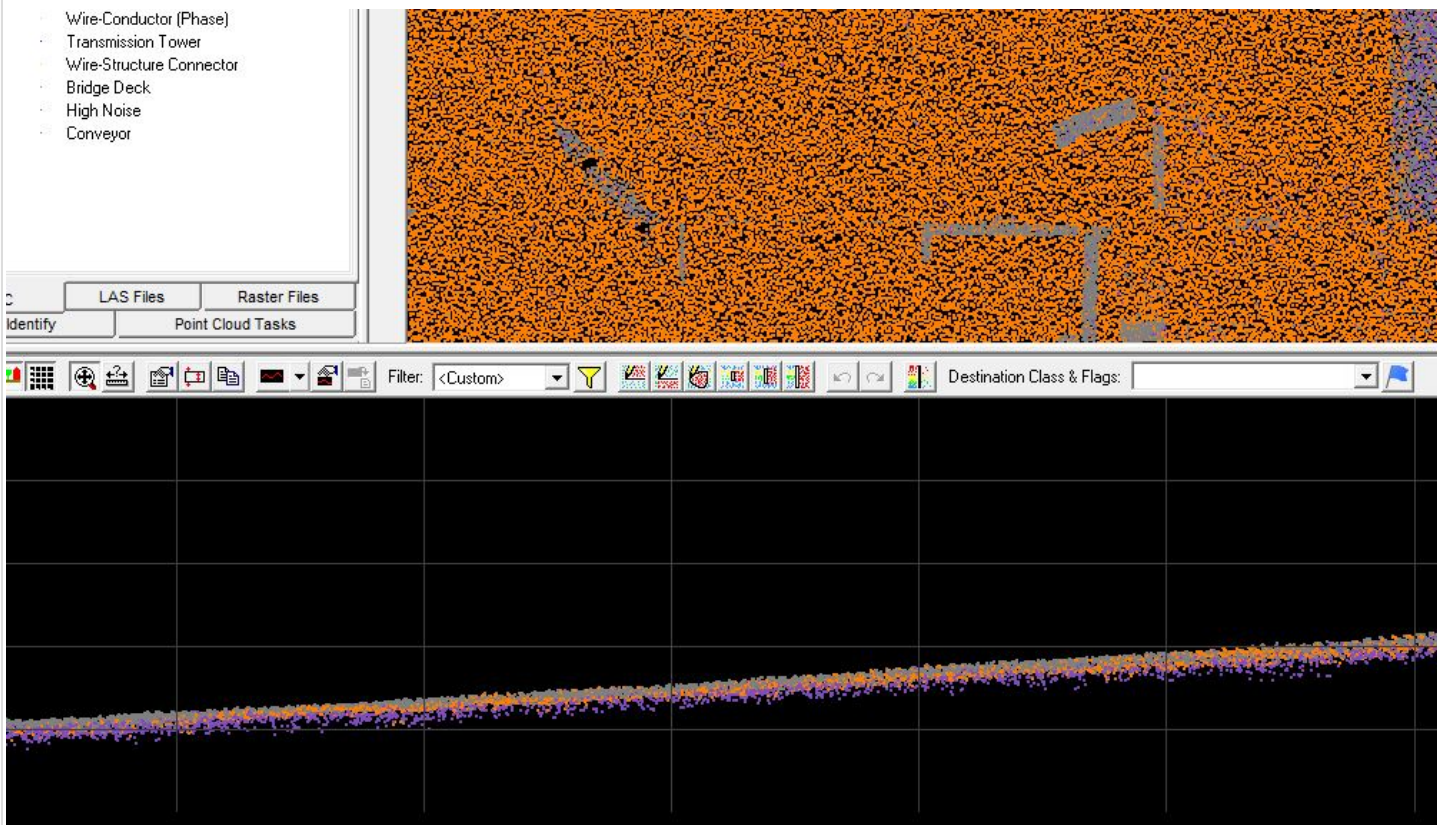



Example of a similar area in another block where the classification of the ground points looks correct.

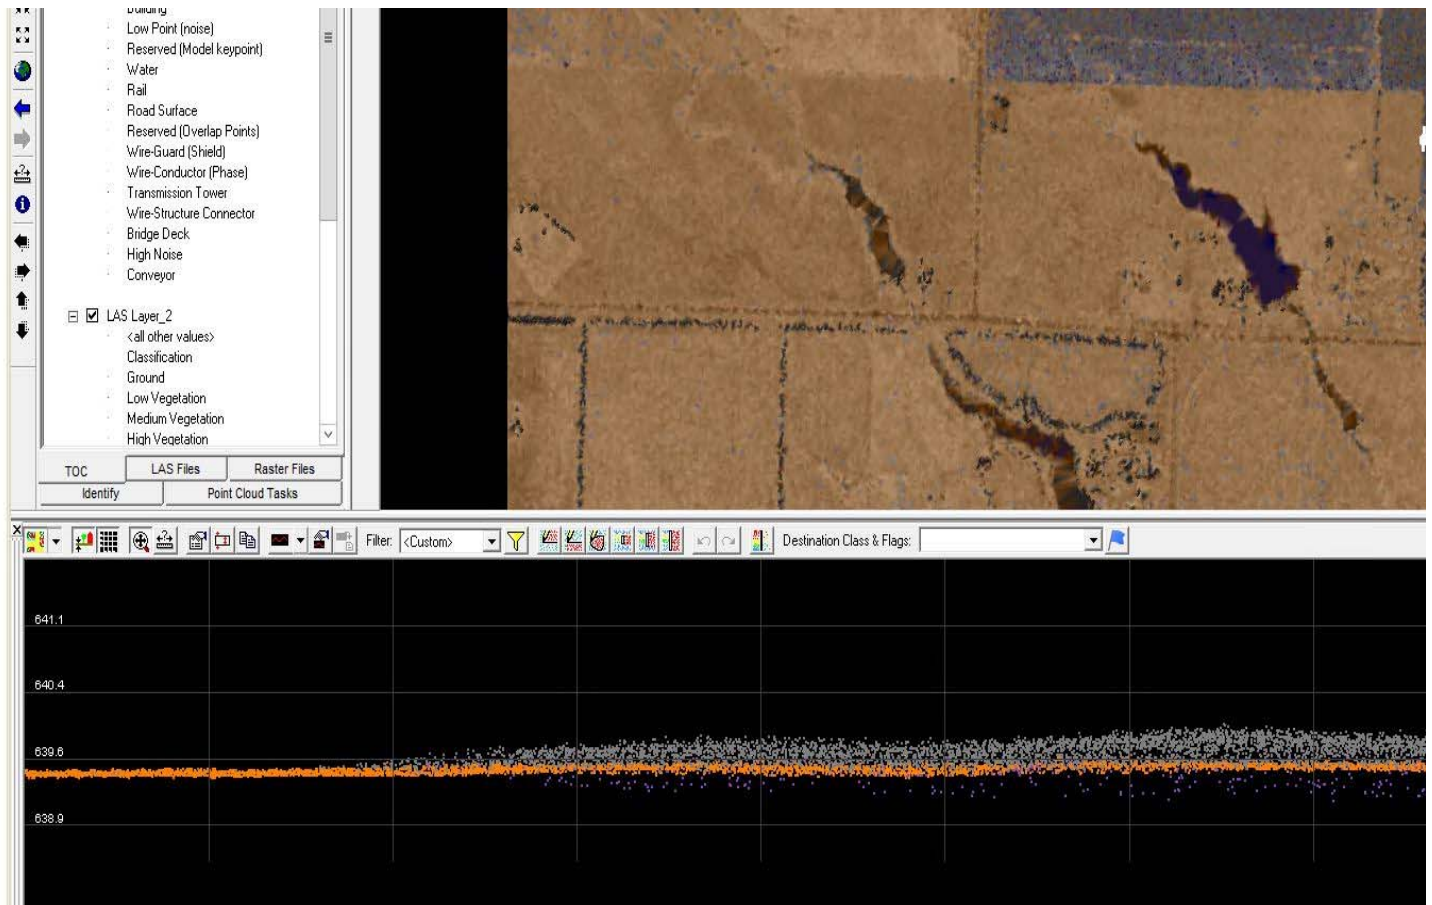

Examples of vertical wall structure scatter from the geiger mode sensor



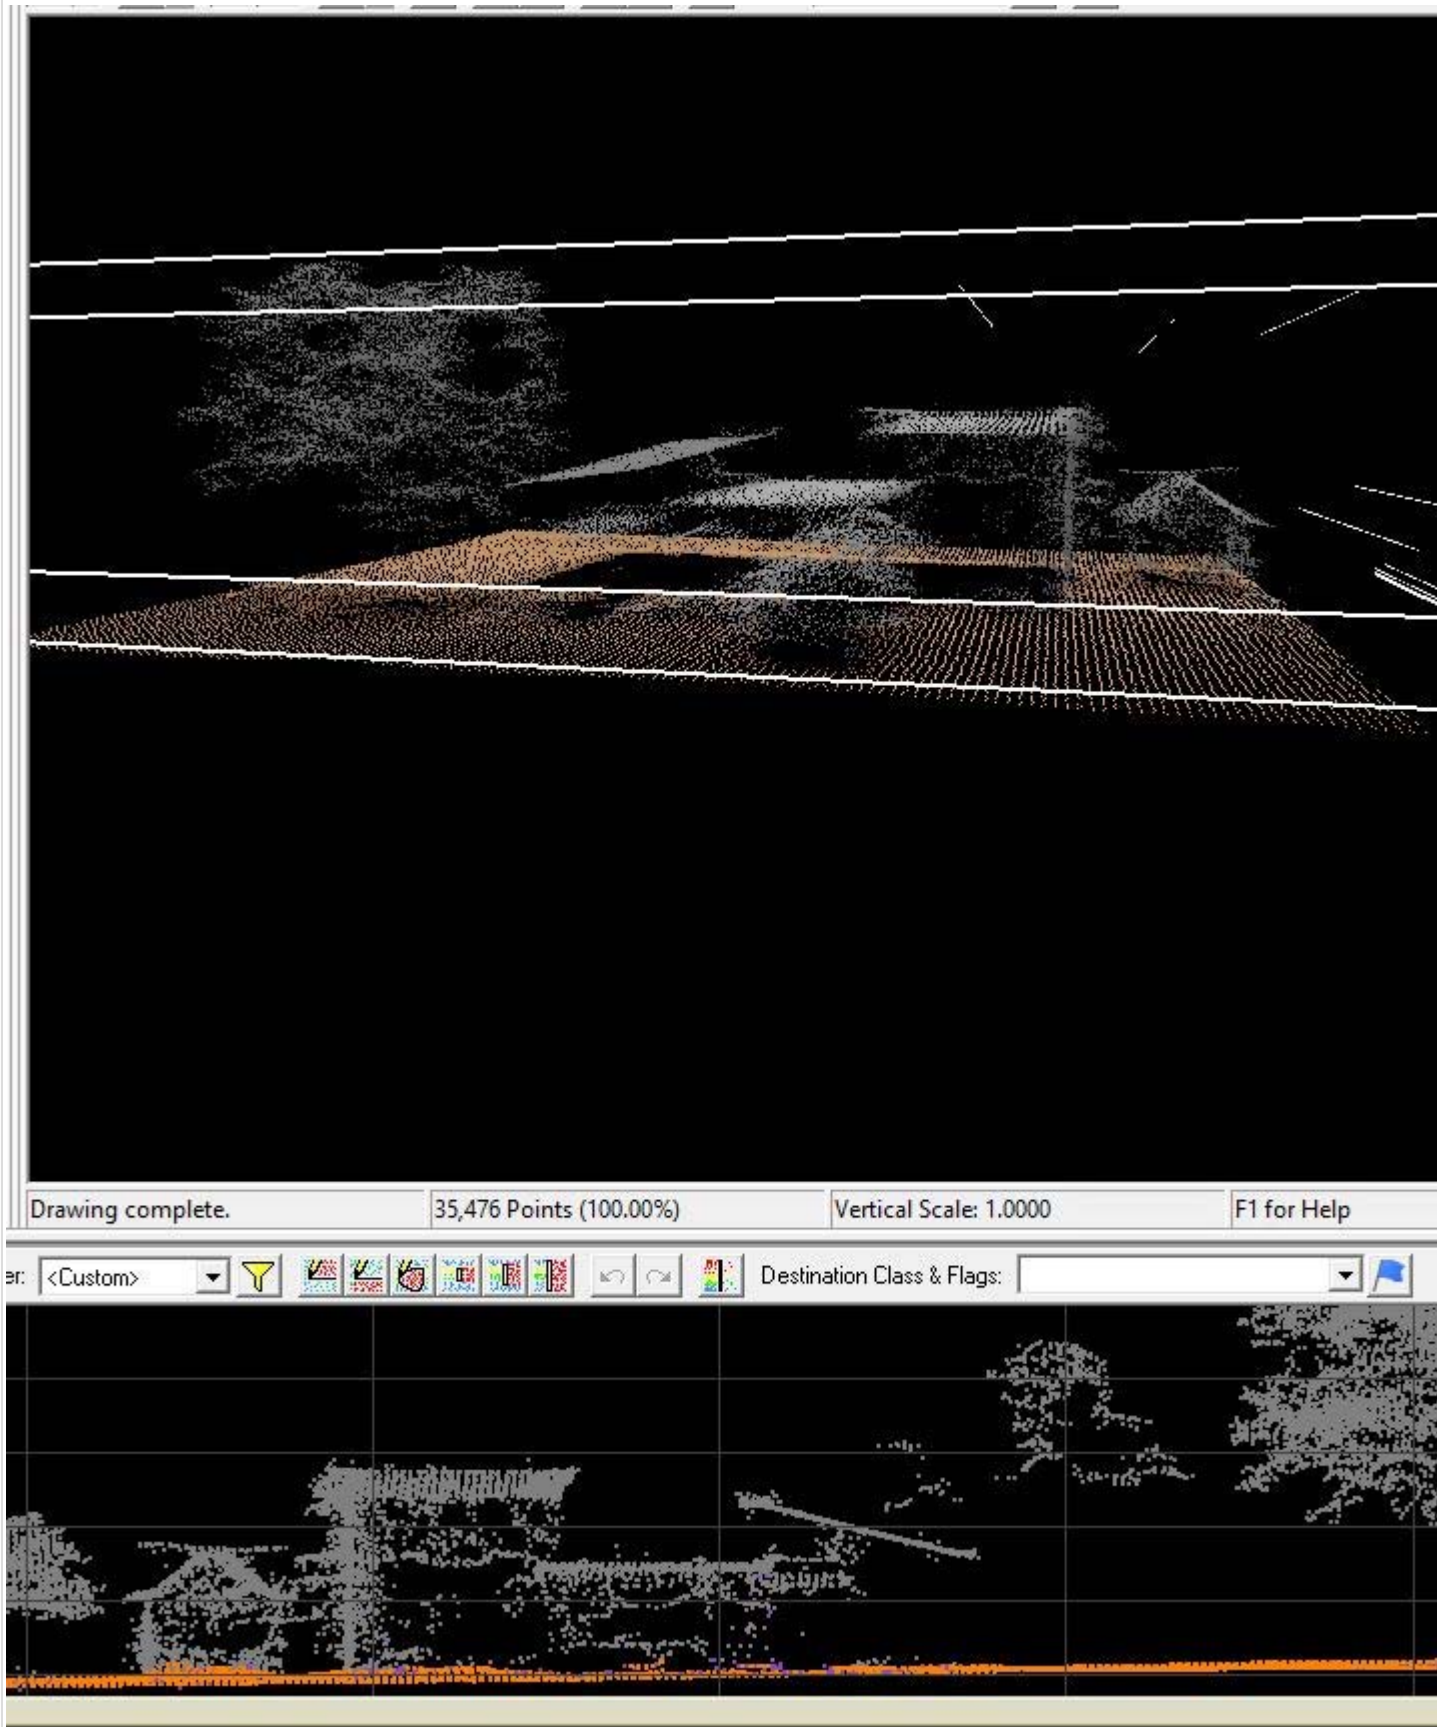

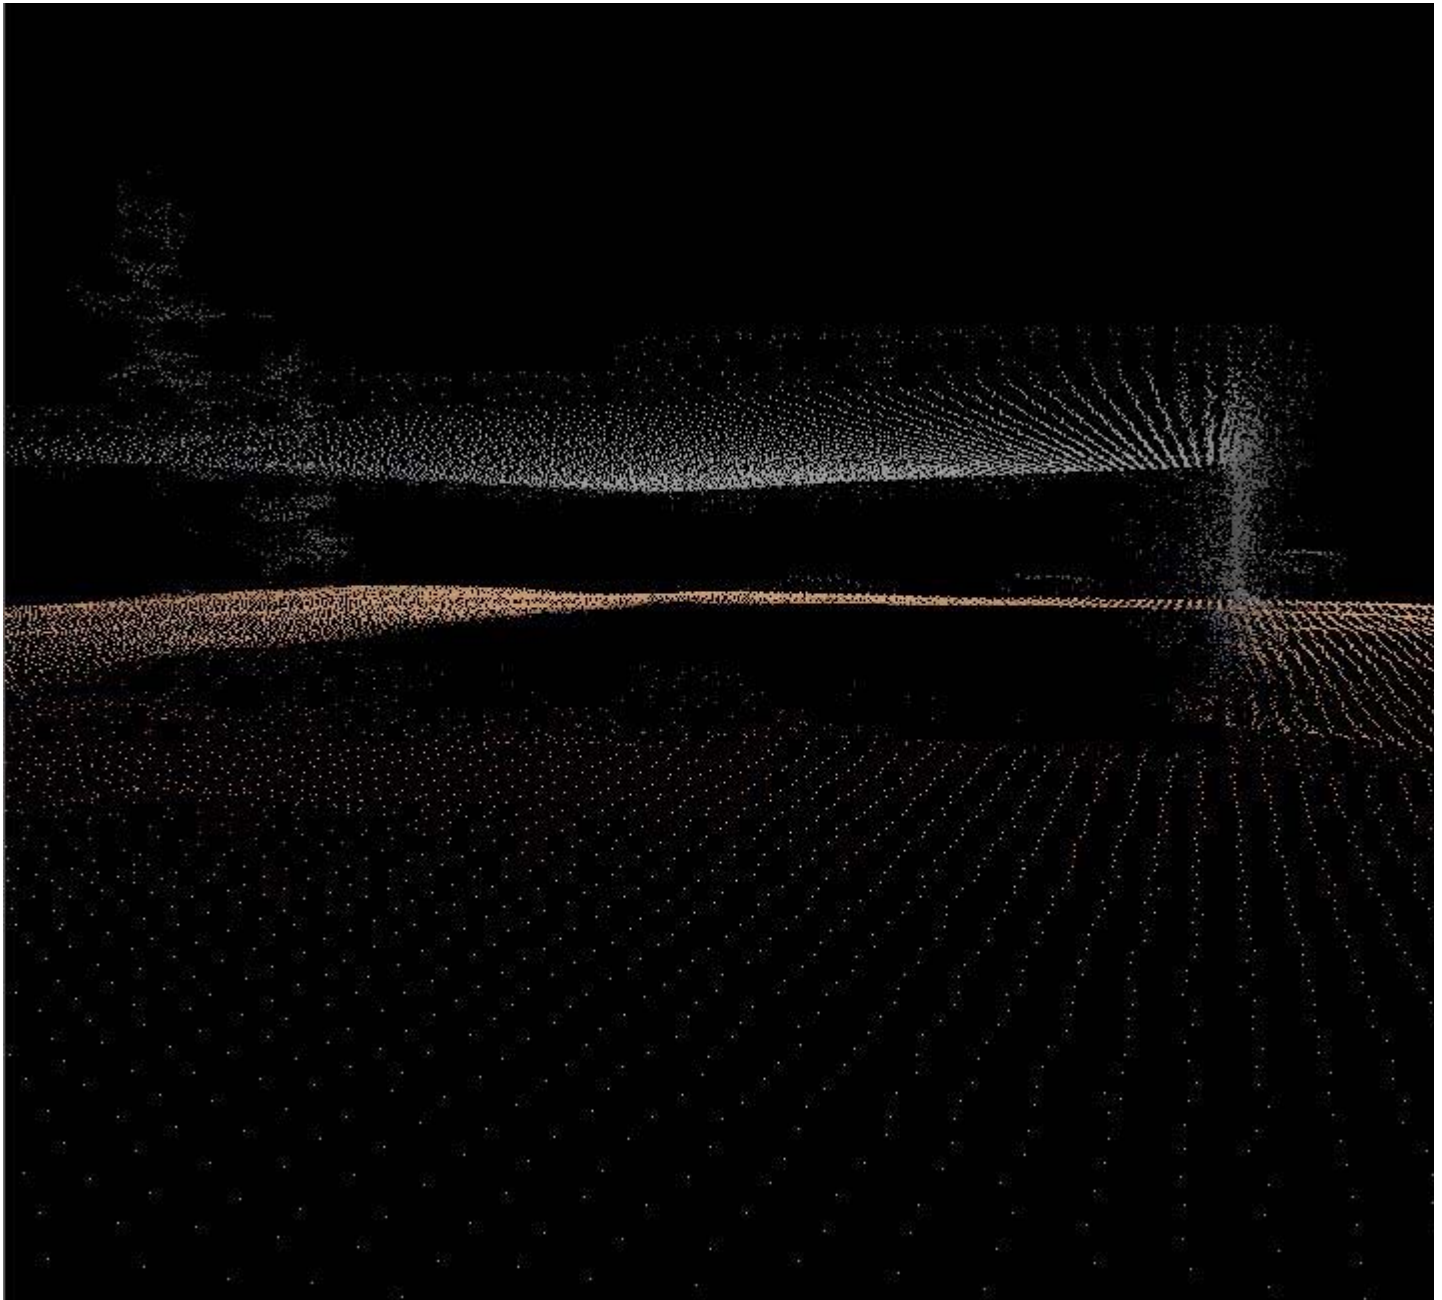

**Based on this review, the USGS does not accept classified/tiled LiDAR data.**

*End of Tiled/Classified LiDAR Review*

## Breakline Review Accepted

Breaklines are vector feature classes that are used to hydro-flatten the bare earth Digital Elevation Models.

Review Required:  Yes  No

### BREAKLINE FILE CHARACTERISTICS:

- Separate folder for breakline files.
- Breaklines contain elevation values.

Elevation values stored in Geometry (ZEnabled)

Units: Meters

- Waterbody Breaklines.

Polyline  Polygon

Single elevation value per waterbody feature.

Required.

Waterbody Elevations were created via Unknown waterbody level techniques.

Double Line Stream Breaklines (Streams Approximately > 100 ft).

Polyline  Polygon

Downstream DLS Flow is Monotonic

Required.

Single Line Breaklines.

No missing or misplaced breaklines.

**Based on this review, the USGS accepts the breakline files.**

End of Breakline Review

## DEM Review **Not Accepted**

The derived bare-earth file(s) receive a review of the vertical accuracies provided by the data supplier, vertical accuracies calculated by the USGS using supplied and independent checkpoints (*see the prior Vertical Accuracy Review Section*), and a thorough visual review for any anomalies or inconsistencies in assessing the quality of the DEM(s).

### BARE-EARTH DEM TILE CHARACTERISTICS:

Separate folder for bare-earth DEM files

Raster File Type: IMG

Raster Cell Size: 0.5 Meters

Tile bit depth/pixel Type: 32\_BIT\_FLOAT

Interpolation or Resampling Technique: Triangulated Irregular Network (TIN)

DEM tiles do not overlap

DEM tiles conform to Project Tiling Scheme

Quantity of DEM files conforms to Project Tiling Scheme


DEM tiles are uniform in size


DEM tiles properly edge match and free of edge artifacts

Tiles are free from Spikes and Pits


Tiles are free from Data Holidays (*voids due to processing or collection errors*)

**Data does not extend out to the project boundary along the Eastern and Southern extent of Block 8. (6/18/2018)**

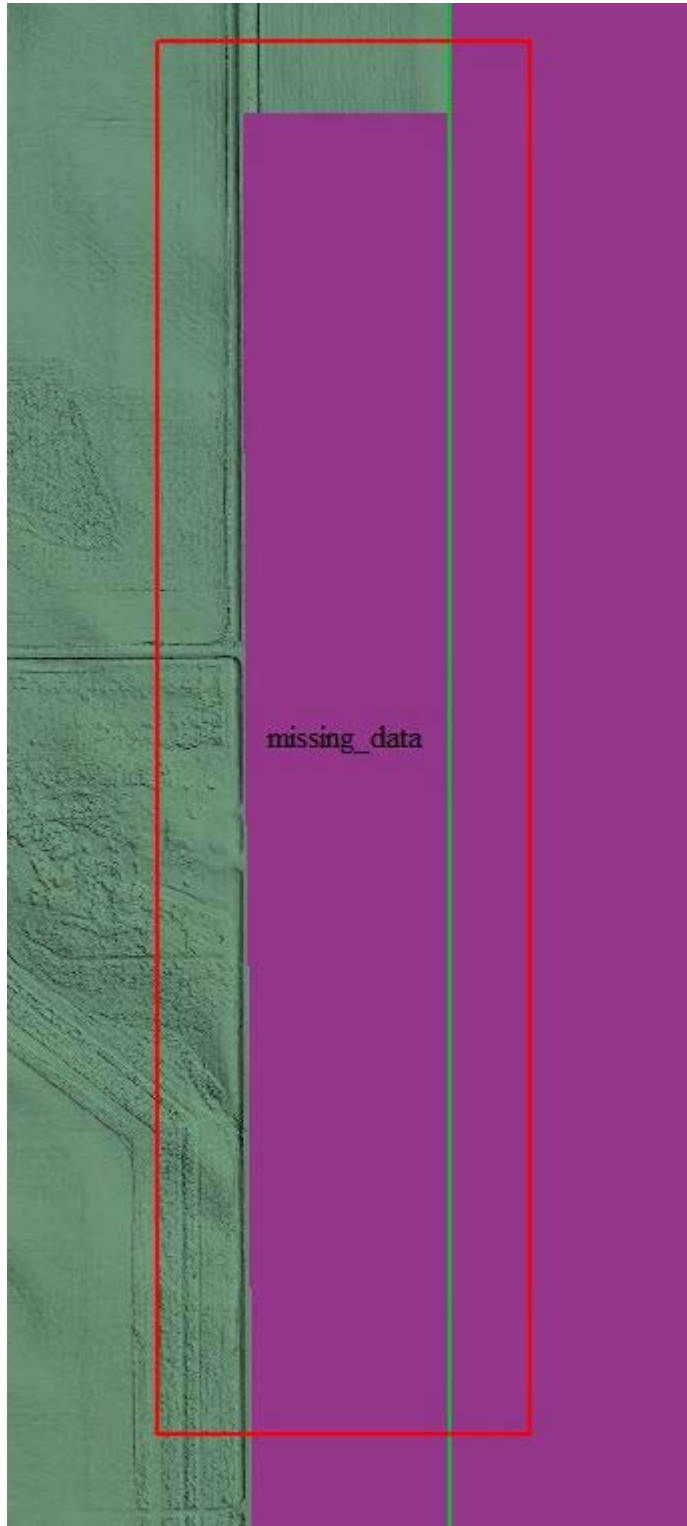

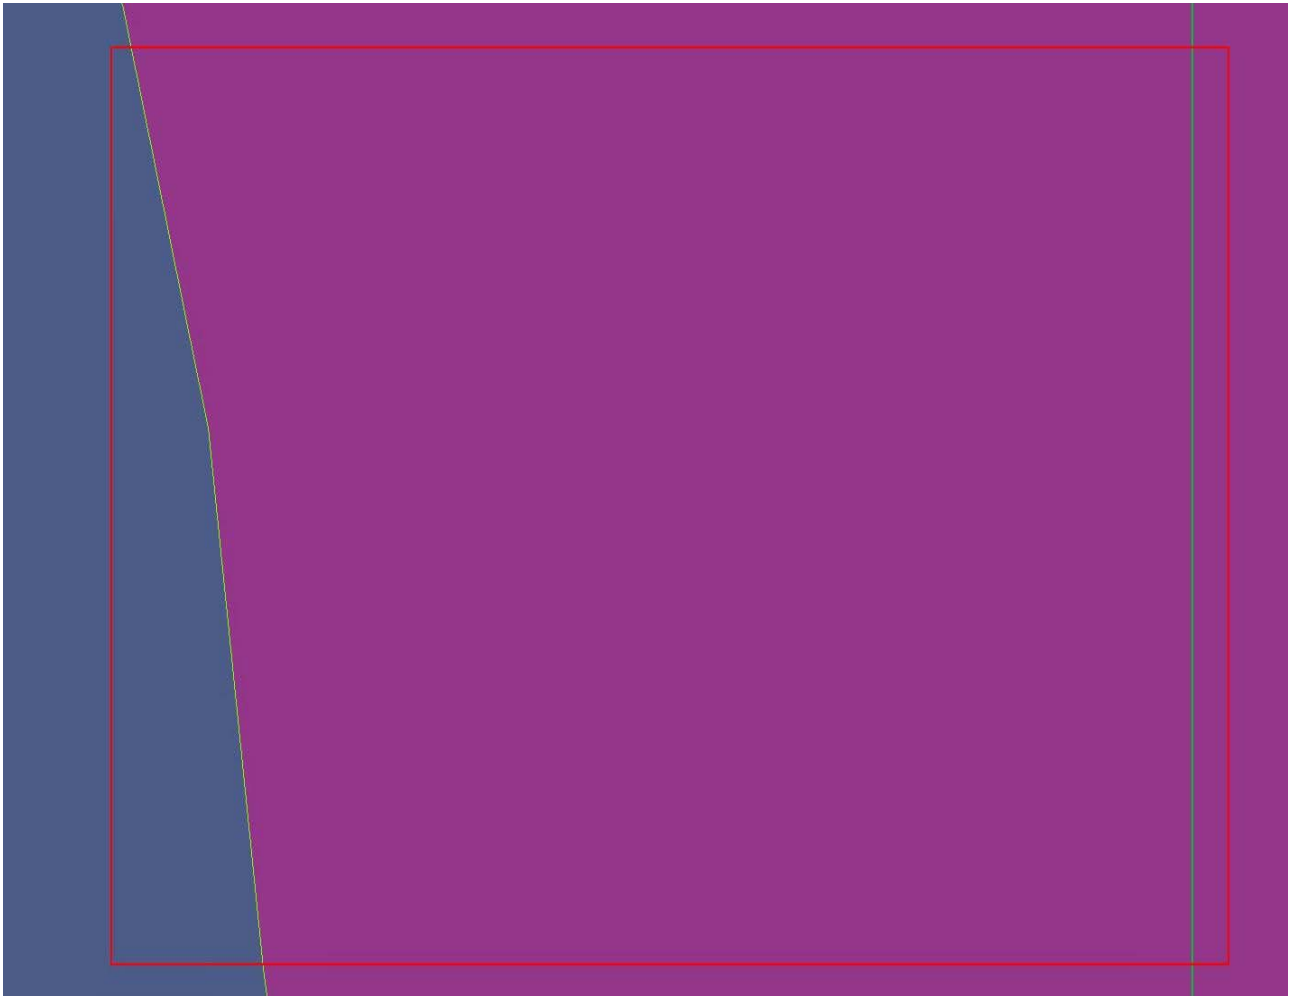

One data void along a lake in block 8 was found. (6/18/18)

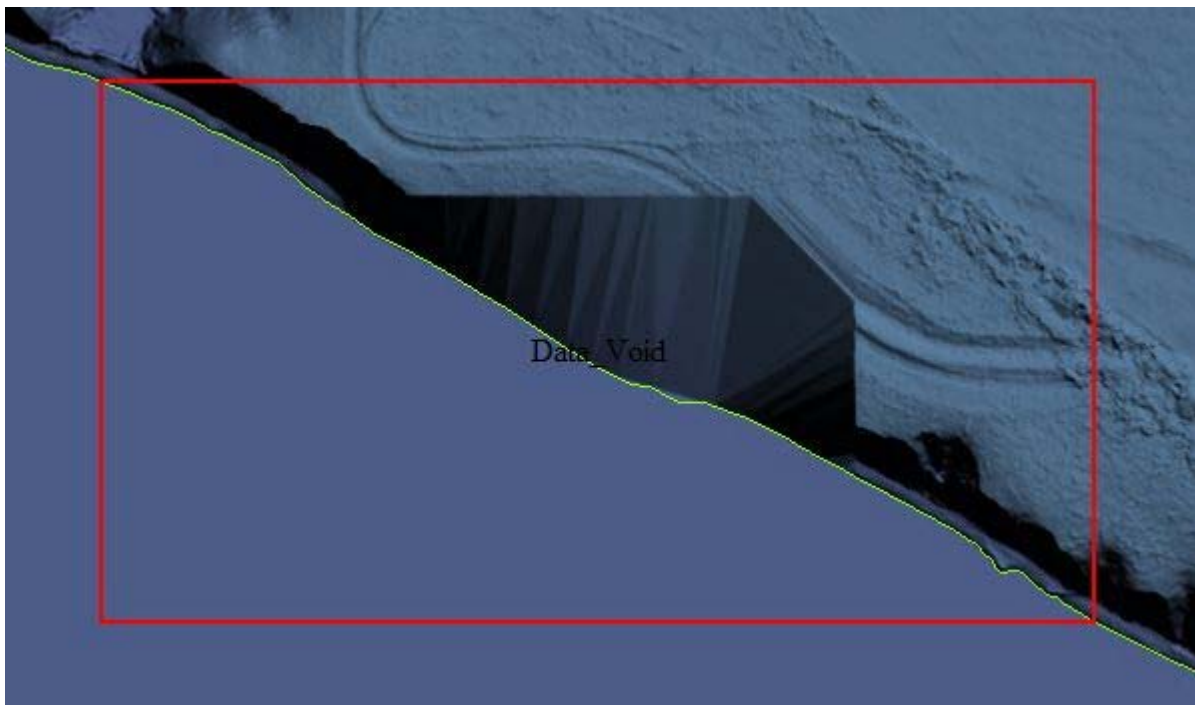



- Tiles do not exhibit systematic sensor error or corrowing

**Hydro Treatment:** hydro-flattened

DEM tiles are properly Hydro Flattened  Yes  No

- Waterbodies  or greater are flattened

2 hydroflattening errors were found in block 8, waterbodies greater than 2 acres are not hydroflattened. Examples of this type of error can be seen below. (6/18/18)



- Streams  or greater are flattened in a downstream manner

- Tidal Boundaries/Shorelines are flattened

- No missing islands  or larger


- Bridges/Overpasses are properly removed

- Culverts are maintained (Not Hydro Enforced)

- Depressions, Sinks, are not filled in (Not Hydro Conditioned)

- Vegetation properly removed

1 error of manmade vegetation (hay rows?). (6/18/2018)

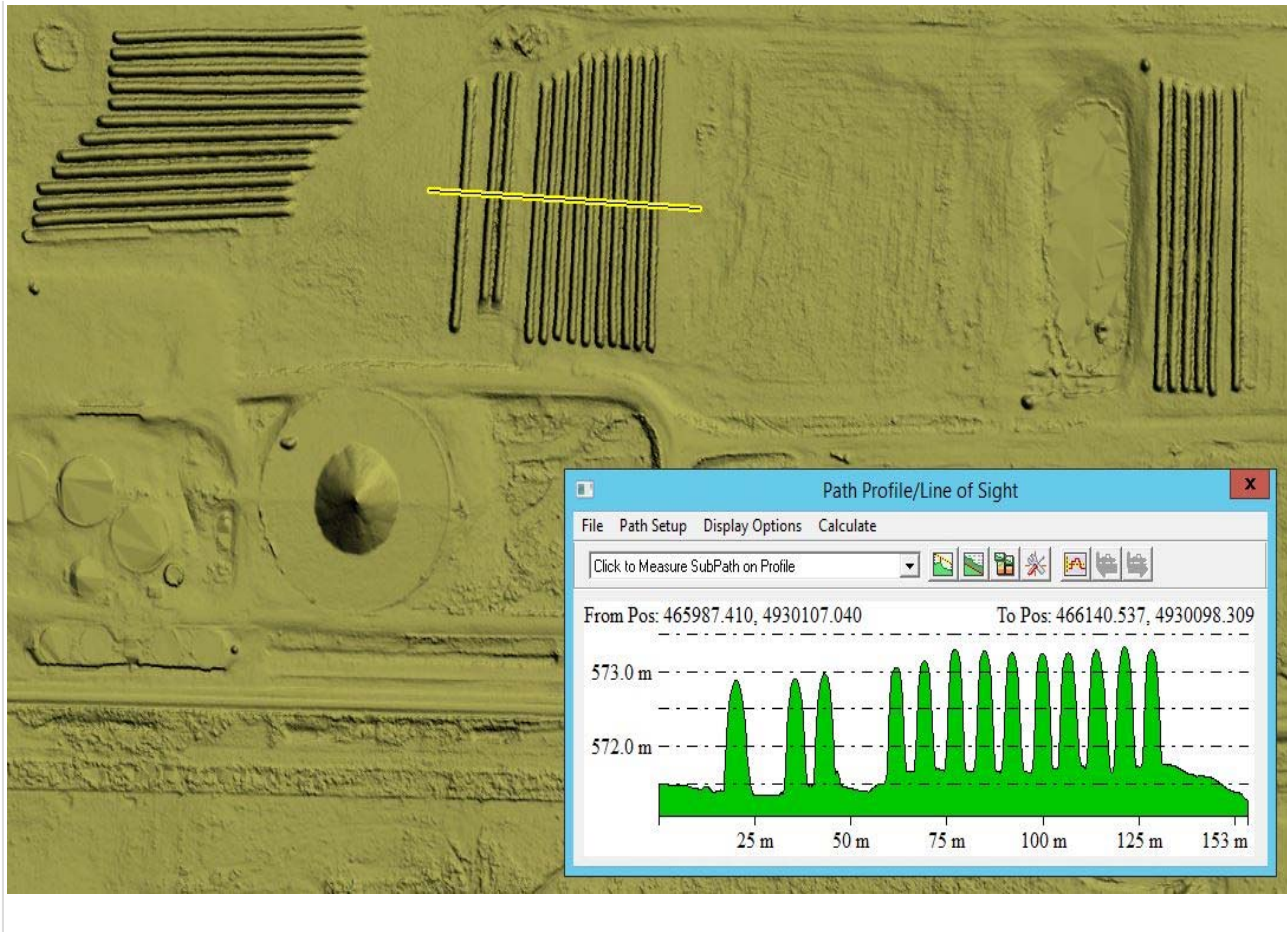

Manmade structures properly removed

Tiles recommended for NED 1/3rd:  Yes.  No.

Tiles recommended for NED 1/9th:  Yes.  No.

Tiles recommended for NED 1 Meter:  Yes.  No.

LAS dataset recommended for distribution: tile classified

**Based on this review, the USGS does not accept the DEM tiles.**

End of DEM Review

**Based on this review, the provided delivery Does Not Meet the Contract and/or Task Order requirements.**

*Additional Comments:*

**INTERNAL COMMENTS**

END OF REPORT (v2.4.0)