

Lidar Mapping Report for the U.S. Geological Survey

Contractor: Woolpert Inc.

Date: December 2022

Contract: 140G0221D0013

Task Order: 140G0222F0109

Project Name: USGS TN Davidson County Lidar 2022 D22

Project ID: 224160

WU Name: TN_DavidsonCo_1_2022

Work Unit ID: 300056



Table of Contents

- Lidar Mapping Report.....1
- for the U.S. Geological Surveycl1
- 1. Overview.....4
 - 1.1. Description4
 - 1.2. Purpose.....5
 - 1.3. Specifications.....5
 - 1.4. Spatial Reference.....5
 - 1.5. Task Order Deliverables.....5
 - 1.5.1. Lidar Data.....5
 - 1.5.2. Spatial Metadata6
 - 1.6. Flight Planning6
 - 1.7. Lidar Sensor Information6
 - 1.7.1. Sensor Specifications7
 - 1.7.2. Laser Specifications7
 - 1.7.3. Accuracy7
 - 1.7.4. Physical Specifications7
 - 1.8. Planned Flight Specifications.....7
 - 1.9. Timeline8
 - 1.10. GNSS and IMU Equipment.....8
 - 1.11. Acquisition Quality Assurance9
- 2. Processing..... 10
 - 2.1. Processing Summary 10
 - 2.1.1. GPS-IMU Trajectory Processing 10
 - 2.1.2. Trajectory Quality 10
 - 2.1.3. Combination Separation..... 10
 - 2.1.4. Estimated Positional Accuracy..... 11
 - 2.1.5. PDOP 11
 - 2.1.6. Geometric Calibration 11
 - 2.1.7. Relative Accuracy: Interswath (Overlap) Consistency..... 11
 - 2.2. Relative Accuracy: Intrawath Precision 12
 - 2.3. Lidar Data Classification 13
 - 2.4. Hydrologic Flattening 14
 - 2.5. Digital Elevation Model 15
 - 2.6. Intensity Imagery..... 15
 - 2.7. Swath Separation Image..... 15

2.8. Metadata 16

3. Accuracy 17

3.1. Horizontal Accuracy..... 17

3.2. Classified Point Cloud 17

3.3. Digital Elevation Model 17

Attachment 1: Sensor Calibration Reports

Attachment 2: Flight Logs

Attachment 3: GPS IMU Images


1. Overview

1.1. Description

The Work Unit TN Davidson County 1 2022, WU 300056 is part of Task order 140G0222F0109.

This Lidar Mapping Report will cover the acquisition, processing, and derivative products of Work Unit 300056. Lidar data was collected to an aggregate nominal pulse spacing (ANPS) of ≤ 0.35 and 8-points per square meter (ppsm) covering approximately 533 square miles in Davidson County, TN to meet USGS Quality Level 1 standards. In addition to high density lidar data acquisition, new horizontal/vertical survey data was collected to support lidar data production.

Figure 1.1.1 – TN Davidson Co 1 2022, WU 300056

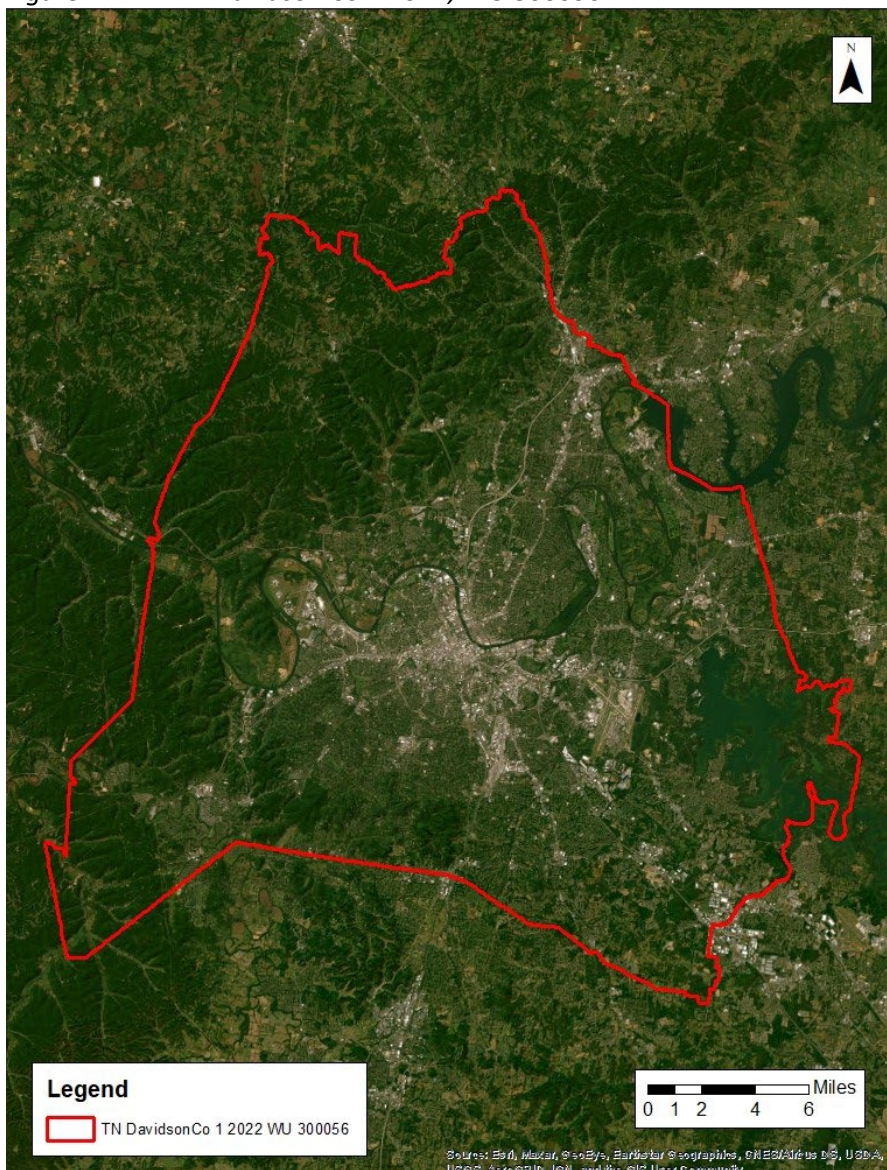

1.2. Purpose

This project will support the 3DEP mission, the Natural Resources Conservation Service (NRCS) high-resolution elevation enterprise, and many state and local agencies.

1.3. Specifications

Data and reporting for this task order were acquired and produced to meet the “USGS Lidar Base Specification v2022 Revision A”, and the American Society of Photogrammetry and Remote Sensing (ASPRS) “Positional Accuracy Standards for Digital Geospatial Data (Edition 1, Version 1.0)”.

1.4. Spatial Reference

Geospatial data products were produced using the following spatial data reference system:

- Horizontal Datum: NAD83 (2011)
- Horizontal Projection: Tennessee
- Horizontal Units: US Survey Feet
- Horizontal EPSG Code: 6576
- Vertical Datum: NAVD88
- Geoid Model: 18
- Vertical Units: US Survey Feet

1.5. Task Order Deliverables

All data products produced as part of this task order are listed below. All tiled deliverables had a tile size of 2000 ft x 3000 ft. Tiles are named in accordance with the US National Grid convention. This delivery’s tiled dataset contains a total of 2,631 tiles. One file was excluded from this dataset (no points):

054010

1.5.1. Lidar Data

Classified lidar point cloud data in compressed LAZ format:

- Class 1 – Default / Processed, but not Classified
- Class 2 – Bare Earth Ground
- Class 7 – Low Noise
- Class 9 – Water
- Class 17 – Bridge Decks
- Class 18 – High Noise
- Class 20 – Ignored Ground
- Class 22 – Temporal Exclusion

Breaklines used for hydro-flattening:

- Rivers 50-feet and greater in width as PolylineZ features in Esri geodatabase format
- Waterbodies greater than 1.5-acres as PolygonZ feature classes in Esri geodatabase format
- Bridges used in DEM generation as PointZ feature classes in Esri .shp format

Hydro-flattened bare earth digital elevation model (DEM): 2-ft pixel size, 32-bit floating-point with no bridges or overpass structures, in GeoTIFF format

Intensity imagery: 2-ft pixel size, 8-bit, 256 gray-scale (linear rescaling from 16-bit intensity) in GeoTIFF format

1.5.2. Spatial Metadata

- Tile index: Esri .shp format
- Interswath results: Esri .shp format
- Intraswath results: Esri .shp format
- Swath polygons: Georeferenced, polygonal representation of the detailed extents of each lidar swath as polygon feature class in an Esri file geodatabase format
- Maximum surface height rasters: 4-ft pixel size, 32-bit floating-point, GeoTIFF format
- Swath separation images: 4-ft pixel size, GeoTIFF format.

The DPA of this task order included 2,631 tiles.

1.6. Flight Planning

Acquisition was planned based on the specifications listed below:

Resolution: 8 points per square meter, with 0.35-meter nominal point spacing

Overlap: At contractor's discretion, but enough to ensure there are no data gaps between usable portions of the swath and to ensure the aggregate nominal point density (ANPD) is achieved

Acquisition Window: March 20, 2022, through March 21, 2022

Acquisition Conditions:

- Daytime Acquisition
- Leaf-off conditions
- No snow is on the ground
- Rivers are within their channels at or below their normal levels
- Sky is sufficiently clear of clouds, smoke, and atmospheric haze.

Data Voids are not allowed except:

- Where caused by waterbodies
- Where caused by areas of low near infra-red (NIR) reflectivity (i.e. asphalt, composition roofing)
- Where caused by lidar shadowing from buildings or other features
- Where appropriately filled-in by another swath

1.7. Lidar Sensor Information

Aerial lidar data was acquired using an Optech Galaxy T2000¹ lidar sensor systems

¹Source: Optech Galaxy T2000 Data Sheet

Optech Galaxy T2000

1.7.1. Sensor Specifications

Operating Altitude: 150-6000 m AGL, nominal

Scan Angle: 10-60°

Scan Width: 10-115% of altitude AGL

Scan Frequency: Maximum 160 Hz (320 scan lines/sec)

1.7.2. Laser Specifications

- Laser Beam Divergence: 0.16 mrad (1/e) or 0.23 mrad (1/e²)
- Laser Classification: Class 4 laser product (US FDA 21 CFR 1040.10 and 1040.11; IEC/EN 60825-1)

1.7.3. Accuracy

- Elevation Accuracy: < 0.03-0.25 m RMSE from 150-6500 m AGL
- Horizontal Accuracy: 1/10,000 × altitude; 1 σ

1.7.4. Physical Specifications

Scanner size: 0.34 × 0.34 × 0.25 m

- Scanner weight: 27-kg
- Scanner operating temperature: 0 – 35°C

Power requirements: 28 V; 400 W

1.8. Planned Flight Specifications

Flight plans were created using Topo Flight/Tracker32 flight design software for direct integration into the aircraft flight navigation system. Aerial lidar data was acquired for this project using the following lidar sensor systems:

- Galaxy T2000 – serial number 5060413, last calibrated September 2020

The following settings for Optech Galaxy were used:

Maximum Number of Returns: 8

Nominal Point Spacing: 0.35-m

Nominal Point Density: 8 ppsm

Flying Height Above Ground Level: 1,768-m

Flight Speed: 145-knots

Scan Angle: 39°

Scan Rate Used: 95-Hz

Pulse Rate Used: 1100-kHz

Multi-Pulse in Air: Enabled
Overlap: Minimum 30%

1.9. Timeline

Lidar data was collected from March 20, 2022, through March 21, 2022. A total of 61 individual flight lines were collected. Flight logs are contained in Attachment 2: Flight Logs.


1.10. GNSS and IMU Equipment

Prior to mobilizing to the project site, flight crews coordinated with required air traffic control personnel to ensure airspace access. Crews were on-site, operating a Global Navigation Satellite System (GNSS) Base Station for airborne GPS support.

Flight navigation during acquisition was performed using computer controlled navigation. The pilots are skilled at maintaining their planned trajectory, while holding the aircraft steady and level. If atmospheric conditions were such that the trajectory, ground speed, roll, pitch and/or heading could not be properly maintained, the mission was aborted until suitable conditions occur.

The PP-RTX stations were used for this work unit.

Figure 2.5.1. Flight Coverage by Lift

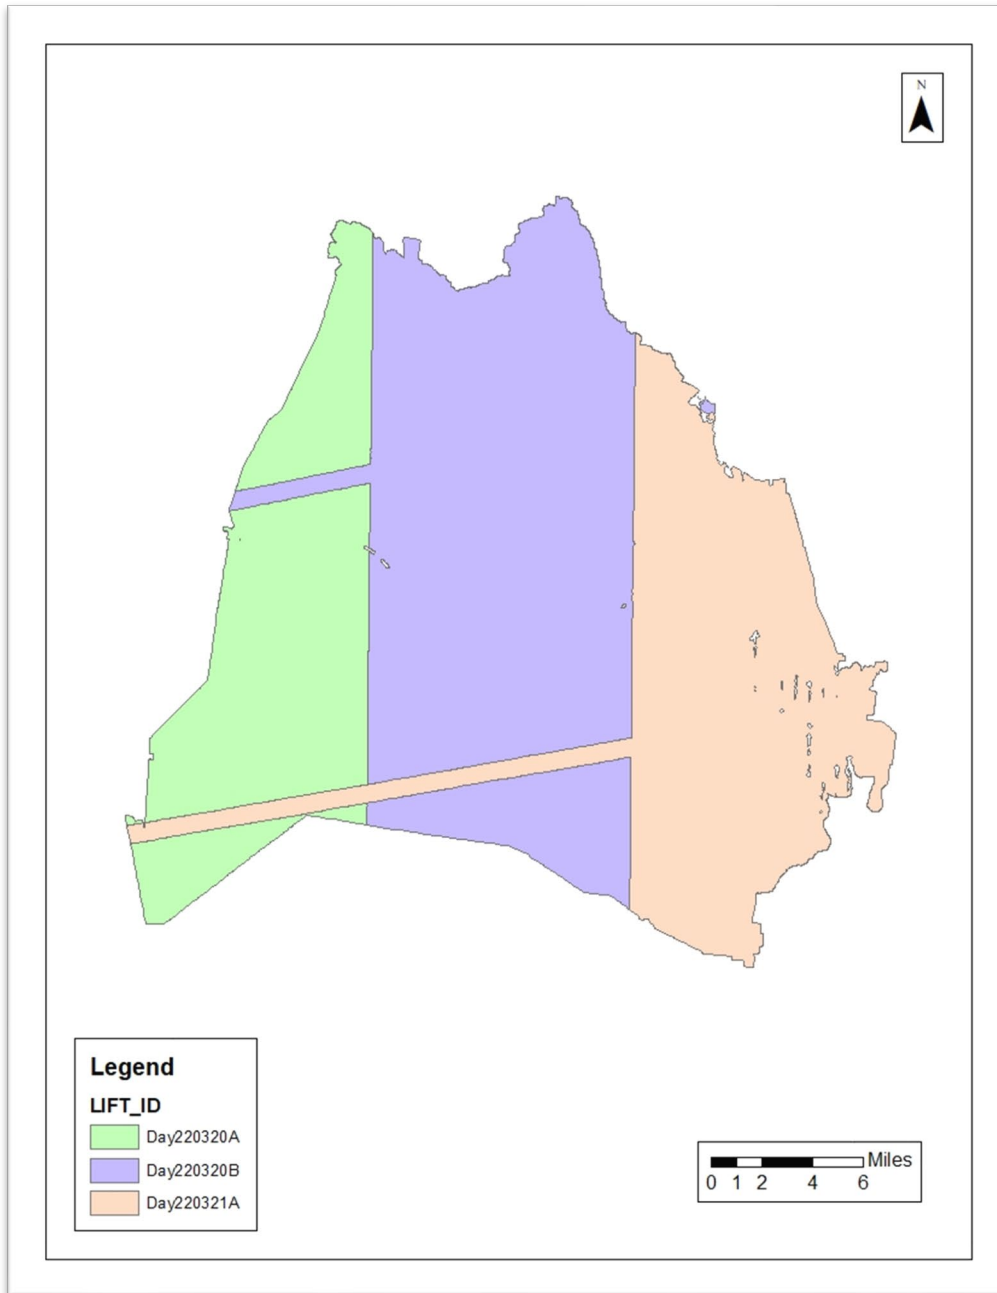

1.11. Acquisition Quality Assurance

Woolpert developed a quality assurance and validation plan to ensure the acquired lidar data meets the USGS Lidar Base Specification. For quality assurance purposes, the lidar data was processed immediately following acquisition to verify the coverage has appropriate density, distribution, and no unacceptable data voids. Accompanying GPS data was post processed using differential and Kalman filter algorithms to derive a best

estimate of trajectory. The quality of the solution was verified to be consistent with the accuracy requirements of the task order. Any required re-flights were scheduled at the earliest opportunity.

The spatial distribution of the geometrically usable first return lidar points was reviewed for density requirements. The first returns were also reviewed for regular and uniform point distribution - verifying the lidar data was spaced so that 90% of the cells in a 2*NPS grid placed over the data contain at least one lidar point. The Nominal Point Spacing (NPS) assessment was conducted against single swath, first return data located within the geometrically usable center portion (typically ~90%) of each swath. Additionally, the data was reviewed for unacceptable data voids –no area greater than or equal to $(4 \times \text{ANPS})^2$ exhibited data coverage gaps. An initial quality control process was performed after each flight to review data coverage, airborne GPS data, and the trajectory solution.

2. Processing

2.1. Processing Summary

Once the lidar data passed initial QC, the dataset was corrected for aircraft orientation and movement. This process used airborne inertial, orientation, and GPS data collected during acquisition along with ground-based GPS data. The data was subject to geometric calibration that further corrected each laser point. This calibrated dataset was used to create the LAS point cloud. LAS point data was initially classified into “ground” and “non-ground”, then further refined using the classes specified by the task order. Breaklines were drawn to denote hydrological features. After the hydro-flattening process, the final deliverable products were created.

There was water level difference on one stream due to time between flights and Class 22 (temporal exclusion) was used where necessary. Temporal polygon was provided to indicate the area in question.

2.1.1. GPS-IMU Trajectory Processing

Kinematic corrections for the aircraft position were resolved using aircraft GPS and static ground GPS (1-Hz) for each geodetic control (base station) for three subsystems: inertial measurement unit (IMU), sensor orientation information, and airborne GPS data.

Post-processing of the IMU system data and aircraft position with attitude data was completed to compute an optimally accurate and blended navigation solution based on Kalman filtering technology, or the smoothed best estimate of trajectory (SBET).

2.1.2. Trajectory Quality

The GNSS trajectory and high-quality IMU data are key factors in determining the overall positional accuracy of the final sensor data. Within the trajectory processing, there are many factors that affect the overall quality, but the most indicative are the combined separation, the estimated positional accuracy, and the Positional Dilution of Precision (PDOP).

2.1.3. Combination Separation

Combined separation is a measure of the difference between the forward-run and the backward-run solution of the trajectory. The Kalman filter was processed in both directions to remove the combined directional anomalies. In general, when these two solutions match closely, an optimally accurate and reliable solution is achieved. The data for this task order was processed with a goal to maintain a combined separation difference of less than 10-cm.

2.1.4. Estimated Positional Accuracy

Estimated positional accuracy plots the standard deviations of the east, north, and vertical directions along a time scale of the trajectory. It illustrates loss of satellite lock issues, as well as issues arising from long baselines, noise, and/or other atmospheric interference.

2.1.5. PDOP

The PDOP measures the precision of the GPS solution in regard to the geometry of the satellites acquired and used for the solution. Lidar data for this task order was processed with a goal to maintain an average PDOP value below 3.0. Brief periods of PDOP over 3.0 are acceptable due to the calibration and control process if other metrics are within specification.

2.1.6. Geometric Calibration

After the initial phase was complete, a formal reduction process was performed on the lidar data. Laser point position was calculated by associating the SBET position to each laser point return time, scan angle, intensity, etc. Raw laser point cloud data was created for the whole project area in LAS format. Automated line-to-line calibrations were then performed for system attitude parameters (pitch, roll, heading), mirror flex (scale) and GPS/IMU drift. Statistical reports were generated for comparison and used to make the necessary adjustments to remove any residual systematic error.

For more information, see the Sensor Calibration Report(s) in Attachment 1: Sensor Calibration Reports. Software used included proprietary software, TerraMatch v20, Optech’s LiDAR Mapping Suite (LMS) v4.5

2.1.7. Relative Accuracy: Interswath (Overlap) Consistency

Interswath (overlap) consistency was assessed at multiple locations within overlap in non-vegetated areas containing only single returns and located in areas with slopes of less than 10-degrees. To the extent allowed by the data, test areas were chosen where the full width of the overlap was represented. These overlap areas include adjacent, overlapping parallel swaths within a project, cross-tie swaths, and a sample of intersecting project swaths in both flight directions, and adjacent, overlapping lifts. The interswath consistency results were produced as polygon features in Esri shapefile format.


This project required the interswath accuracy to meet ≤ 8 -cm RMSDz. Accuracy was assessed in accordance with “USGS Base Specification v2022, Revision A”.

Table 3.4.1 Interswath Results

FID	Minimum (m)	Maximum (m)	RMSDz (m)
0	-0.080	0.100	0.036
1	-0.050	0.085	0.027
2	-0.260	0.140	0.060
3	-0.120	0.150	0.045
4	-0.093	0.168	0.041
5	-0.085	0.065	0.032
6	-0.170	0.140	0.040
7	-0.100	0.130	0.047
8	-0.055	0.140	0.030
9	-0.090	0.140	0.037

10	-0.070	0.140	0.033
11	-0.120	0.150	0.036
12	-0.075	0.085	0.037
13	-0.183	0.197	0.050
14	-0.085	0.080	0.033

Figure 3.4.2 Interswath Testing Locations

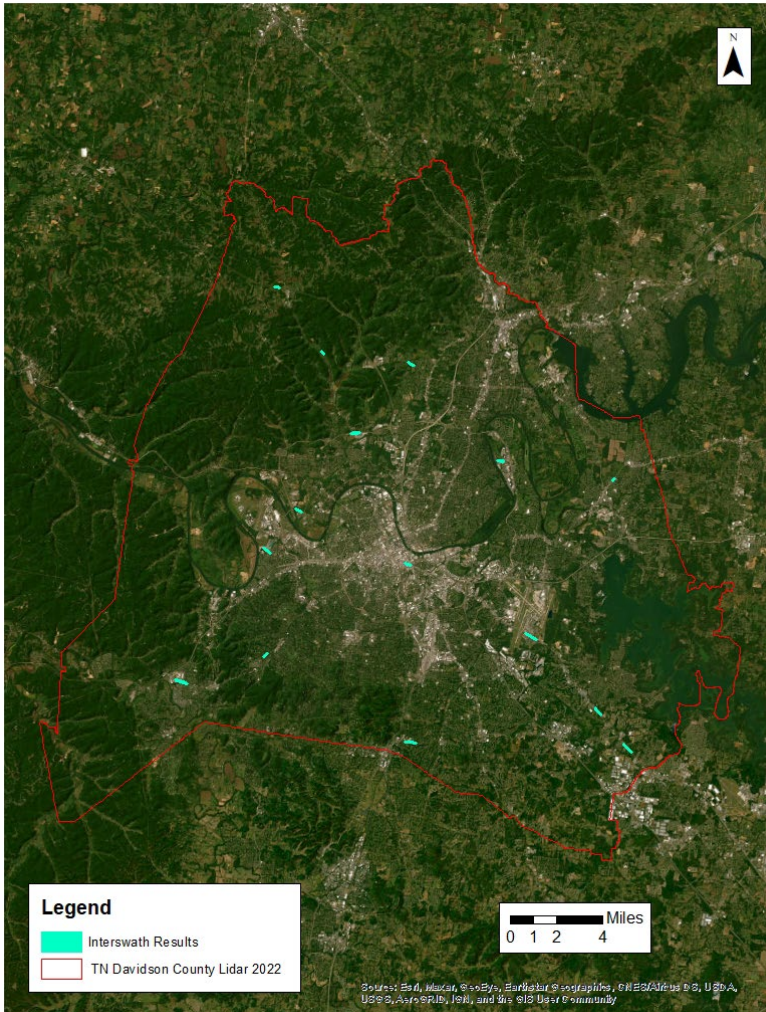

2.2. Relative Accuracy: Intrawath Precision


Intrawath precision (smooth surface precision) was performed on hard surfaces with areas consisting of approximately 100-pixels (ex.: parking lots, large rooftops) and containing only single return lidar points. Sample areas were selected where full width of the swath(s) (left, center, and right) were represented to the extent the data allowed. The intrawath precision results were produced as polygon features in Esri shapefile format.

This project required the intrawath accuracy to meet ≤ 6 -cm RMSDz. Accuracy was assessed in accordance with the “USGS Base Specification v2022, Revision A”.

Table 3.5.1 Intrawath Results

FID	Minimum (m)	Maximum (m)	RMSDz (m)
0	-0.105	0.000	0.038
1	-0.169	0.184	0.056
2	-0.115	0.000	0.035
3	-0.141	0.191	0.035

Figure 3.5.2 Intrawath Testing Locations

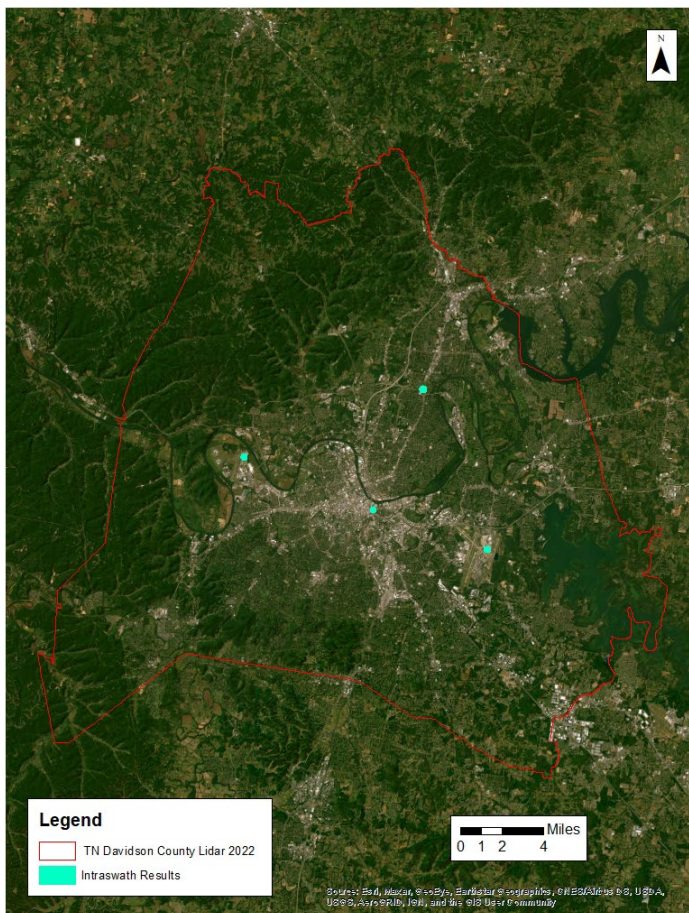

2.3. Lidar Data Classification

LAS data was initially classified as ground and non-ground points “first and only” as well as “last of many” lidar returns. Additional filters were created to meet the task order classification specifications. Statistical absolute accuracy was assessed by direct comparisons of ground classified points to ground RTK survey data. Based on the statistical analysis, the lidar data was then adjusted to reduce the vertical bias when compared to the survey ground control of higher accuracy.

The bare-earth (Class 2 - Ground) lidar points were subject to a manual quality control step to verify the quality of the Digital Elevation Model (DEM) as well as a peer-based review. This included a review of the DEM surface to remove artifacts and ensure topographic quality. After the bare-earth surface was finalized, it was used to generate all hydro-breaklines through a semi-automated process.

All Ground (Class 2) lidar data inside of the Lake Pond and Double Line Drain hydrological flattening breaklines were then classified to Water (Class 9) using TerraScan/LP360 algorithms. A buffer of 0.7-meters was also used around each hydro-flattened feature to classify these Ground (Class 2) points to Ignored Ground (Class 20). All Lake Pond Island and Double Line Drain Island features were checked to ensure that the Ground (Class 2) points were reclassified to the correct classification after the automated classification was completed.

All data was manually reviewed and any remaining artifacts were removed. Industry-standard LAS files were then created. Final statistical analysis was performed per tile on the LAS files classes to verify final classification metrics and full LAS header information. Those classes include:

- Class 1: Processed, but Unclassified
- Class 2: Bare Earth
- Class 7: Low Noise
- Class 9: Water
- Class 17: Bridge Deck
- Class 18: High Noise
- Class 20: Ignored Ground
- Class 22: temporal exclusion

Classified LAS files were evaluated through a series of manual quality control steps as well as a peer-based review to eliminate remaining artifacts from the Ground class. This included a review of the DEM surface to remove artifacts and ensure topographic quality. Software used included proprietary software, GeoCue LP360, TerraScan v20, and Global Mapper v20.

2.4. Hydrologic Flattening

The lidar task order required compilation of breaklines defining the following types of waterbody features:

Lakes, reservoirs, and ponds:

- Minimum of 1.5-acres or greater
- Compiled as closed polygons collected at a constant elevation

Rivers and streams:

- Nominal width of 50-foot
- Compiled in direction of flow, with both sides maintaining an equal elevation gradient

Woolpert used the following steps to hydrologically flatten the waterbodies and for gradient hydrologic flattening of the double line streams within the existing lidar data:

1. Newly acquired lidar data was used to manually compile the hydrologic features in a 2D environment using the lidar intensity and bare earth surface. Open Source imagery was used as reference as necessary.
2. An integrated software approach combined the lidar data and 2D breaklines. This process “draped” the 2D breaklines onto the 3D lidar surface model to assign an elevation. A monotonic process was

performed to ensure the streams flowed consistently in a downhill gradient. A secondary step within the program verified an equally matching elevation of both stream edges. The breaklines that characterize the closed waterbodies were draped onto the 3D lidar surface and assigned a constant elevation at or just below ground elevation.

3. All classified ground points inside the hydrologic feature polygons were reclassified to Water (Class 9).
4. All classified Ground points were reclassified from within a buffer along the hydrologic feature breaklines to Buffered Ground (Class 20). The buffer distance was approximately the task order designed Nominal Pulse Spacing distance.
5. Breaklines used for bridge removal during the hydrologic flattening were included with the hydrologic breakline geodatabase deliverable. These breaklines produce a more aesthetically pleasing DEM appearance.
6. The lidar ground points and breaklines were used to generate a DEM.
7. Quality control was performed by reviewing the hydrologically flattened DEM and hydrologic breakline features. An approach combining commercial off the shelf software and proprietary methods reviewed the overall connectivity of the hydrologic breaklines.

Breaklines defining waterbodies greater than 1.5-acres were provided as a PolygonZ feature class. All lake breaklines compiled as part of the flattening process were provided in an Esri file geodatabase. Breaklines used for DEM generation were provided as PointZ features in Esri shapefile format.

Software used included TerraScan v20, TerraModeler v20, Esri ArcMap v10.7, and GeoCue LP360.

TerraScan was used to add the hydrologic breakline vertices and export the lattice models.

2.5. Digital Elevation Model

TerraScan was used to add the hydrologic breakline vertices and export the lattice models. Ground lidar points in conjunction with the hydro breaklines and bridge breaklines were used to create 2-ft hydro-flattened bare-earth raster DEM files. Automated routines in ArcMap generated a 32-bit floating point raster GeoTIFF file for each tile. 2,631 files were produced and clipped to the data extent. Each surface was checked for surface anomalies or incorrect elevations found within the surface.

Software used included TerraScan v20, GDAL 2.4.0, Esri ArcMap v10.7, and Global Mapper v20.

2.6. Intensity Imagery

Lidar intensity data derived from the acquired lidar data was linearly rescaled from 16-bit intensity and provided as 2-ft pixel, 8-bit, 256 gray scale GeoTIFF files. 2,630 files were produced and clipped to the data extent.

Software used included TerraScan v20 and Esri ArcMap v10.7.

2.7. Swath Separation Image

The swath separation image was generated to visualize the DZ between the overlapping areas of the flight lines. To generate this surface a point insertion method was applied as the primary algorithm. All returns for point classes except Classes 7 and 18 were used in the calculation for each cell. GSD and color ramp values were dependent on the Quality Level and point spacing for the project. The GSD for the surface was no more than four (4) times the NPS of the lidar data rounded to an appropriate whole number.


Intensity values were modulated to 50% to ensure that there is no oversaturation of intensities values throughout the surface. After all calculations and surfaces were made, 2,631 files were produced and clipped to the data extent.

Software used was GeoCue LP360.

The color ramp for the swath separation image is as follows:

- Less than 8-cm: Green
- 8 to 16-cm: Yellow
- Greater than 16-cm: Red

Figure 3.10.1 Swath Separation Image

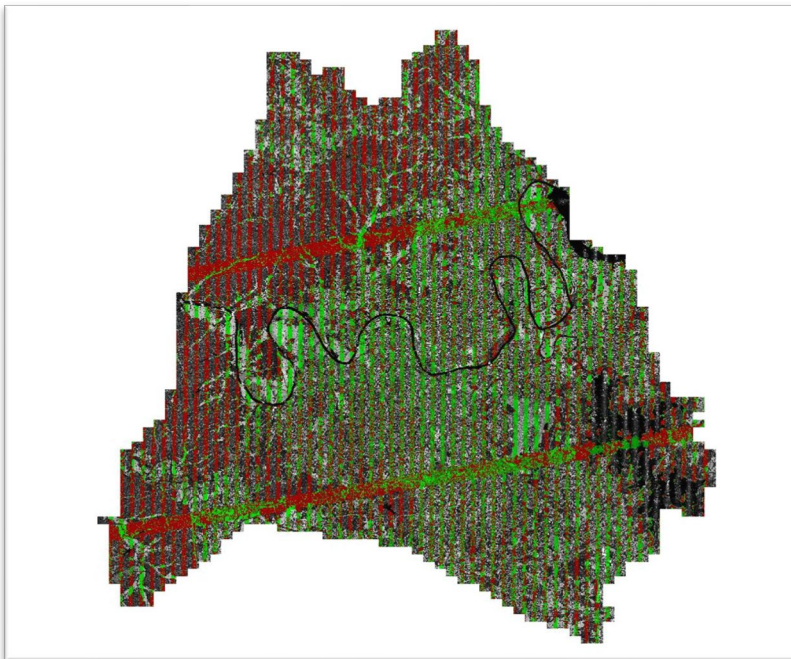

2.8. Metadata

FGDC CSDGM/USGS MetaParser-compliant metadata was produced in XML format. The metadata includes a complete description of the task order client information, contractor information, project purpose, lidar acquisition and ground survey collection parameters, lidar acquisition and ground survey collection dates, spatial reference system information, data processing including acquisition quality assurance procedures, GPS and base station processing, geometric calibration, lidar classification, hydrologic flattening, intensity imagery development, and final product development.

Other metadata deliverables included:

Interswath and intraswath test results

Tile index

Georeferenced, polygonal representation of the detailed extents of each acquired lidar swath

Swath separation images in GeoTIFF format

Maximum surface height rasters in GeoTIFF format

3. Accuracy

3.1. Horizontal Accuracy

This data set was produced to meet ASPRS Positional Accuracy Standards for Digital Geospatial Data (2014) for a 0.13 cm RMSE_x / RMSE_y Horizontal Accuracy Class which equates to Positional Horizontal Accuracy = +/- 0.32 cm at a 95% confidence level.

3.2. Classified Point Cloud

LAS Swath Non-Vegetated Vertical Accuracy (NVA) produced to meet ≤ 0.196 Meters Non-vegetated vertical accuracy at a 95 percent confidence level, derived according to NSSDA using ≤ 0.100 Meters (RMSE_z) x 1.96000 as defined by the National Standards for Spatial Data Accuracy (NSSDA); assessed and reported using National Digital Elevation Program (NDEP)/ASPRS Guidelines.

LAS Swath Vegetated Vertical Accuracy (VVA) produced to meet ≤ 0.30 Meters Vegetated vertical accuracy at the 95th percentile as defined by the National Standards for Spatial Data Accuracy (NSSDA); assessed and reported using National Digital Elevation Program (NDEP)/ASPRS Guidelines.

This data set was produced to meet ASPRS Positional Accuracy Standard for Digital Geospatial Data (2014) for a 10-cm RMSE_z Vertical Accuracy Class.

3.3. Digital Elevation Model

Bare-Earth DEM Non-Vegetated Vertical Accuracy (NVA) produced to meet ≤ 0.196 Meters Non-vegetated vertical accuracy at a 95 percent confidence level, derived according to NSSDA using ≤ 0.100 Meters (RMSE_z) x 1.96000 as defined by the National Standards for Spatial Data Accuracy (NSSDA); assessed and reported using National Digital Elevation Program (NDEP)/ASPRS Guidelines.

Bare-Earth DEM Vegetated Vertical Accuracy (VVA) produced to meet ≤ 0.30 Meters Vegetated vertical accuracy at the 95th percentile as defined by the National Standards for Spatial Data Accuracy (NSSDA); assessed and reported using National Digital Elevation Program (NDEP)/ASPRS Guidelines. (ASPRS).