

Airborne Topographic LiDAR Report

Wisconsin WROC - 3DEP

Dane County LiDAR 2017



Prime contractor: Ayres Associates
Airborne LiDAR acquisition completed by Quantum Spatial



Contact: Ayres Associates, Geospatial Division • 5201 E. Terrace Drive, Suite 200,
Madison, WI 53718 • 608.443.1200
www.AyresAssociates.com

TABLE OF CONTENTS

1. Summary / Scope.....	Page 1
1.1 Summary	Page 1
1.2 Scope	Page 1
1.3 Coverage.....	Page 1
1.4 Duration	Page 1
1.5 Issues	Page 1
1.6 Deliverables	Page 2
2. Planning / Equipment	Page 4
2.1 Flight Planning	Page 4
2.2 LiDAR Sensor	Page 4
2.3 Aircraft	Page 7
2.4 Base Station Information	Page 8
2.5 Time Period	Page 8
3. Processing Summary	Page 10
3.1 Flight Logs	Page 10
3.2 LiDAR Processing	Page 11
4. Project Coverage Verification	Page 12
5. Ground Control and Check Point Collection	Page 14
5.1 Calibration Control Point Testing	Page 14

LIST OF FIGURES

Figure 1. Project Boundary	Page 3
Figure 2. Planned Flight Lines	Page 5
Figure 3. Leica ALS 70 LiDAR Sensor	Page 6
Figure 4. Some of Quantum Spatial's Planes	Page 7
Figure 5. Base Station Locations	Page 9
Figure 6. Flightline Swatch LAS File Coverage	Page 13
Figure 7. Calibration Control Point Locations	Page 15

LIST OF TABLES

Table 1. Originally Planned LiDAR Specifications	Page 1
Table 2. LiDAR System Specifications	Page 6
Table 3. Base Station Locations	Page 8
Table 4. Calibration Control Point Report	Page 16

LIST OF APPENDICES

Appendix A: GPS / IMU Processing Statistics and Flight Logs

1. Summary / Scope

1.1. Summary

This report contains a summary of the Wisconsin WROC Dane QL2 2017 LiDAR acquisition task order, issued by Ayres under their Task Order # 24 on March 3, 2017. The task order yielded a project area covering 1,252 square miles over Dane County, Wisconsin. The intent of this document is only to provide specific validation information for the data acquisition/collection work completed as specified in the task order.

1.2. Scope

Aerial topographic LiDAR was acquired using state of the art technology along with the necessary surveyed ground control points (GCPs) and airborne GPS and inertial navigation systems. The aerial data collection was designed with the following specifications listed in Table 1 below.

Table 1. Originally Planned LiDAR Specifications

Average Point Density	Flight Altitude (AGL)	Field of View	Minimum Side Overlap	RMSEz
2 pts / m ²	1,800 m	40°	30%	≤ 10 cm

1.3. Coverage

The project boundary covers 1,252 square miles and encompasses the entirety of Dane County in southern Wisconsin. A buffer of 100 meters was created to meet task order specifications. LiDAR extents are shown in Figure 1.

1.4. Duration

LiDAR data was acquired from March 21, 2017 to March 22, 2017 in seven total lifts. See “Section: 2.5. Time Period” for more details.

1.5. Issues

There were no issues to report with this project.


1.6. Deliverables

The following products were produced and delivered:

- Raw LiDAR point cloud data swaths in LAS 1.4 format
- LiDAR point cloud data, tiled, in LAS 1.4 format
- SBETs in .SOL format
- Trajectories in .TRJ format
- Flight logs and GPS/IMU statistics in .PDF format
- Lift-level metadata in .XML format

All geospatial deliverables were produced in NAD83 (2011) Dane County Coordinate System (WISCRS), US survey feet; NAVD88 (GEOID12B), US survey feet. All tiled deliverables have a tile size of 4,500 ft x 4,500 ft.

Figure 1. Project Boundary

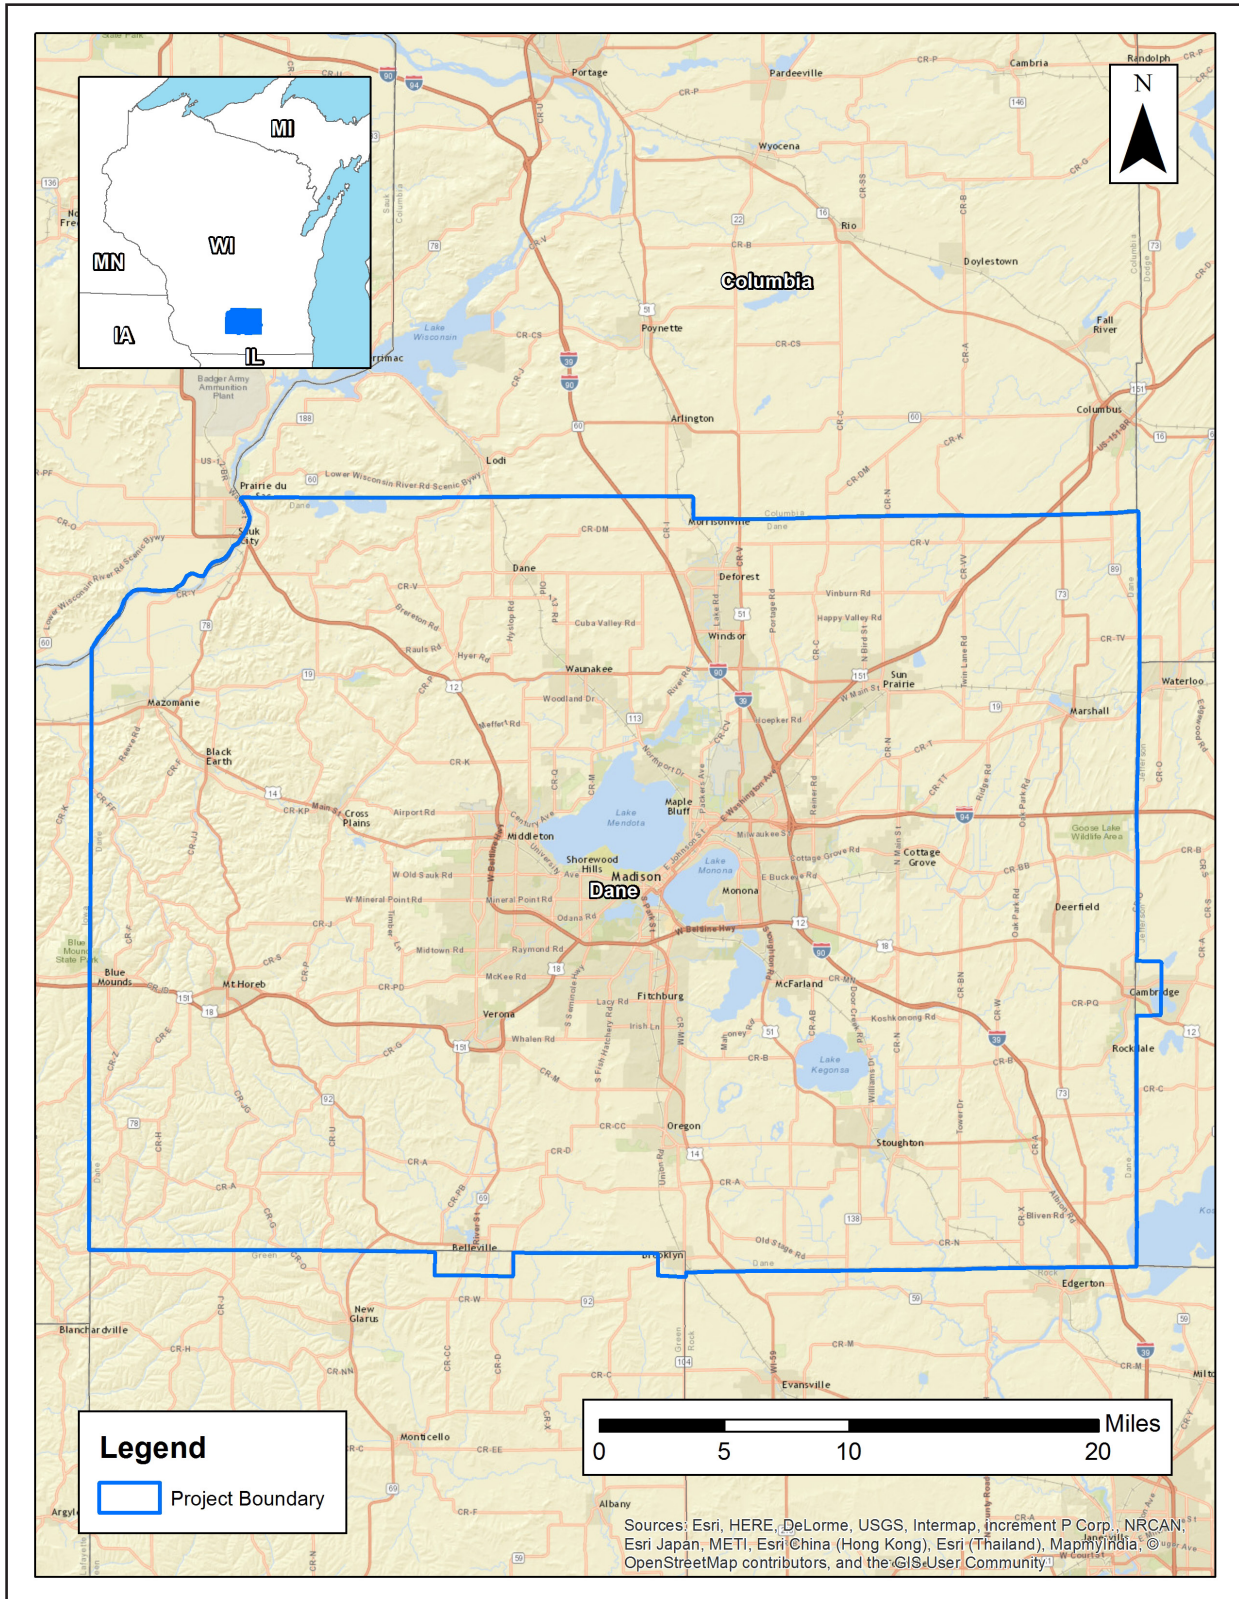

2. Planning / Equipment

2.1. Flight Planning

Flight planning was based on the unique project requirements and characteristics of the project site. The basis of planning included: required accuracies, type of development, amount / type of vegetation within project area, required data posting, and potential altitude restrictions for flights in project vicinity.

Detailed project flight planning calculations were performed for the project using Leica MissionPro planning software. The entire target area was comprised of 62 planned flight lines measuring approximately 2,588 total flight line miles (Figure 2).

2.2. LiDAR Sensor

Quantum Spatial utilized a Leica ALS 70 LiDAR sensor (Figure 3), serial number 7161, during the project. The Leica ALS 70 system is capable of collecting data at a maximum frequency of 500 kHz, which affords elevation data collection of up to 500,000 points per second. The system utilizes a Multi-Pulse in the Air option (MPIA). The sensor is also equipped with the ability to measure up to 4 returns per outgoing pulse from the laser and these come in the form of 1st, 2nd, 3rd and last returns. The intensity of the returns is also captured during aerial acquisition.

A brief summary of the aerial acquisition parameters for the project are shown in the LiDAR System Specifications in Table 2.

Figure 2. Planned Flight Lines

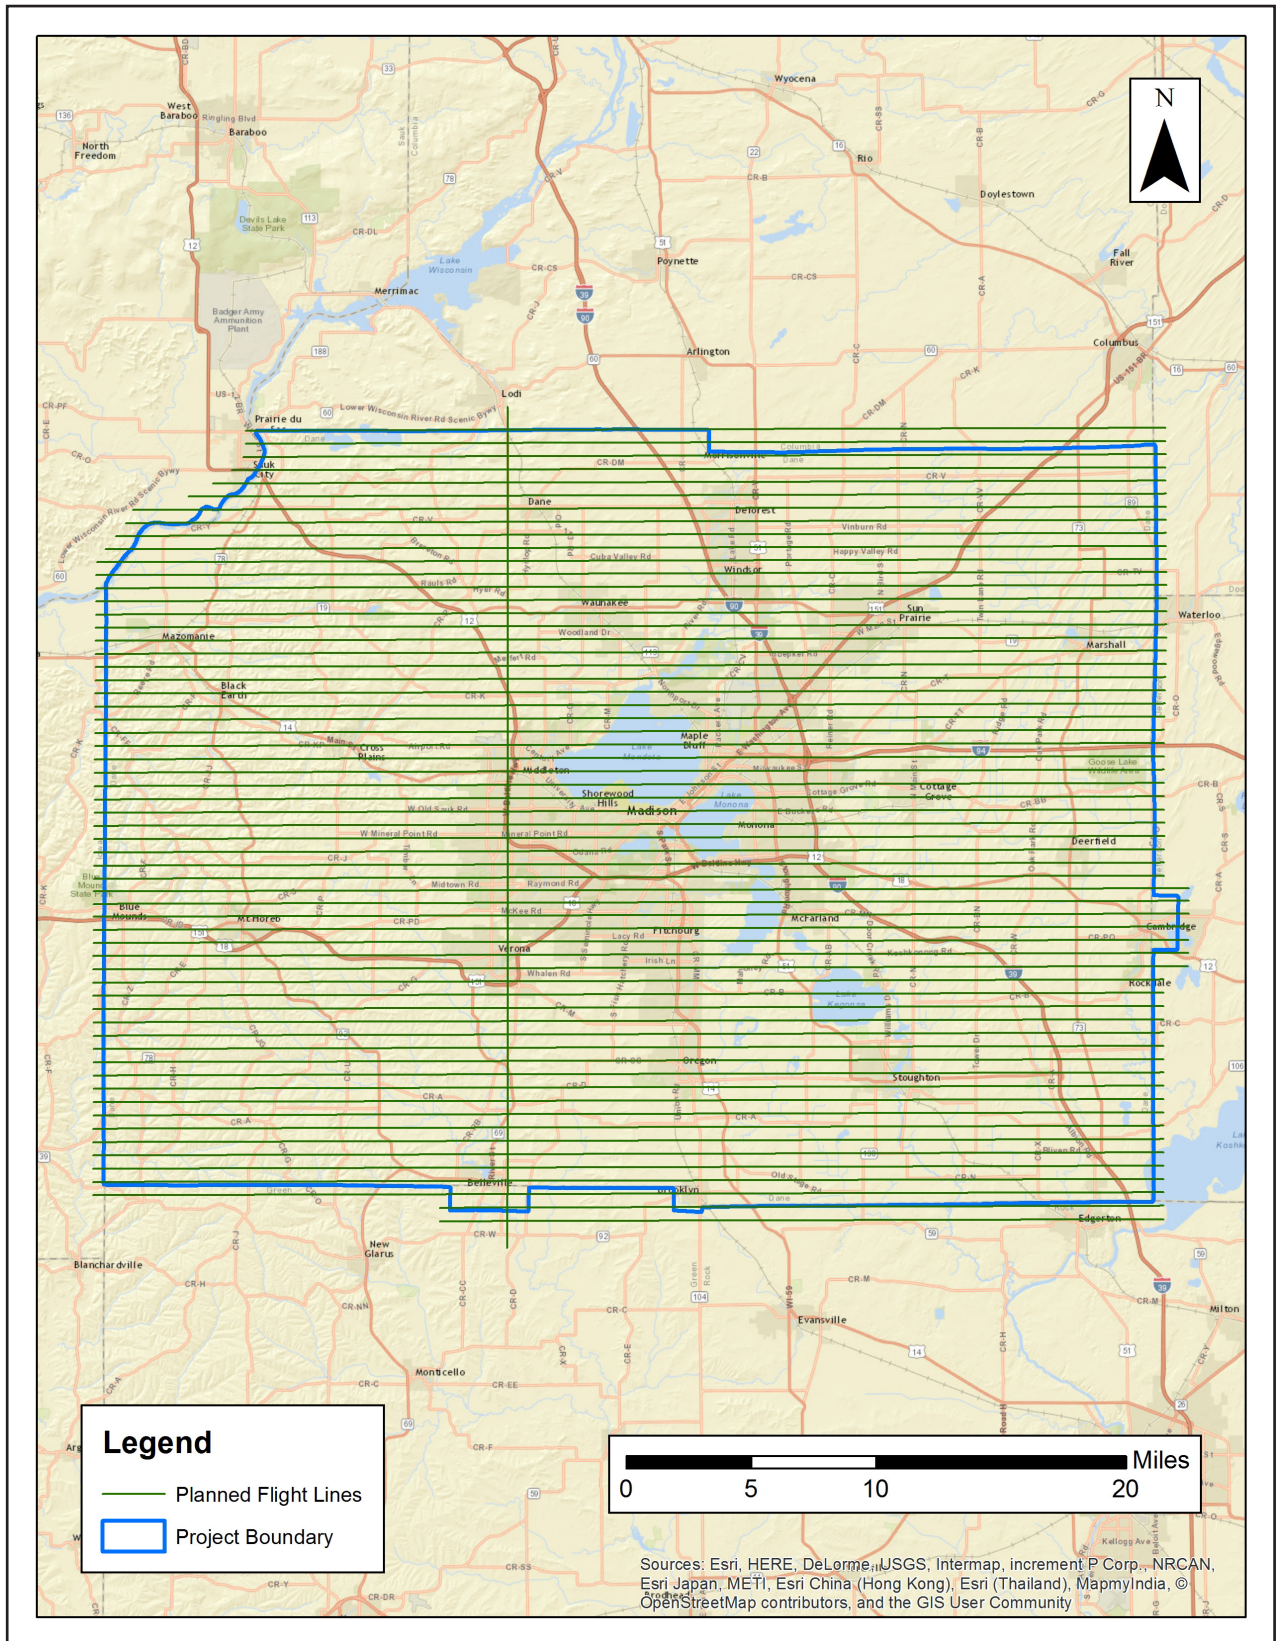


Table 2. Lidar System Specifications

Terrain and Aircraft Scanner	Flying Height	1,800 m
	Recommended Ground Speed	150 kts
Scanner	Field of View	40°
	Scan Rate Setting Used	53.4 Hz
Laser	Laser Pulse Rate Used	302.6 kHz
	Multi Pulse in Air Mode	Enabled
Coverage	Full Swath Width	1,310.29 m
	Line Spacing	989.51 m
Point Spacing and Density	Maximum Point Spacing Across Track	1.01 m
	Maximum Point Spacing Along Track (in phase)	1.44 m
	Maximum Point Spacing Along Track (out of phase)	0.72 m
	Average Point Density	2.99 pts / m ²

Figure 3. Leica ALS 70 LiDAR Sensor



2.3. Aircraft

All flights for the project were accomplished through the use of a customized Piper Navajo (twinpiston), Tail # N262AS. This aircraft provided an ideal, stable aerial base for LiDAR acquisition. This aerial platform has relatively fast cruise speeds which are beneficial for project mobilization / demobilization while maintaining relatively slow stall speeds which proved ideal for collection of high-density, consistent data posting using a state-of-the-art Leica LiDAR systems. Some of Quantum Spatial's operating aircraft can be seen in Figure 4 below.

Figure 4. Some of Quantum Spatial's Planes



2.4. Base Station Information

GPS base stations were utilized during all phases of flight (Table 3). The base station locations were verified using NGS OPUS service and subsequent surveys. Base station locations are depicted in Figure 5. Data sheets, graphical depiction of base station locations or log sheets used during station occupation are available in Appendix A.

Table 3. Base Station Locations


Base Station	WGS84		Ellipsoid Height (m)
	Longitude	Latitude	
MAON	-89.40951945	43.03688415	248.654
V094	-89.68248057	43.25638057	99.988
V095	-89.04981666	43.26014168	99.981
WIWB	-88.14874192	43.42054701	235.14

2.5. Time Period

Project specific flights were conducted over two days. Seven sorties, or aircraft lifts were completed. Accomplished sorties are listed below.

- Mar 21, 2017-A (N262AS, SN7161)
- Mar 21, 2017-B (N262AS, SN7161)
- Mar 21, 2017-C (N262AS, SN7161)
- Mar 21, 2017-D (N262AS, SN7161)
- Mar 22, 2017-A (N262AS, SN7161)
- Mar 22, 2017-B (N262AS, SN7161)
- Mar 22, 2017-C (N262AS, SN7161)

Figure 5. Base Station Locations

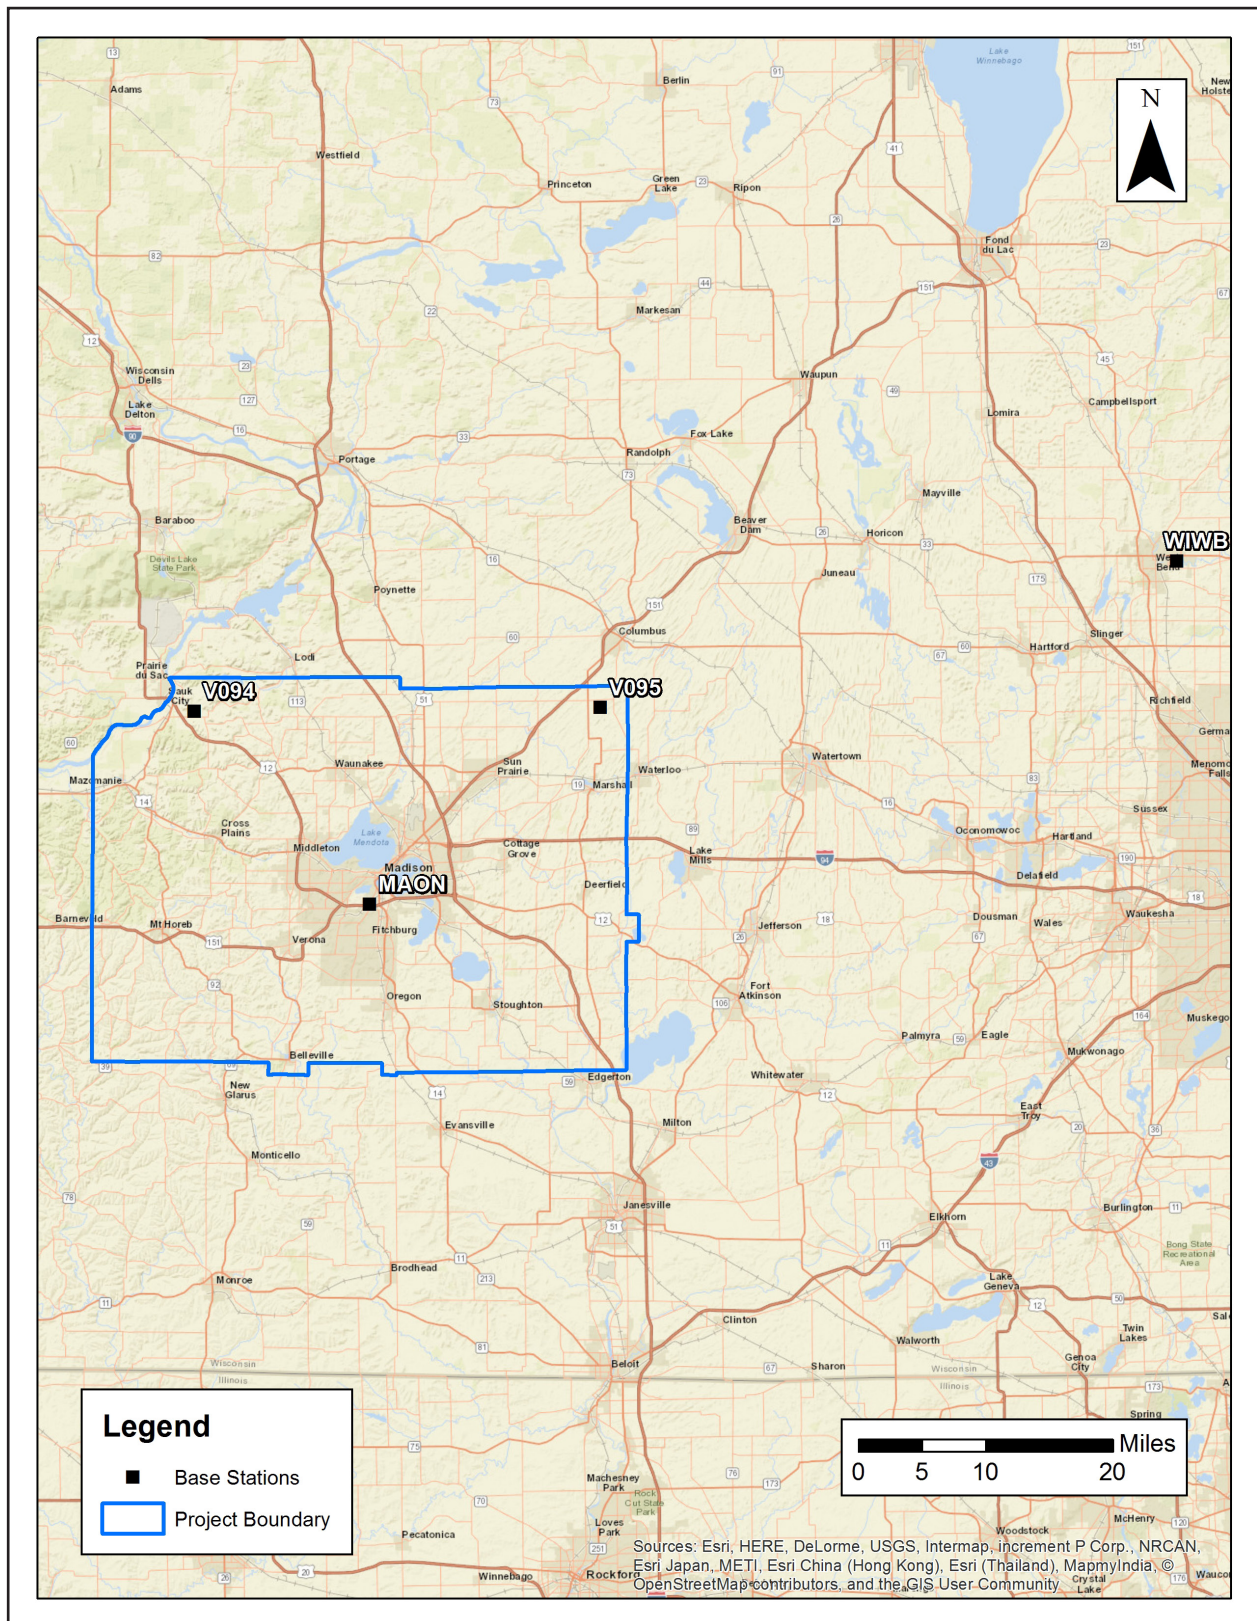

3. Processing Summary

3.1. Flight Logs

Flight logs were completed by LIDAR sensor technicians for each mission during acquisition. These logs depict a variety of information, including:

- Job / Project #
- Flight Date / Lift Number
- FOV (Field of View)
- Scan Rate (HZ)
- Pulse Rate Frequency (Hz)
- Ground Speed
- Altitude
- Base Station
- PDOP avoidance times
- Flight Line #
- Flight Line Start and Stop Times
- Flight Line Altitude (AMSL)
- Heading
- Speed
- Returns
- Crab

Notes: (Visibility, winds, ride, weather, temperature, dew point, pressure, etc). Project specific flight logs for each sortie are available in Appendix A.

3.2. LiDAR Processing

Inertial Explorer software was used for post-processing of airborne GPS and inertial data (IMU), which is critical to the positioning and orientation of the LiDAR sensor during all flights. Inertial Explorer combines aircraft raw trajectory data with stationary GPS base station data yielding a “Smoothed Best Estimate Trajectory (SBET)” necessary for additional post processing software to develop the resulting geo-referenced point cloud from the LiDAR missions.

During the sensor trajectory processing (combining GPS & IMU datasets) certain statistical graphs and tables are generated within the Inertial Explorer processing environment which are commonly used as indicators of processing stability and accuracy. This data for analysis include: Max horizontal / vertical GPS variance, separation plot, altitude plot, PDOP plot, base station baseline length, processing mode, number of satellite vehicles, and mission trajectory. All relevant graphs produced in the Inertial Explorer processing environment for each sortie during the project mobilization are available in Appendix A.


The generated point cloud is the mathematical three dimensional composite of all returns from all laser pulses as determined from the aerial mission. Laser point data are imported into TerraScan and a manual calibration is performed to assess the system offsets for pitch, roll, heading and scale. At this point this data is ready for analysis, classification, and filtering to generate a bare earth surface model in which the above-ground features are removed from the data set. Point clouds were created using the Leica CloudPro software. GeoCue distributive processing software was used in the creation of some files needed in downstream processing, as well as in the tiling of the dataset into more manageable file sizes. TerraScan and TerraModeler software packages were then used for the automated data classification, manual cleanup, and bare earth generation. Project specific macros were developed to classify the ground and remove side overlap between parallel flight lines.

All data was manually reviewed and any remaining artifacts removed using functionality provided by TerraScan and TerraModeler. Global Mapper was used as a final check of the bare earth dataset. GeoCue was used to create the deliverable industry-standard LAS files for both the All Point Cloud Data.

4. Project Coverage Verification

Coverage verification was performed by comparing coverage of processed .LAS files captured during project collection to generate project shape files depicting boundaries of specified project areas. Please refer to Figure 6.

Figure 6. Flightline Swath LAS File Coverage

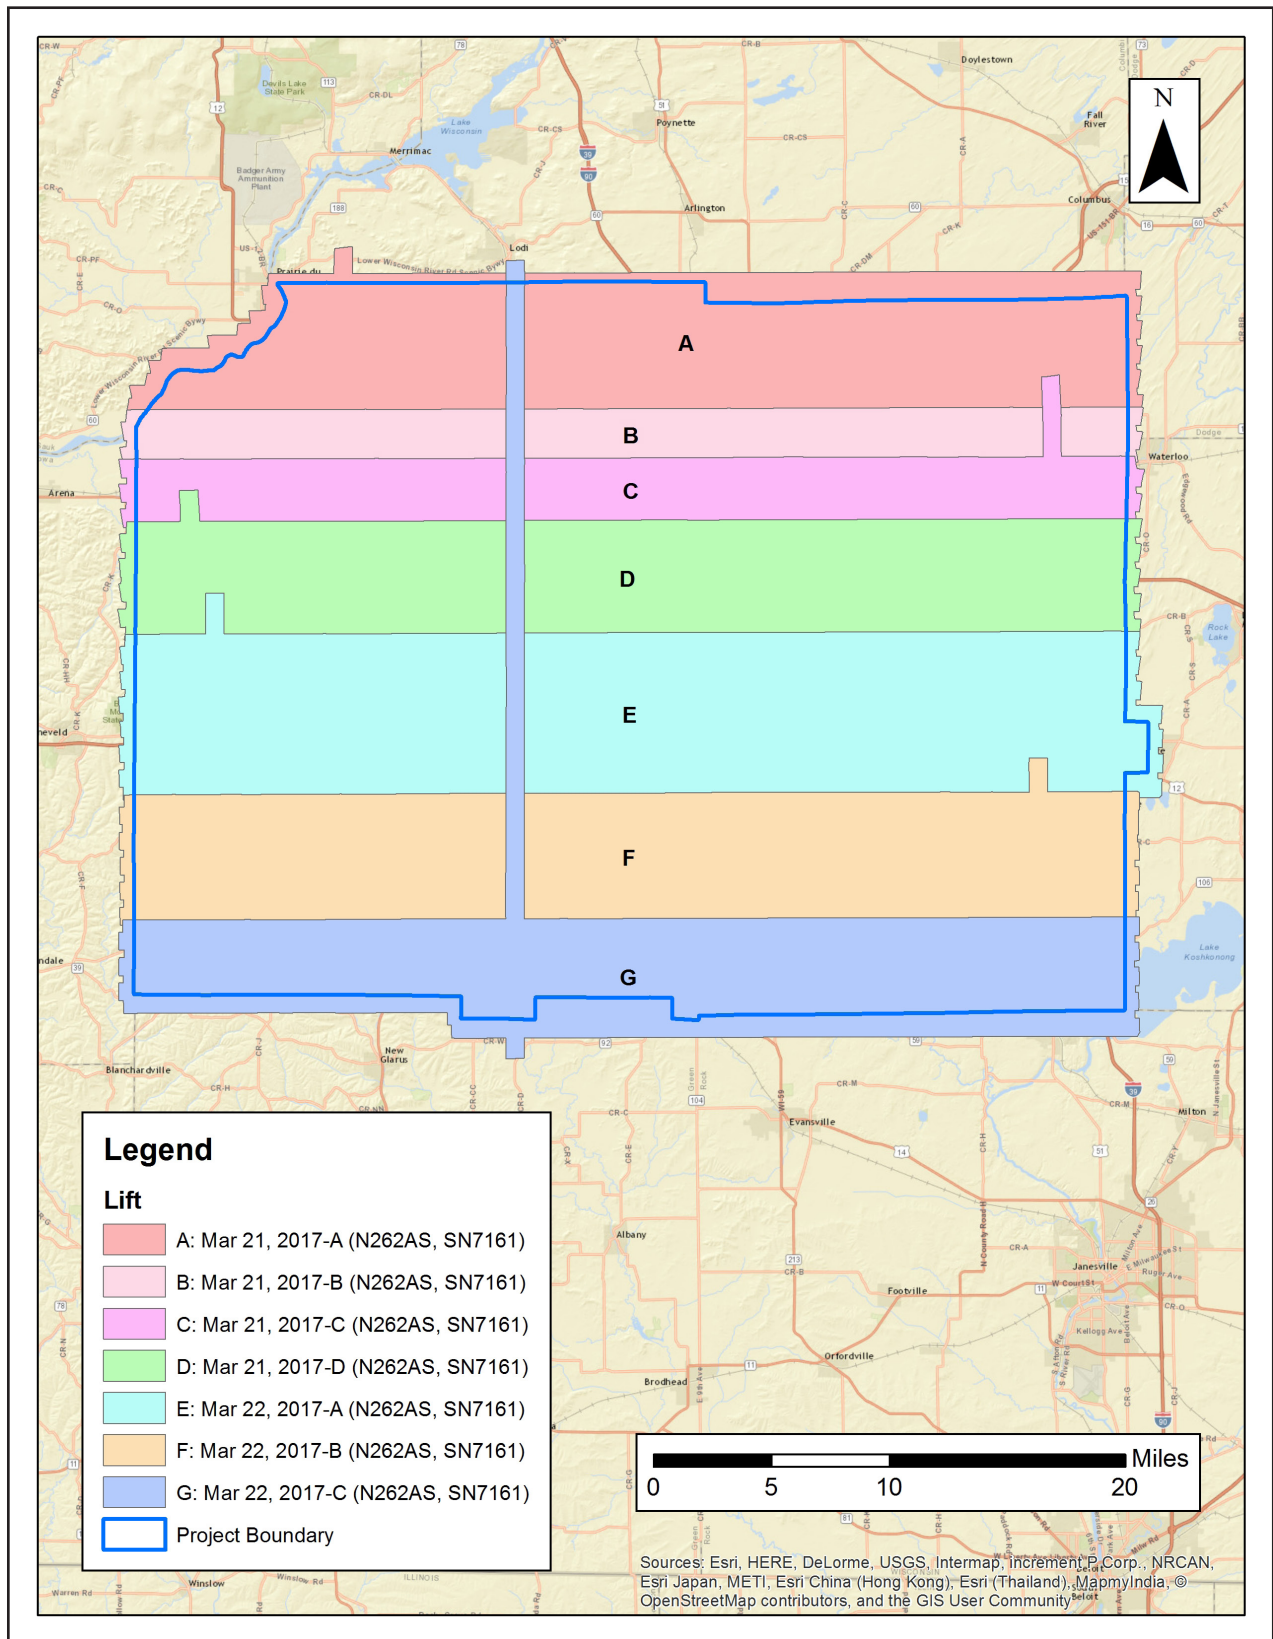

5. Ground Control and Check Point Collection

Quantum Spatial utilized 10 ground control (calibration) points collected by Ayres Associates, Inc. as an independent test of the accuracy of this project; point #1109 was removed from the calculation as it fell on a slope. In this document, horizontal coordinates for ground control and QA points for all LiDAR classes are reported in NAD83 (2011) Dane County Coordinate System (WISCRS), US survey feet; NAVD88 (GEOID12B), US survey feet.

5.1. Calibration Control Point Testing

Figure 7 shows the location of each bare earth calibration point for the project area. Table 4 depicts the Control Report for the LiDAR bare earth calibration points, as computed in TerraScan as a quality assurance check. Note that these results of the surface calibration are not an independent assessment of the accuracy of these project deliverables, but the statistical results do provide additional feedback as to the overall quality of the elevation surface.

Figure 7. Calibration Control Point Locations

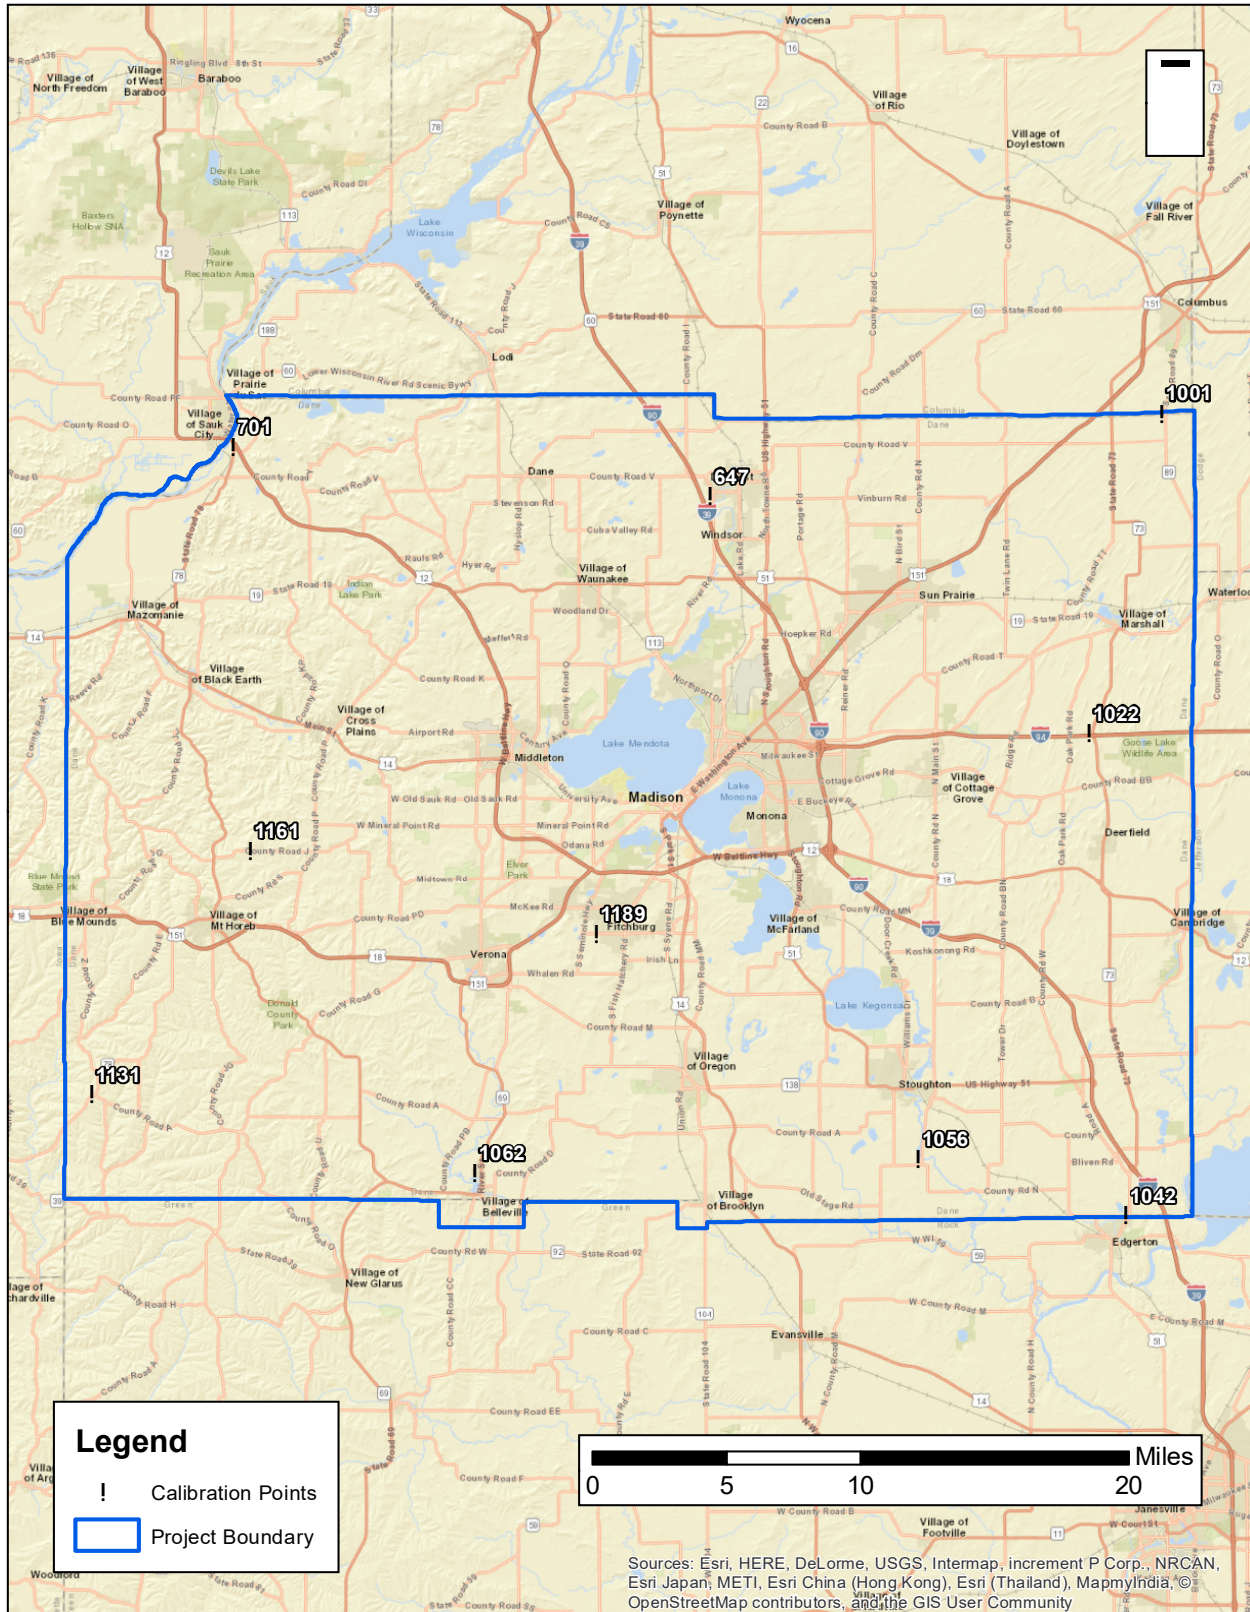


Table 4. Calibration Control Point Report
Units = US survey feet

NUMBER	EASTING	NORTHING	KNOWN Z	LASER Z	Dz
1001	915684.788	559451.191	909	909.12	0.12
1022	901434.826	495855.791	884.77	884.8	0.03
1042	908646.422	400242.74	836.16	836.14	-0.02
1056	867871.752	411358.94	829.81	829.72	-0.09
1131	705346.267	424164.679	1150.93	1151.04	0.11
1161	736618.553	472653.749	1129.36	1129.37	0.01
1189	804585.135	456103.699	1048.07	1047.92	-0.15
647	827081.383	8542955.128	952.74	952.93	0.19
701	733063.366	552785.346	775.66	775.74	0.08
1062	780697.934	408688.676	870.19	870.25	0.06
Average Dz		0.034			
Minimum Dz		-0.15			
Maximum Dz		0.19			
Average Magnitude		0.086			
Root Mean Square		0.102			
Std Deviation		0.102			