
Project Information

Prepared By: Mitchell Fyock
Project Name: 4219_Natrona County, Cross Section 3
Sensor Info: Leica ALS70
Required Nominal Pulse Spacing: 0.77
Vendor Name: Sanborn Map Company Inc.
Units: US Survey Feet
Percent of Extent Tolerance: Extents Not Checked
Date of Aquisition: Start: 6/8/2015 Finish: 6/8/2015

Metadata Information

Tile Index:

Path: Z:\01_GCP\01_City of Casper\2015\4219_Natrona County\03_Casper_City_3Inch\05_CompassTA\05

Number of Polys: 1

Intensity:

Tile Index Attribute: Not Specified

Path to Data: Not Specified

DEM:

Tile Index Attribute: Name


Path to Data: Z:\01_GCP\01_City of Casper\2015\4219_Natrona County\03_Casper_City_3Inch\03_Data_F

LAS:

Tile Index Attribute:

Path to Data:

Tiled-Data Area

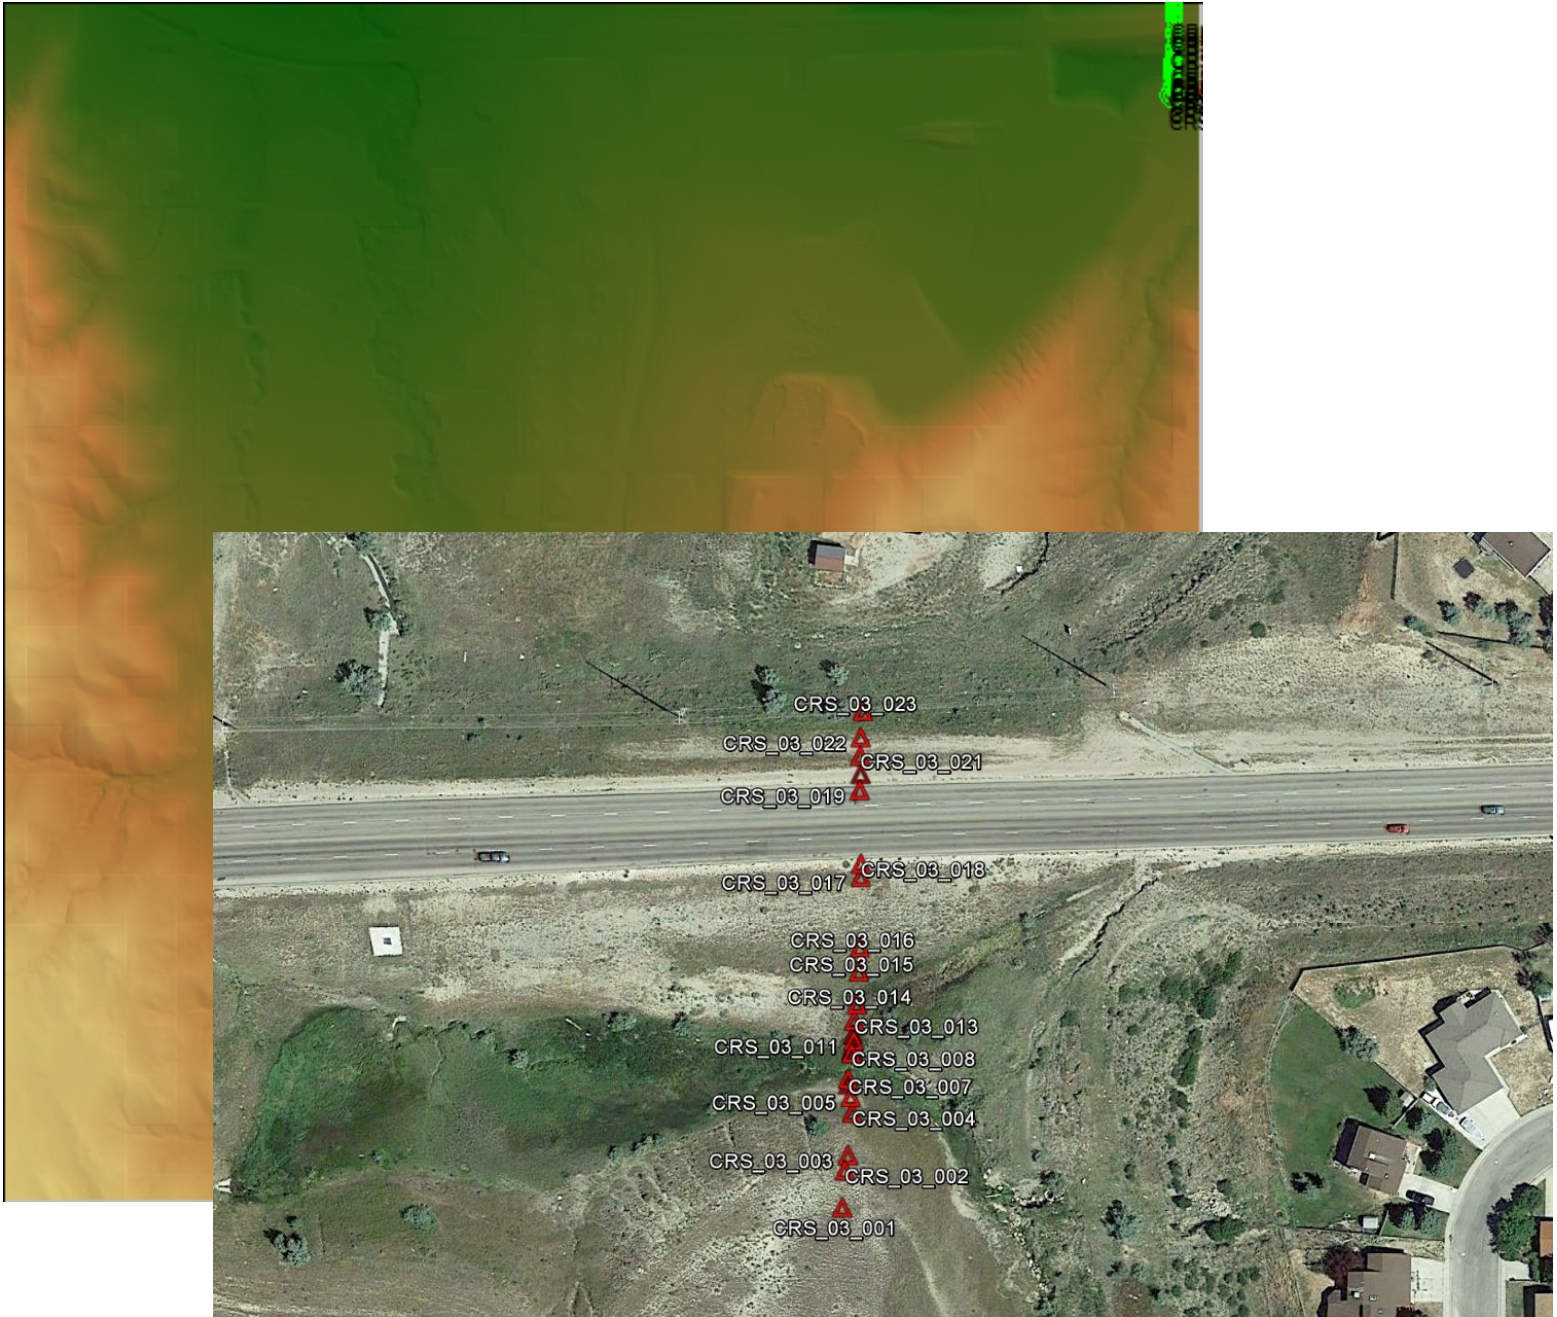

LiDAR Accuracy Assessment Summary

LC Type	# of Points	FVA	SVA	CVA
DEM				
ALL	23	1.717	1.871	1.871
	23	1.717	1.871	1.871
Total	23			


Units: US Survey Feet

DEM

Fundamental Vertical Accuracy

LandCover Type: ALL,
Minimum DZ: -1.957
Maximum DZ: 1.929
Mean DZ: -0.008
Mean Magnitude DZ: 0.845
Number Observations: 23
Standard Deviation DZ: 0.896
RMSE Z: 0.876
95% Confidence Level Z: 1.717
Units: US Survey Feet

Histogram

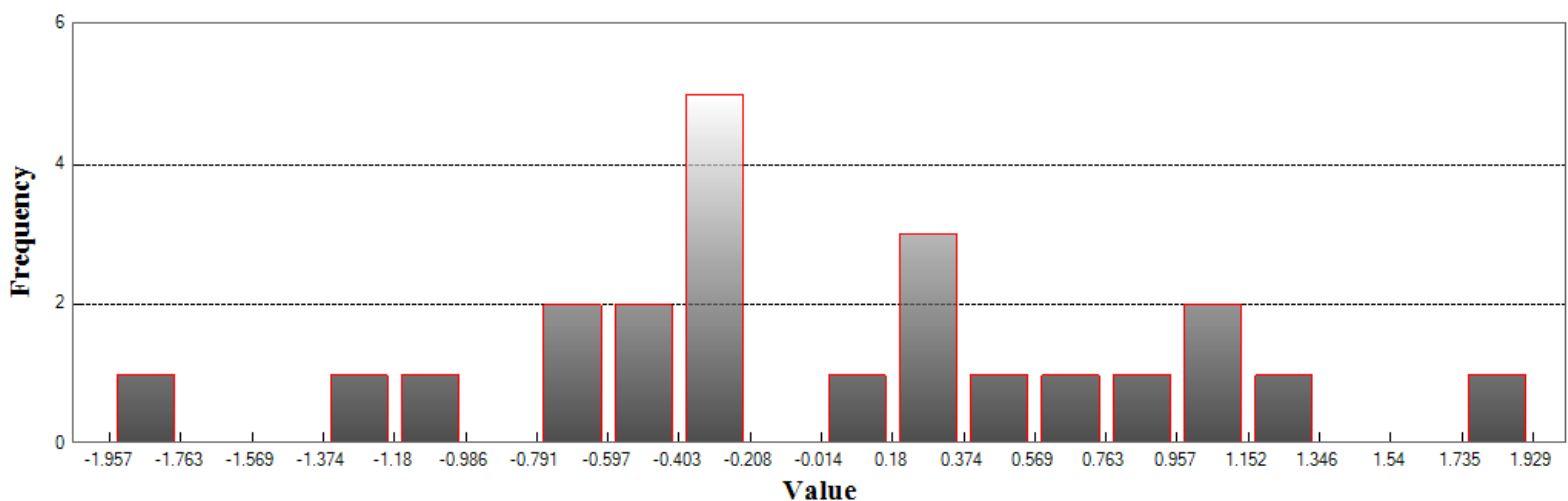

Min: -1.957
Max: 1.929
Number Of Bins: 20
Bin Interval: 0.194