General Information

Mission Information

Project name	200622_A_5060380_nad2011_FINAL
Processing date	2020-06-23 13:19:46
Mission date	2020-06-22 13:12:03
Mission duration	05:08:29.000
Processing mode	IN-Fusion PP-RTX

Rover Hardware Information

Product	POS AV 610 VER6 HW2.5-12
Serial number	S/N7769
IMU type	57
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
200622a.000	POS Data
200622a.001	POS Data
200622a.002	POS Data
200622a.003	POS Data
200622a.004	POS Data
200622a.005	POS Data
200622a.006	POS Data
200622a.007	POS Data
200622a.008	POS Data
200622a.009	POS Data
200622a.010	POS Data
200622a.011	POS Data
200622a.012	POS Data
200622a.013	POS Data
200622a.014	POS Data
200622a.015	POS Data
200622a.016	POS Data
200622a.017	POS Data
200622a.018	POS Data
200622a.019	POS Data
200622a.020	POS Data
200622a.021	POS Data
200622a.022	POS Data
200622a.023	POS Data
200622a.024	POS Data
200622a.025	POS Data
200622a.026	POS Data
200622a.027	POS Data
200622a.028	POS Data

Input Files

File Name	File Type
Ephm1740.20g	GLONASS Broadcast Ephemeris
Ephm1740.20n	GPS Broadcast Ephemeris

Output Files

Filename	File type
sbet_200622_A_5060380_nad2011_FINAL.out	SBET Trajectory File
sbet_200622_A_5060380_nad2011_FINAL.shp	Shapefile Export Output

Rover Data Summary

First raw data file	200622a.000		
Last raw data file	200622a.028		
Start GPS week	2111		
Start time	133928.338 (06/22/2020 13:12:08)		
End time	152431.840 (06/22/2020 18:20:31)		
Start of fine alignment	134264.170 (06/22/2020 13:17:44)		
Available subsystems	Primary GNSS, IMU		
POS Event Input	Event 1 Input		
Correction data	None		
IMU Installation Lever Arms & Mounting Angles			
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	180.000
Reference to Primary GNSS lever arm (m)	0.556	-0.429	-0.965
Reference to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Rover Data QC

Raw IMU Import QC Summary

IMU data input file	imu_Mission 1.dat
IMU data check log file	imudt_200622_A_5060380_nad2011_FINAL.log
IMU Records Processed	3701570
Termination Status	Warnings
IMU Anomalies	1
IMU Failure Messages	
133928.093 : WARNING : Gap of 133906.1055 seconds in CHECKDT input data	

Primary Observables & Satellite Data

L1 Satellite Lock/Elevation

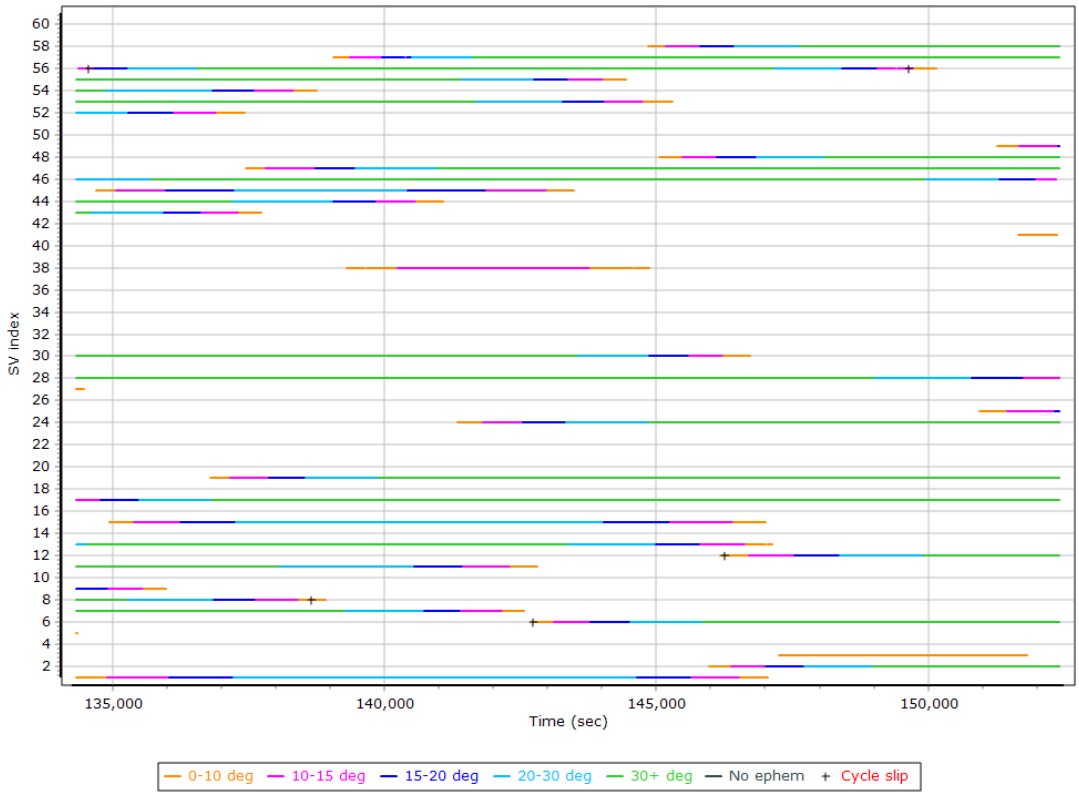

L2 Satellite Lock/Elevation

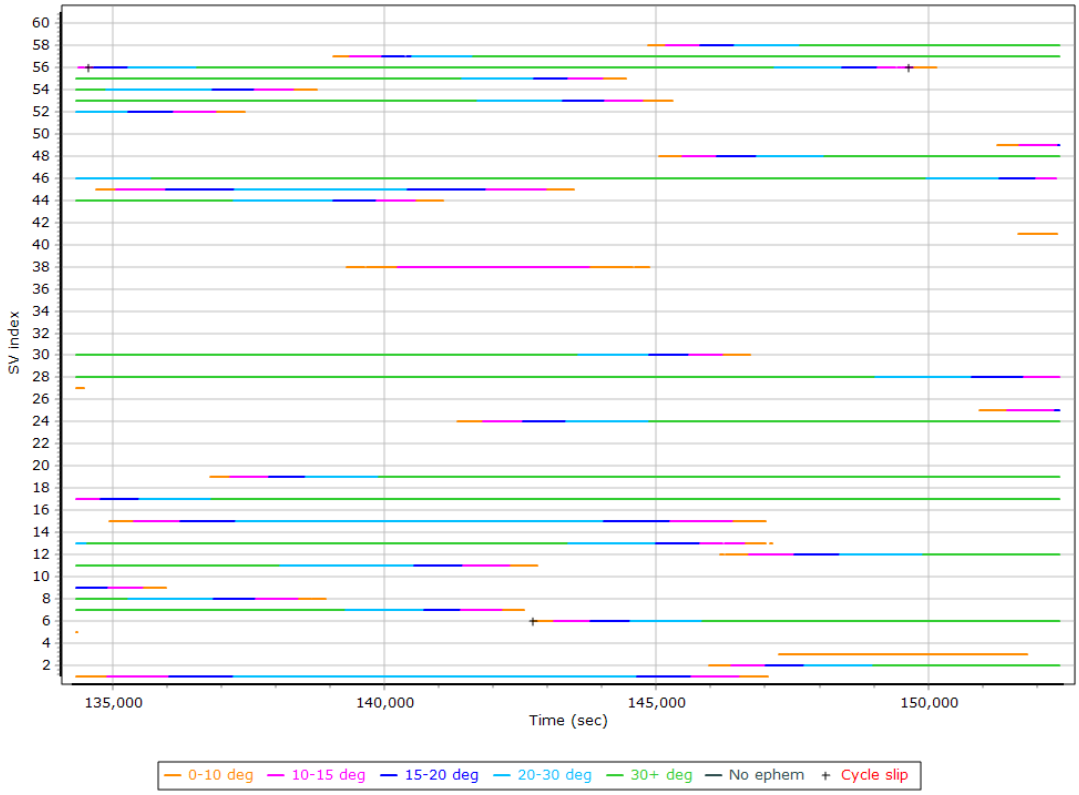

GPS L1 SNR

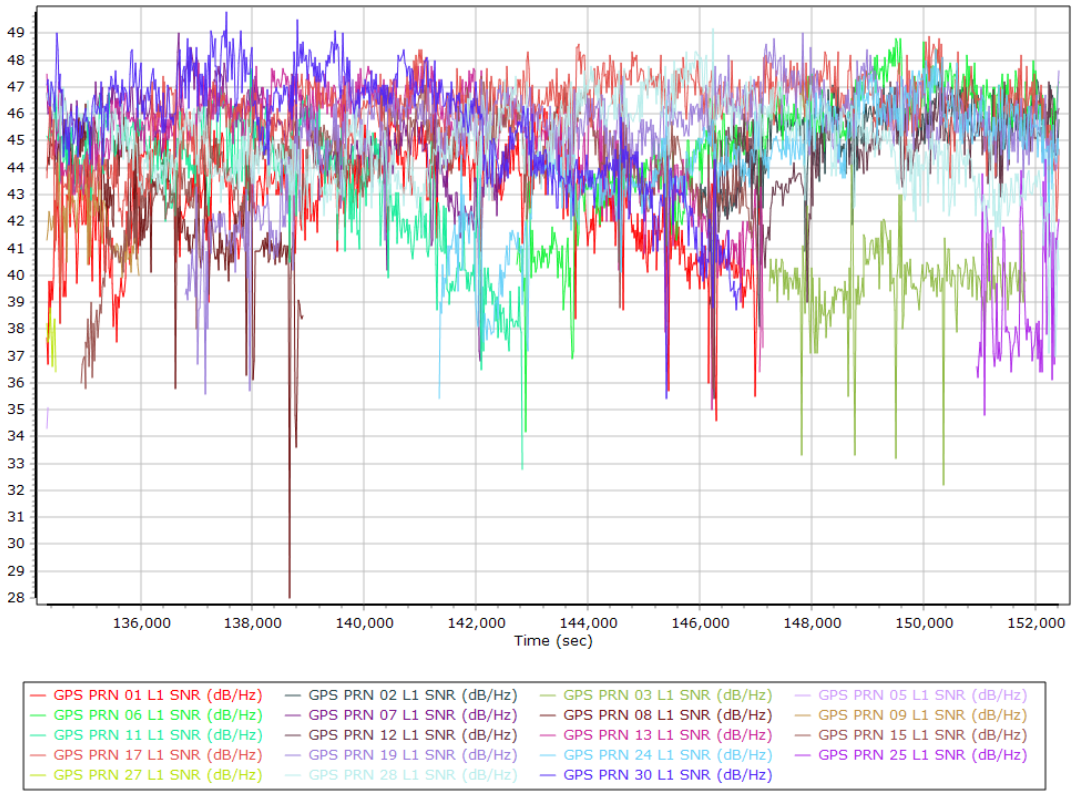

GPS L2 SNR

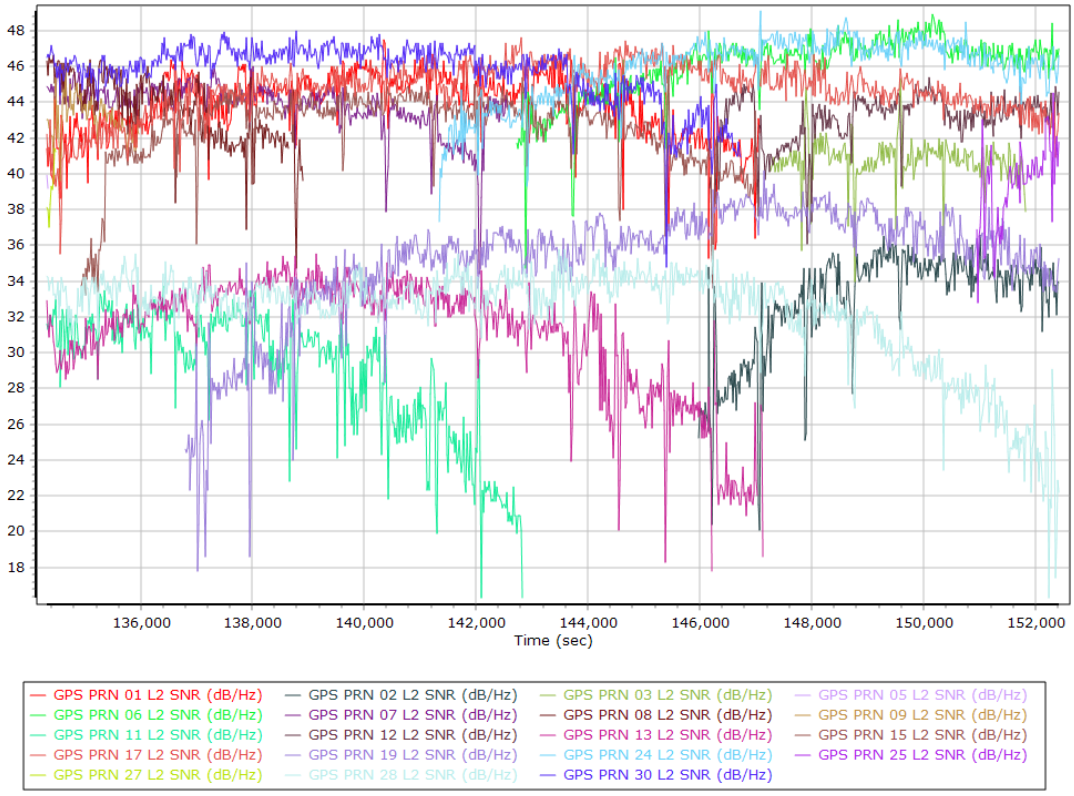

GLONASS L1 SNR

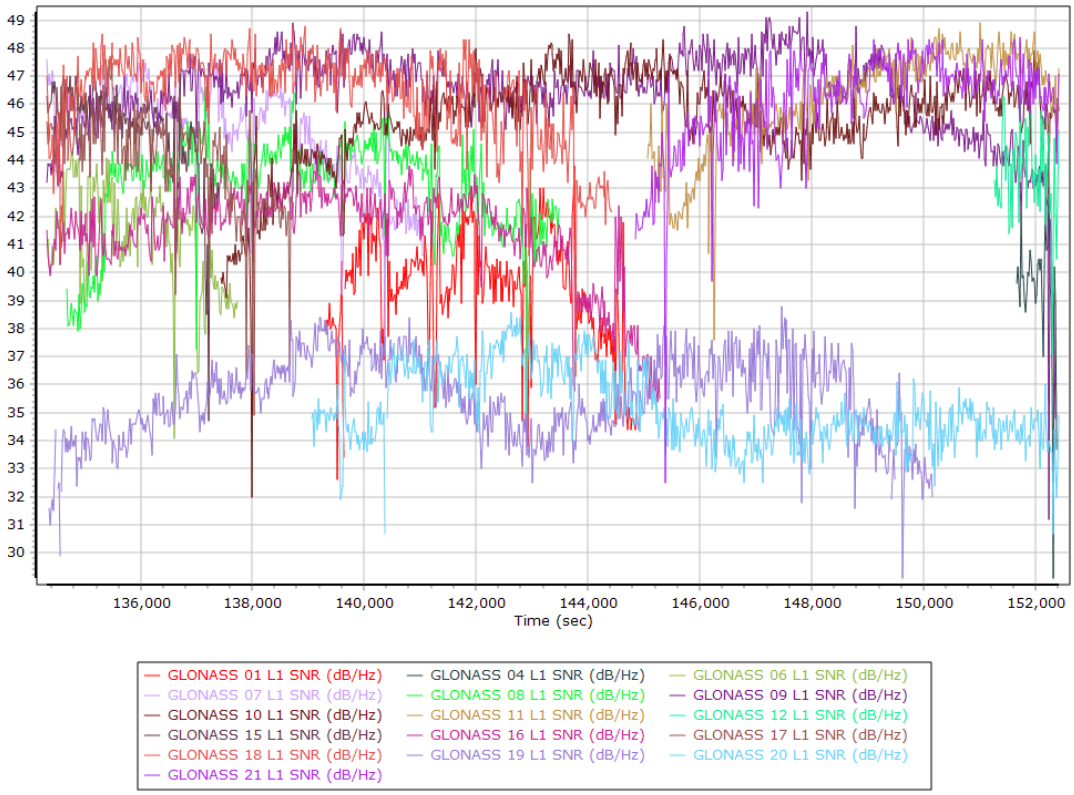

GLONASS L2 SNR

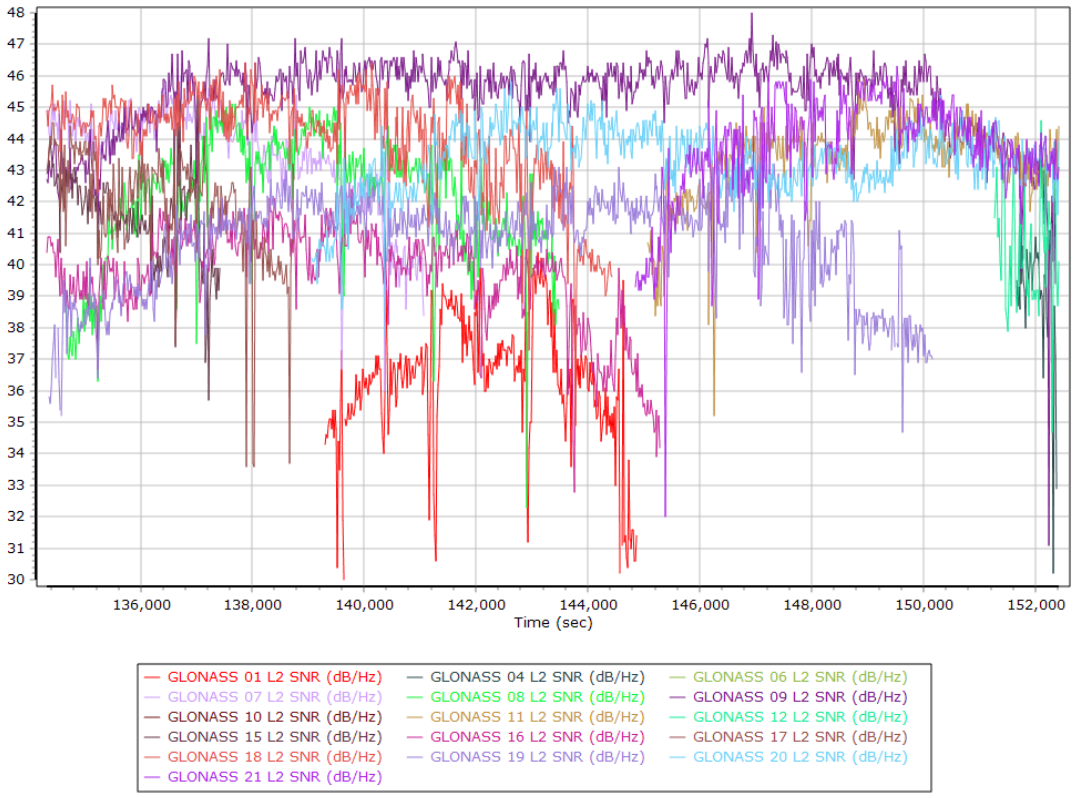

BEIDOU SNR

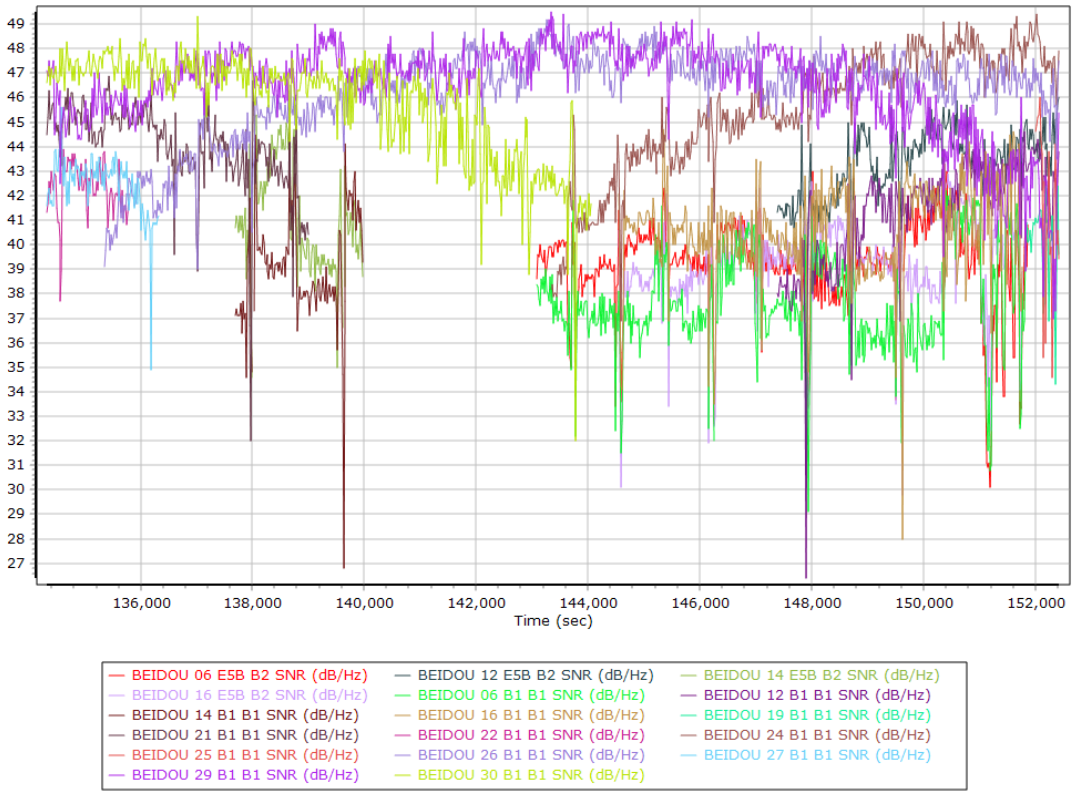

GALILEO SNR

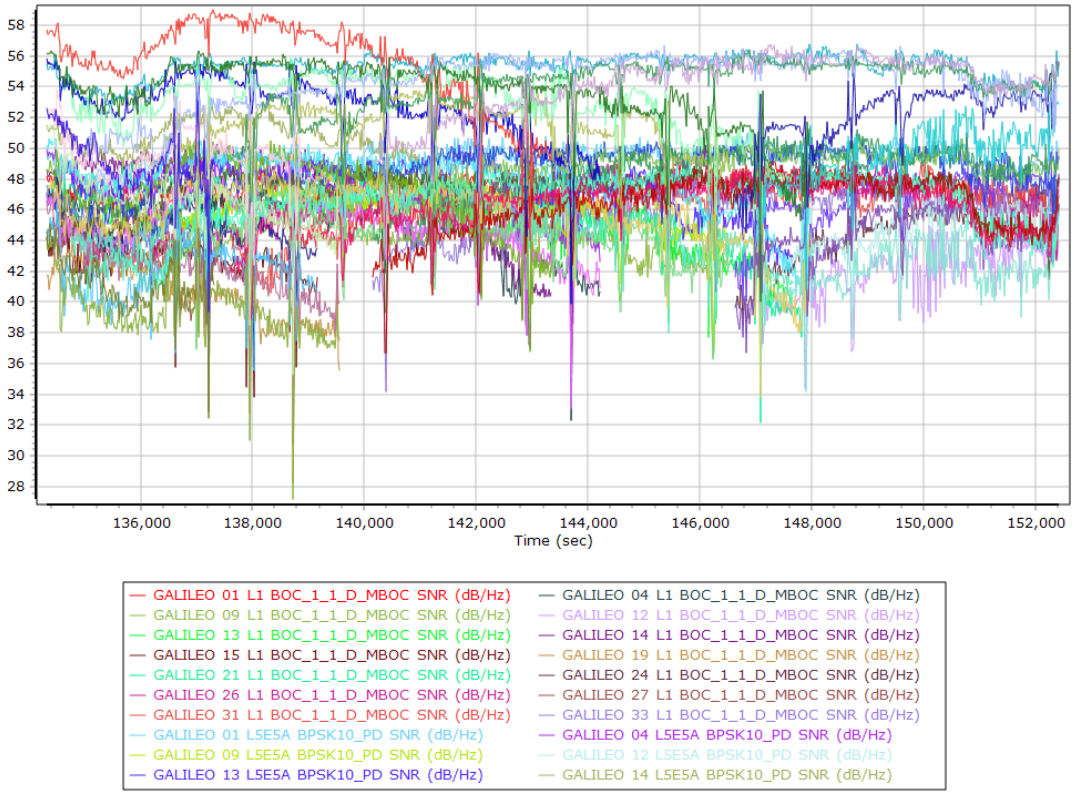
58
56
54
52
50
48
46
44
42
40
38
36
34
32
30
28
136,000
138,000
140,000
142,000
144,000
146,000
148,000
150,000
152,000
Time (sec)
GALILEO 01 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 04 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 09 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 12 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 13 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 14 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 15 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 19 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 21 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 24 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 26 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 27 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 31 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 33 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 01 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 04 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 09 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 12 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 13 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 14 L5E5A BPSK10_PD SNR (dB/Hz)

Smoothed Trajectory Information

Top View

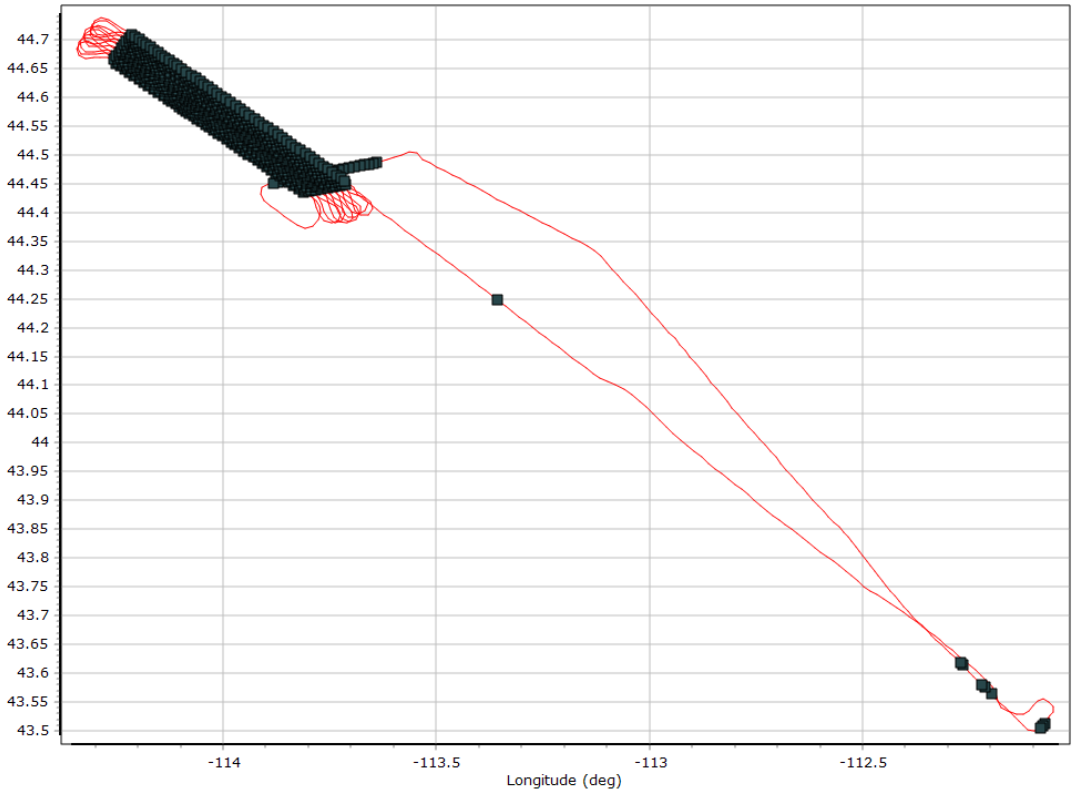

Altitude

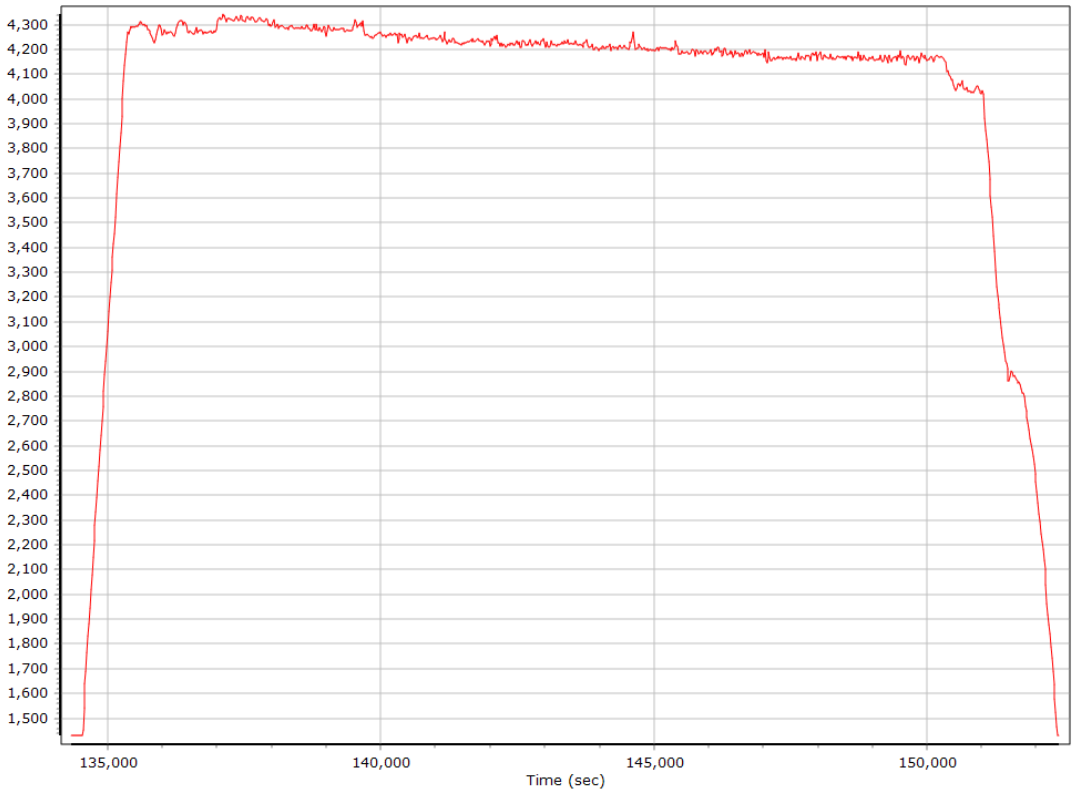

Roll/Pitch

Heading

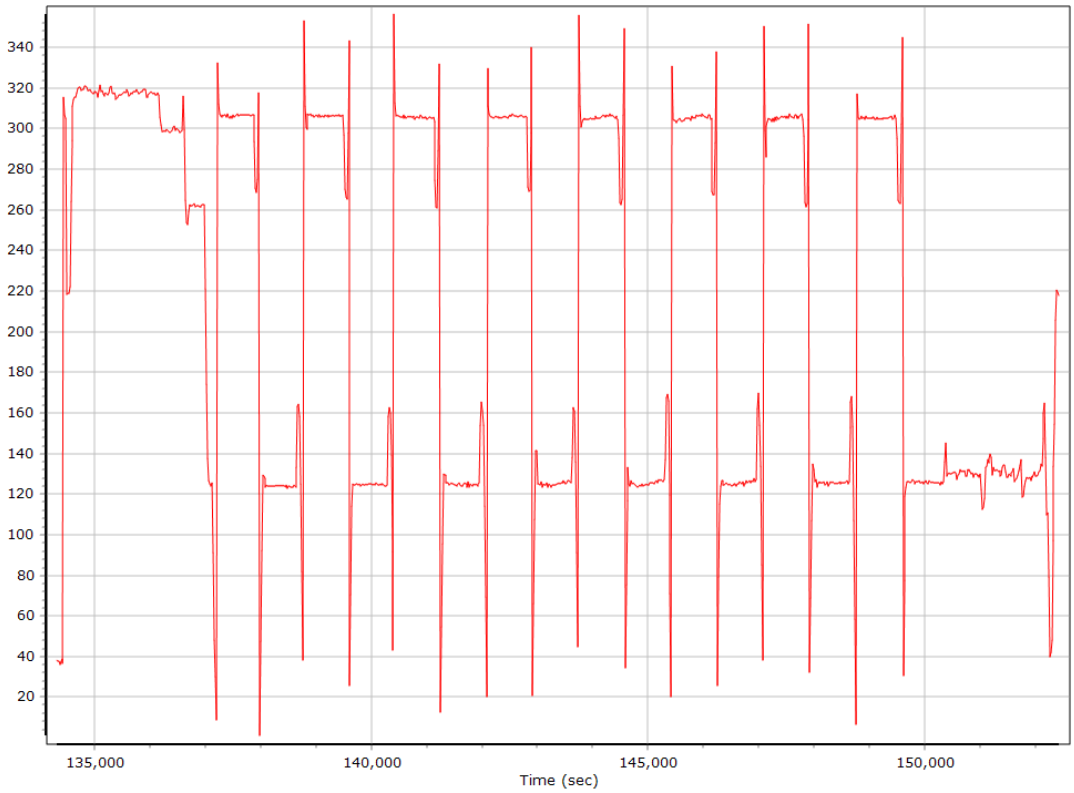

North/East Velocity

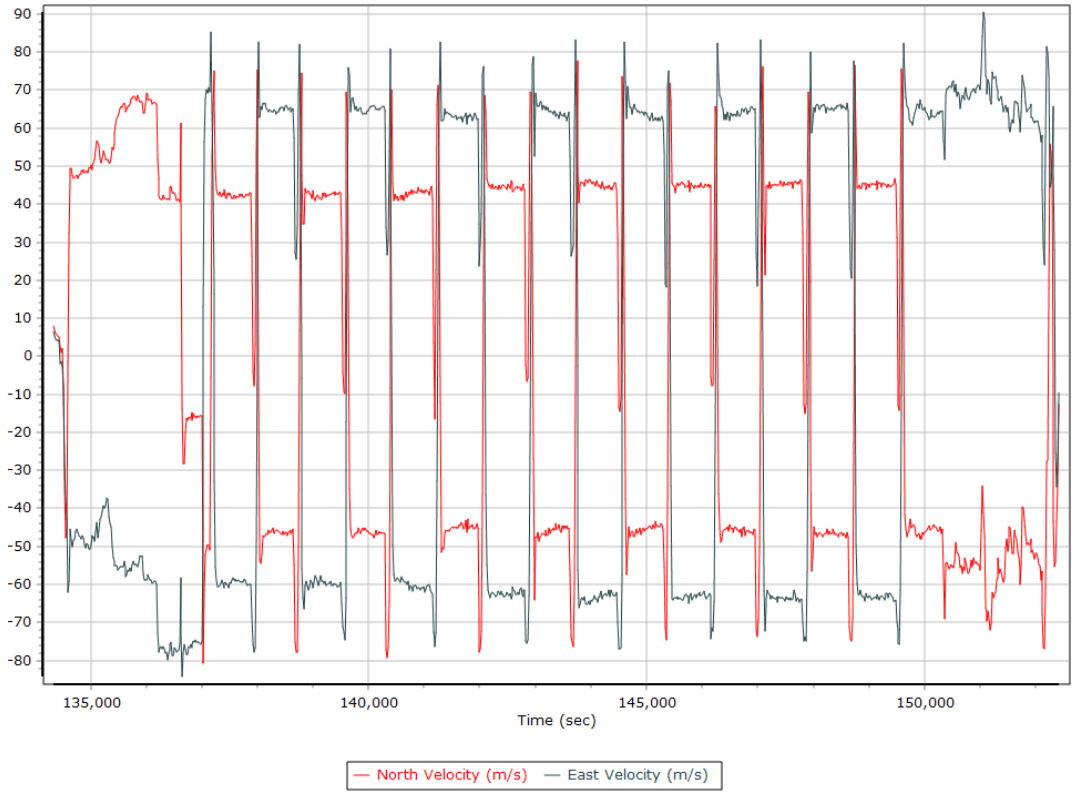

Down Velocity

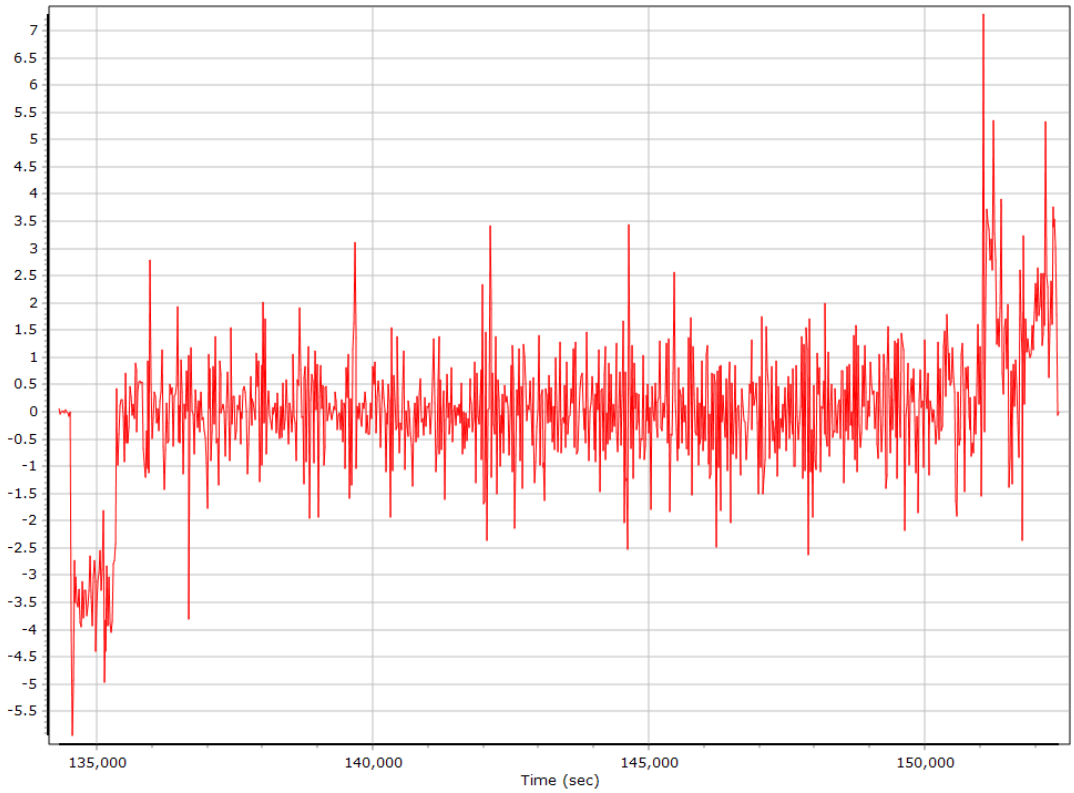

Total Speed

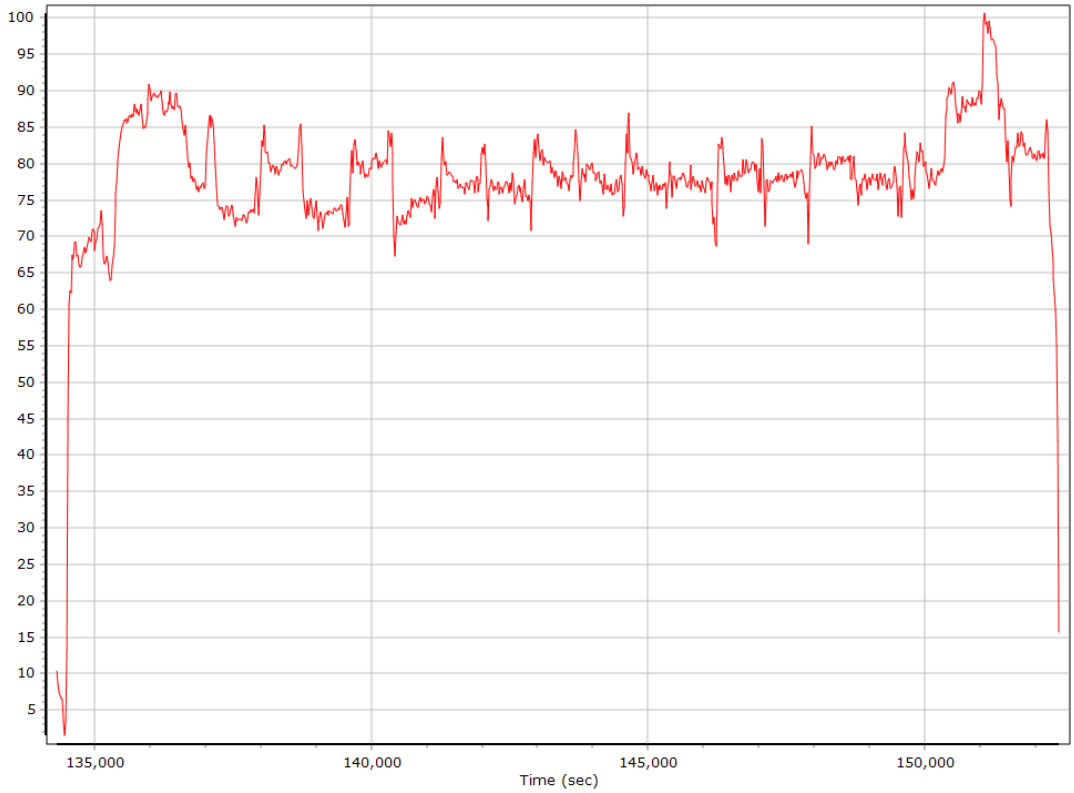

Ground Speed

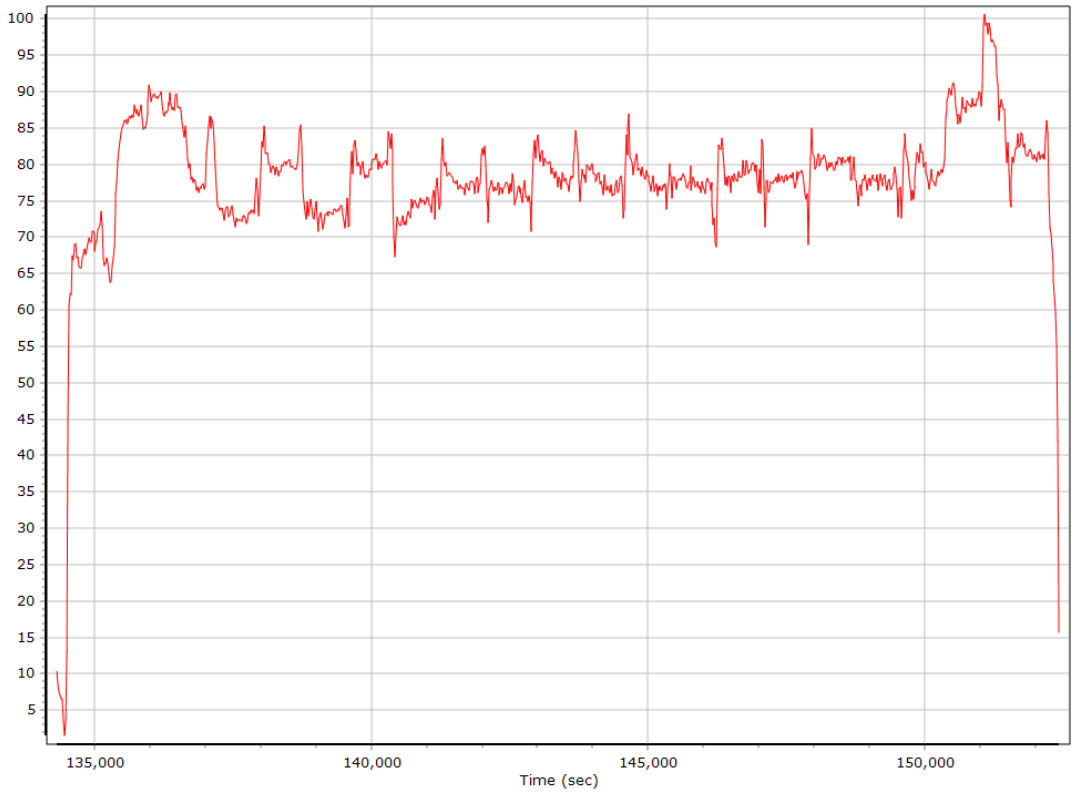

Body Acceleration

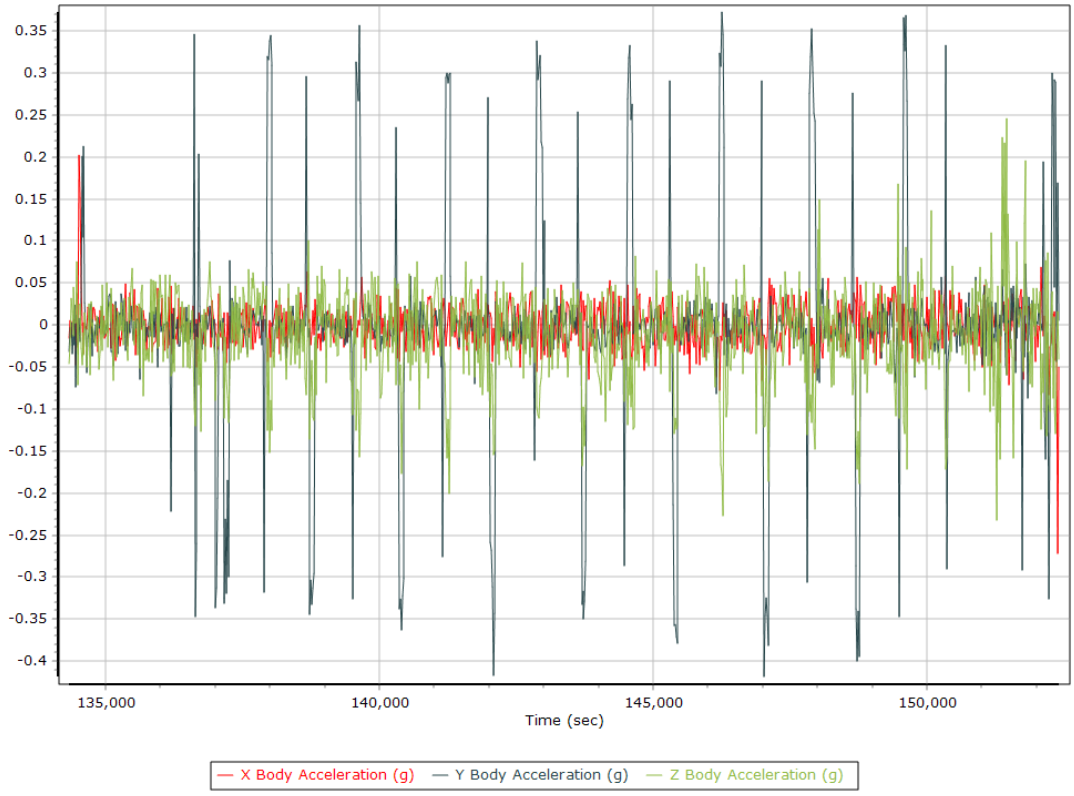

Total Body Acceleration

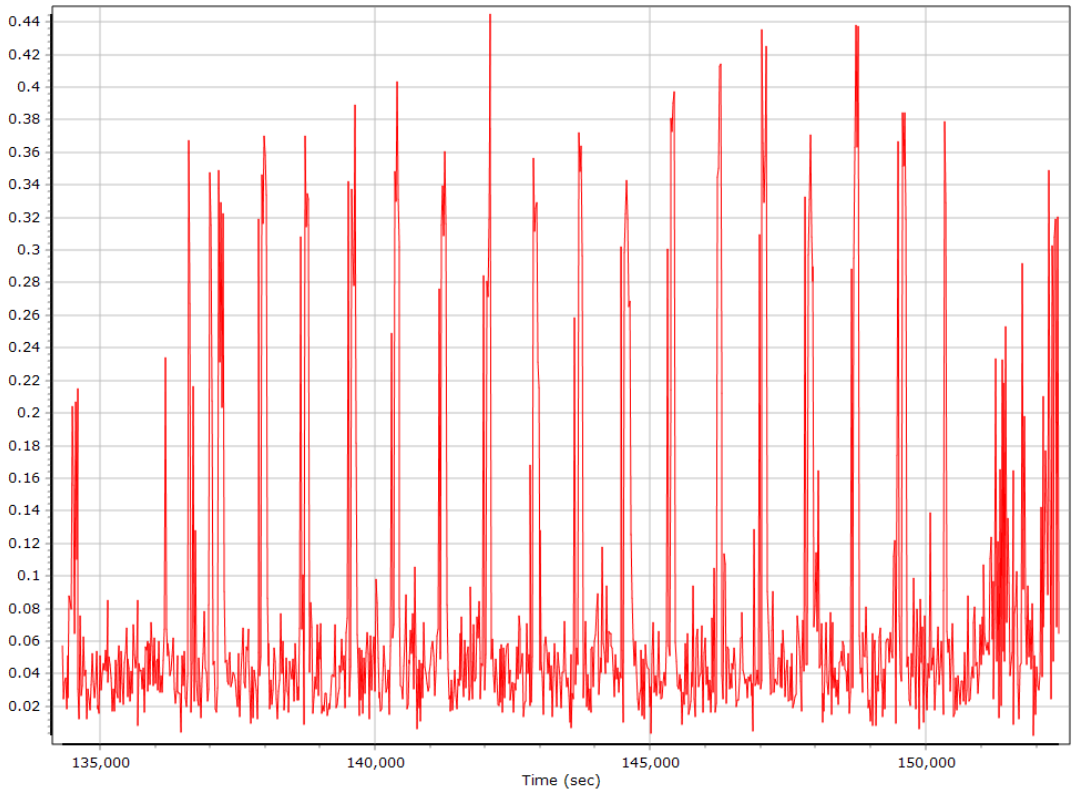

Body Angular Rate

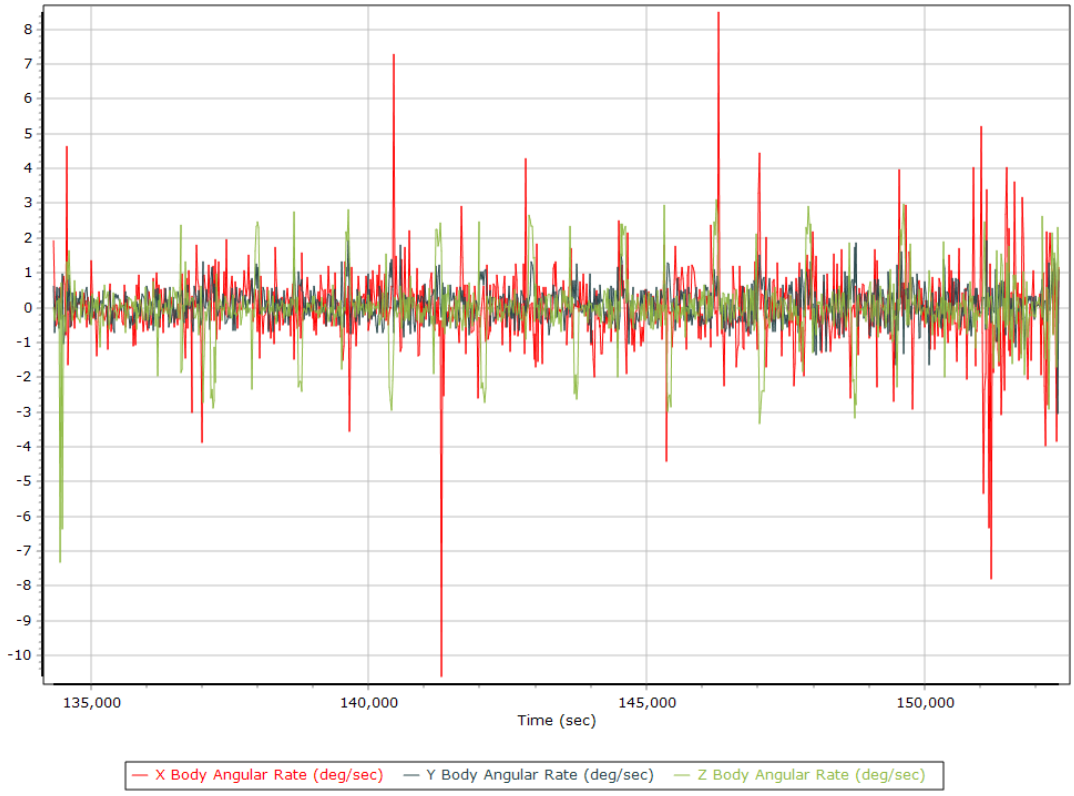

Forward Processed Trajectory Information

Top View

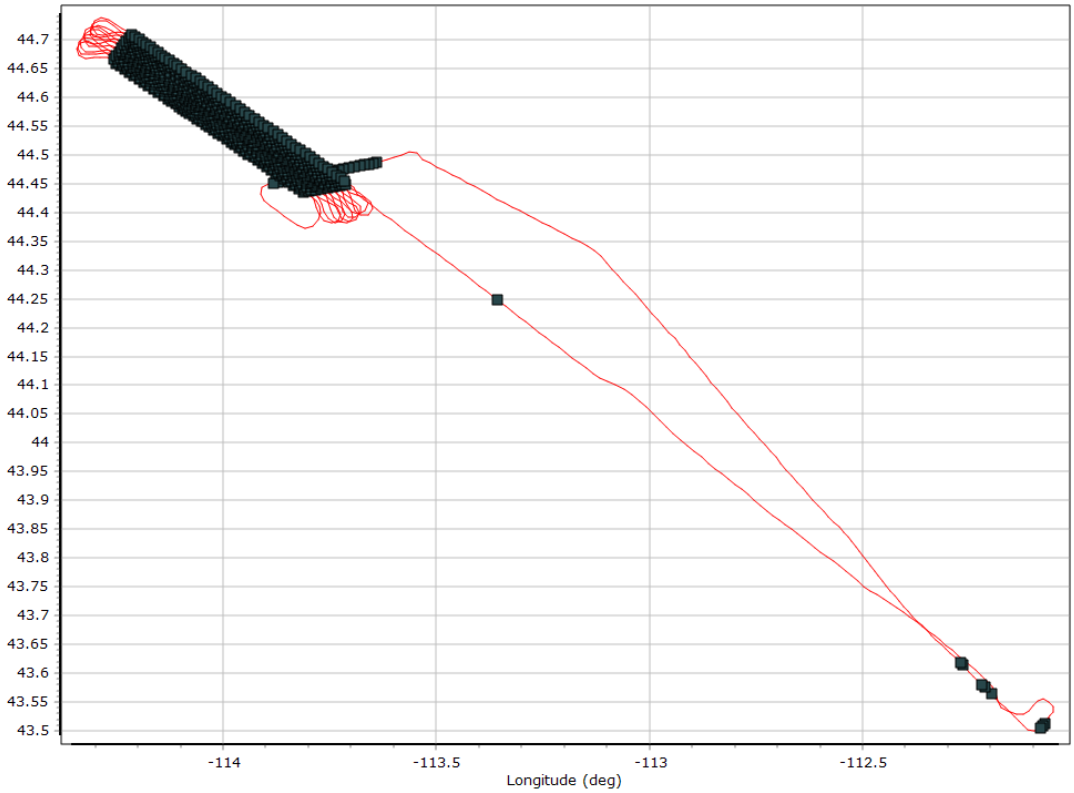

Altitude

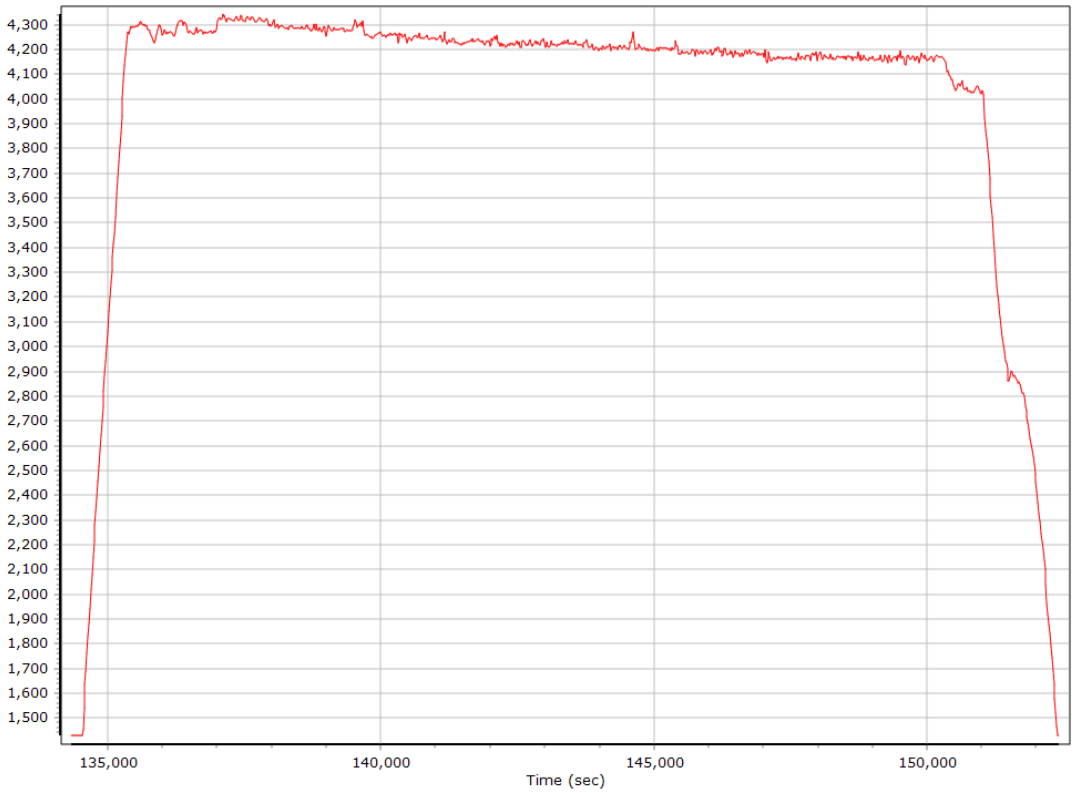

Roll/Pitch

Heading

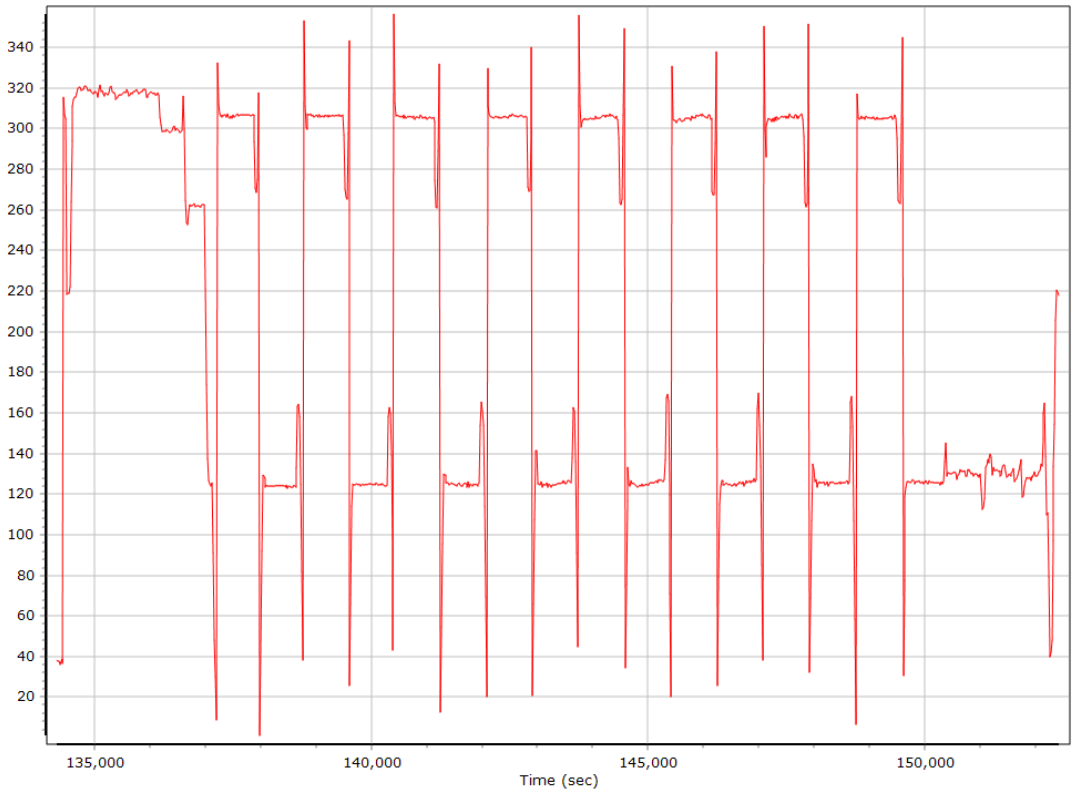

North/East Velocity

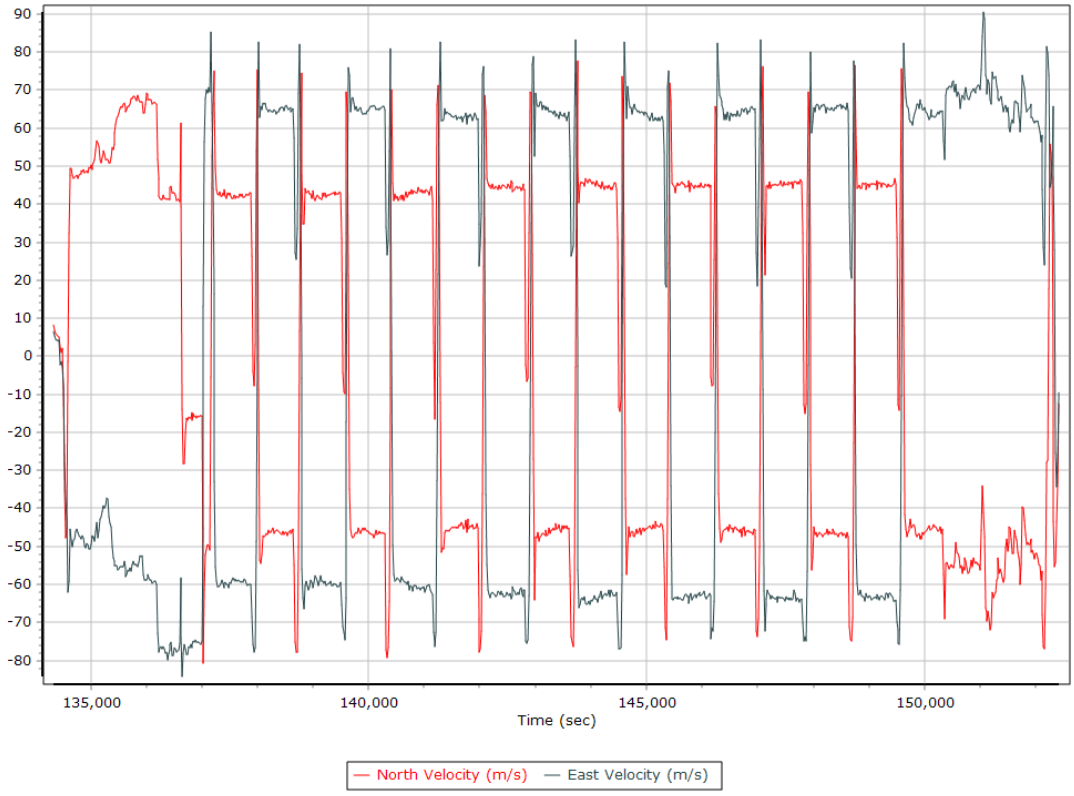

Down Velocity

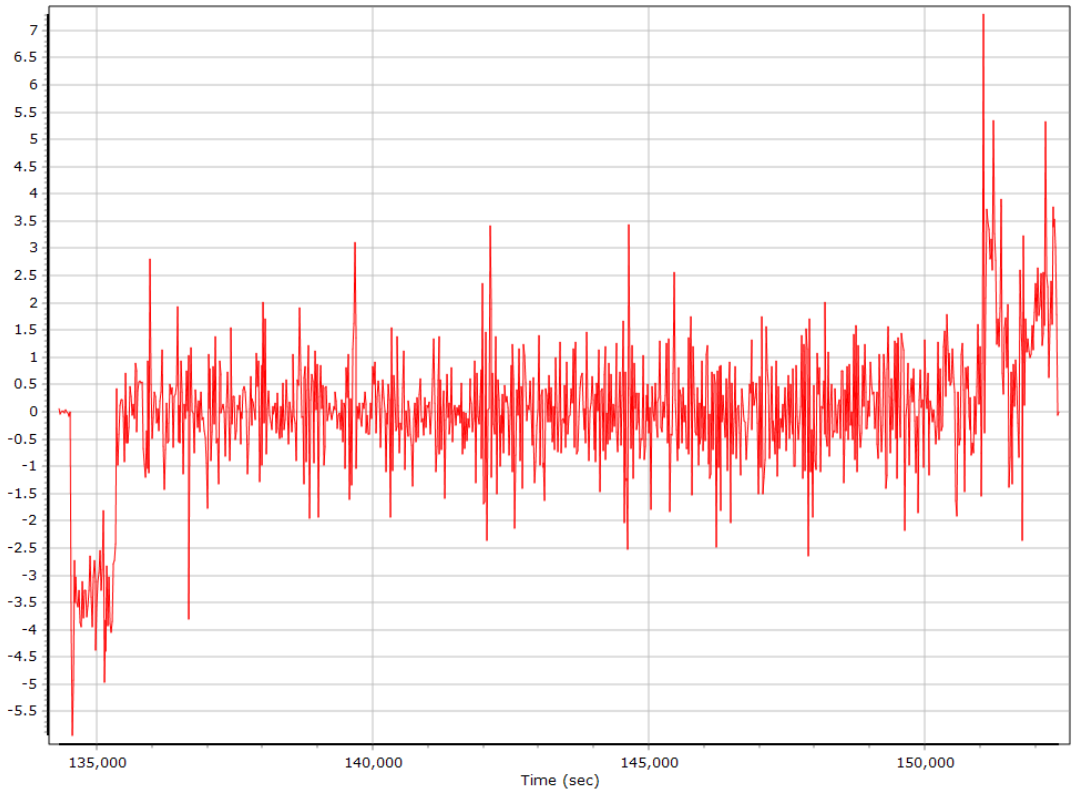

Total Speed

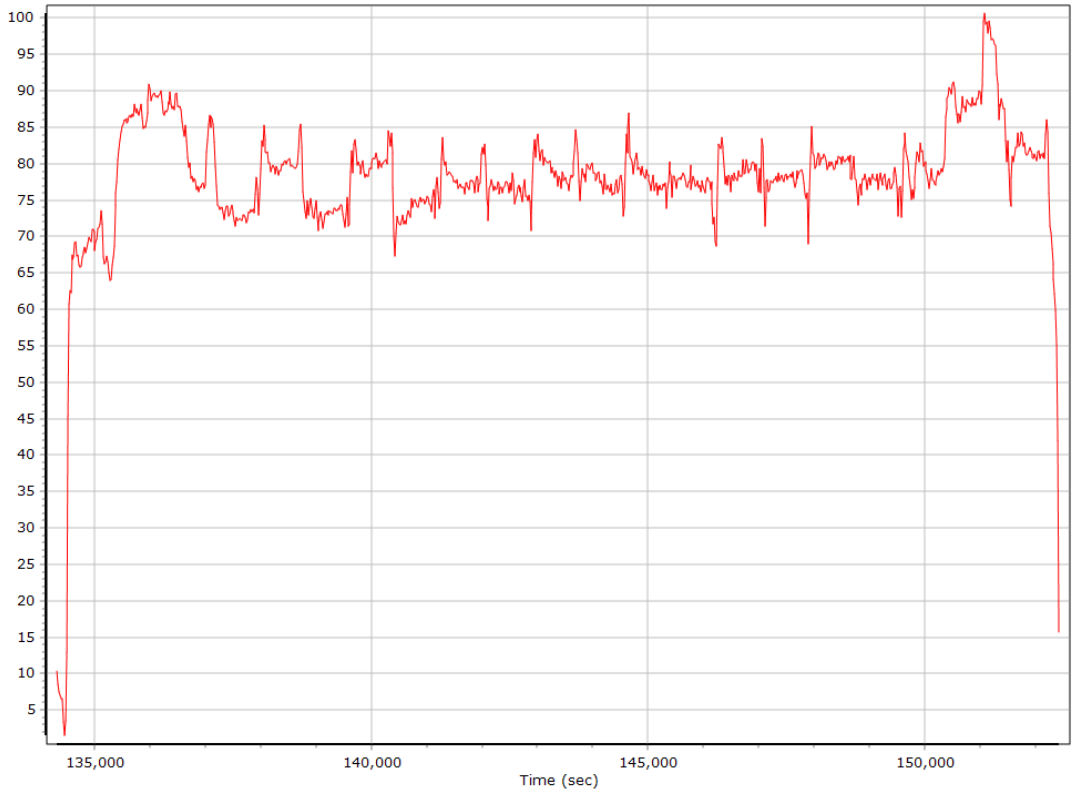

Ground Speed

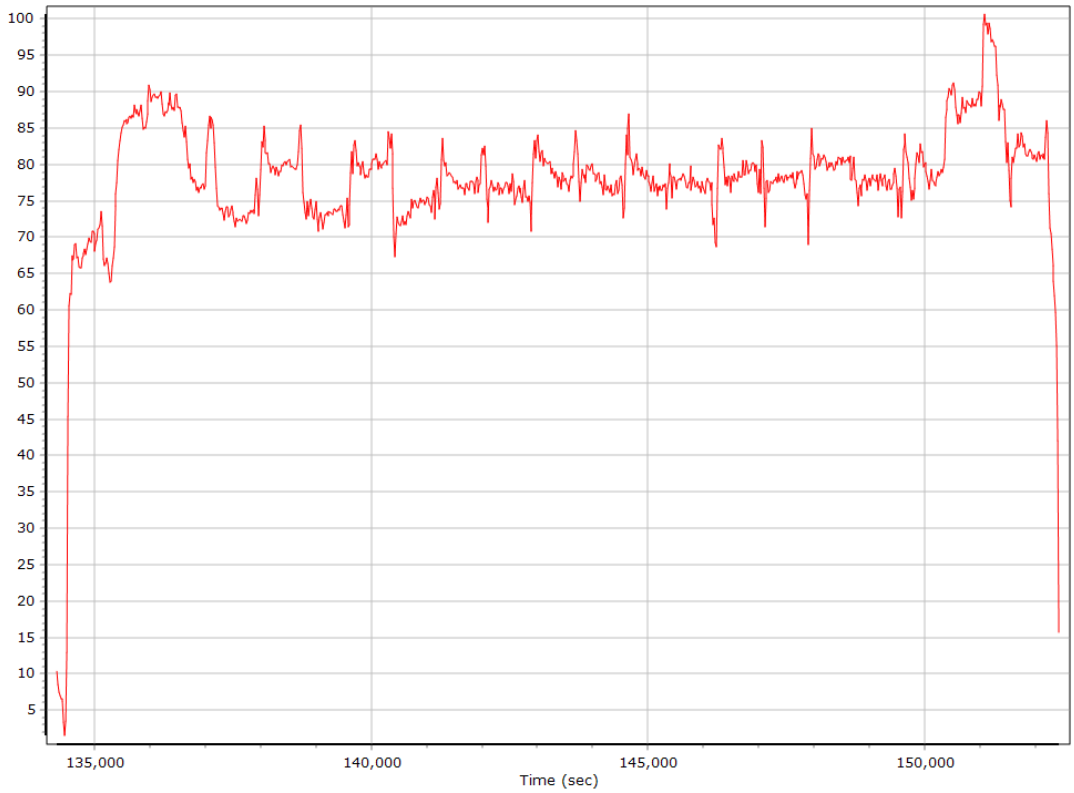

Body Acceleration

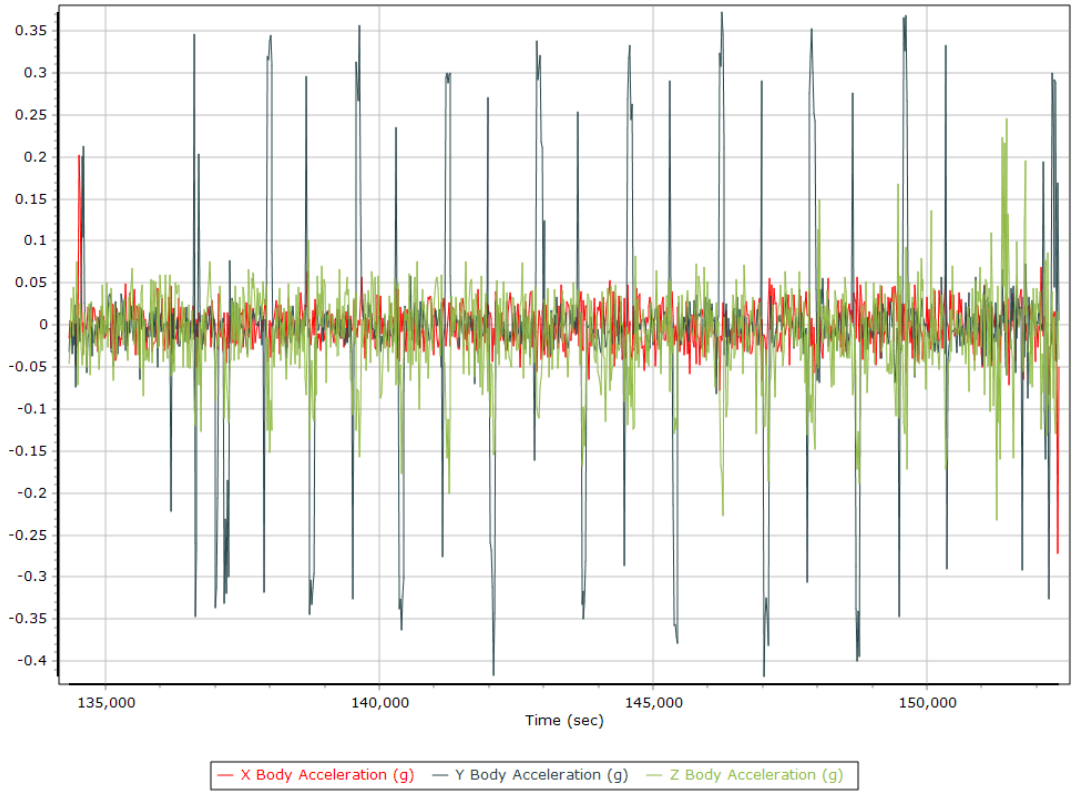

Total Body Acceleration

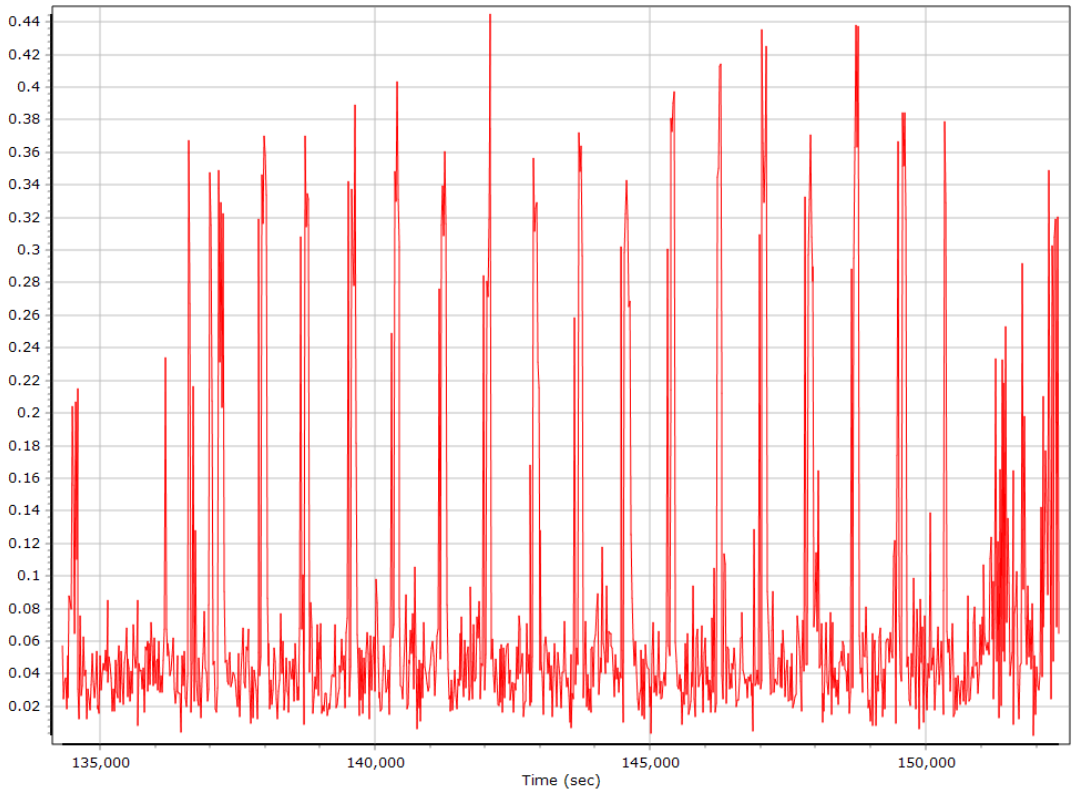

Body Angular Rate

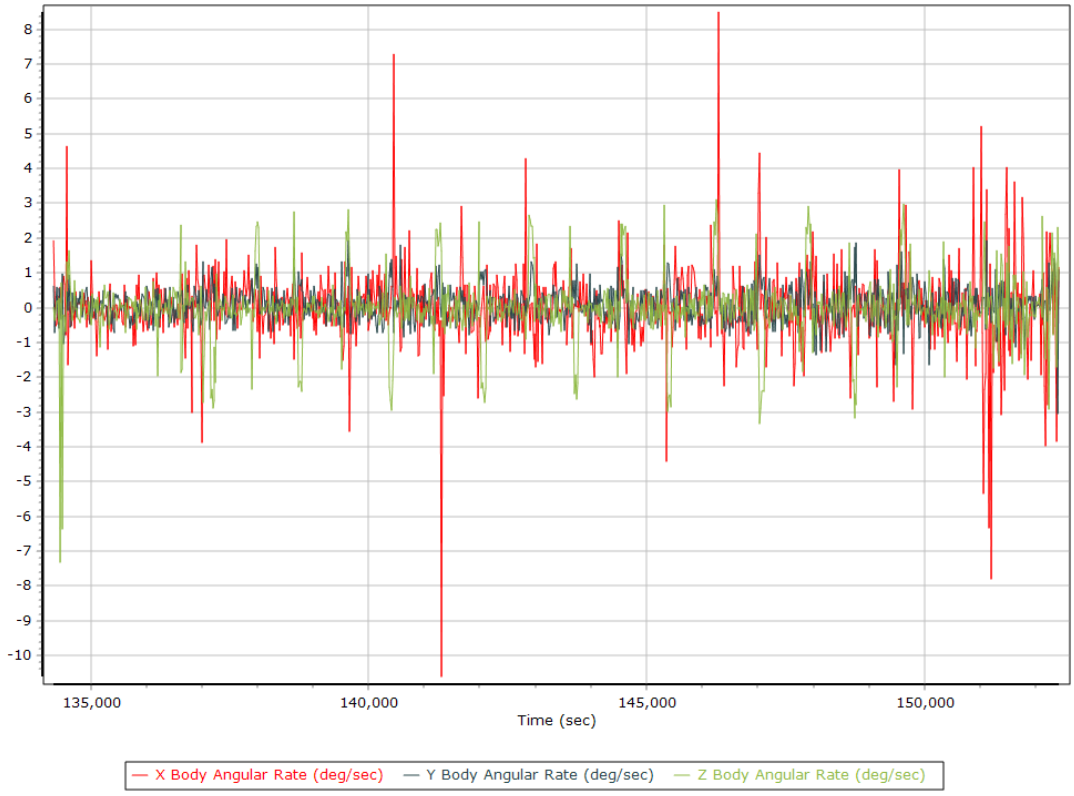

GNSS QC

GNSS QC Statistics

Statistics	Min	Max	Mean
Baseline length (km)	0.00	0.00	
Number of GPS SV	5	10	8
Number of GLONASS SV	0	8	6
Number of QZSS SV	0	0	0
Number of BEIDOU SV	0	2	0
Number of GALILEO SV	0	9	7
Total number of SV	12	26	21
PDOP	0.95	2.38	1.17
QC Solution Gaps	0.00	0.00	
Solution Type	Fixed	Float	No solution
Epoch (sec)	18483.00	0.00	0.00
Percentage	100.00	0.00	0.00

Num SVs in solution

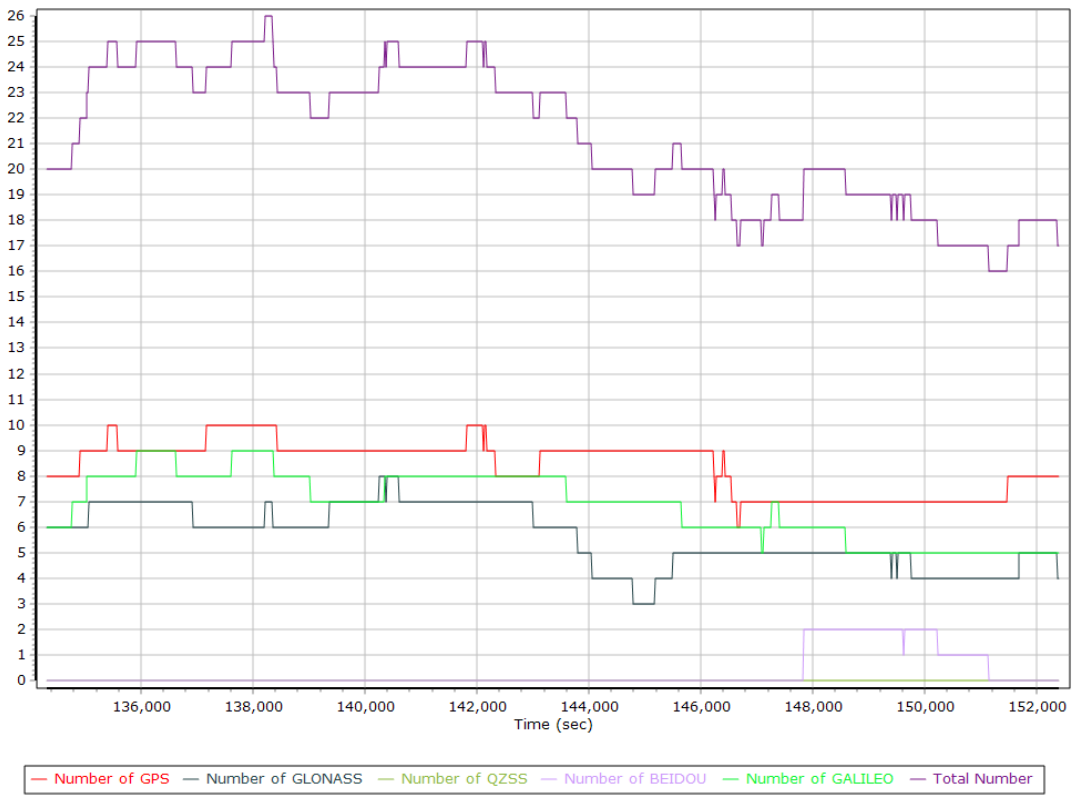

Forward/Reverse Separation

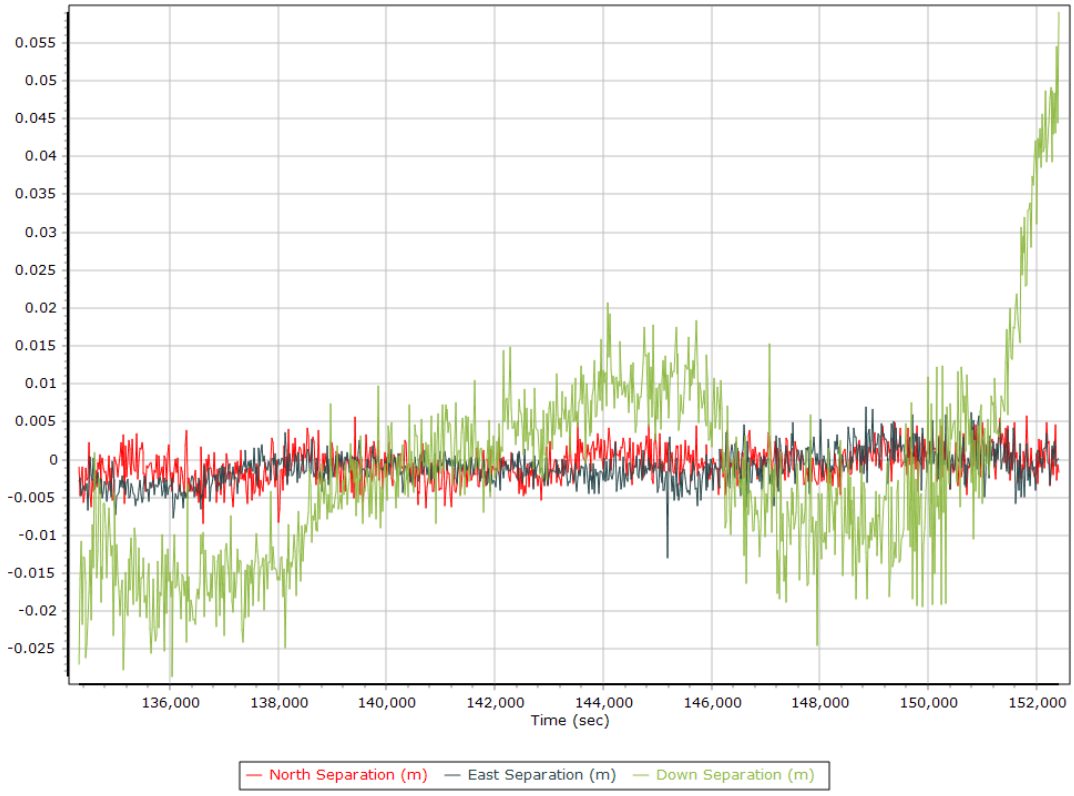

PDOP

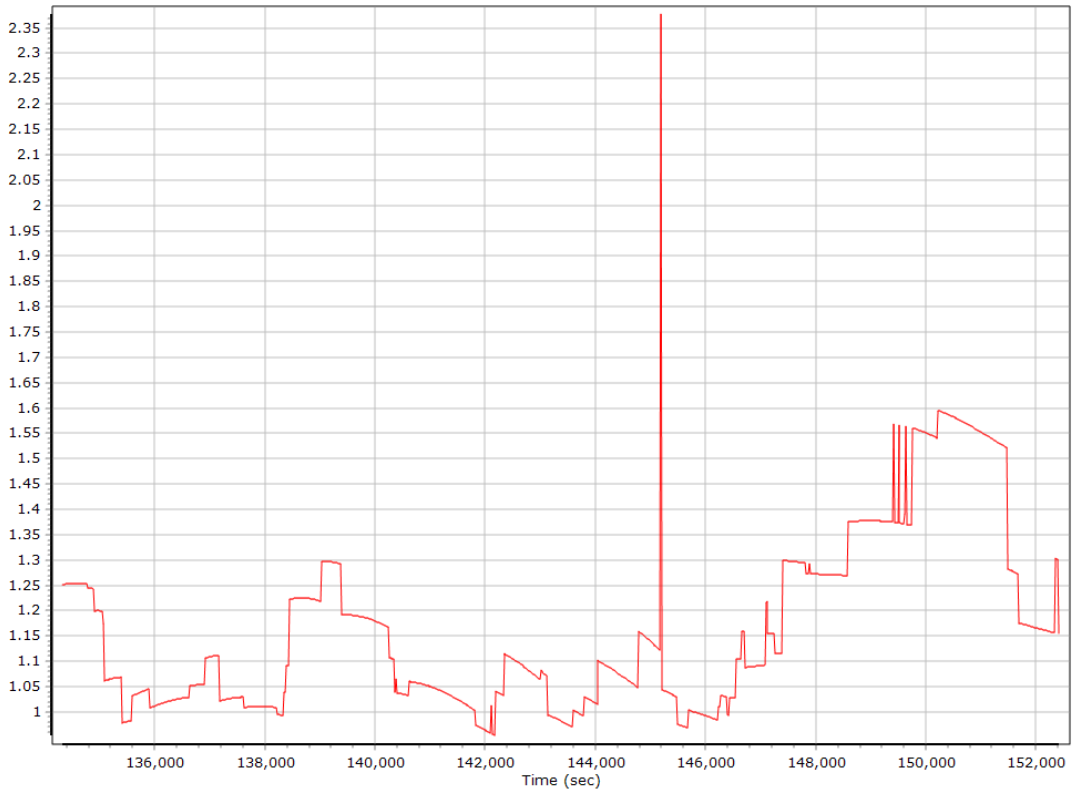

Estimated Position Accuracy

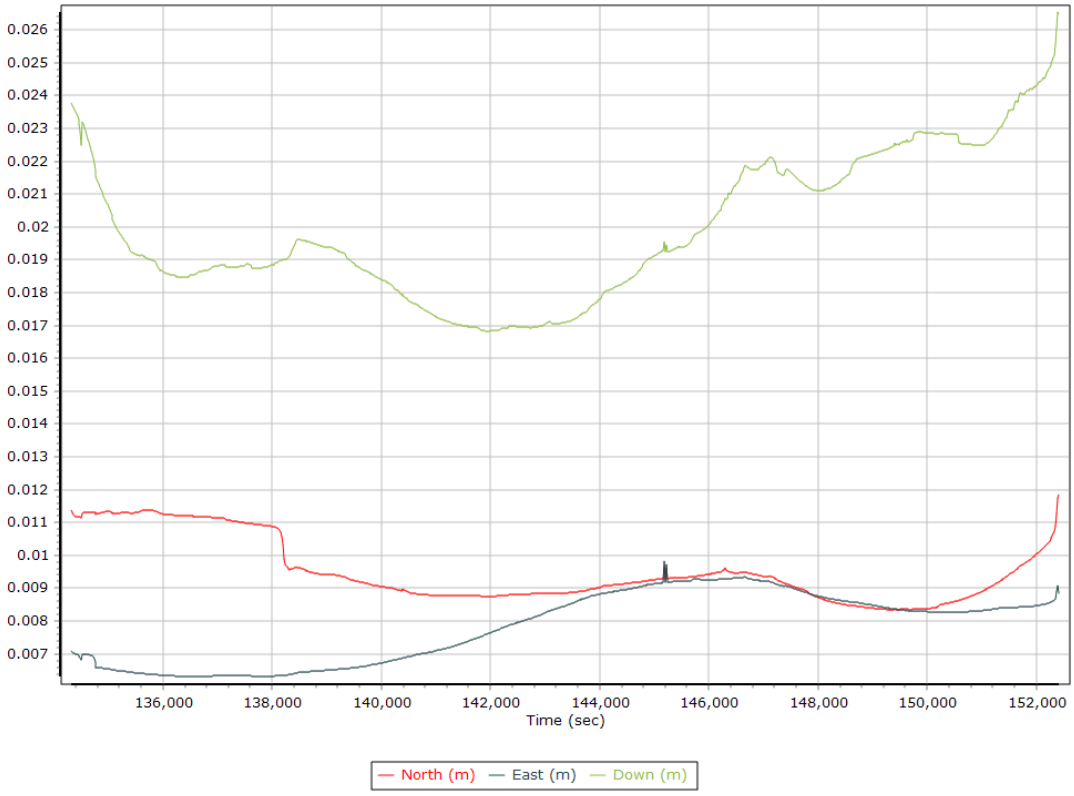

GPS Residuals

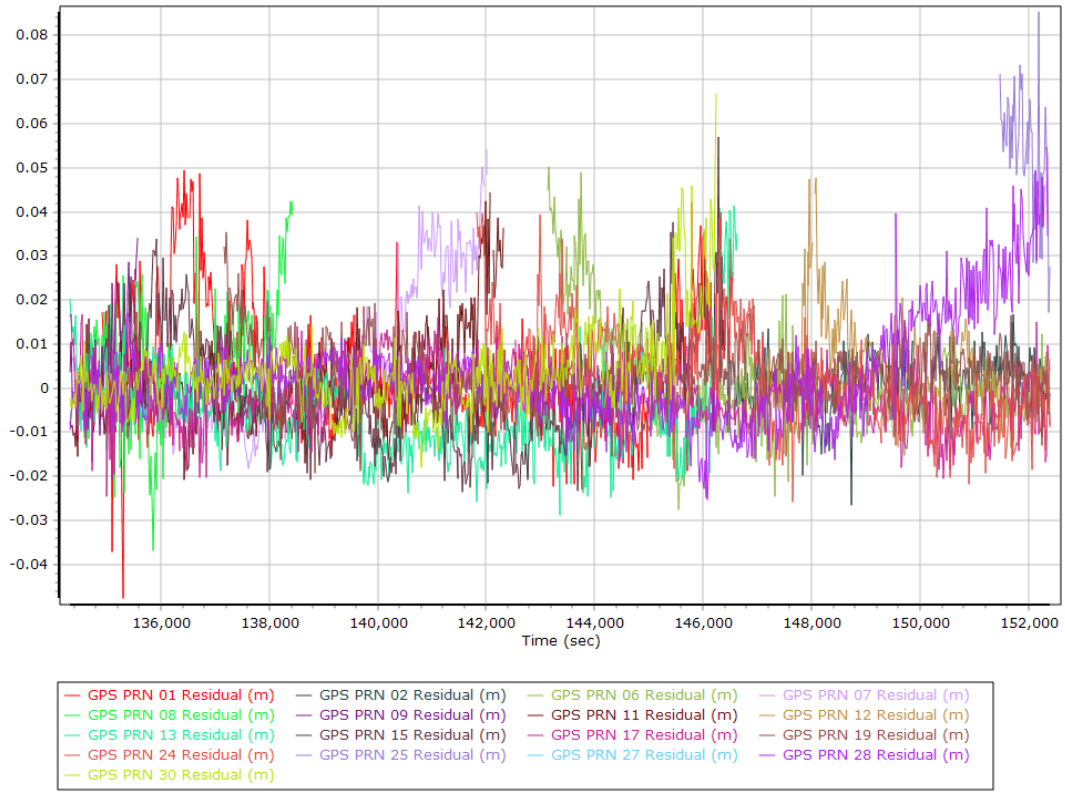

GLONASS Residuals

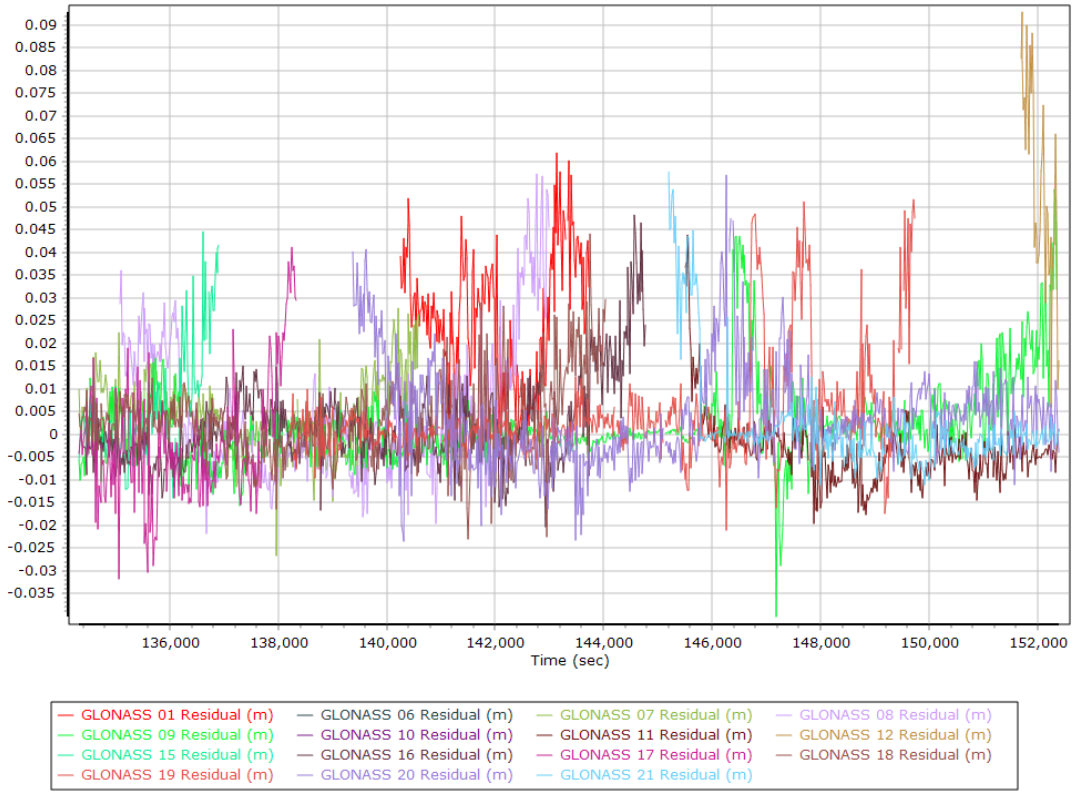

BEIDOU Residuals

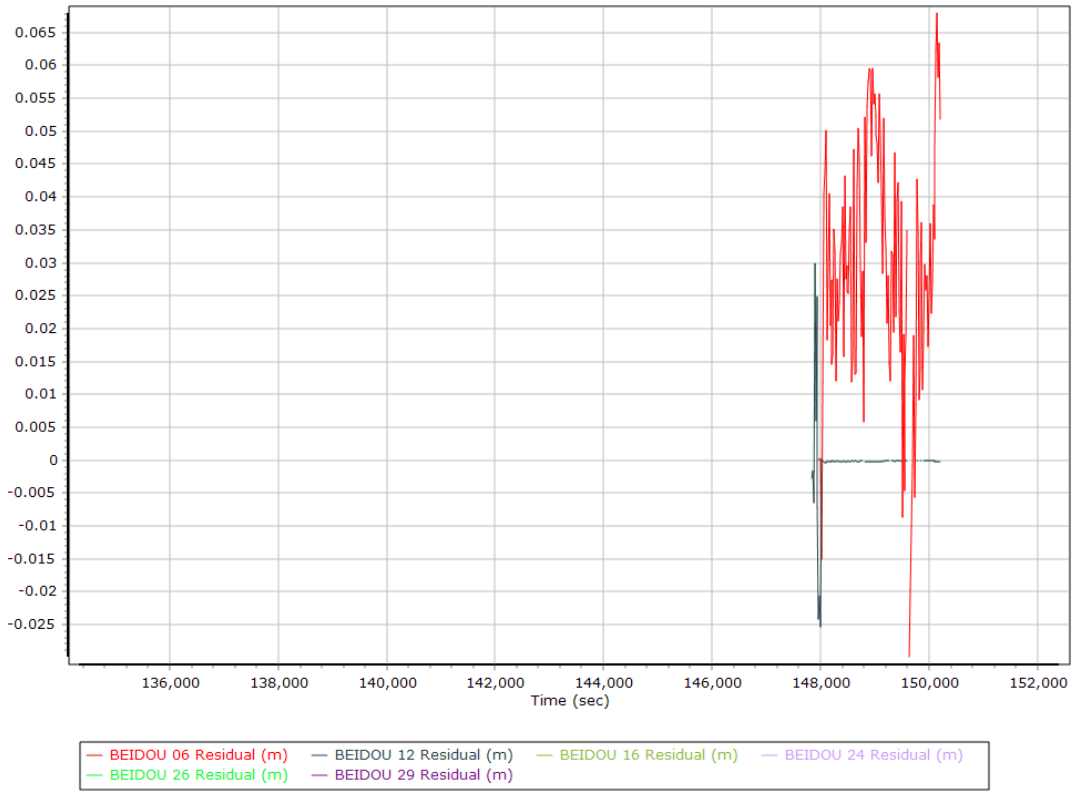

GALILEO Residuals

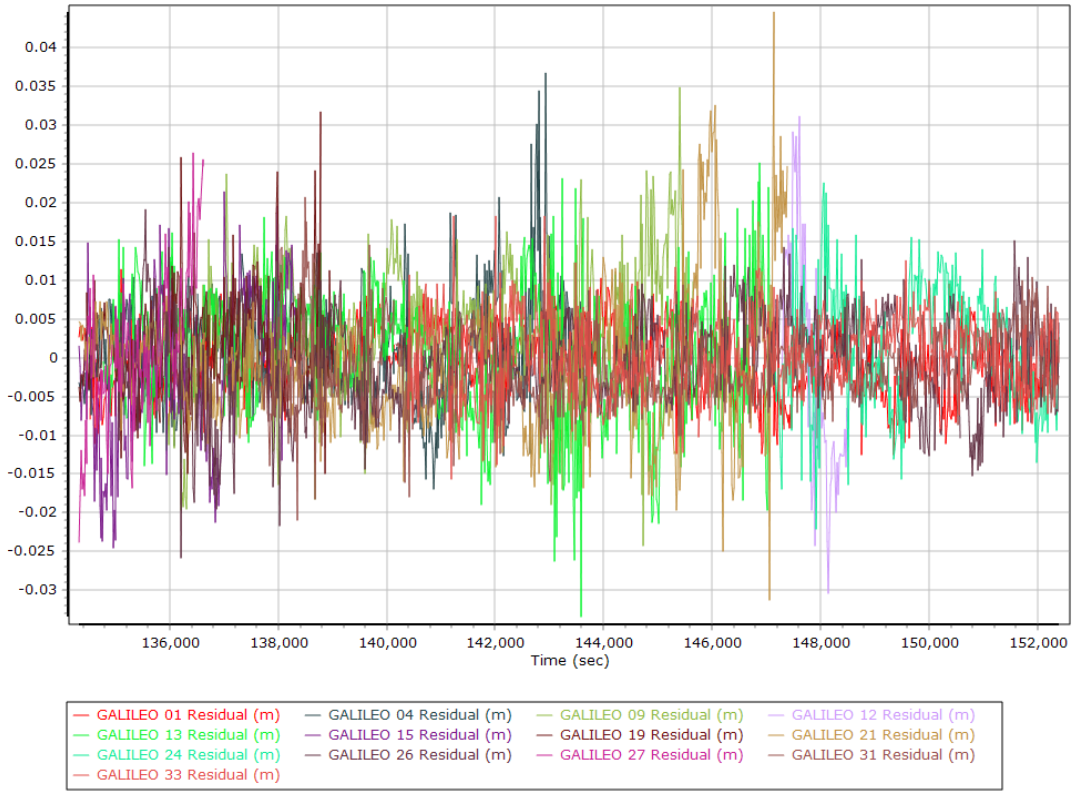

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion PP-RTX		
Stabilized mount	False		
Processing start time	133923.000 (06/22/2020 13:12:03)		
Processing end time	152432.000 (06/22/2020 18:20:32)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	180.000
Reference to Primary GNSS lever arm (m)	0.554	-0.436	-0.958
Reference to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm (m)

X Reference-Primary GNSS Lever Arm (m)

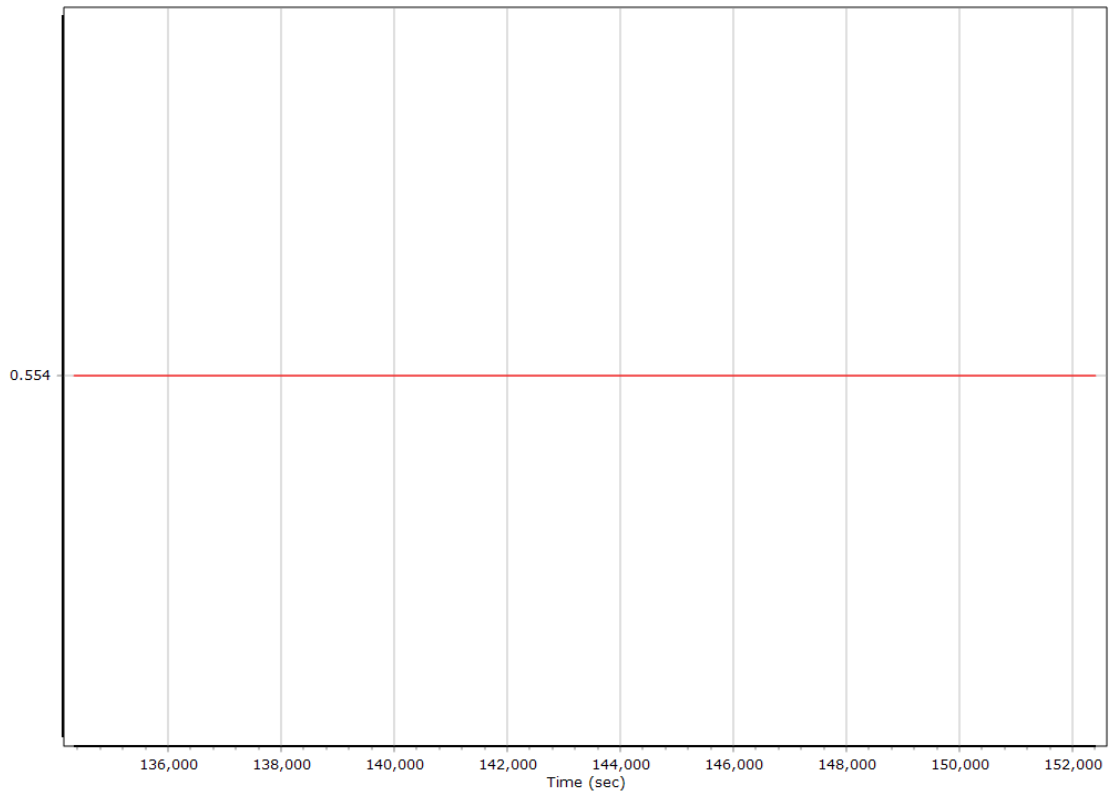

Y Reference-Primary GNSS Lever Arm (m)

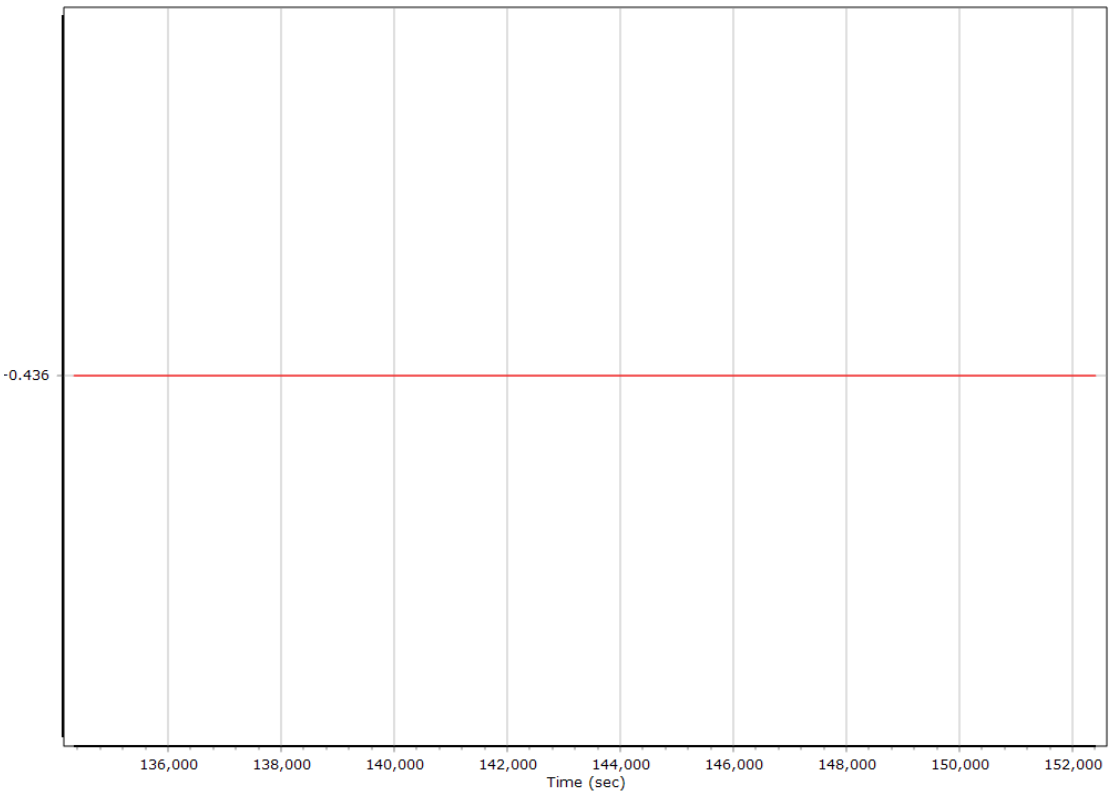

Z Reference-Primary GNSS Lever Arm (m)

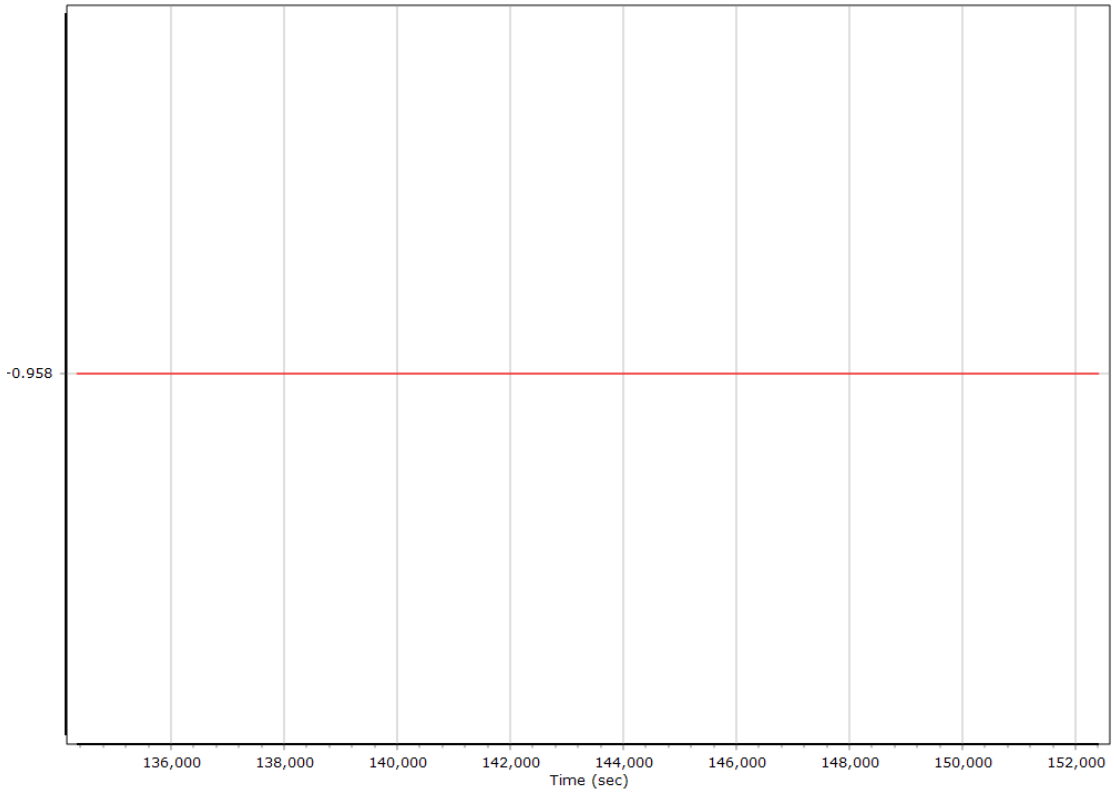

Reference-Primary GNSS Lever Arm Figure of Merit

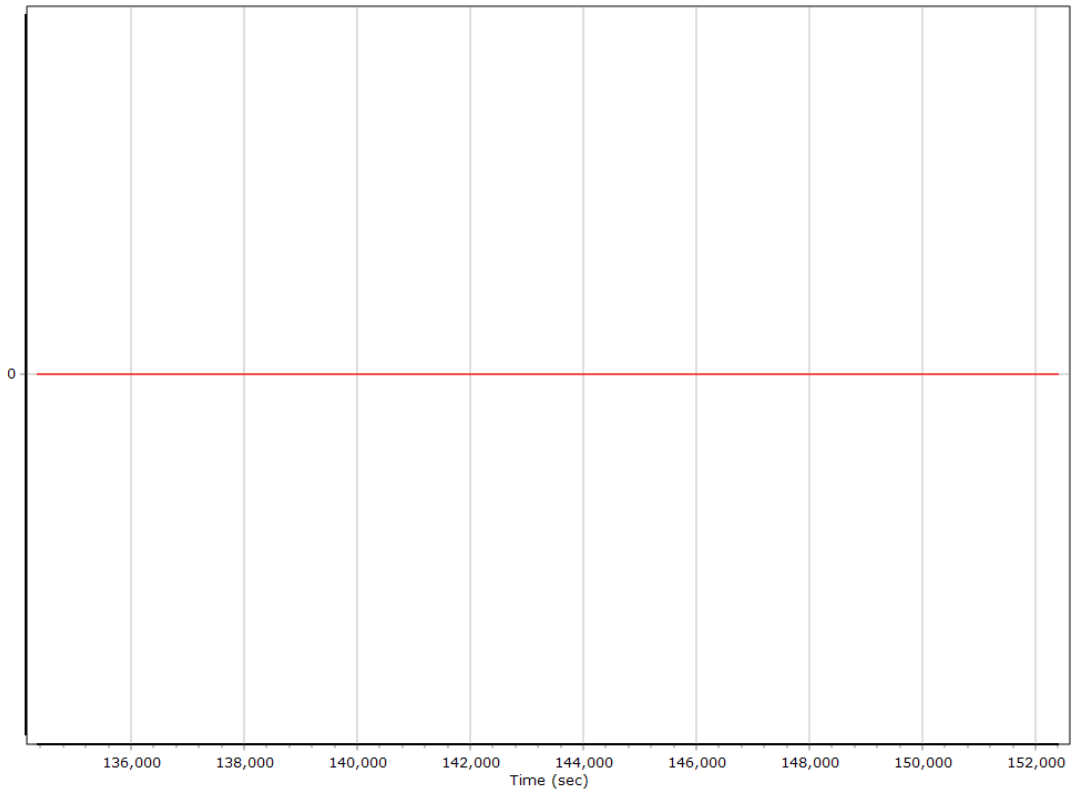

IN-Fusion QC

Forward Processed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

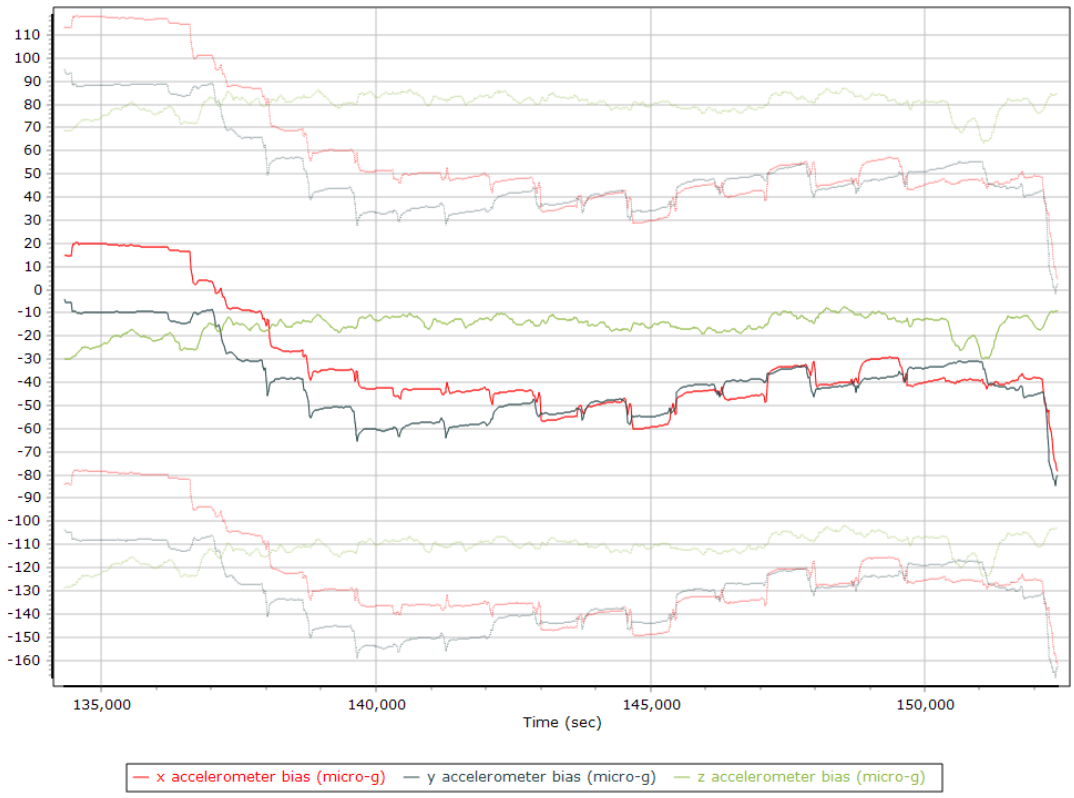

X Accelerometer Bias (micro-g)

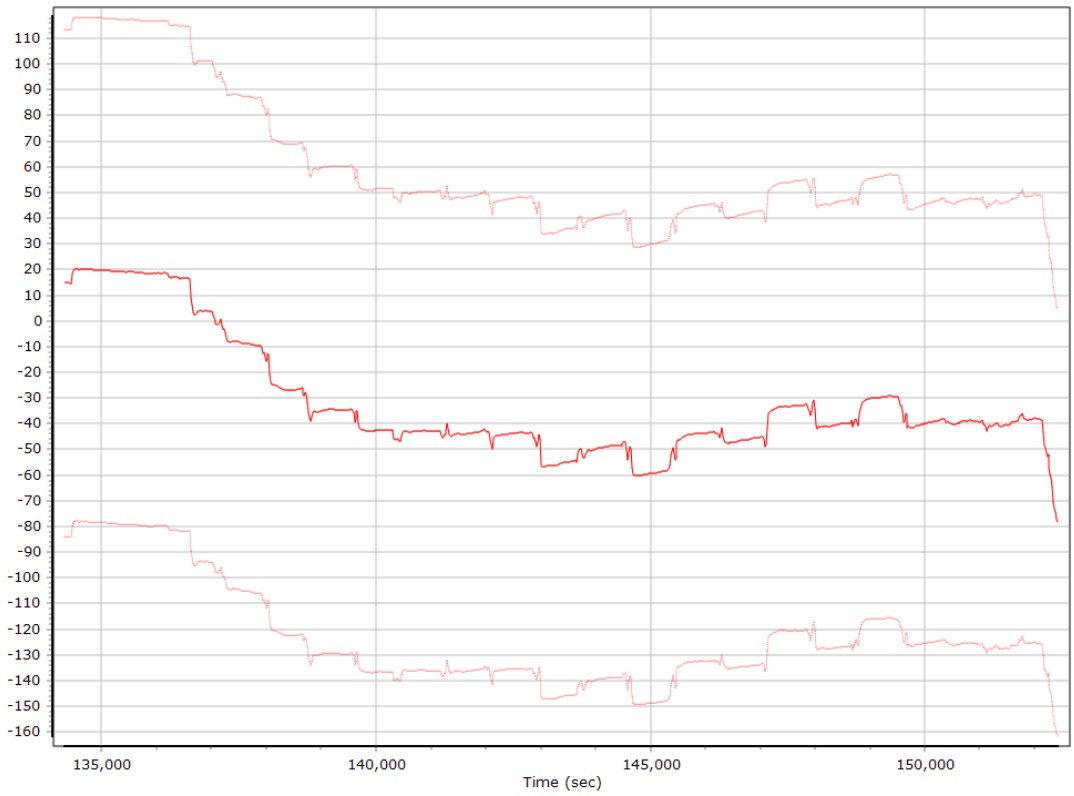

Y Accelerometer Bias (micro-g)

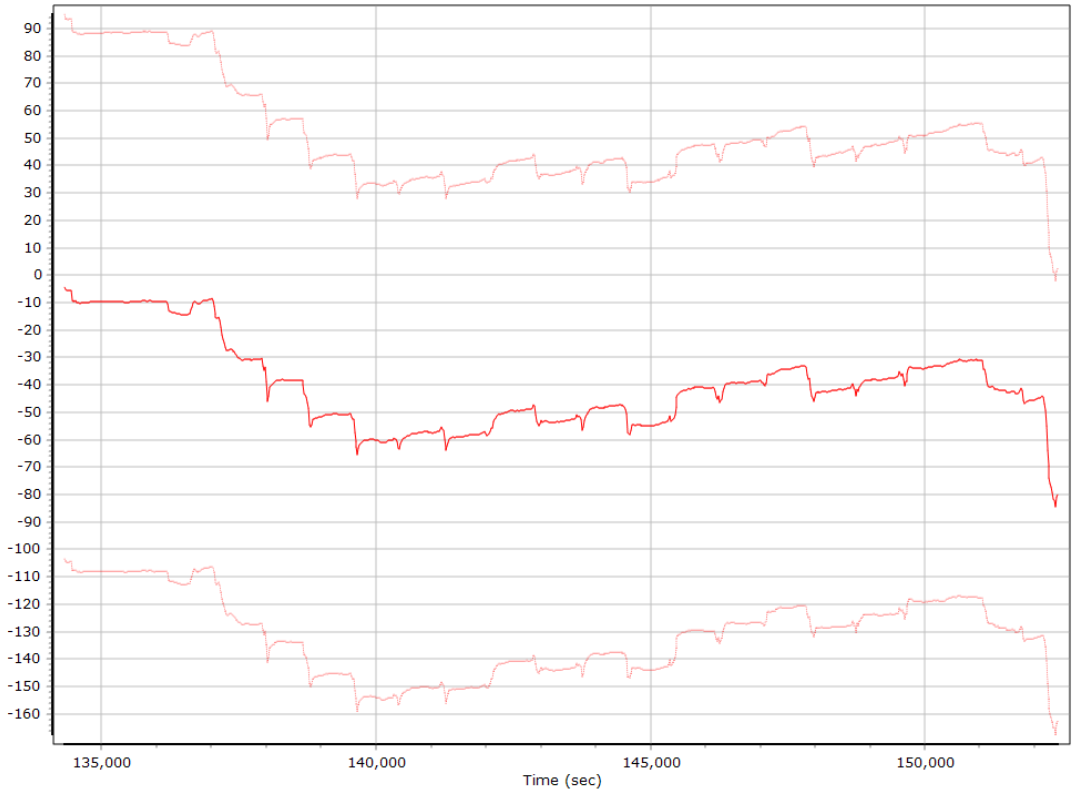

Z Accelerometer Bias (micro-g)

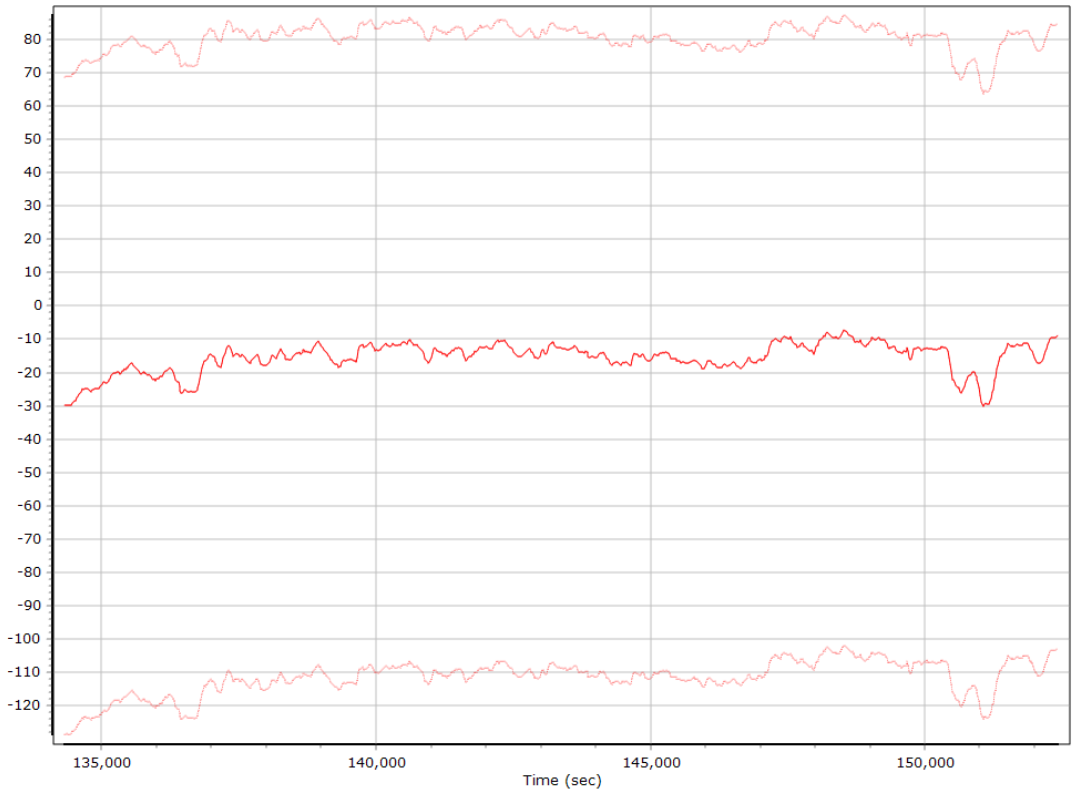

Accelerometer Scale Error (ppm)

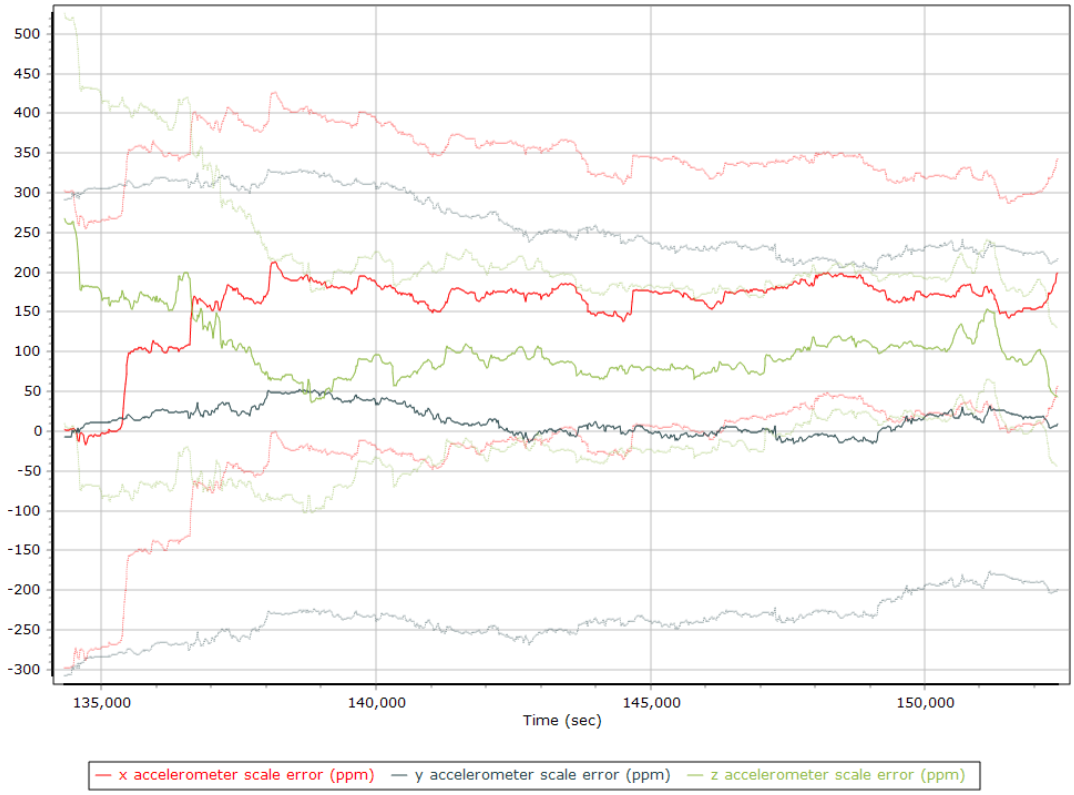

X Accelerometer Scale Error (ppm)

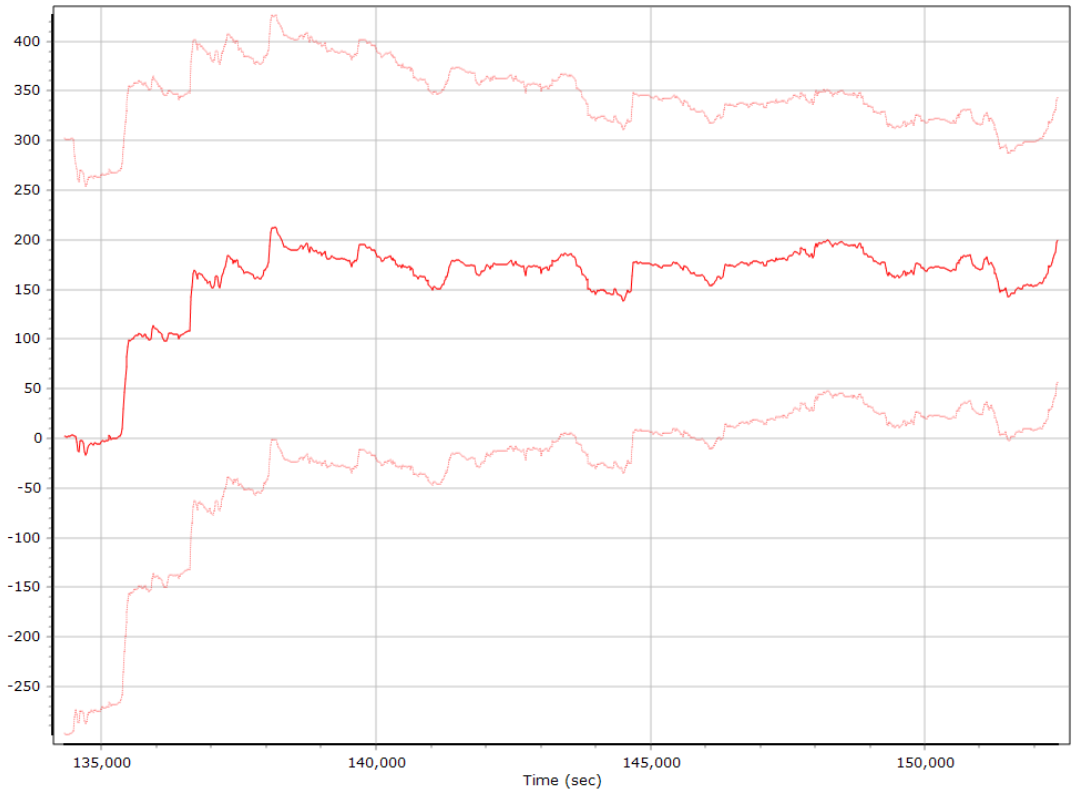

Y Accelerometer Scale Error (ppm)

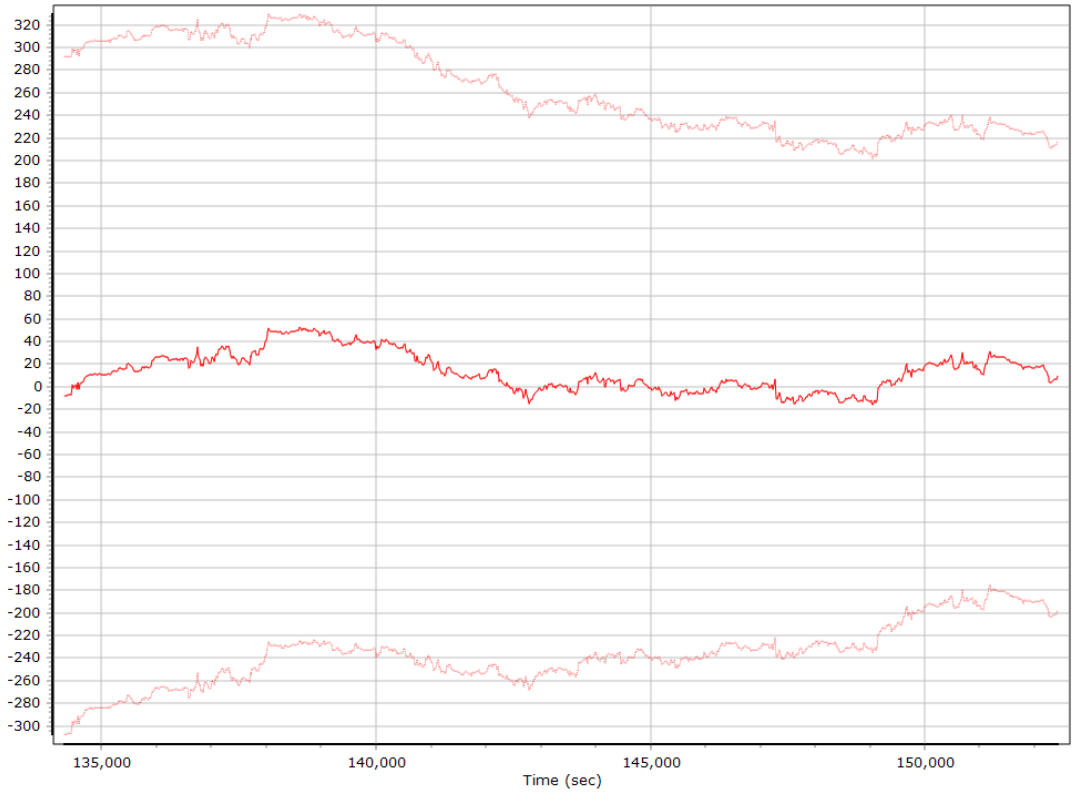

Z Accelerometer Scale Error (ppm)

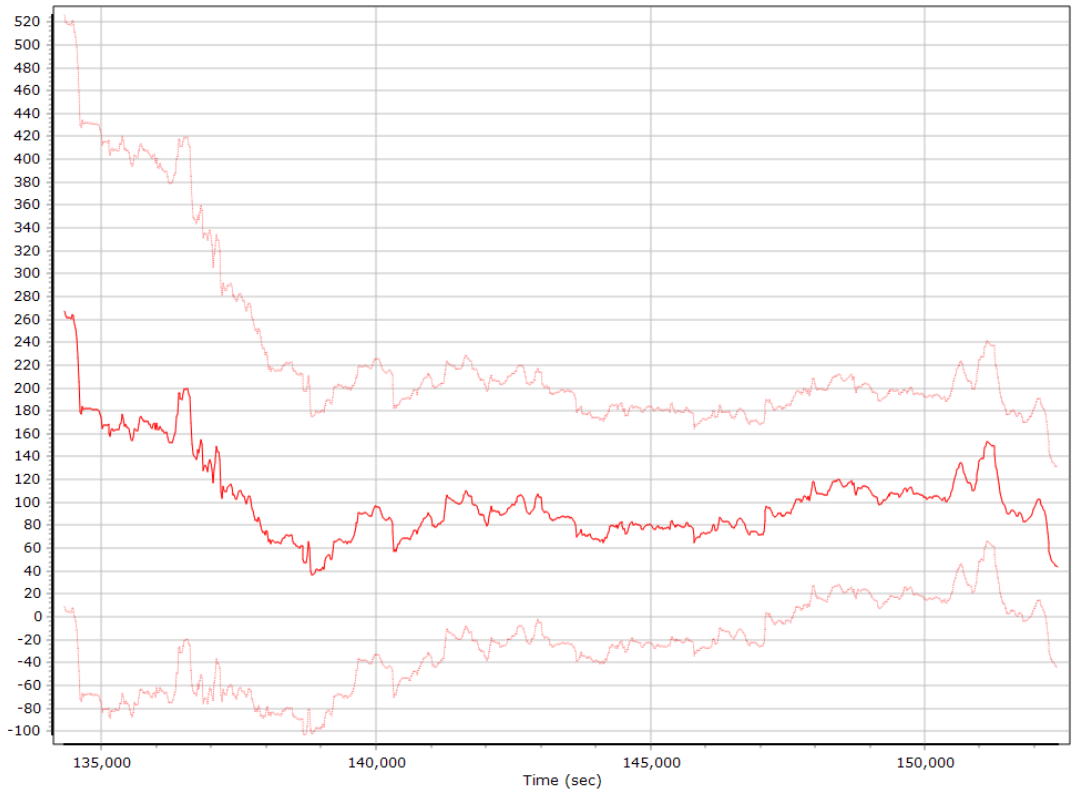

Gyro Bias (deg/h)

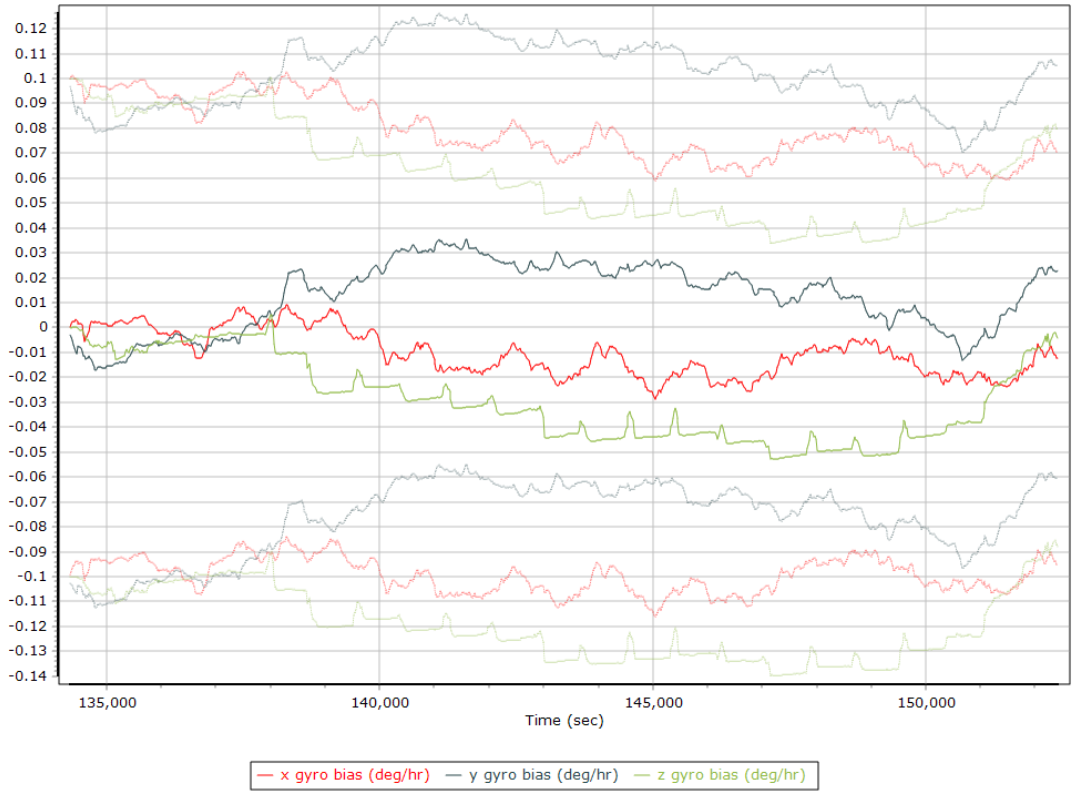

X Gyro Bias (deg/h)

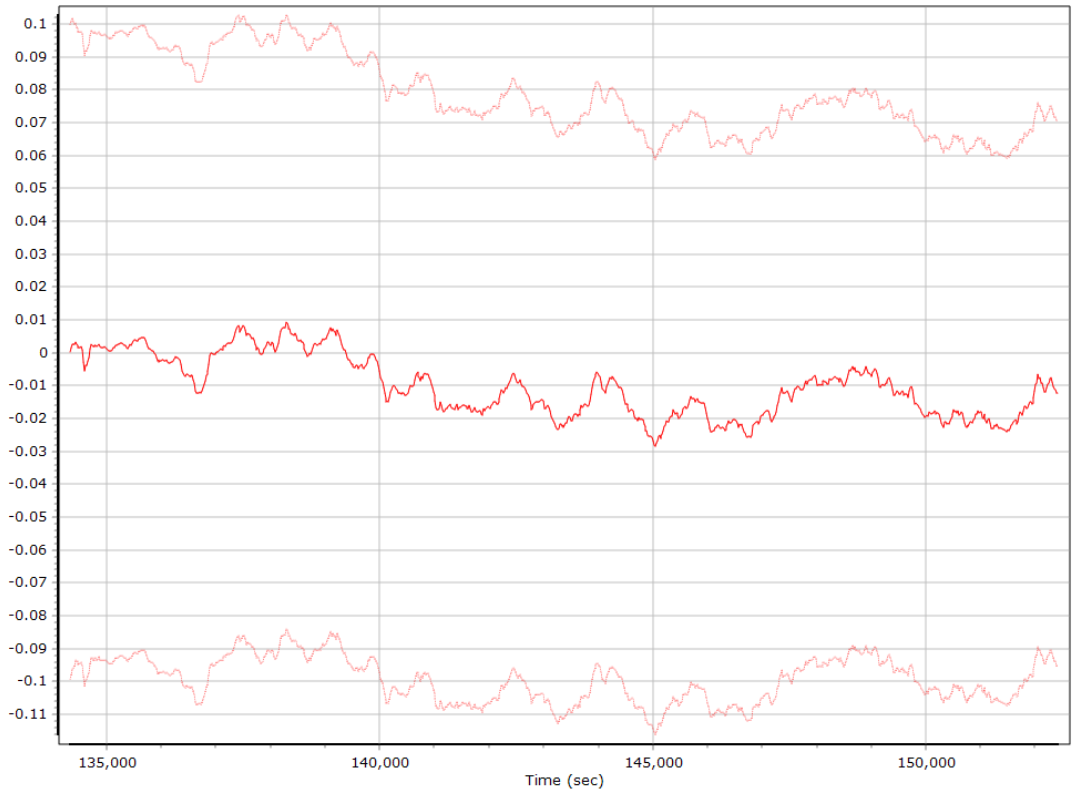

Y Gyro Bias (deg/h)

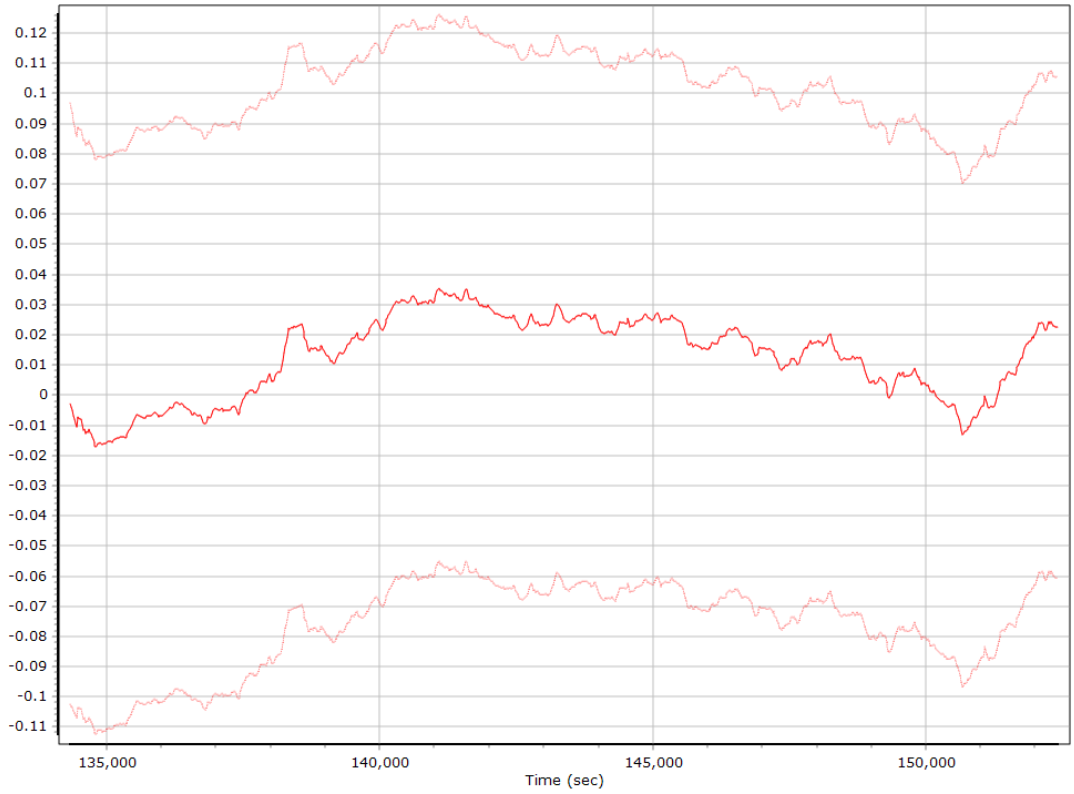

Z Gyro Bias (deg/h)

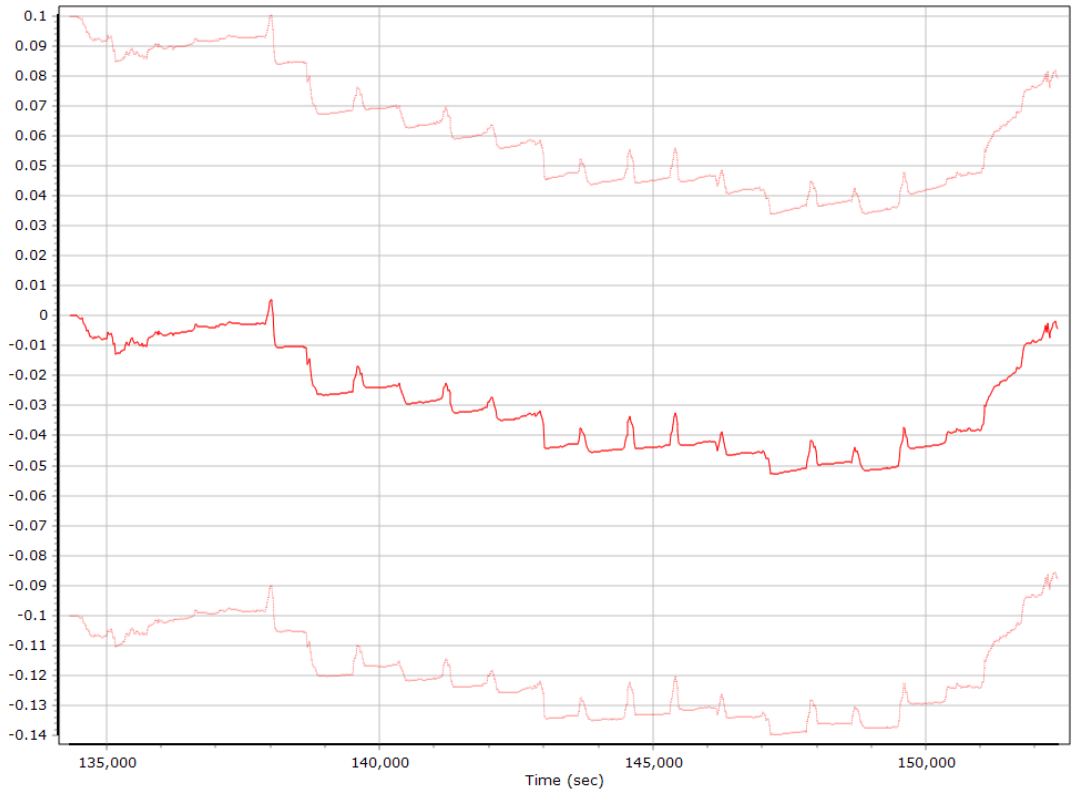

Gyro Scale Error (ppm)

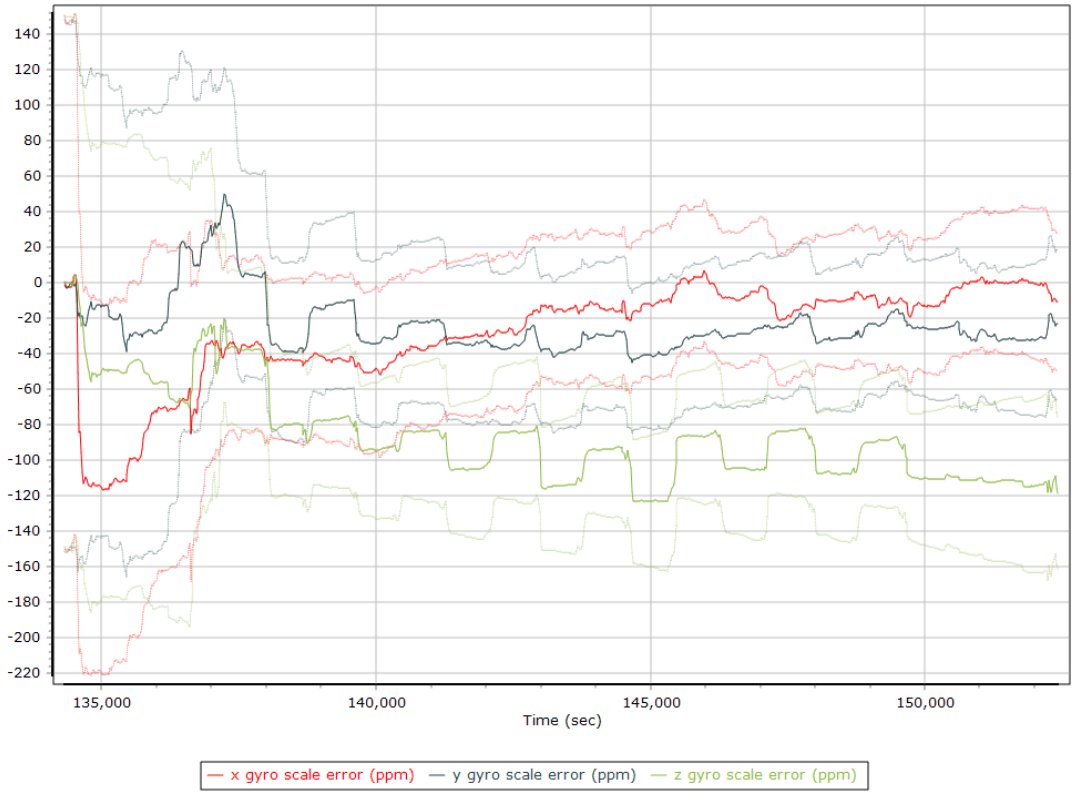

X Gyro Scale Error (ppm)

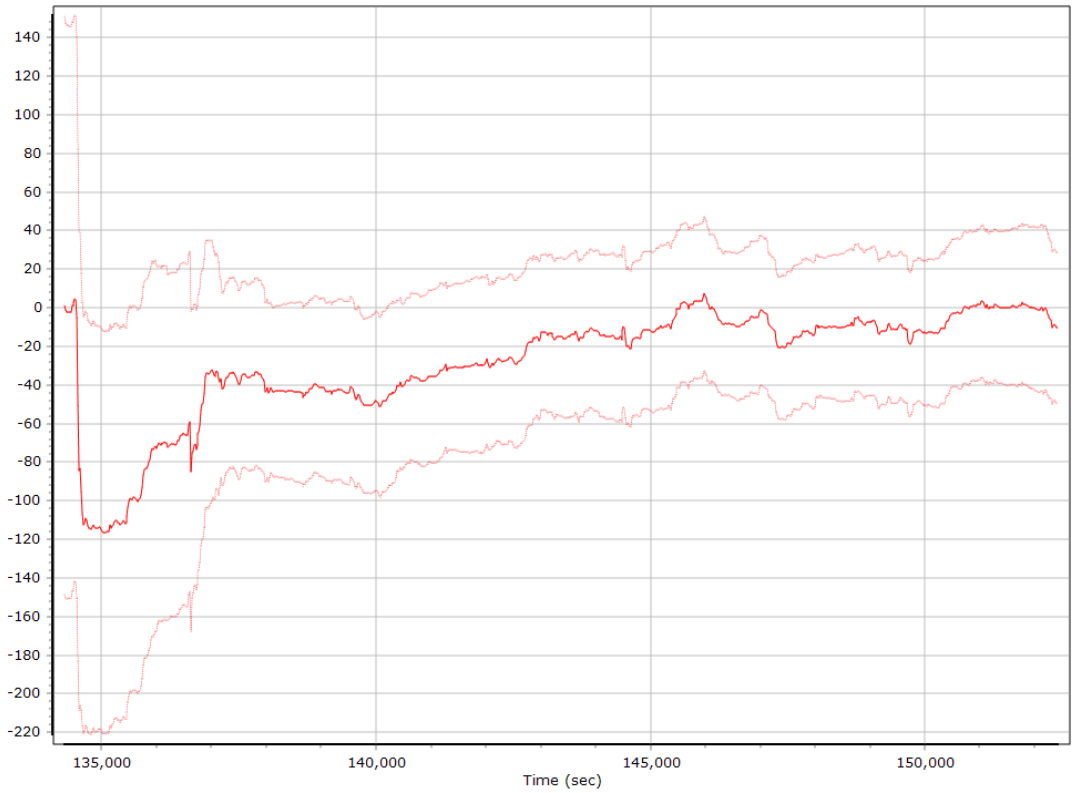

Y Gyro Scale Error (ppm)

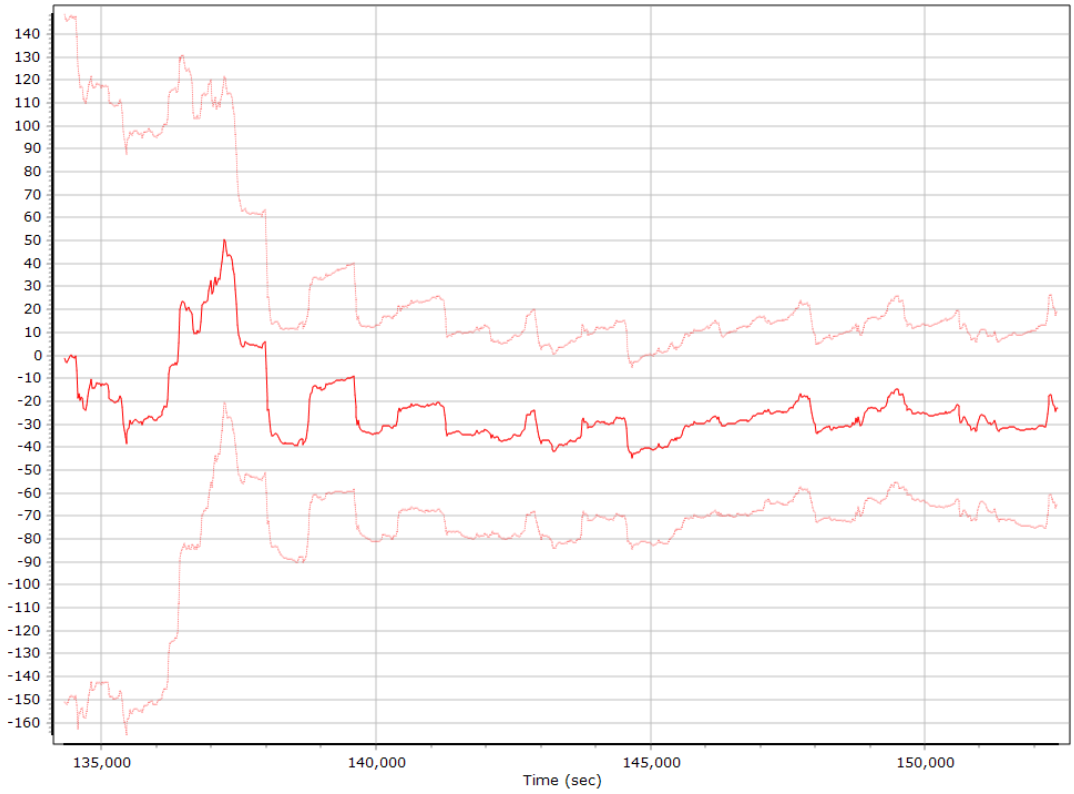

Z Gyro Scale Error (ppm)

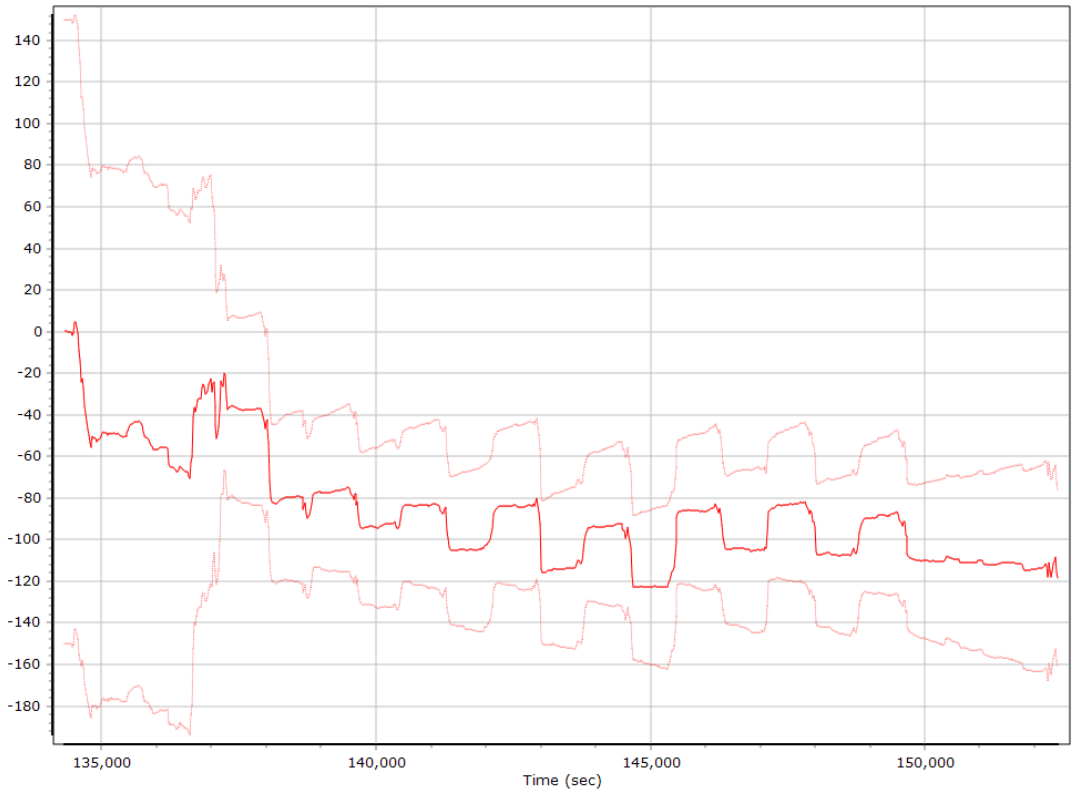

Forward Processed Estimated Constant Errors, Reference Frame

Accelerometer Bias (micro-g)

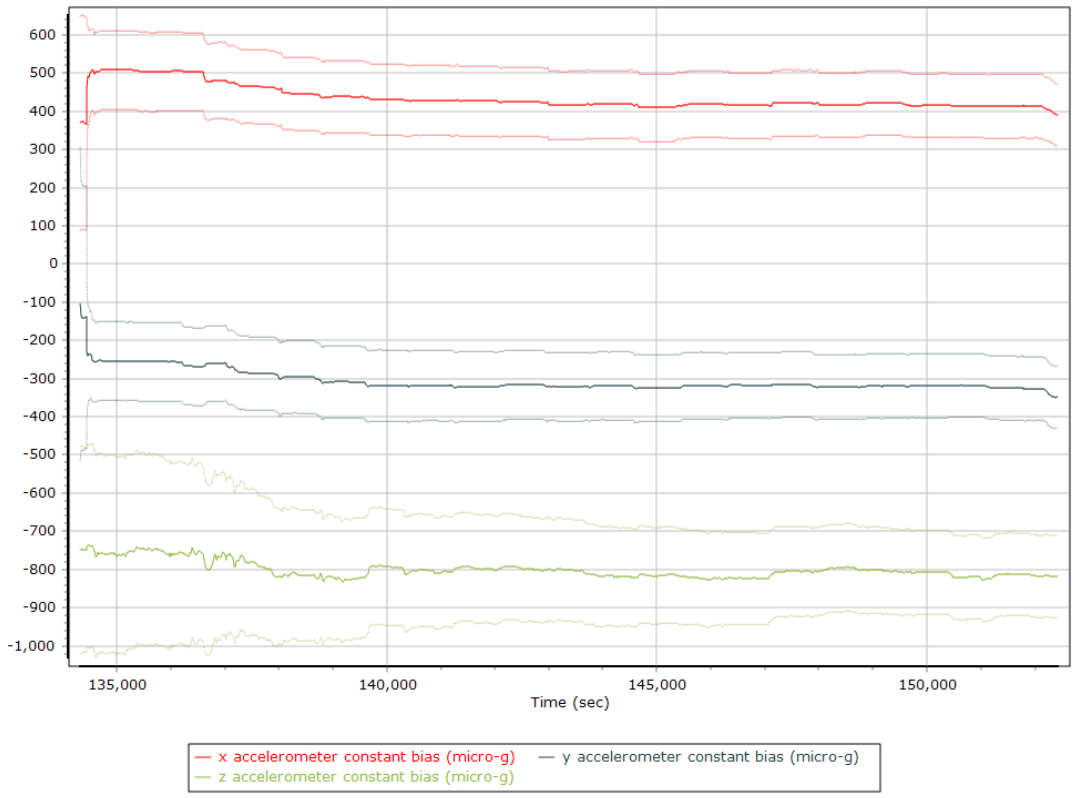

X Accelerometer Bias (micro-g)

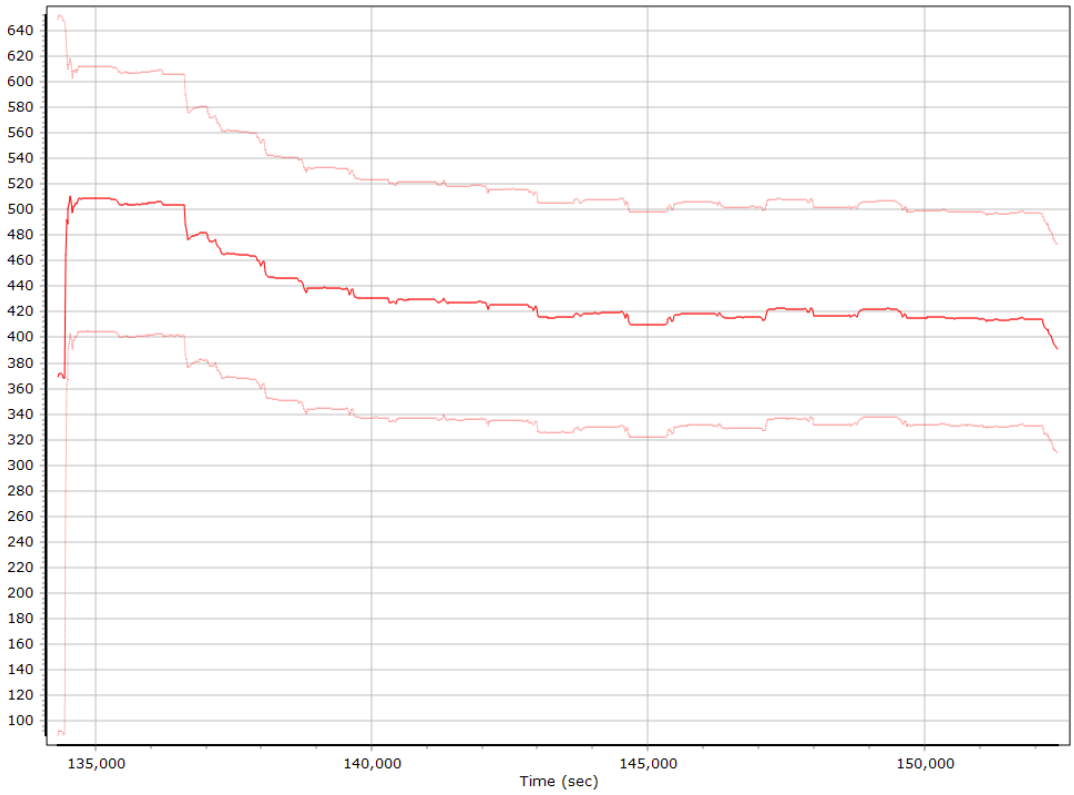

Y Accelerometer Bias (micro-g)

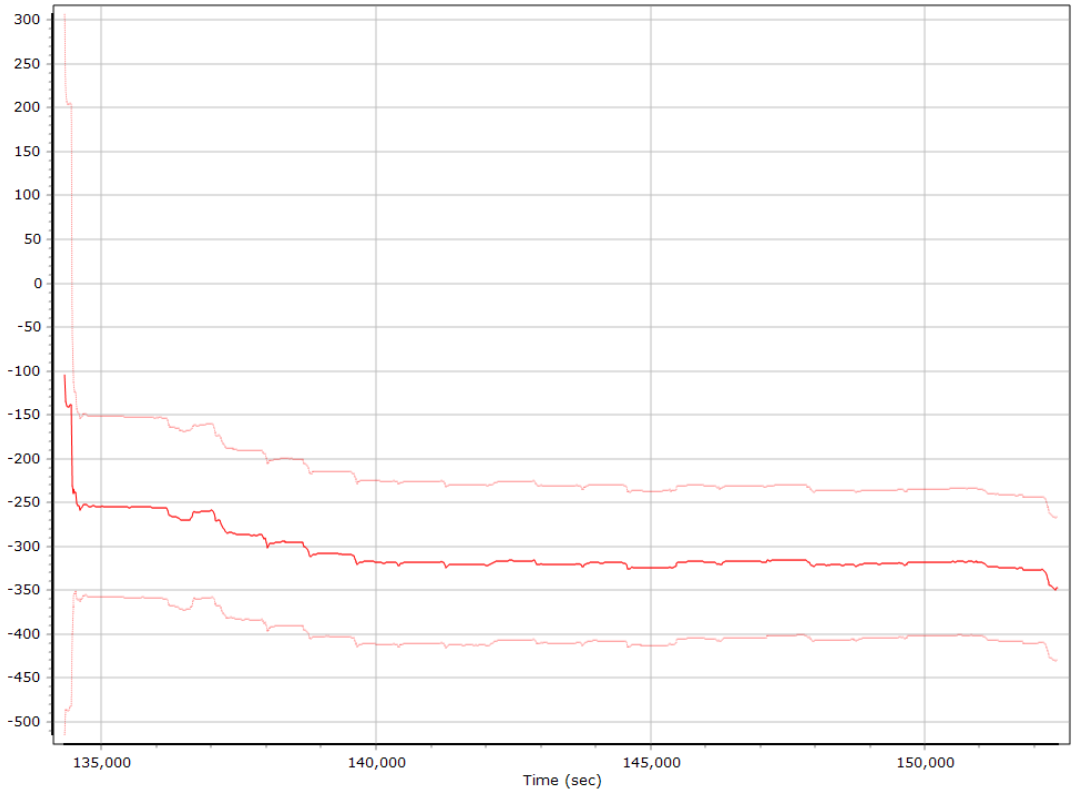

Z Accelerometer Bias (micro-g)

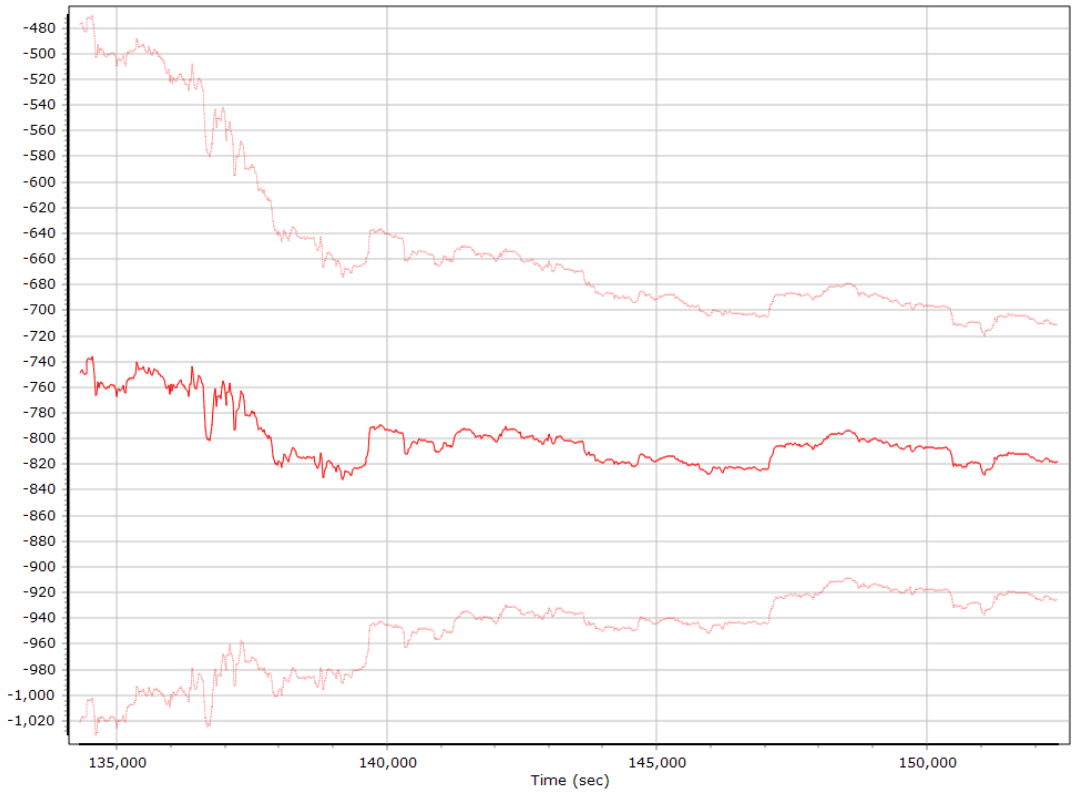

Gyro Bias (deg/h)

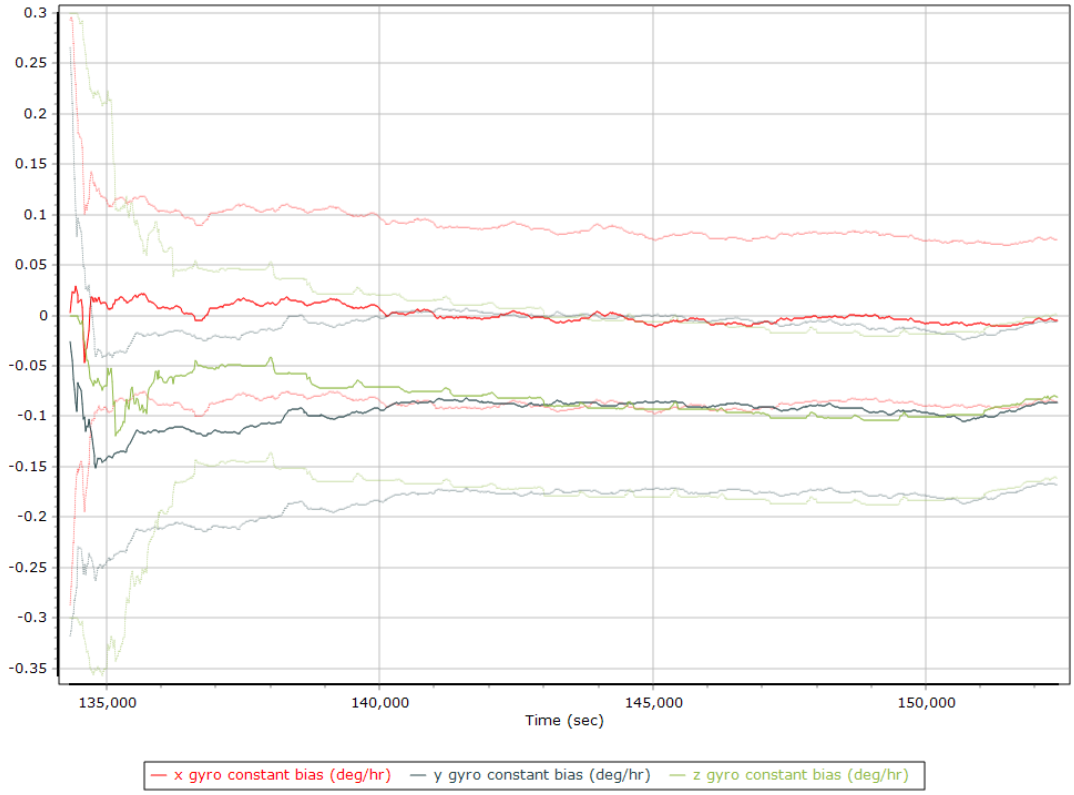

X Gyro Bias (deg/h)

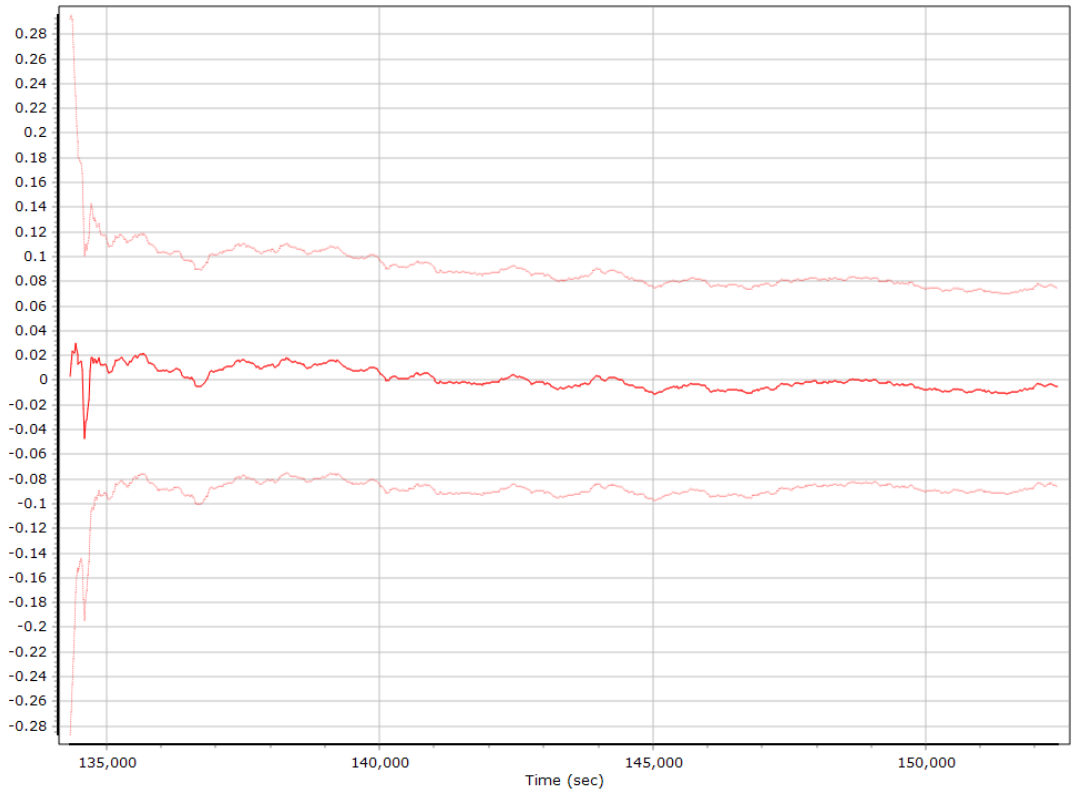

Y Gyro Bias (deg/h)

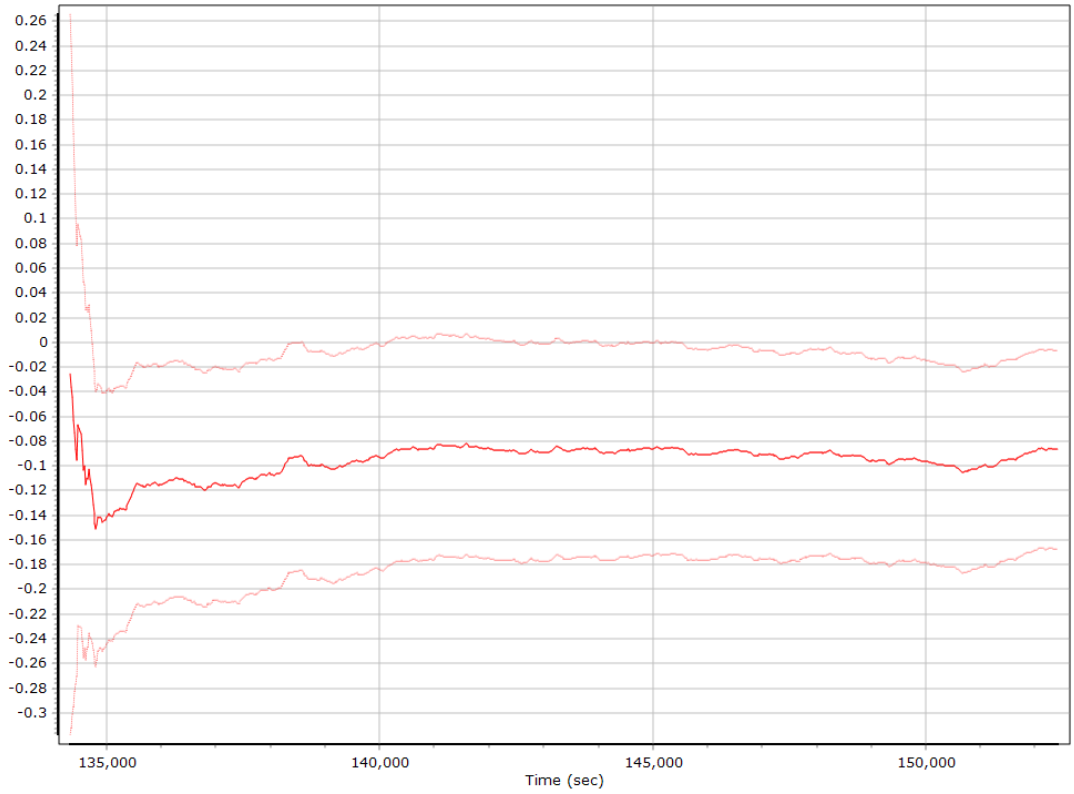

Z Gyro Bias (deg/h)

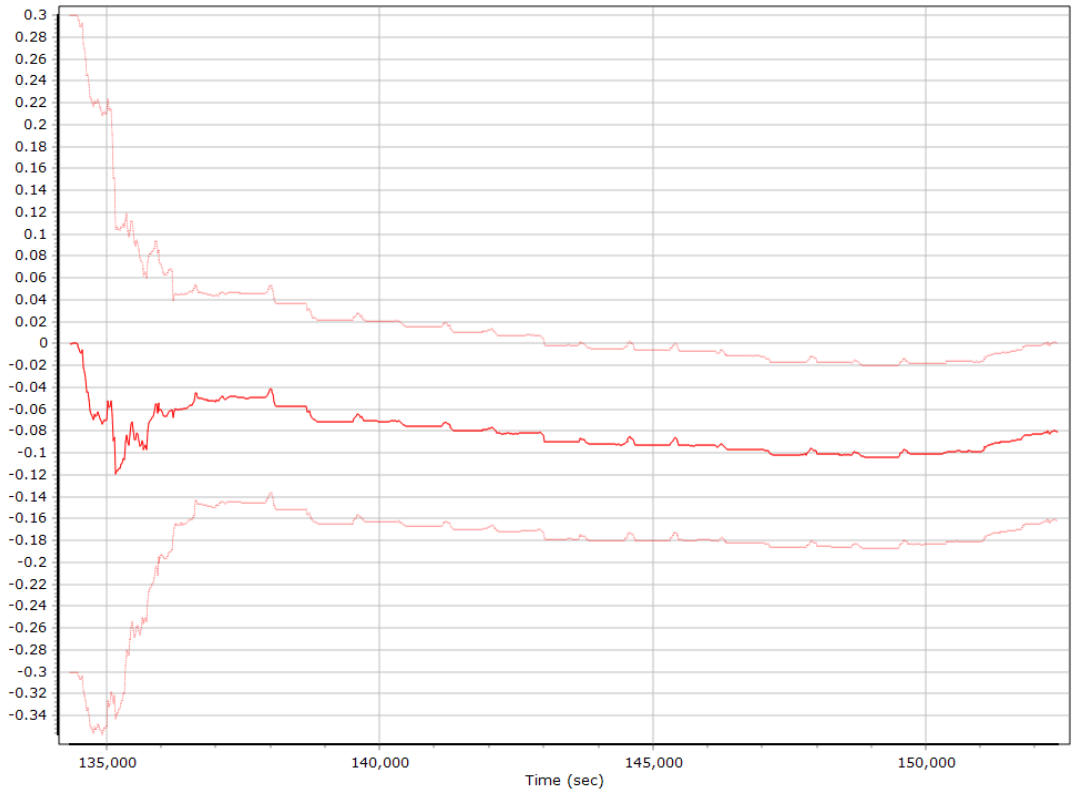

Smoothed Performance Metrics

Position Error RMS (m)

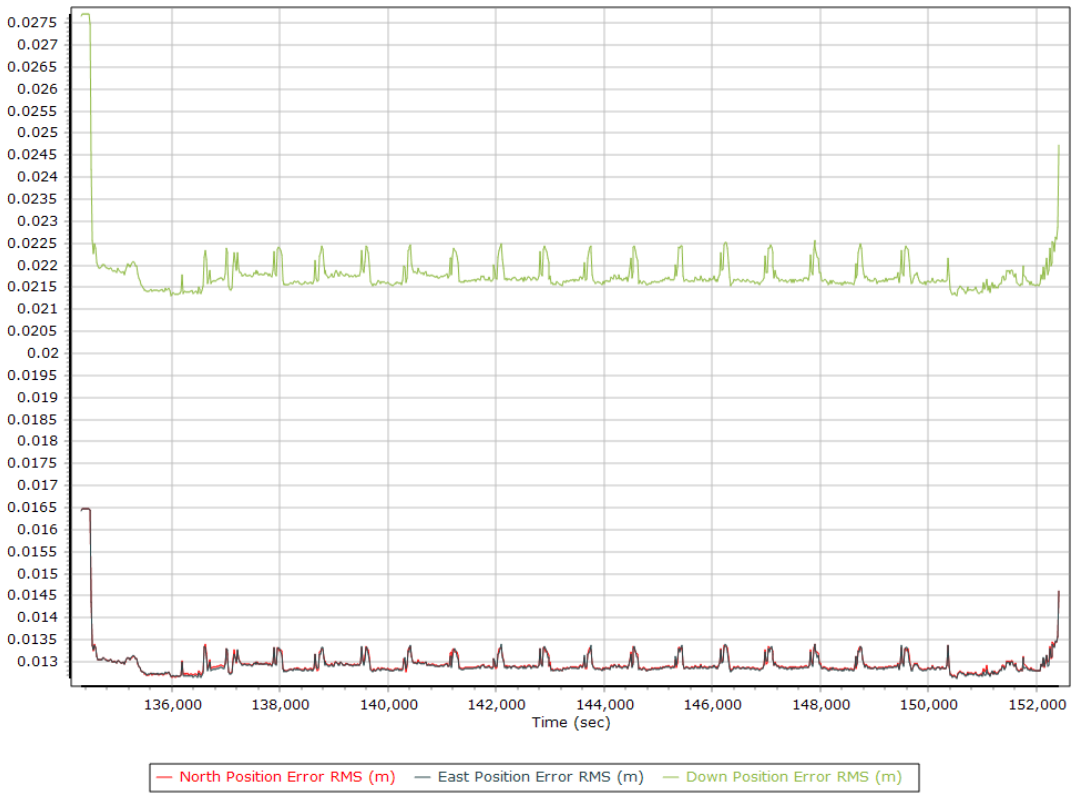

Velocity Error RMS (m/s)

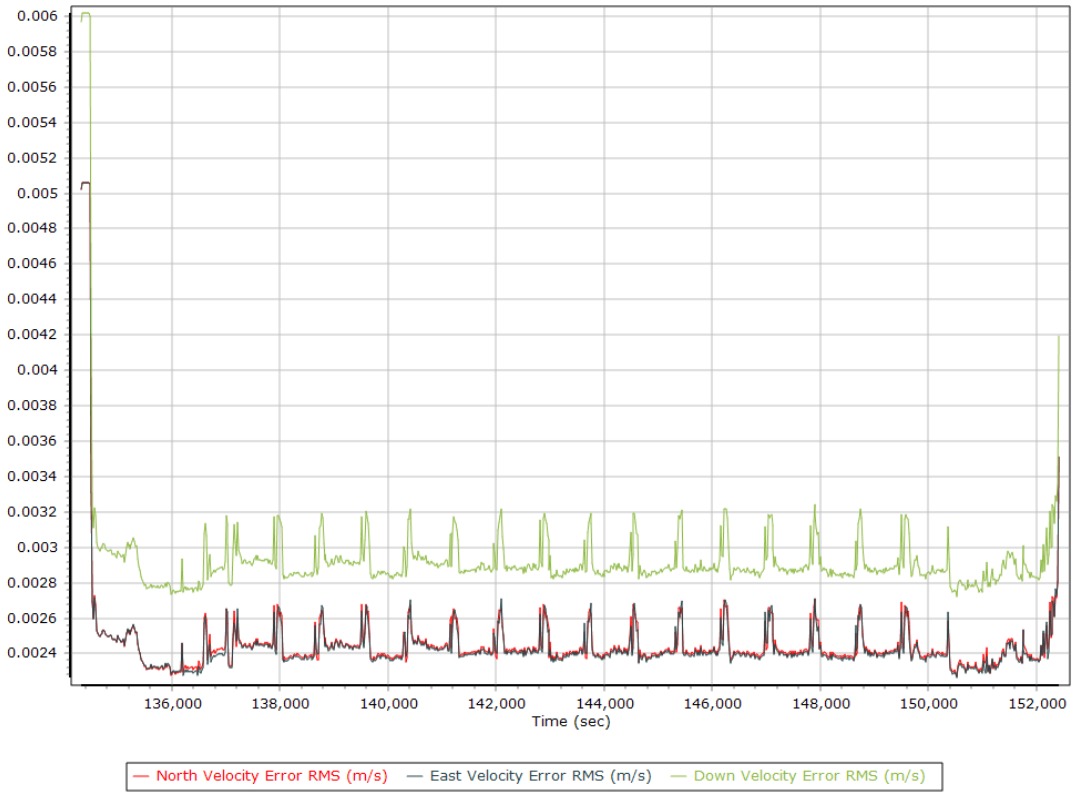

Roll/Pitch Error RMS (arc-min)

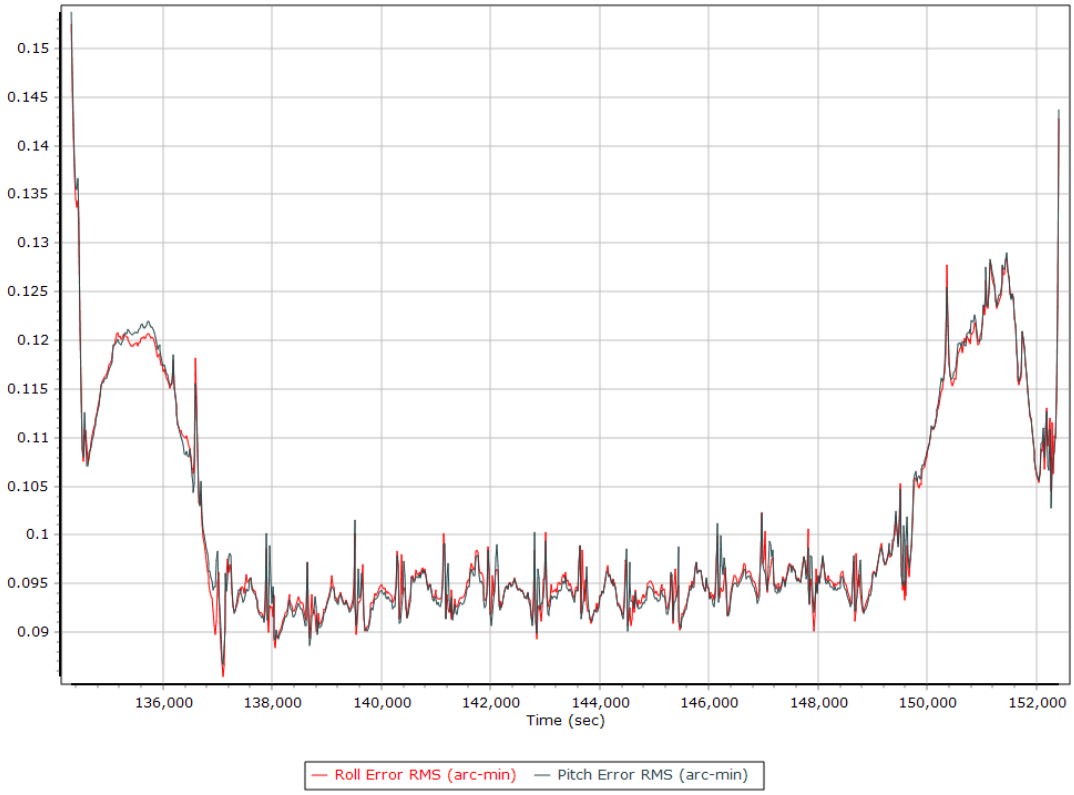

Heading Error RMS (arc-min)

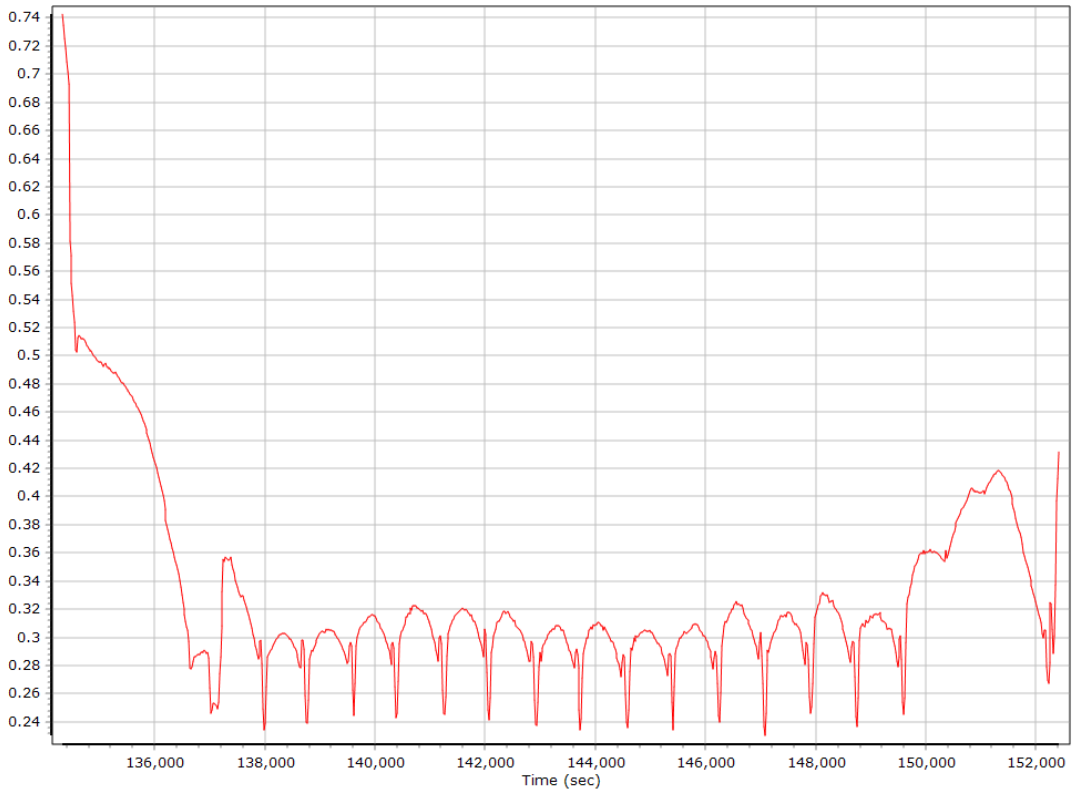

Forward Processed Performance Metrics

Position Error RMS (m)

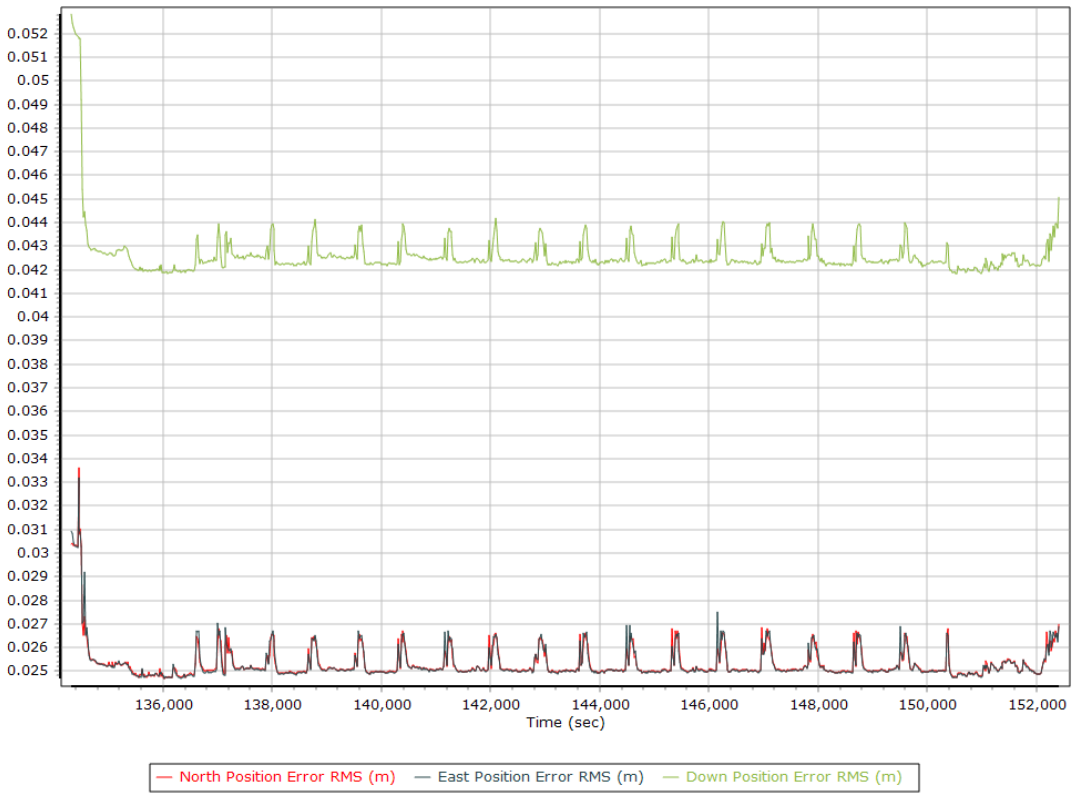

Velocity Error RMS (m/s)

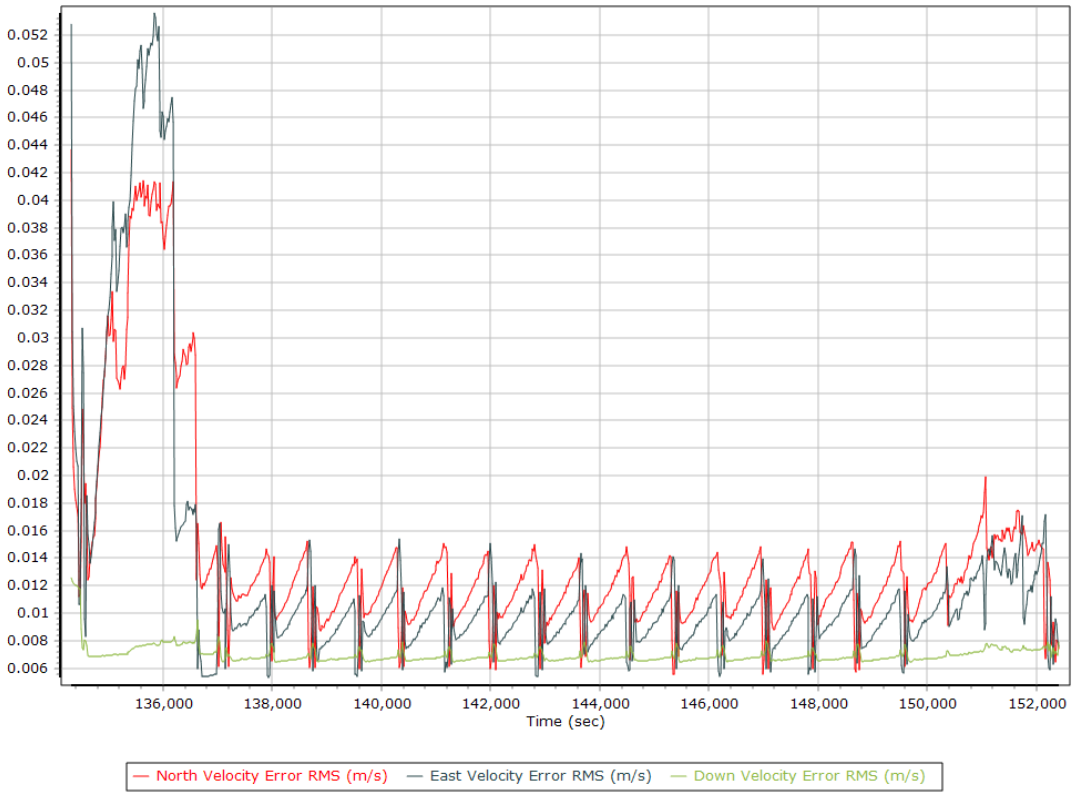

Roll/Pitch Error RMS (arc-min)

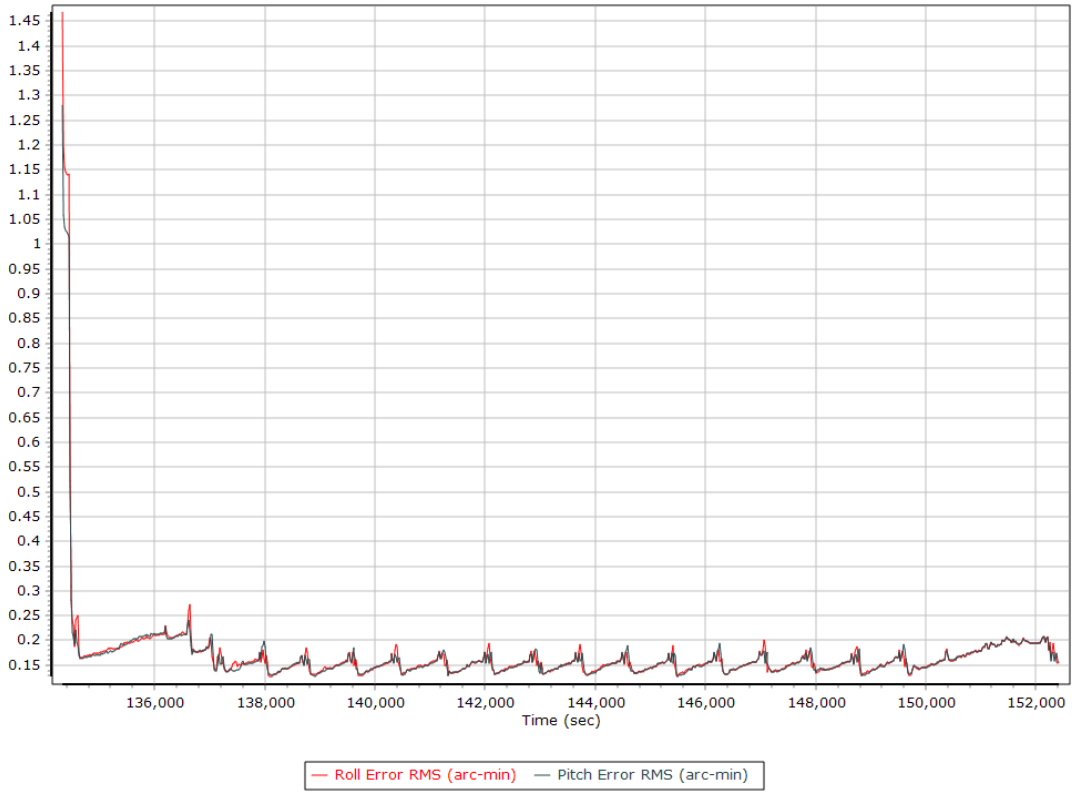

Heading Error RMS (arc-min)

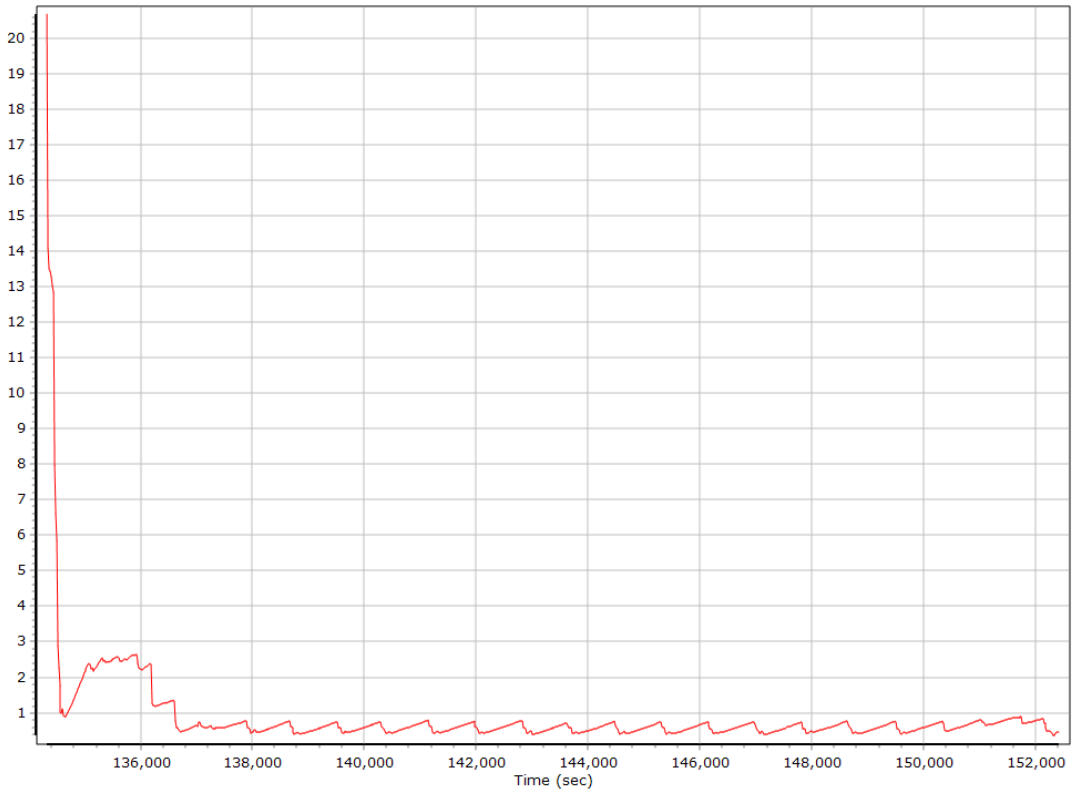

Forward Processed Solution Status

Processing Mode

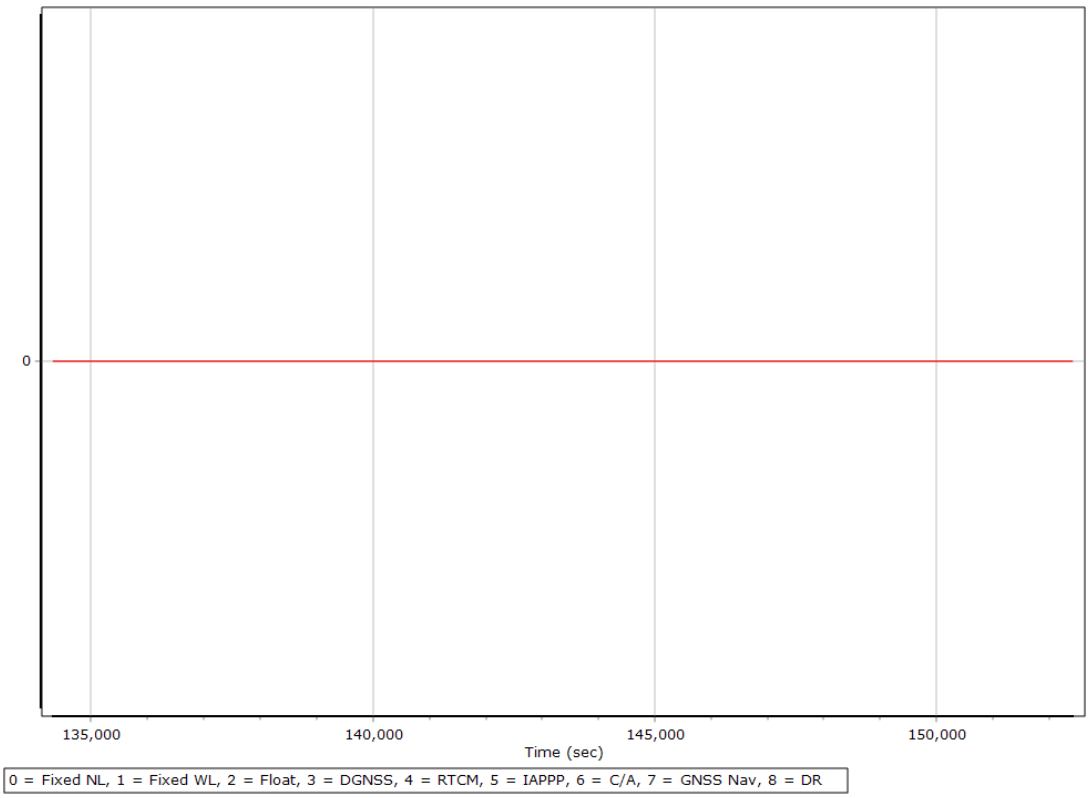

Number of Satellites

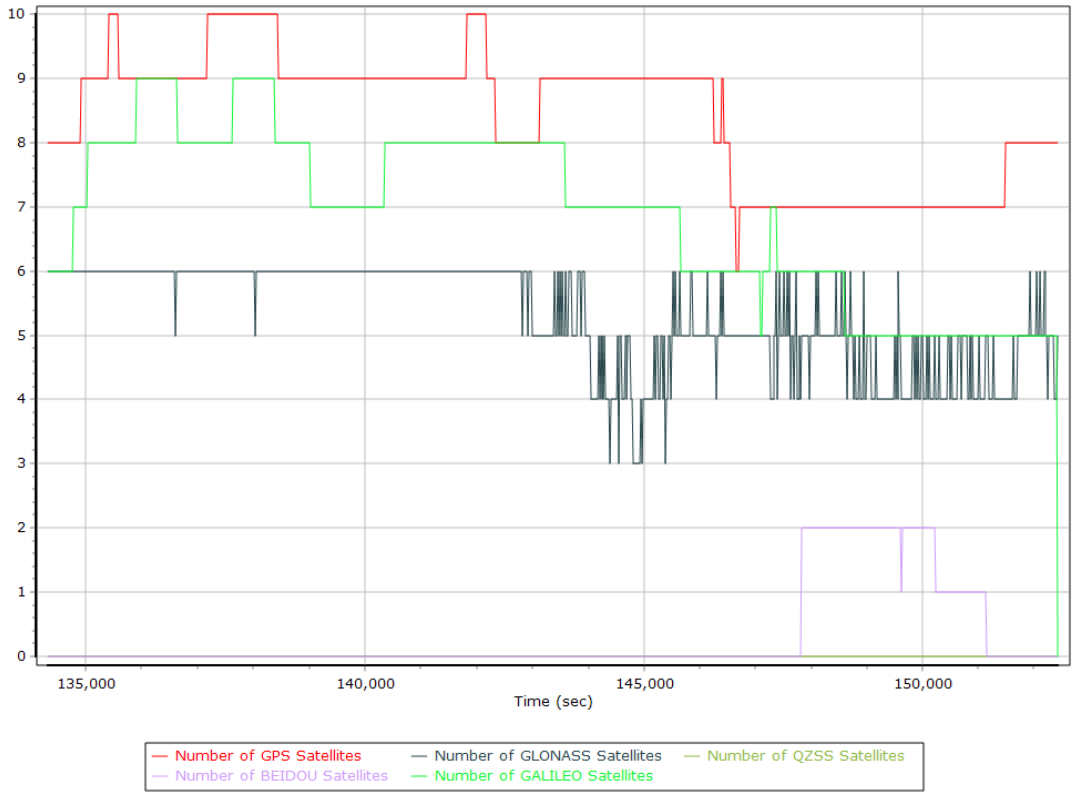

Baseline Length

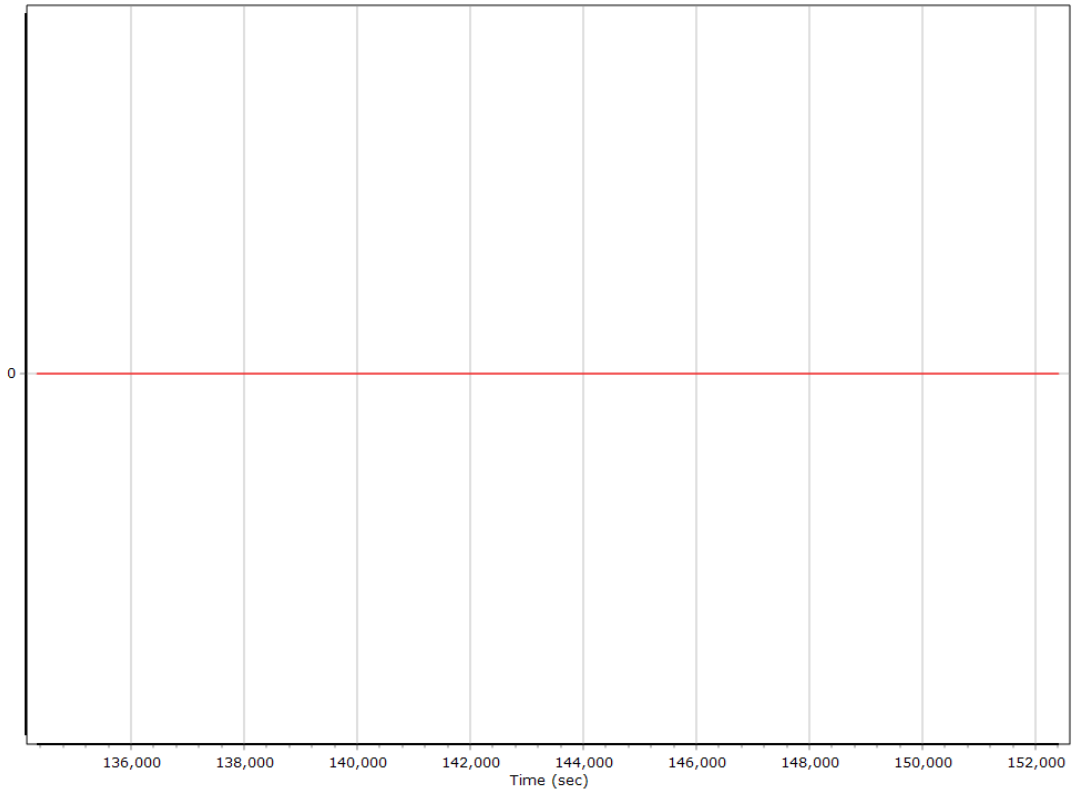

Export Summary

Export file	sbet_200622_A_5060380_nad2011_FINAL.shp		
Export format	Shapefile		
Solution in use	Post-processed		
Output rate	Specified Distance Interval		
Distance Interval (m)	10.000		
Reference to Output lever arm (m)	0.000	0.000	0.000
Reference mounting angles (deg)	0.000	0.000	0.000
Output units (Coordinate / Lat & Lon)	Meter	Deg Decimal	
Export start time	134266.005 (06/22/2020 13:17:46)		
Export end time	152432.005 (06/22/2020 18:20:32)		
Height option	Ellipsoid Height		
WGS84 height flag	False		
Grid	CONUS Albers		
Zone	CONUS Albers		
Datum	NAD83 (2011)		
Ellipsoid	GRS 1980		
Local Transformation	NONE		
Target Epoch	2010		