General Information

Mission Information

Project name	200624_A_5060380_nad2011_FINAL
Processing date	2020-06-25 12:00:41
Mission date	2020-06-24 13:11:01
Mission duration	04:31:31.000
Processing mode	IN-Fusion PP-RTX

Rover Hardware Information

Product	POS AV 610 VER6 HW2.5-12
Serial number	S/N7769
IMU type	57
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
200624a.093	POS Data
200624a.094	POS Data
200624a.095	POS Data
200624a.096	POS Data
200624a.097	POS Data
200624a.098	POS Data
200624a.099	POS Data
200624a.100	POS Data
200624a.101	POS Data
200624a.102	POS Data
200624a.103	POS Data
200624a.104	POS Data
200624a.105	POS Data
200624a.106	POS Data
200624a.107	POS Data
200624a.108	POS Data
200624a.109	POS Data
200624a.110	POS Data
200624a.111	POS Data
200624a.112	POS Data
200624a.113	POS Data
200624a.114	POS Data
200624a.115	POS Data
200624a.116	POS Data
200624a.117	POS Data

Input Files

File Name	File Type
Ephm1760.20g	GLONASS Broadcast Ephemeris
Ephm1760.20n	GPS Broadcast Ephemeris

Output Files

Filename	File type
sbet_200624_A_5060380_nad2011_FINAL.out	SBET Trajectory File

Rover Data Summary

First raw data file	200624a.093		
Last raw data file	200624a.117		
Start GPS week	2111		
Start time	306668.974 (06/24/2020 13:11:08)		
End time	322953.040 (06/24/2020 17:42:33)		
Start of fine alignment	306996.803 (06/24/2020 13:16:36)		
Available subsystems	Primary GNSS, IMU		
POS Event Input	Event 1 Input		
Correction data	None		
IMU Installation Lever Arms & Mounting Angles			
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	180.000
Reference to Primary GNSS lever arm (m)	0.556	-0.429	-0.965
Reference to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Rover Data QC

Raw IMU Import QC Summary

IMU data input file	imu_200624_A_5060380_nad2011_FINAL.dat
IMU data check log file	imudt_200624_A_5060380_nad2011_FINAL.log
IMU Records Processed	3257858
Termination Status	Warnings
IMU Anomalies	1
IMU Failure Messages	
306668.729 : WARNING : Gap of 306646.7415 seconds in CHECKDT input data	

Primary Observables & Satellite Data

L1 Satellite Lock/Elevation

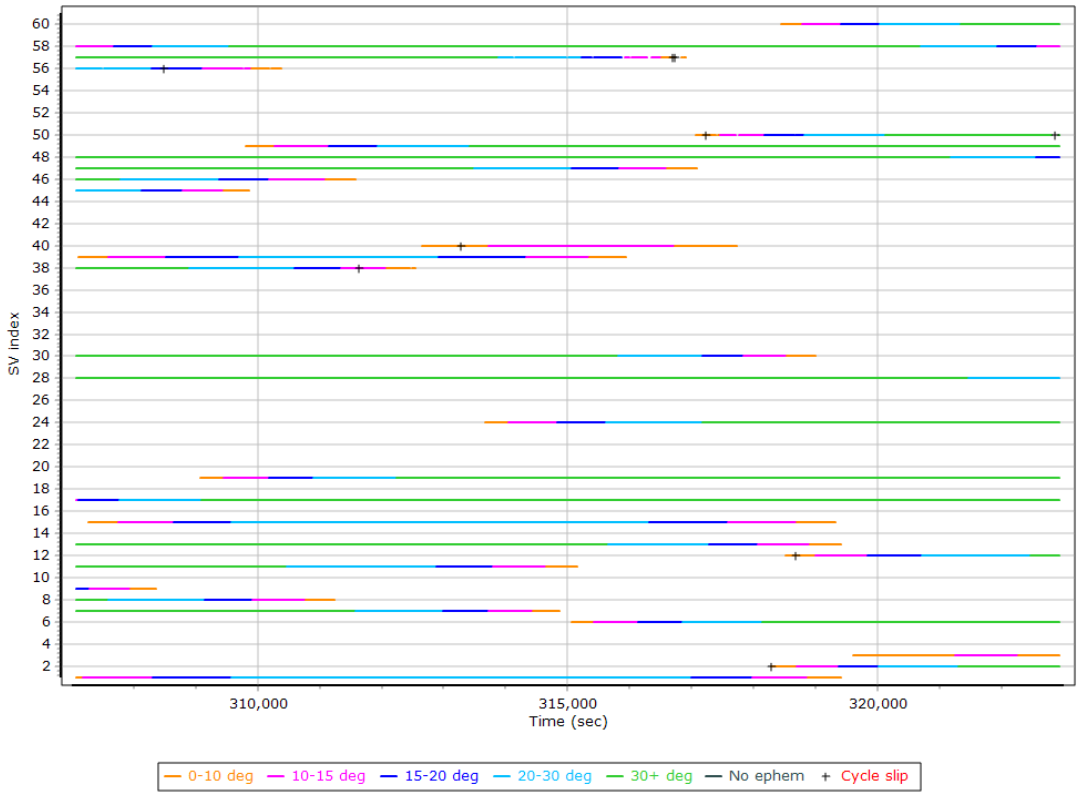

L2 Satellite Lock/Elevation

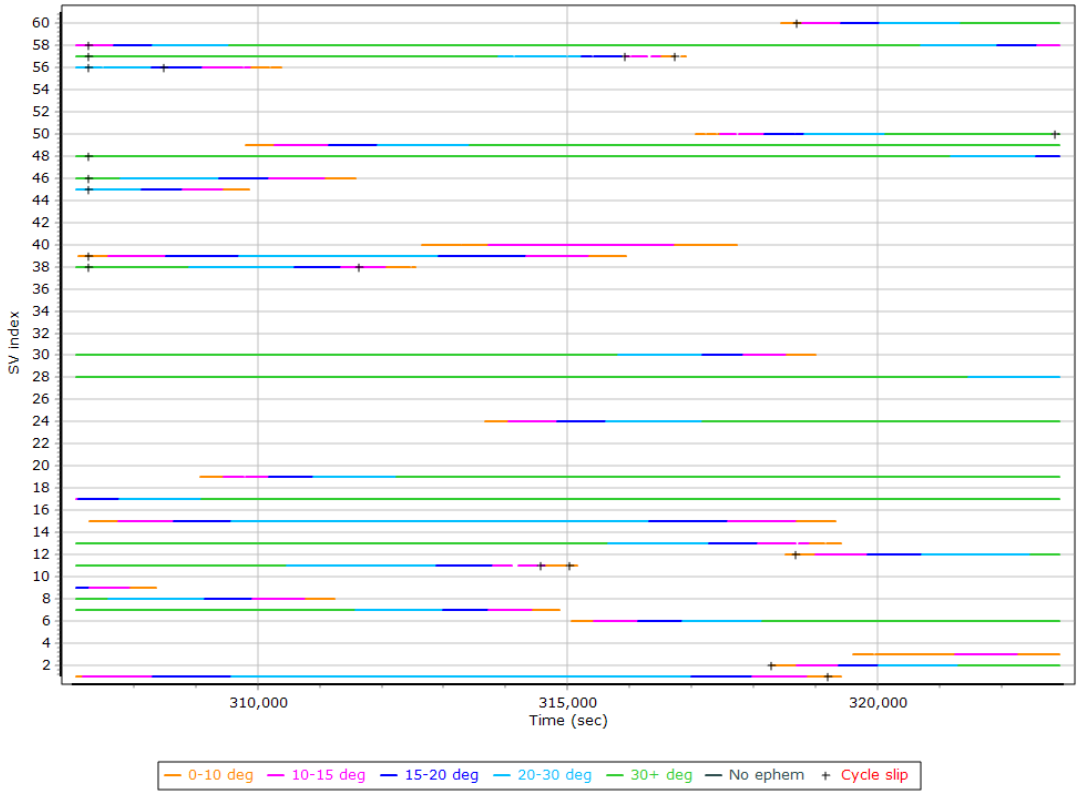

GPS L1 SNR

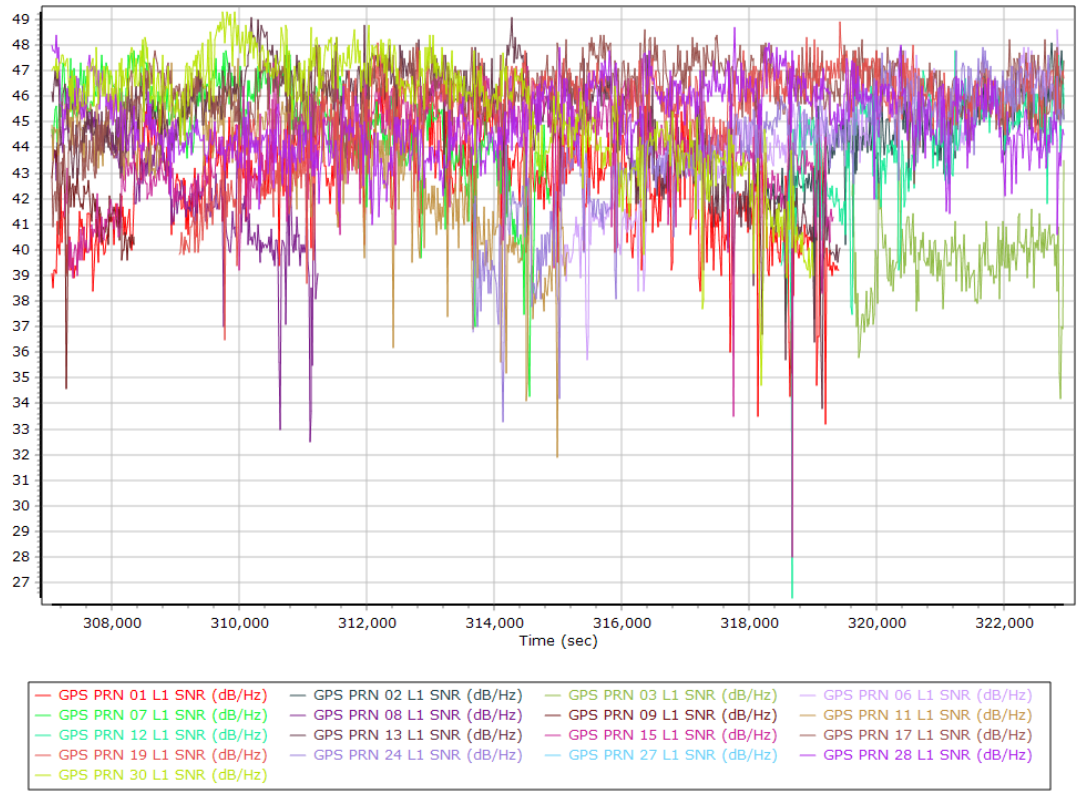

GPS L2 SNR

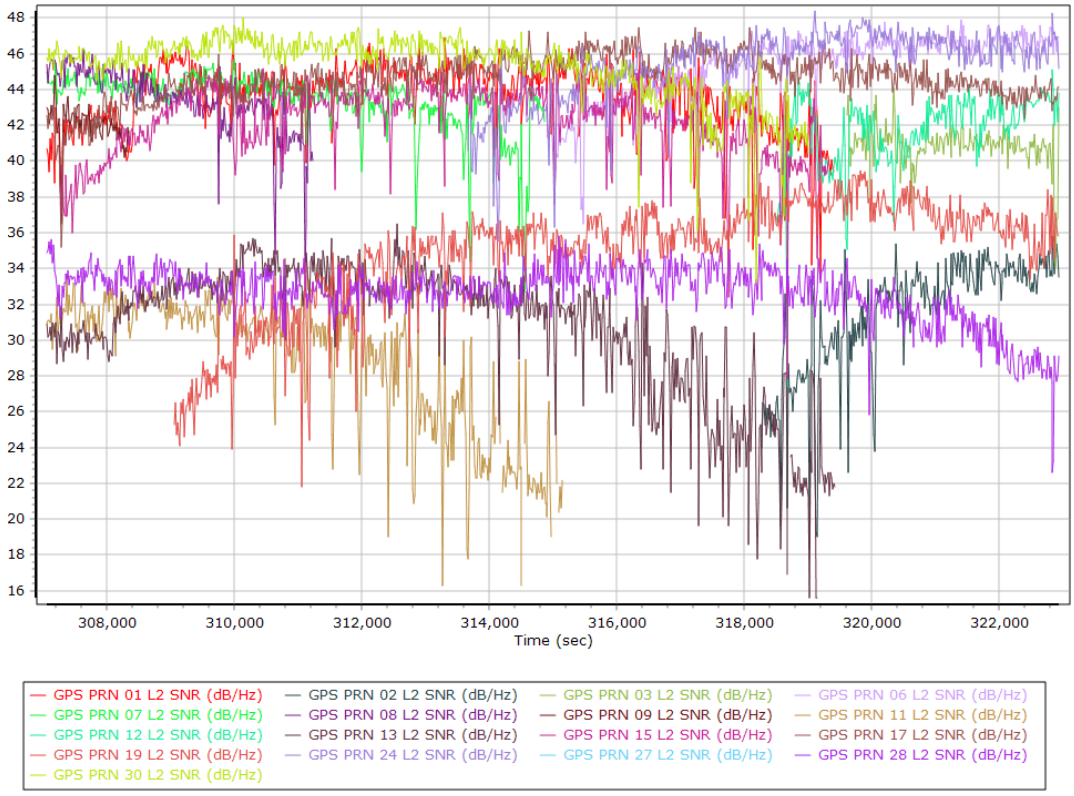

GLONASS L1 SNR

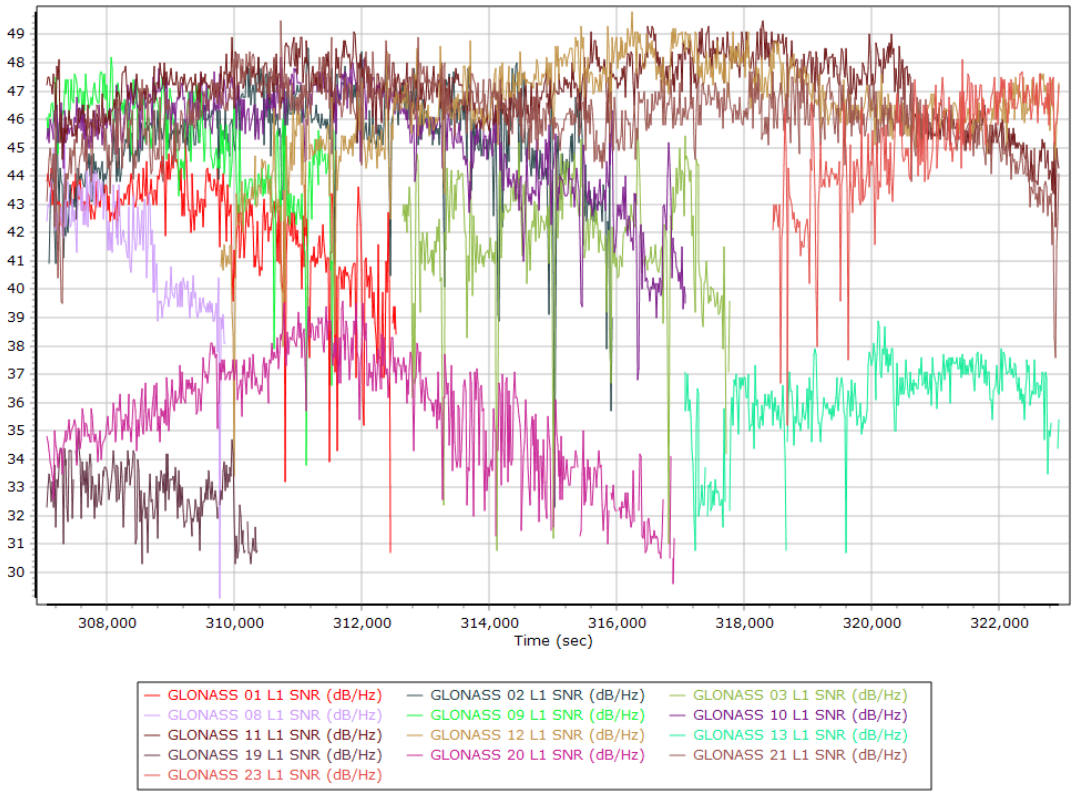

GLONASS L2 SNR

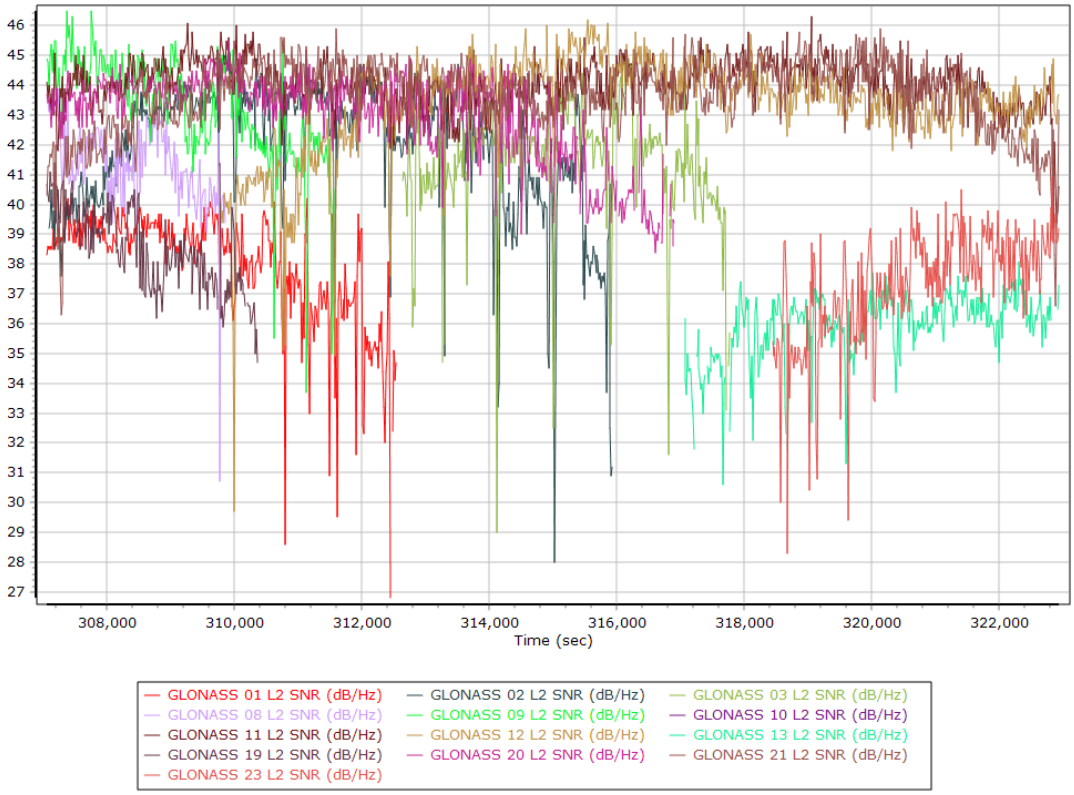

BEIDOU SNR

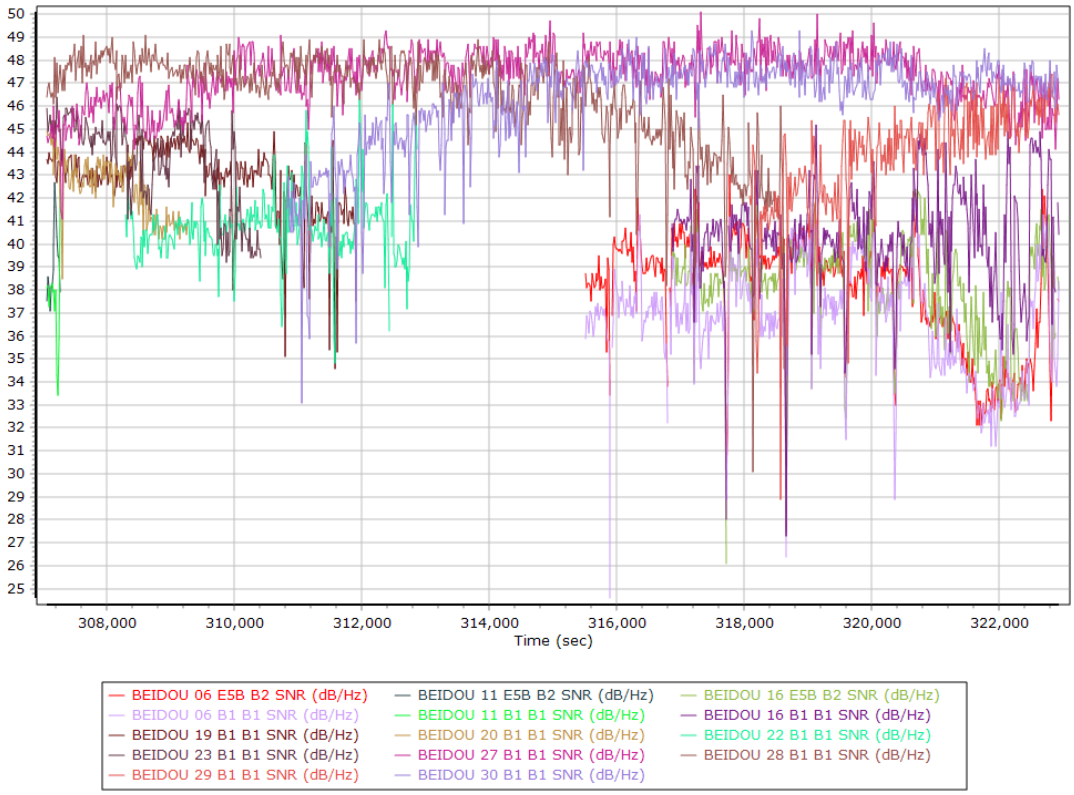

GALILEO SNR

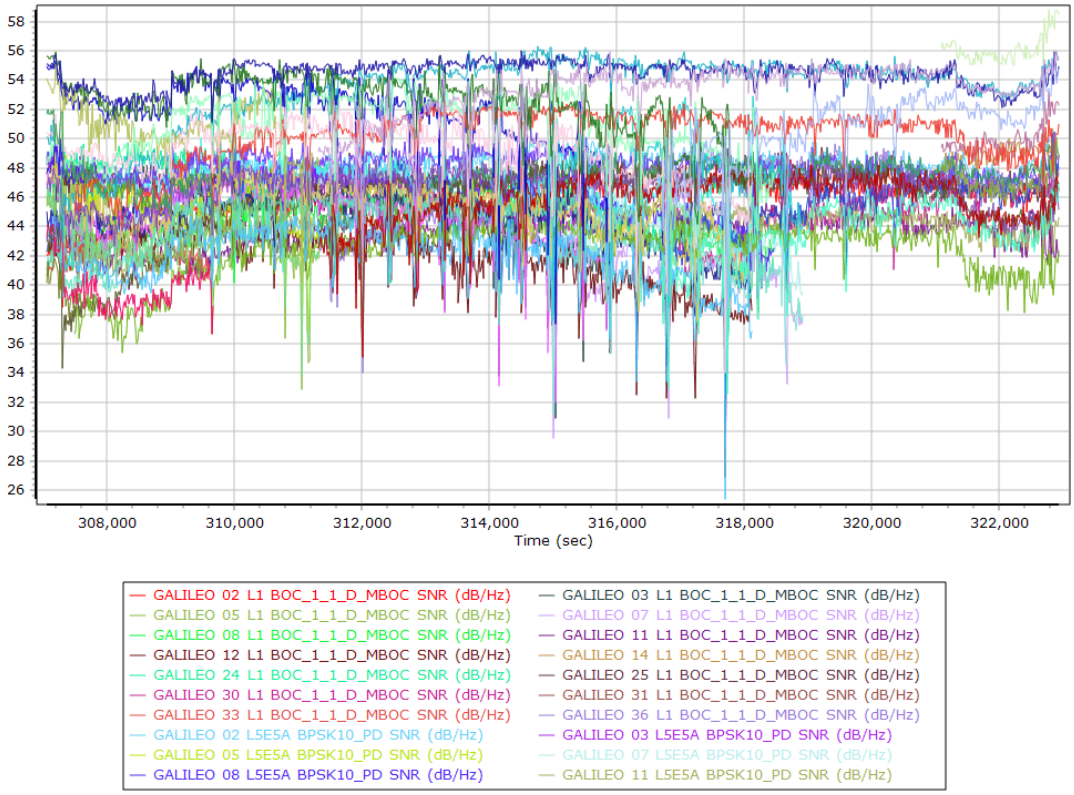
58
56
54
52
50
48
46
44
42
40
38
36
34
32
30
28
26
308,000
310,000
312,000
314,000
316,000
318,000
320,000
322,000
Time (sec)
GALILEO 02 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 03 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 05 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 07 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 08 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 11 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 12 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 14 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 24 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 25 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 30 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 31 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 33 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 36 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 02 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 03 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 05 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 07 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 08 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 11 L5E5A BPSK10_PD SNR (dB/Hz)

Smoothed Trajectory Information

Top View

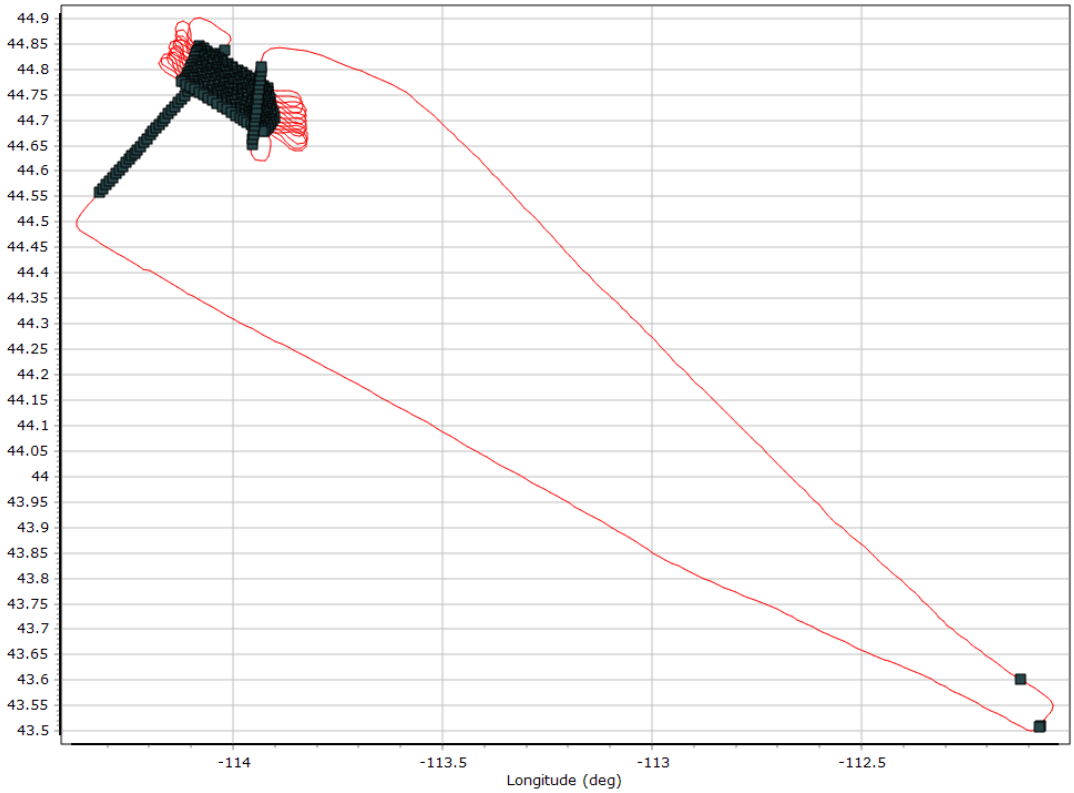

Altitude

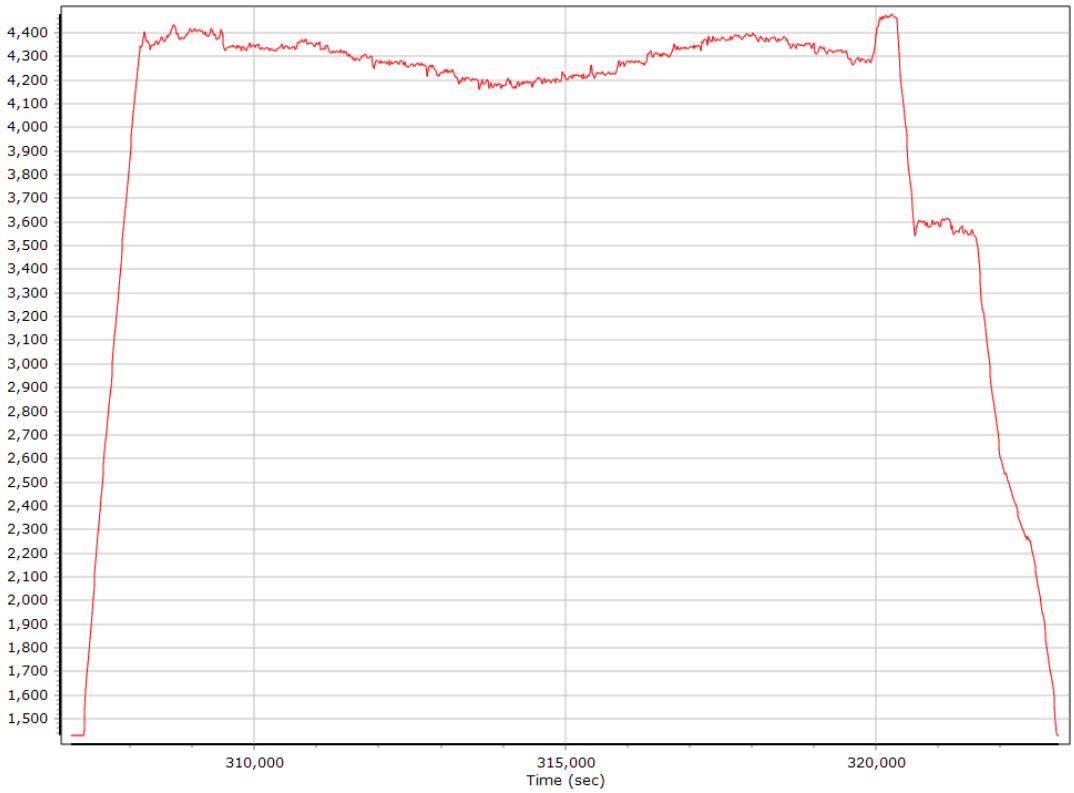

Roll/Pitch

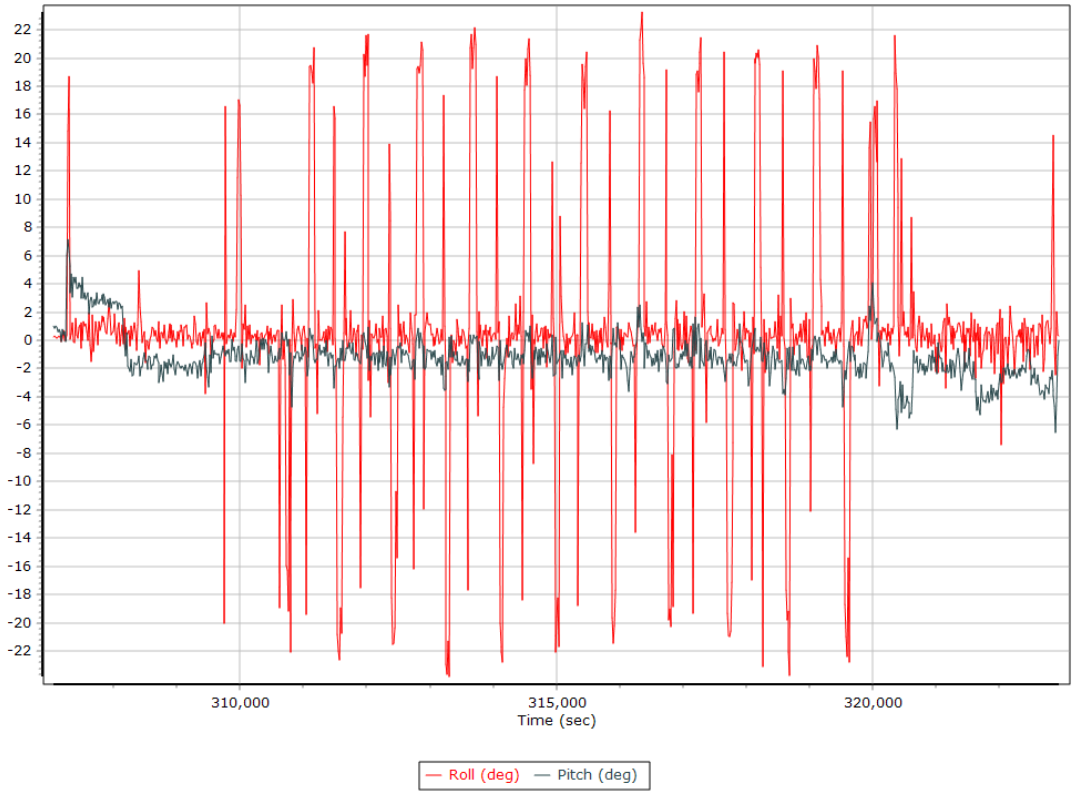

Heading

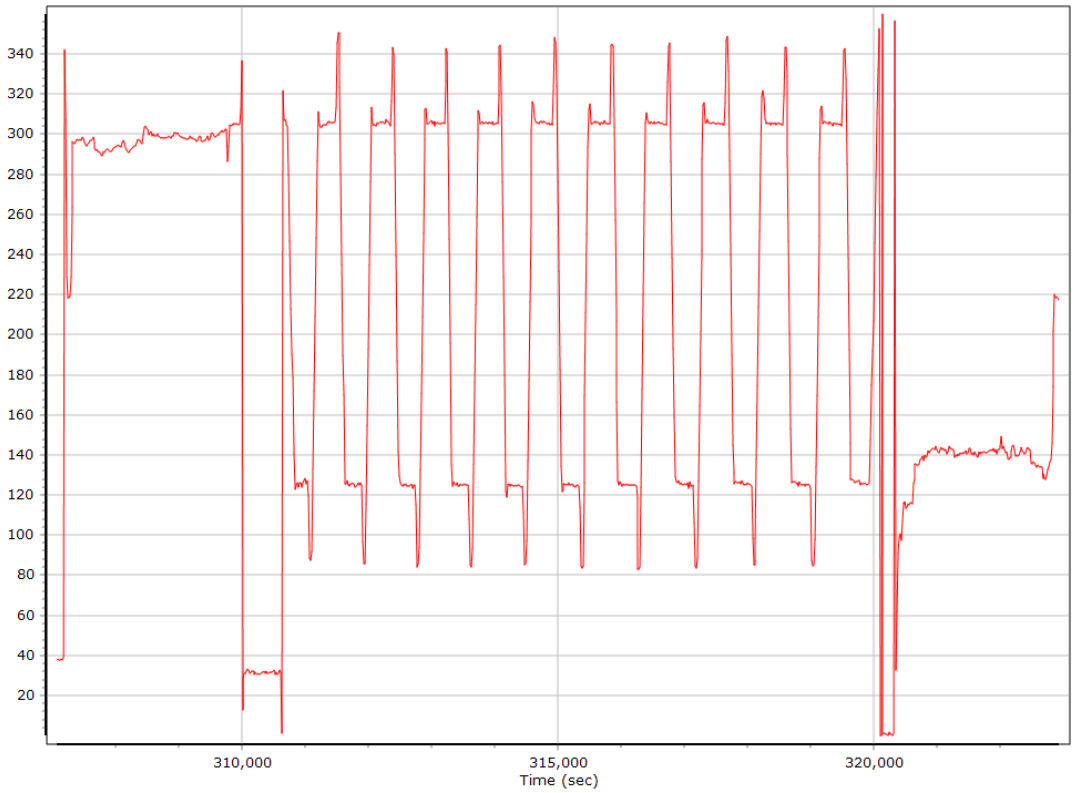

North/East Velocity

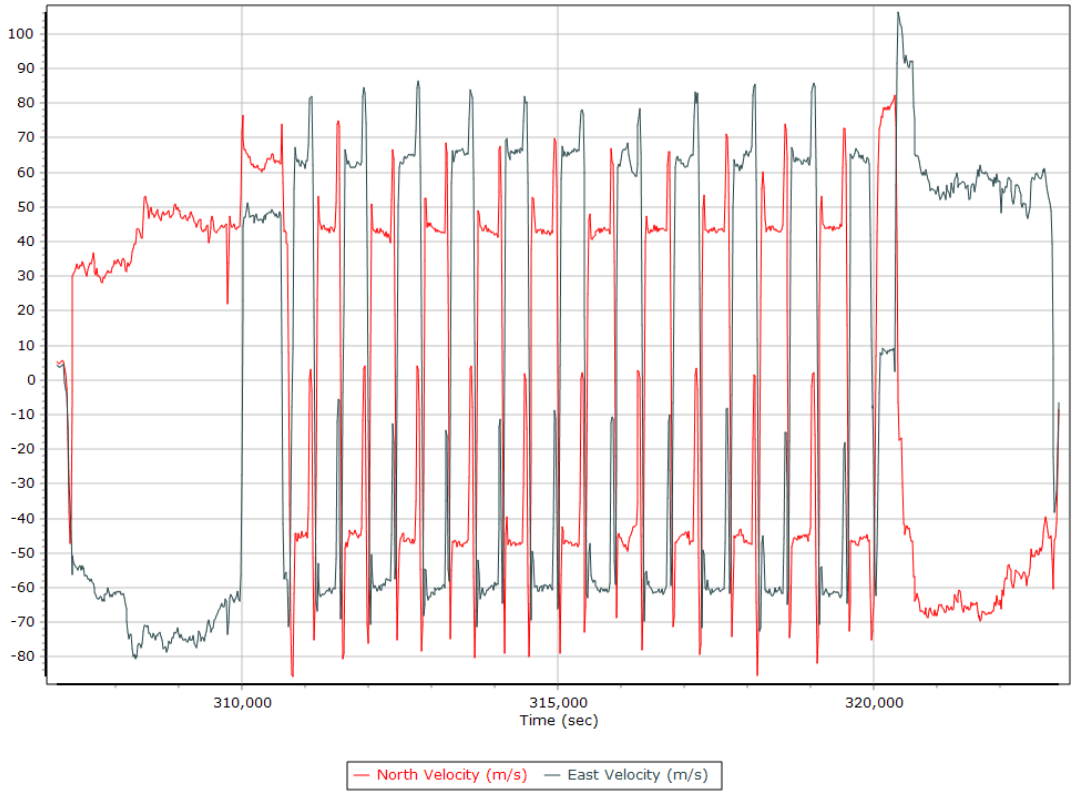

Down Velocity

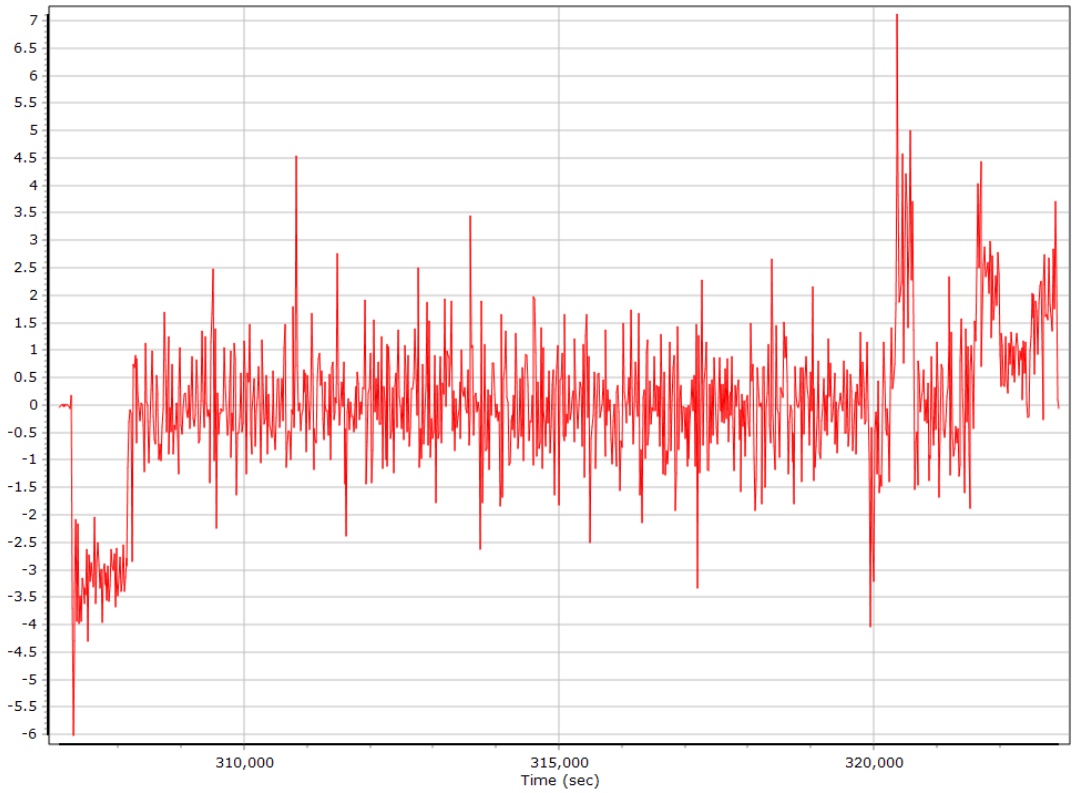

Total Speed

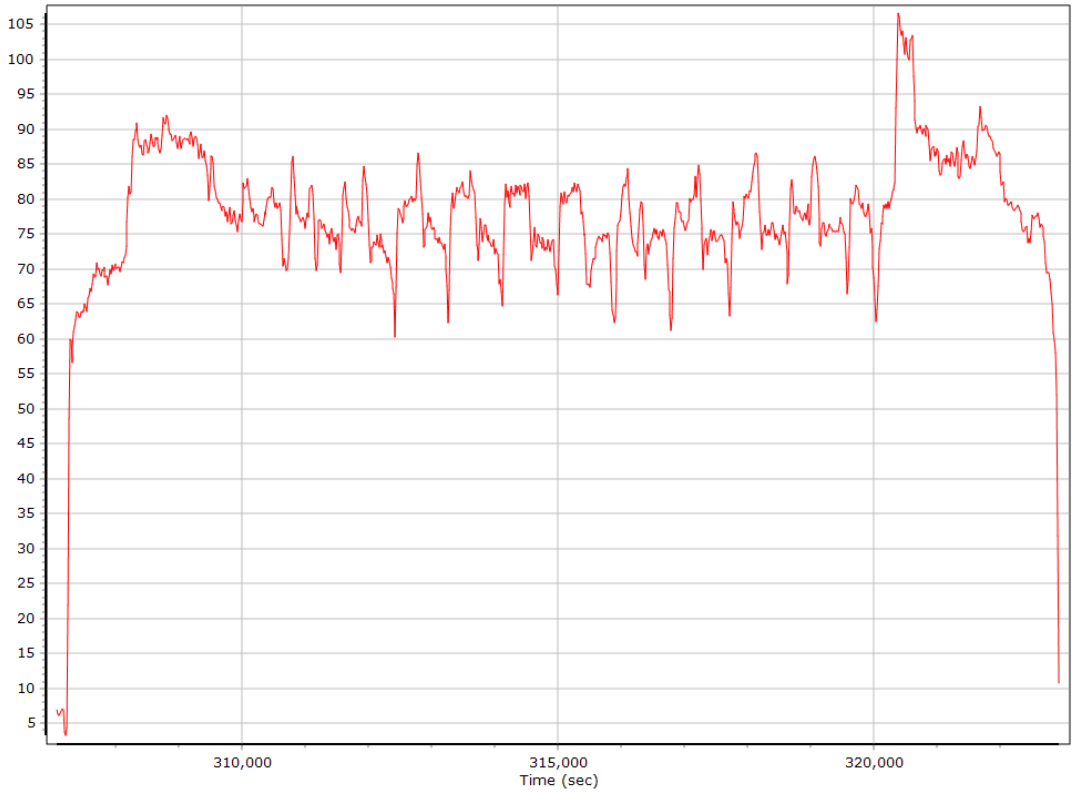

Ground Speed

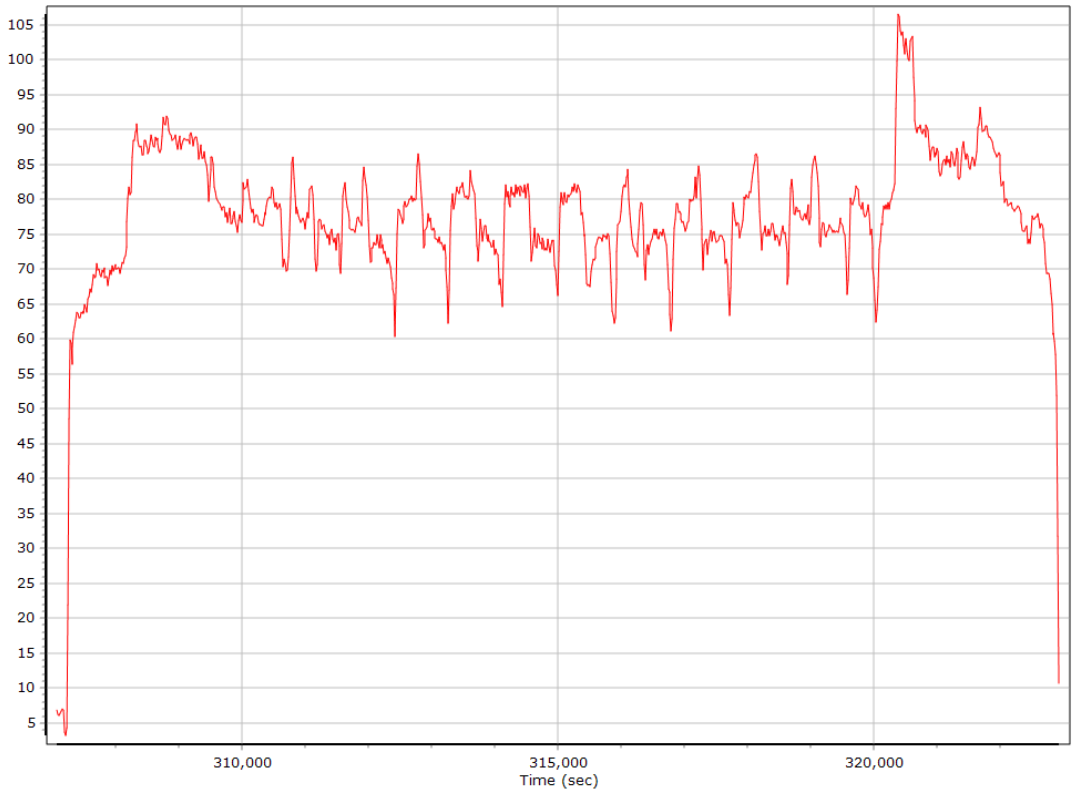

Body Acceleration

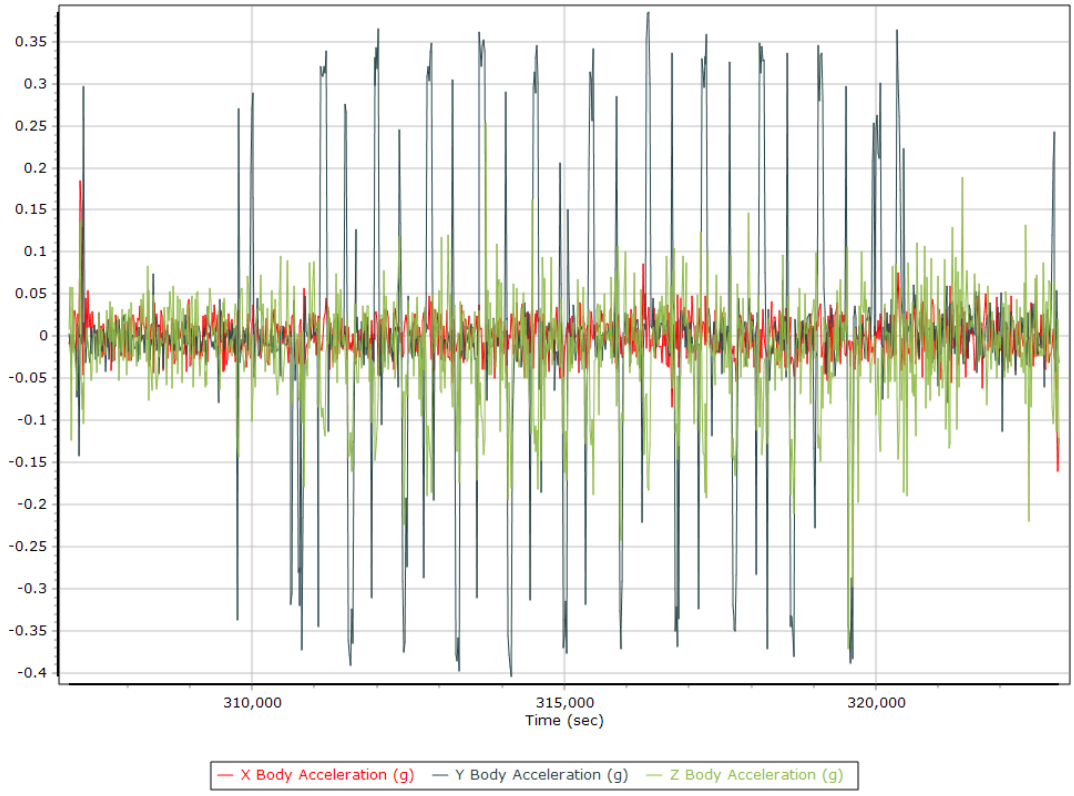

Total Body Acceleration

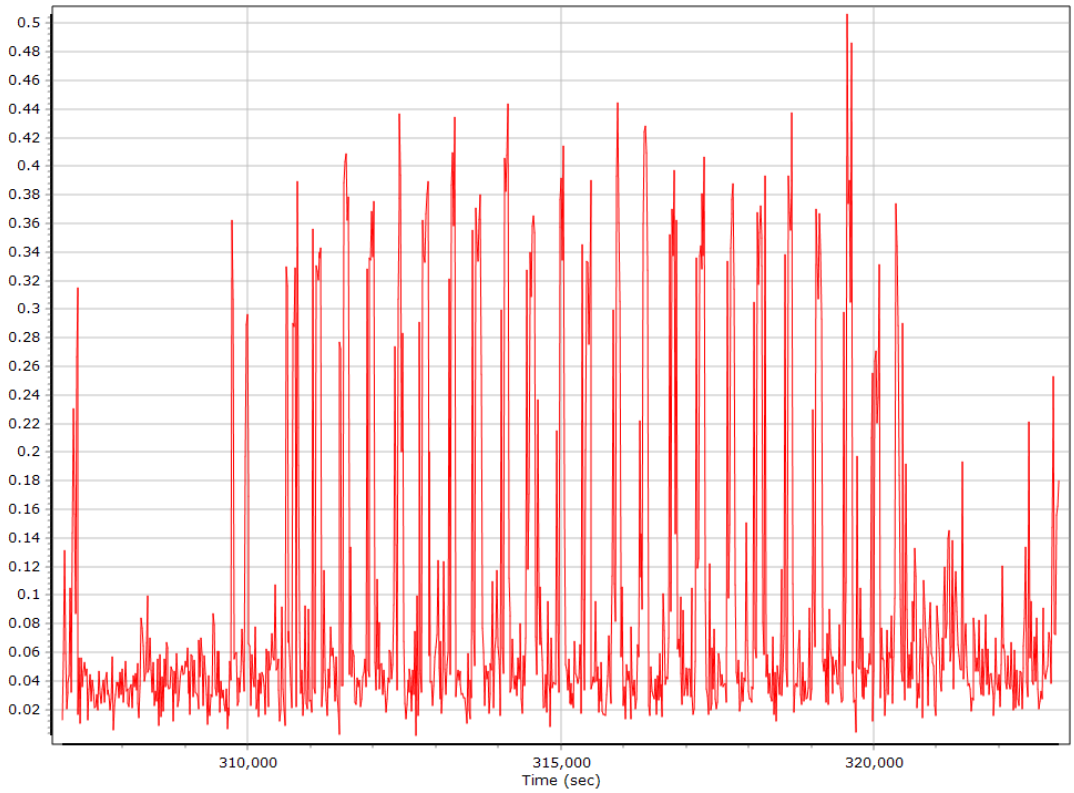

Body Angular Rate

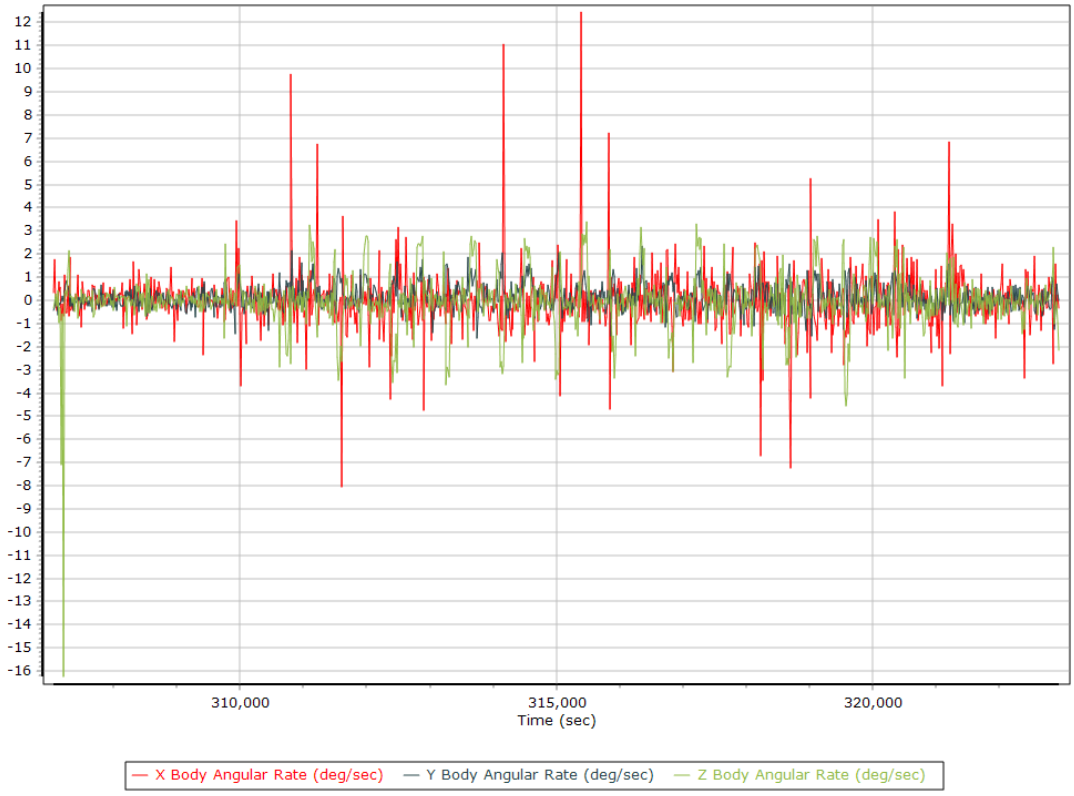

Forward Processed Trajectory Information

Top View

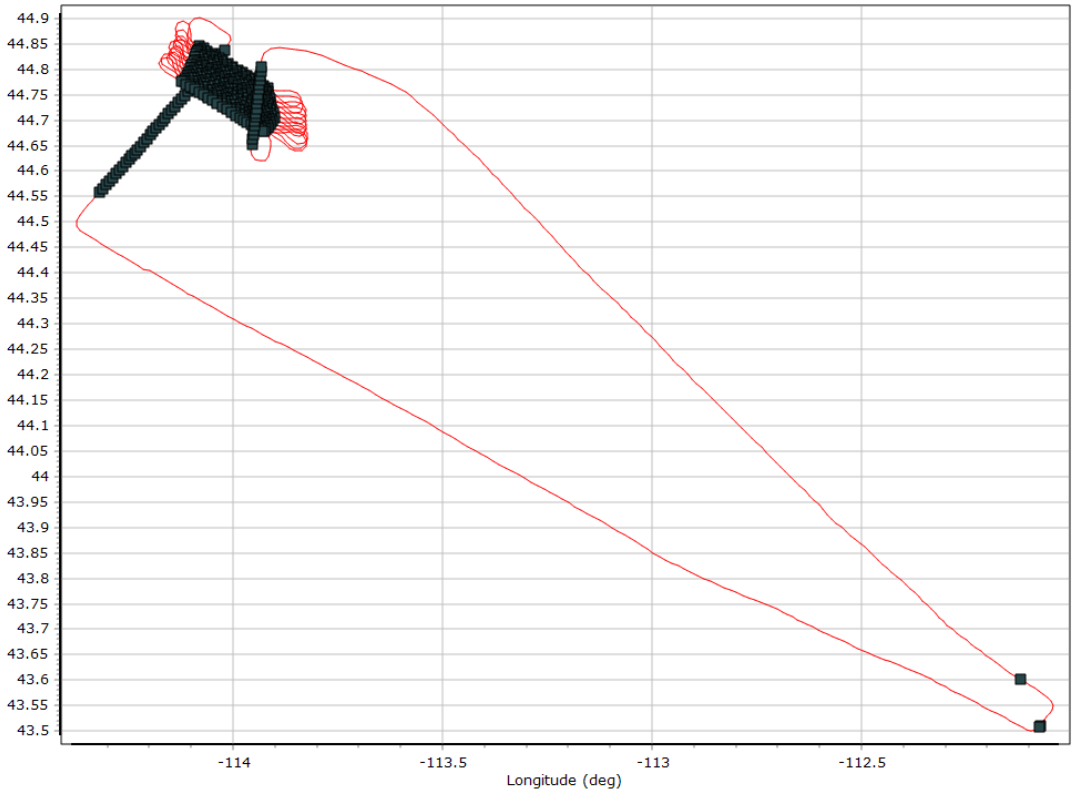

Altitude

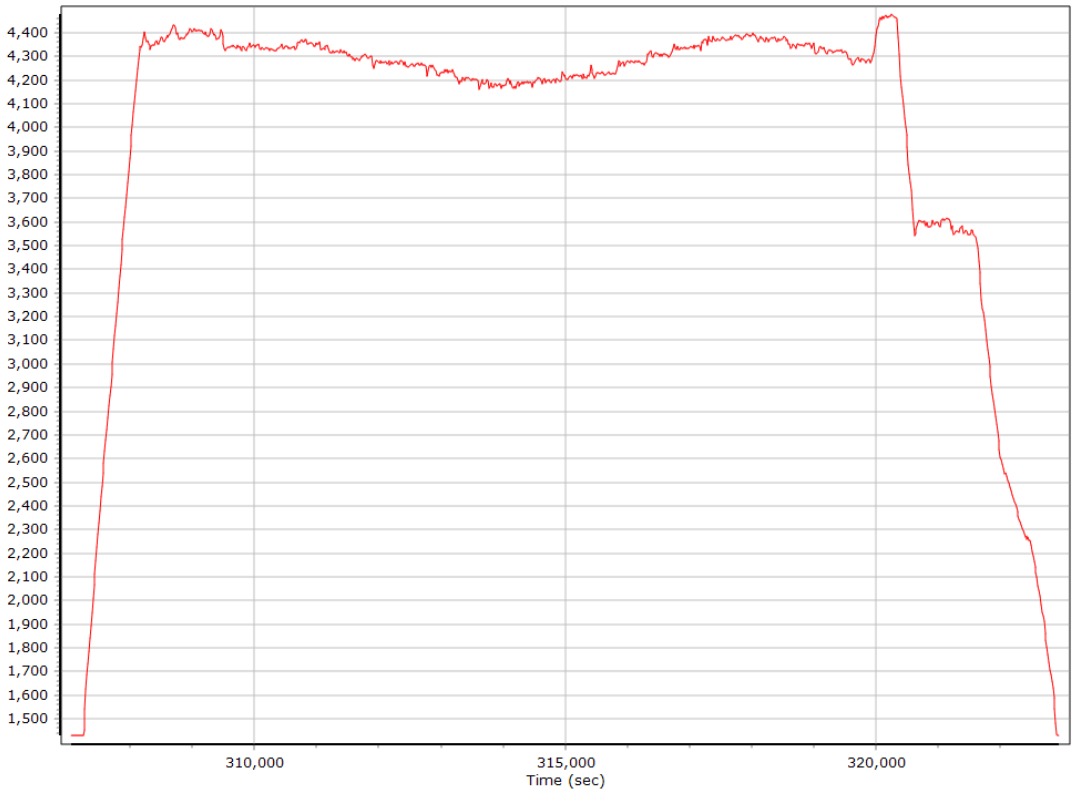

Roll/Pitch

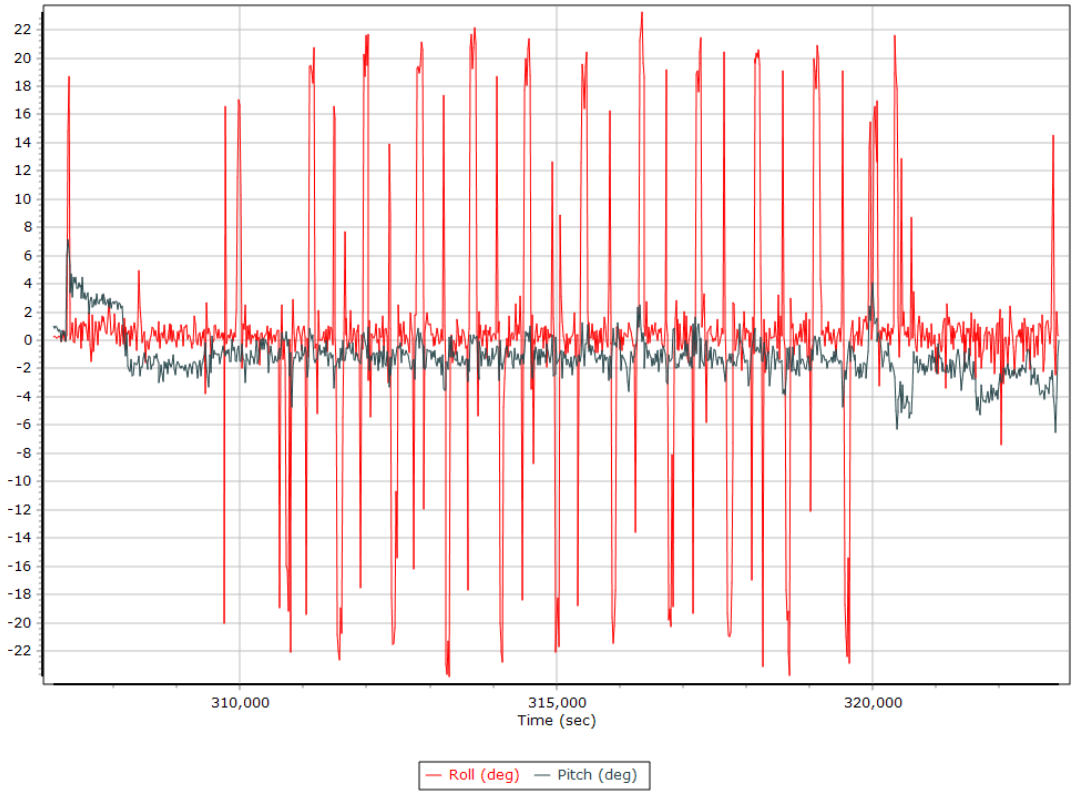

Heading

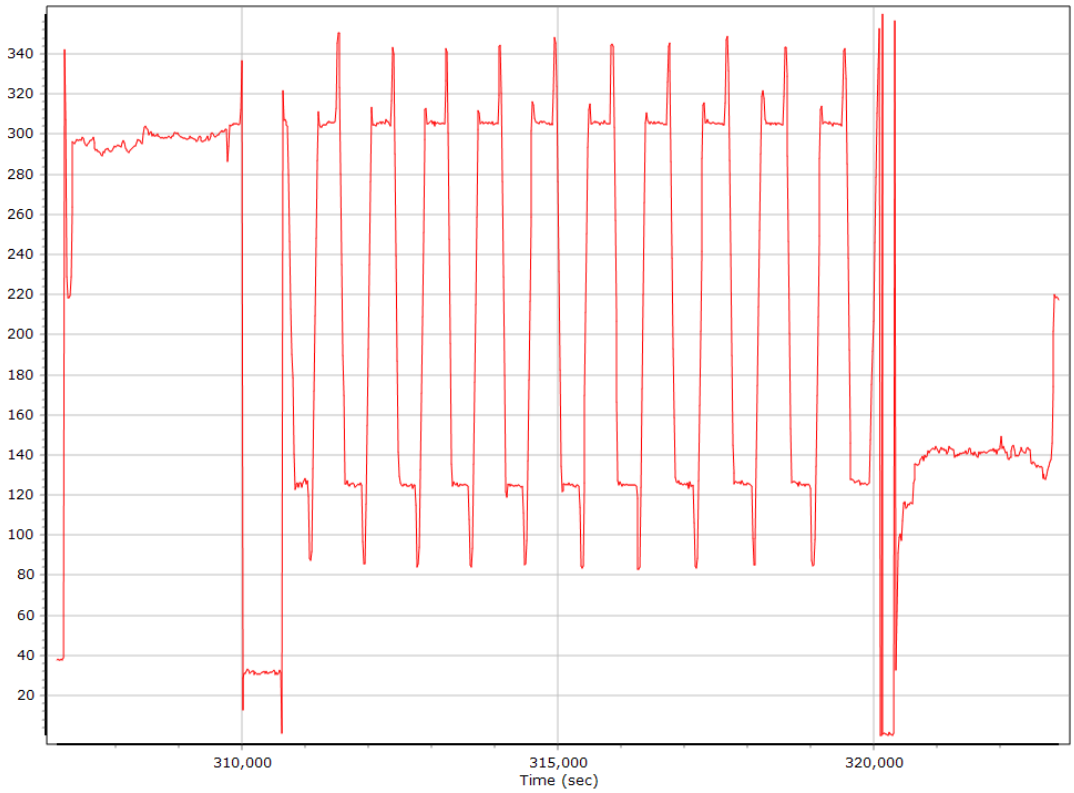

North/East Velocity

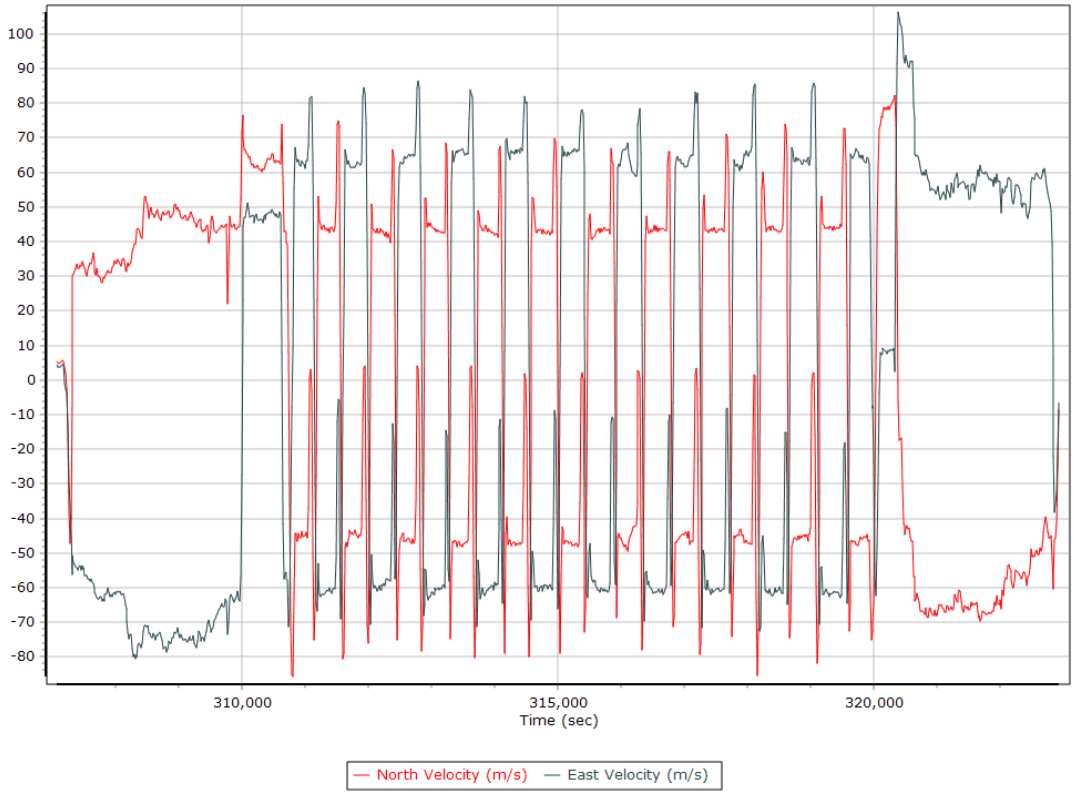

Down Velocity

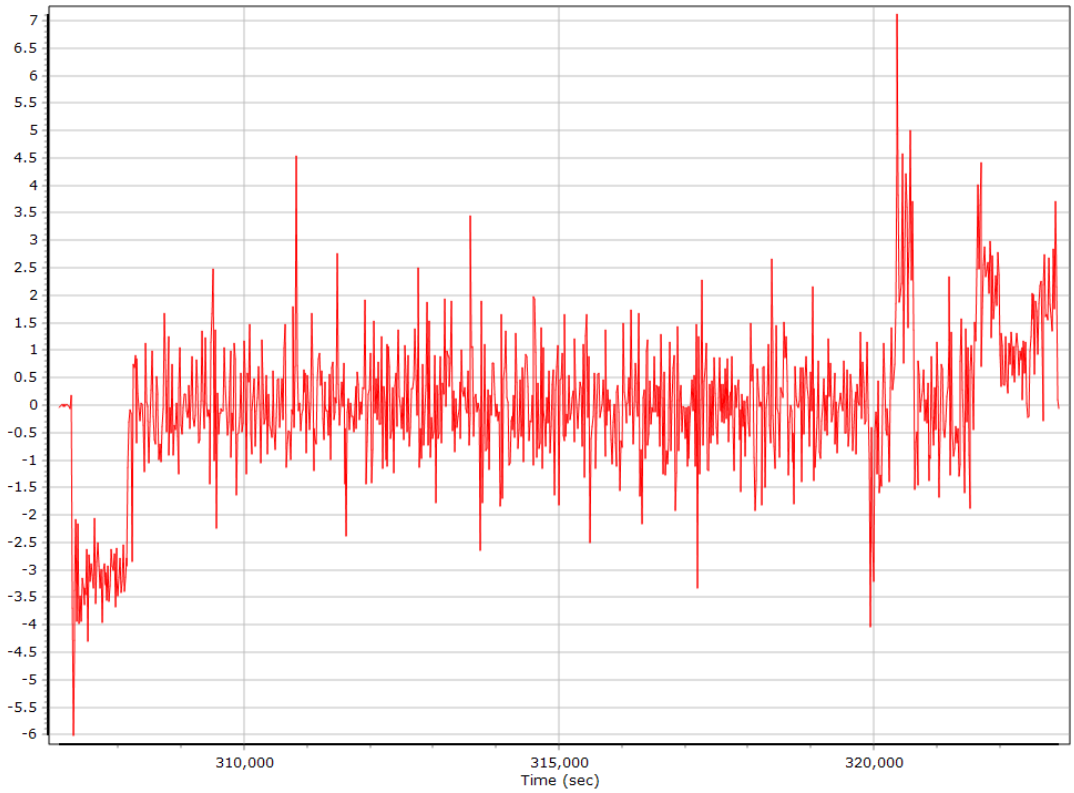

Total Speed

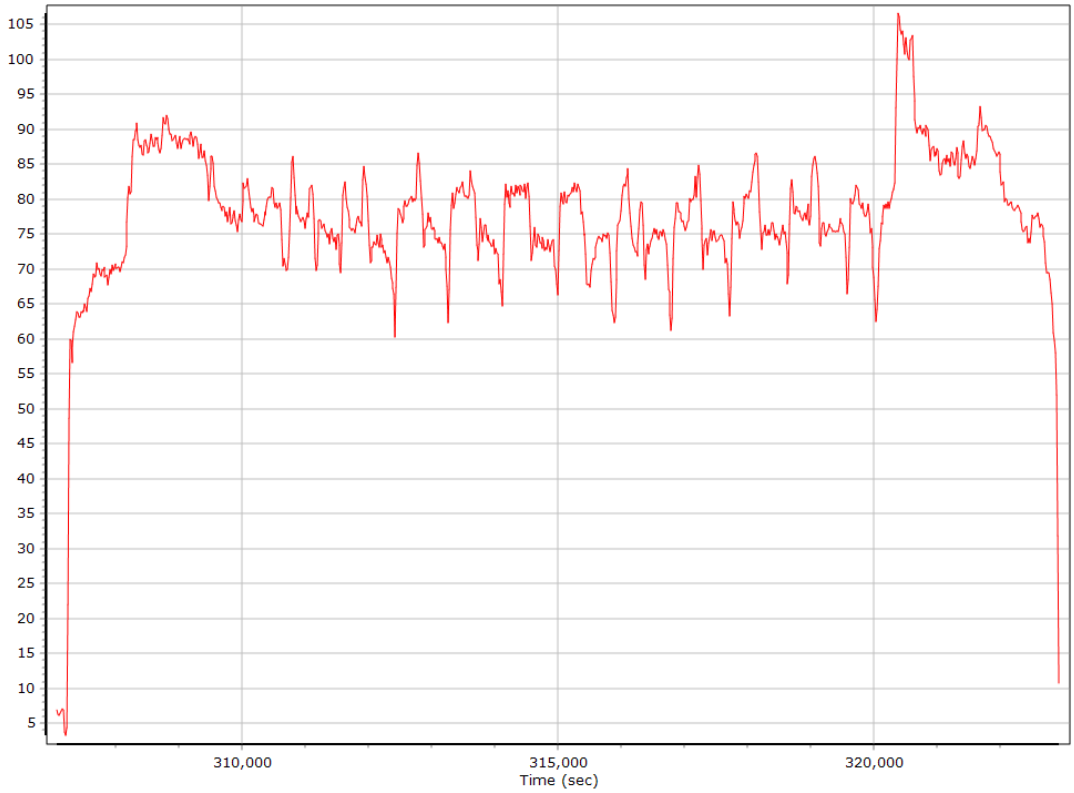

Ground Speed

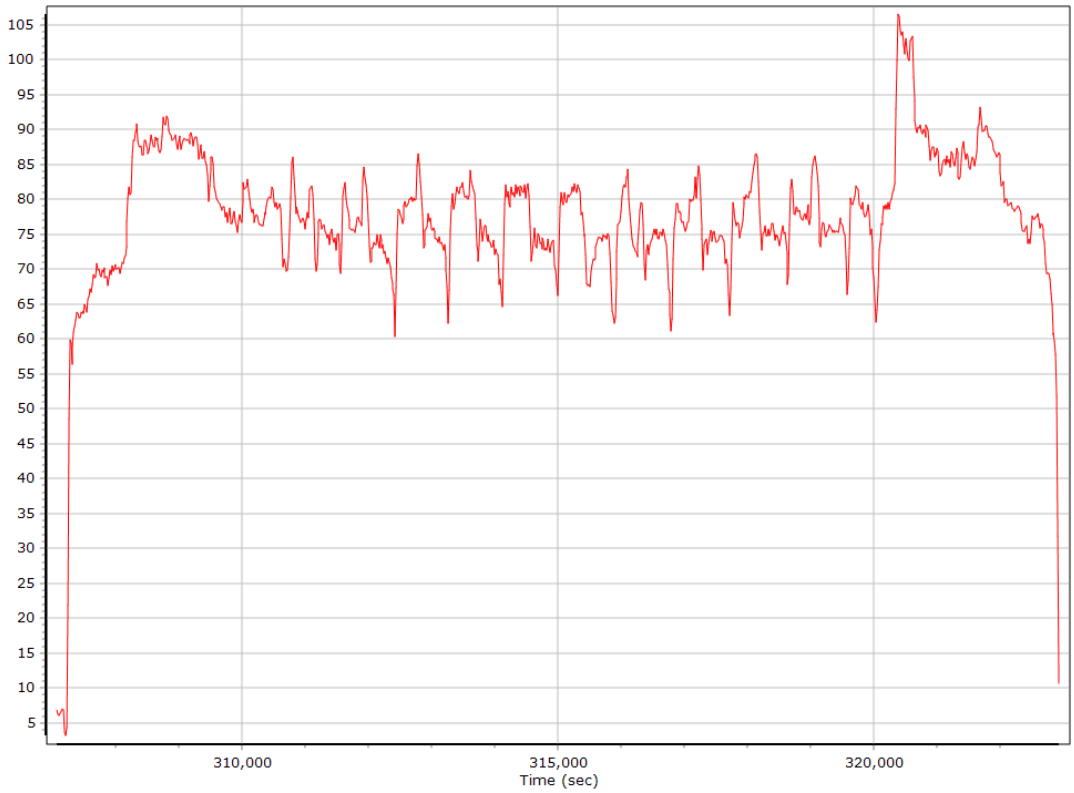

Body Acceleration

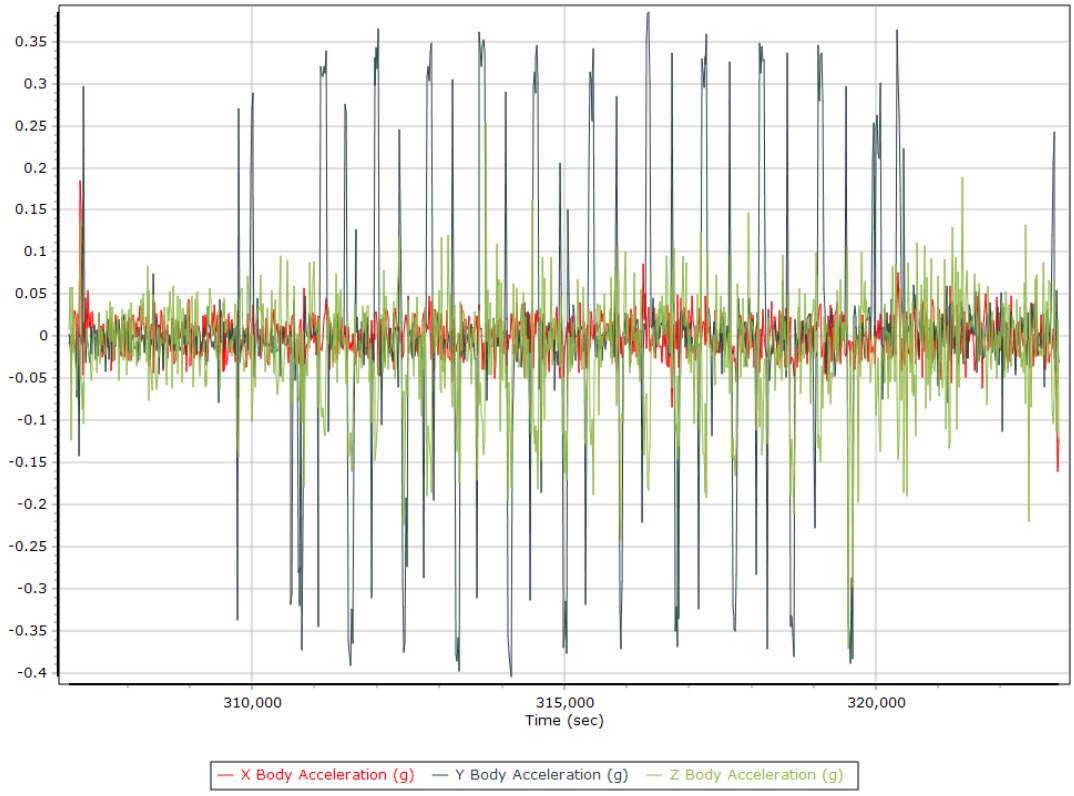

Total Body Acceleration

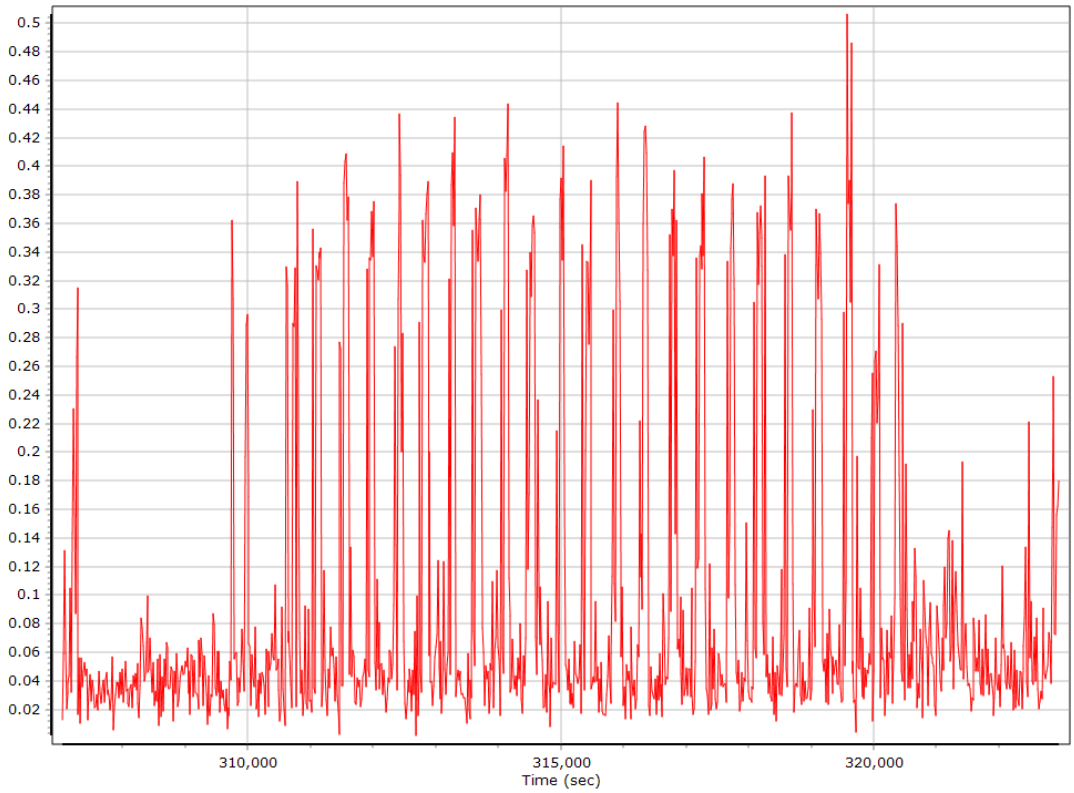

Body Angular Rate

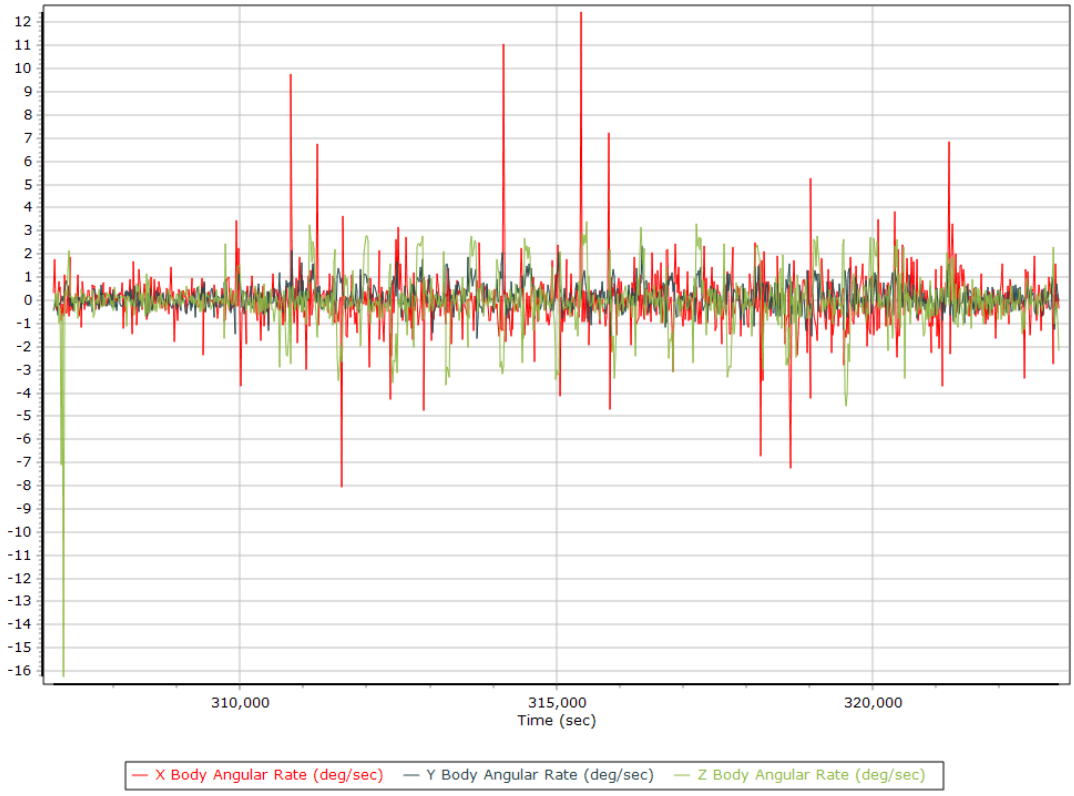

GNSS QC

GNSS QC Statistics

Statistics	Min	Max	Mean
Baseline length (km)	0.00	0.00	
Number of GPS SV	6	10	9
Number of GLONASS SV	0	8	6
Number of QZSS SV	0	0	0
Number of BEIDOU SV	0	0	0
Number of GALILEO SV	0	9	7
Total number of SV	12	27	21
PDOP	0.94	1.81	1.18
QC Solution Gaps	0.00	0.00	
Solution Type	Fixed	Float	No solution
Epoch (sec)	16265.00	0.00	0.00
Percentage	100.00	0.00	0.00

Num SVs in solution

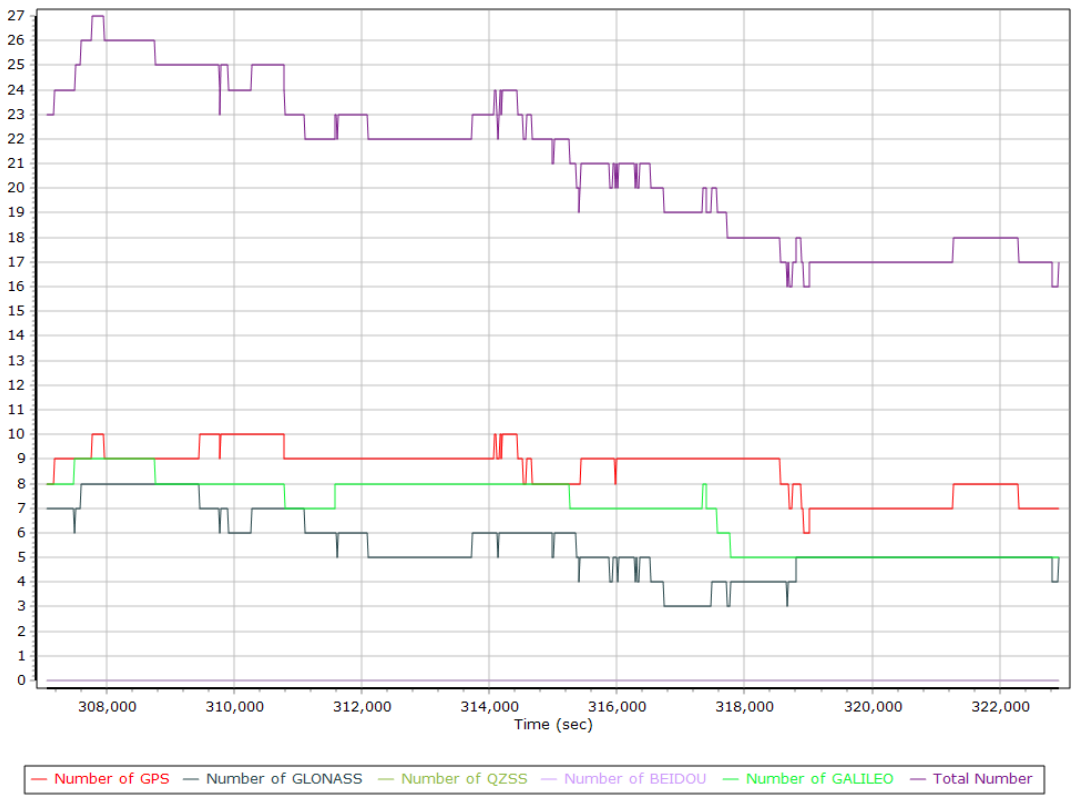

Forward/Reverse Separation

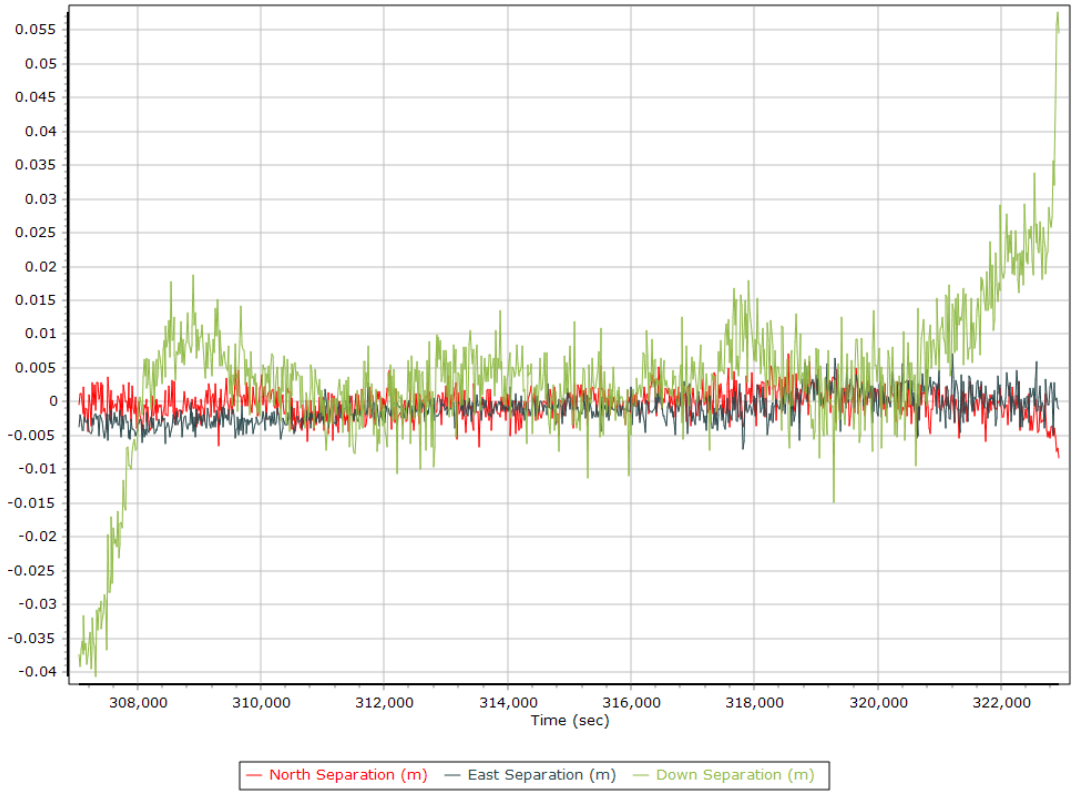

PDOP

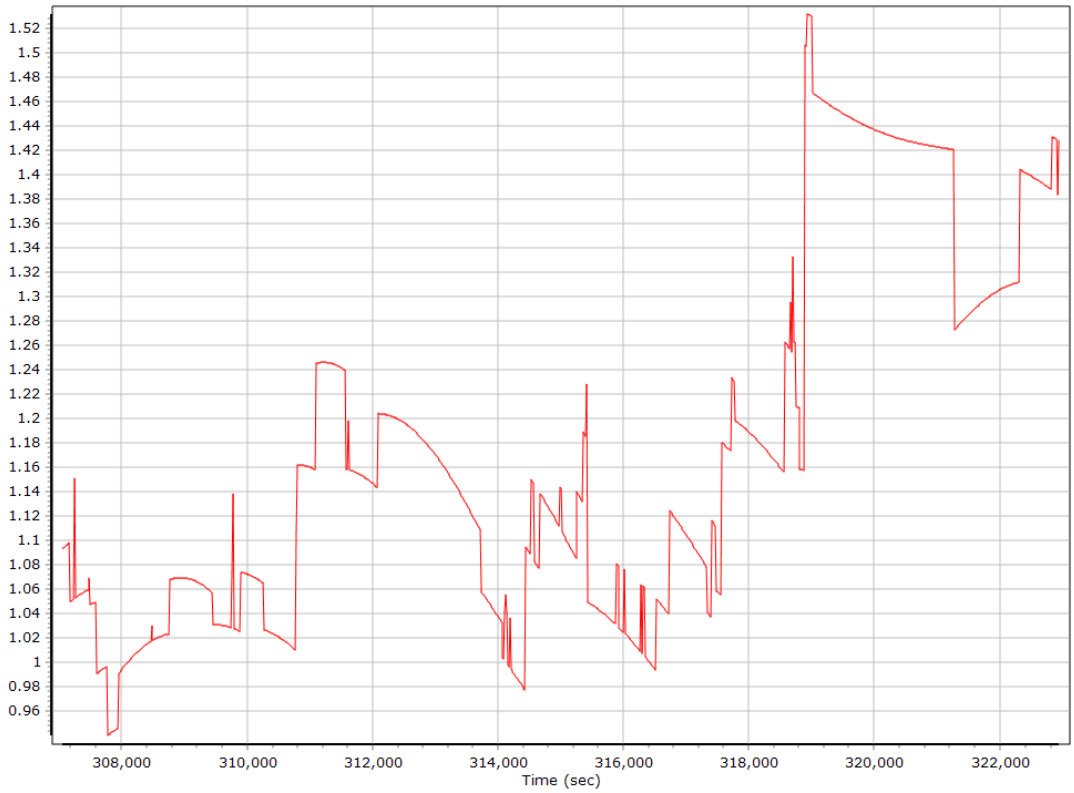

Estimated Position Accuracy

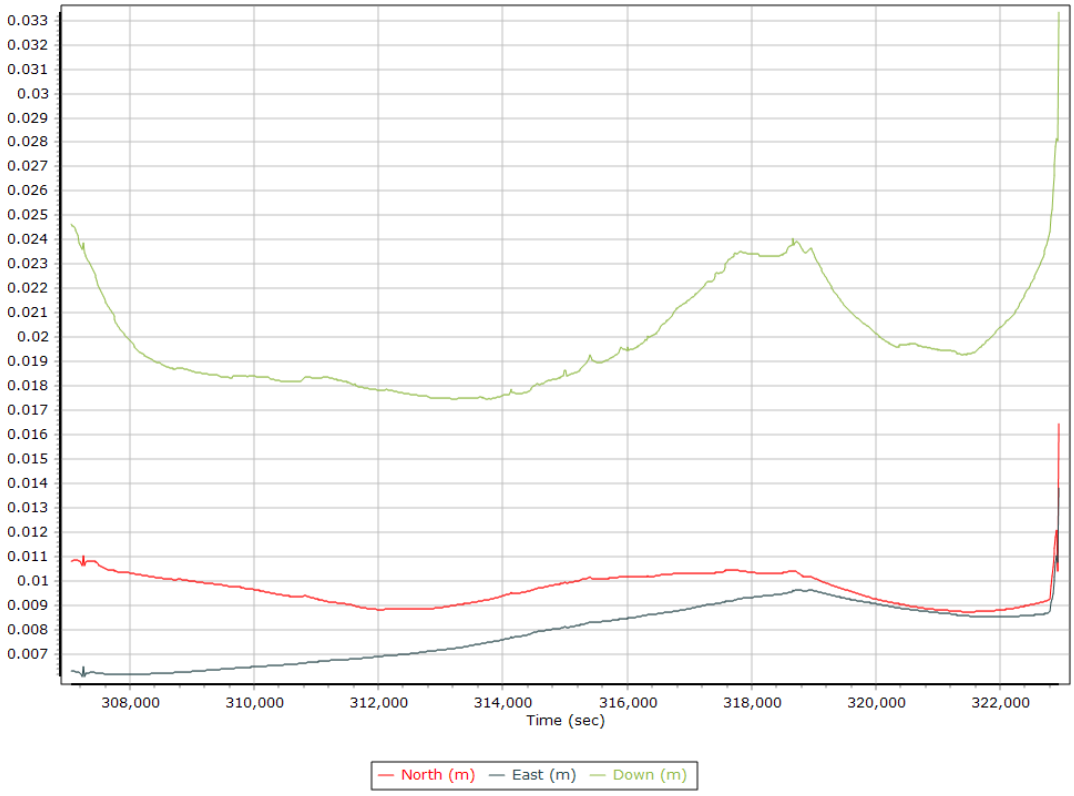

GPS Residuals

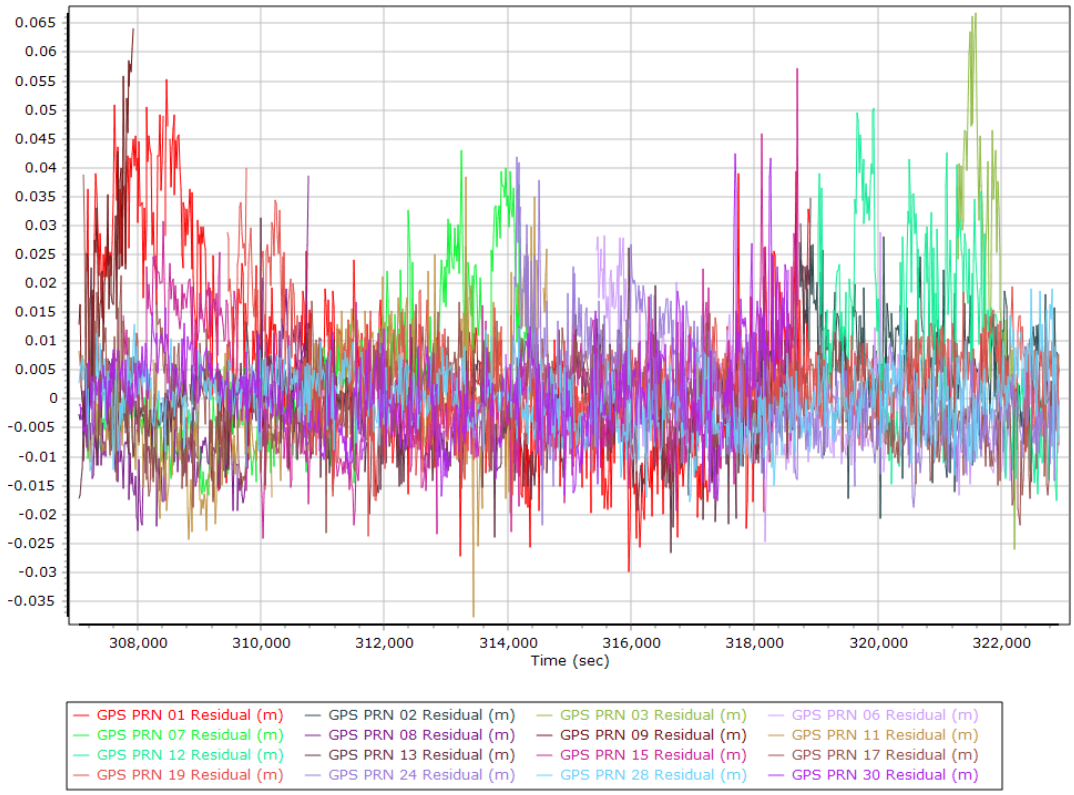

GLONASS Residuals

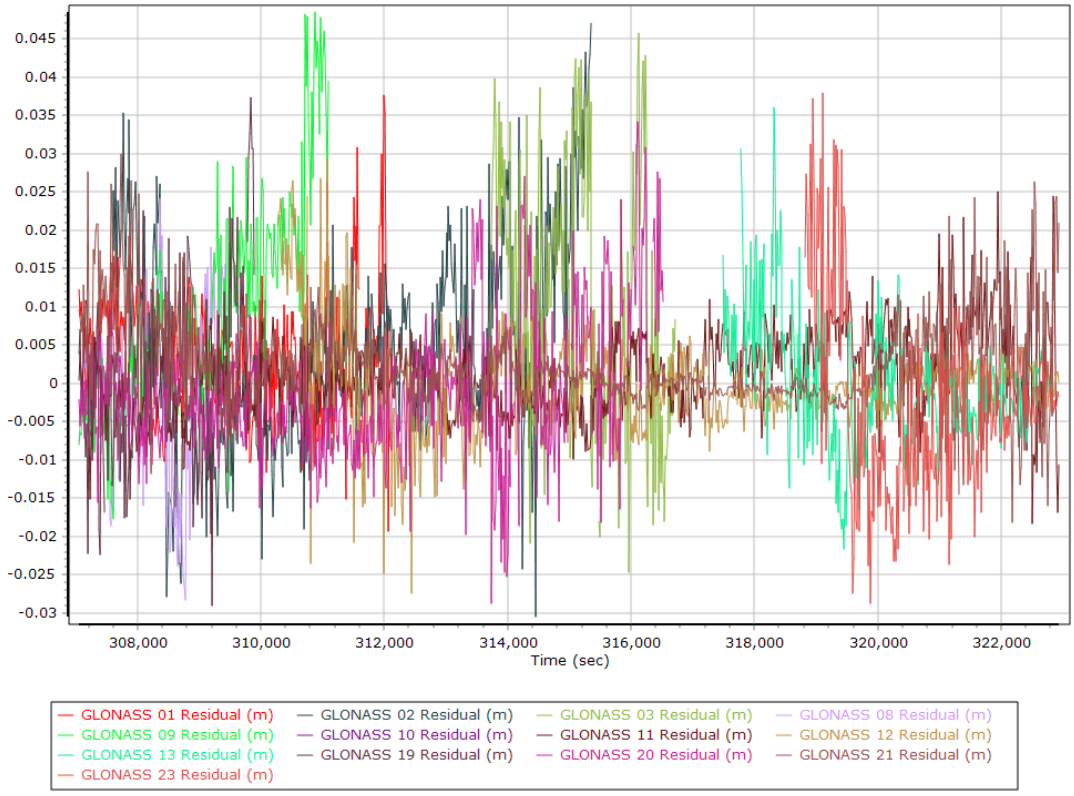

GALILEO Residuals

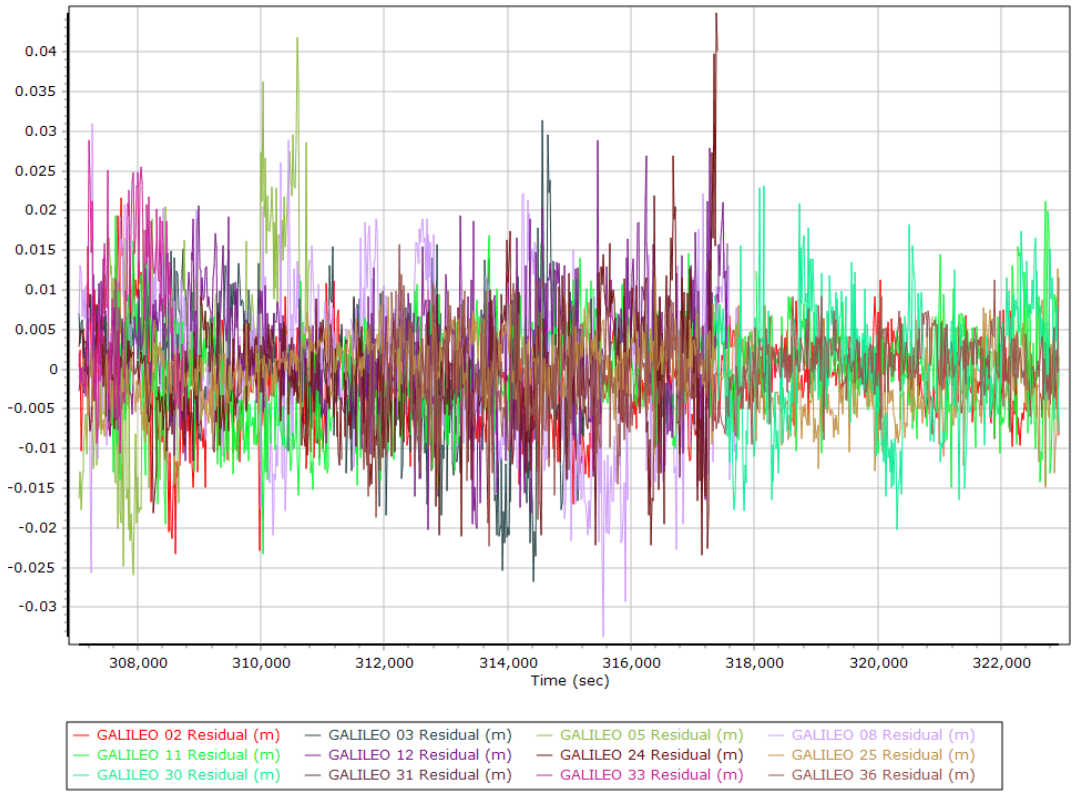

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion PP-RTX		
Stabilized mount	False		
Processing start time	306661.000 (06/24/2020 13:11:01)		
Processing end time	322952.000 (06/24/2020 17:42:32)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	180.000
Reference to Primary GNSS lever arm (m)	0.525	-0.430	-0.955
Reference to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm (m)

X Reference-Primary GNSS Lever Arm (m)

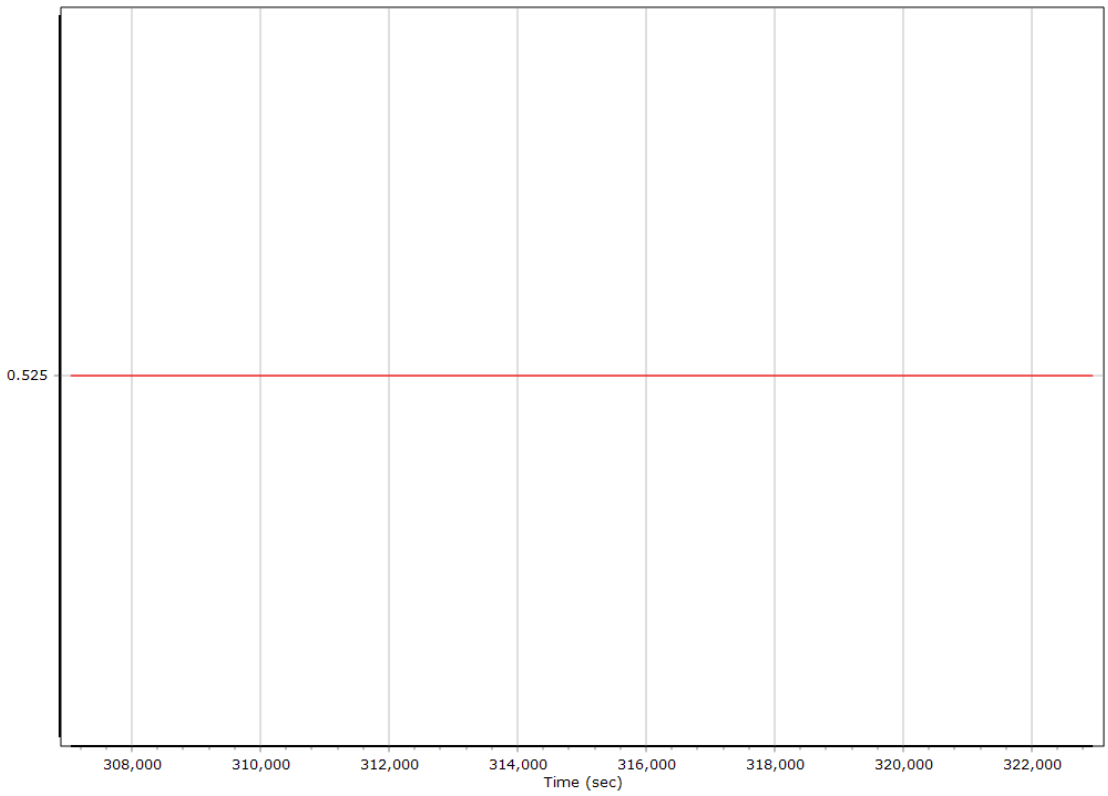

Y Reference-Primary GNSS Lever Arm (m)

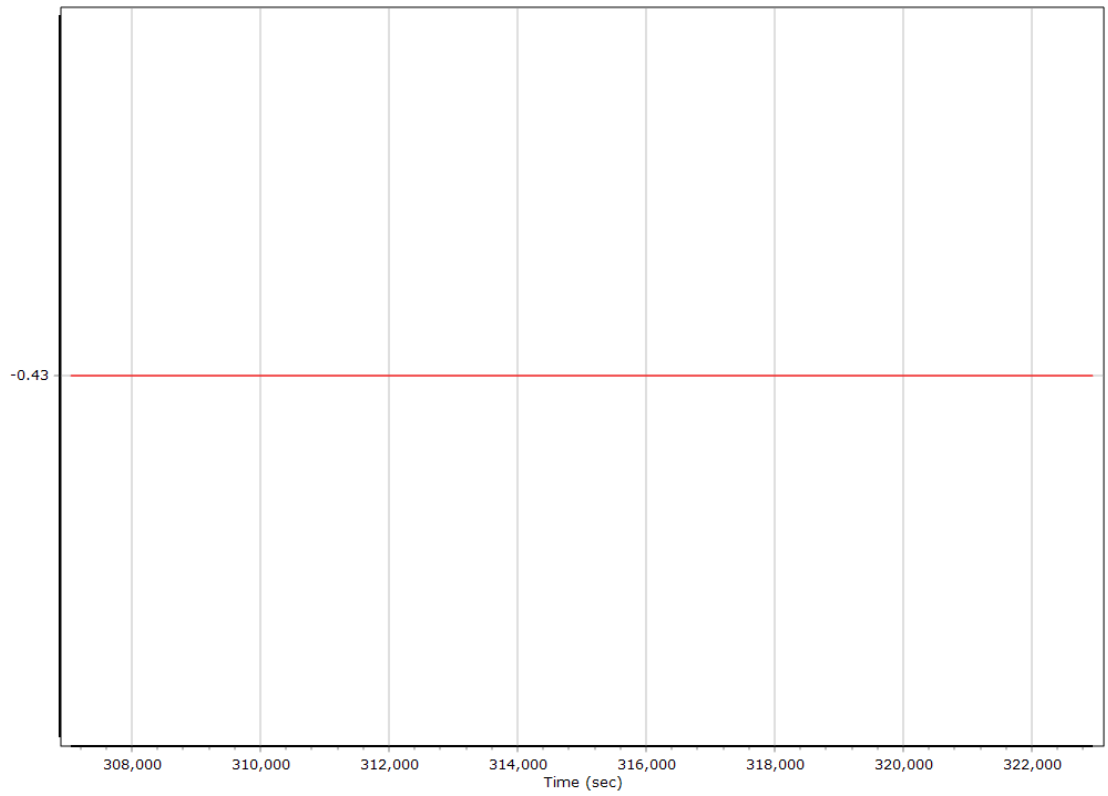

Z Reference-Primary GNSS Lever Arm (m)

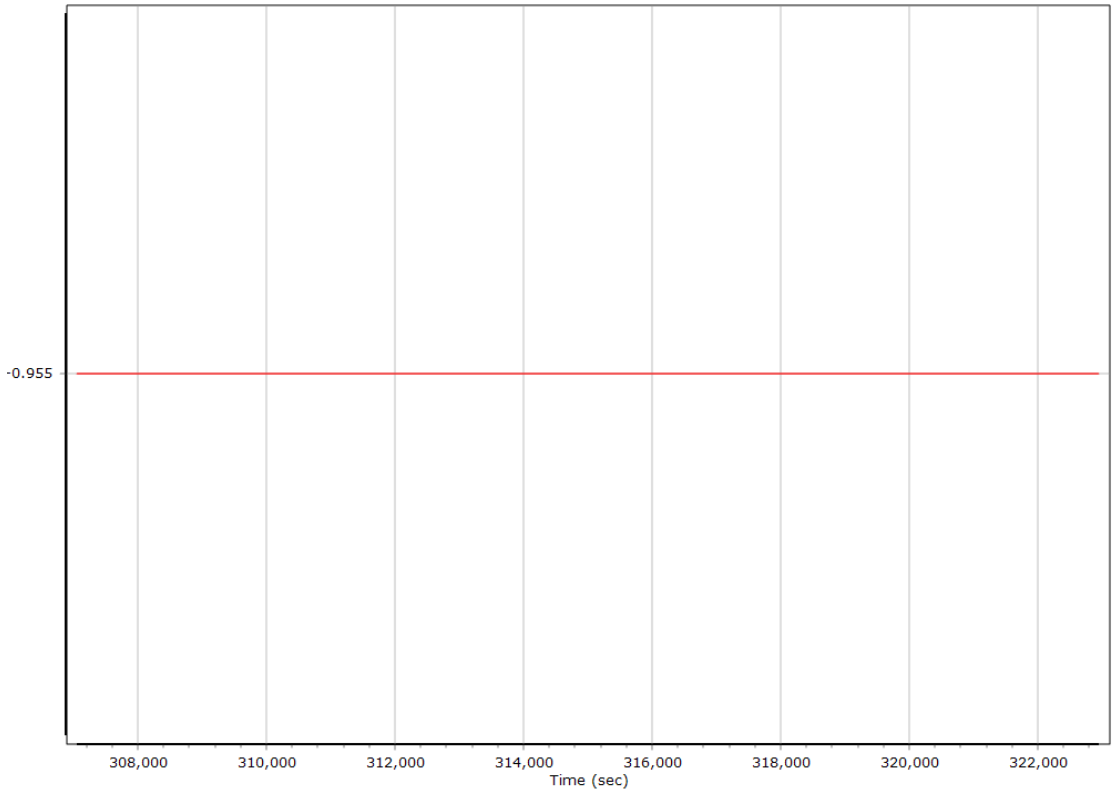

Reference-Primary GNSS Lever Arm Figure of Merit

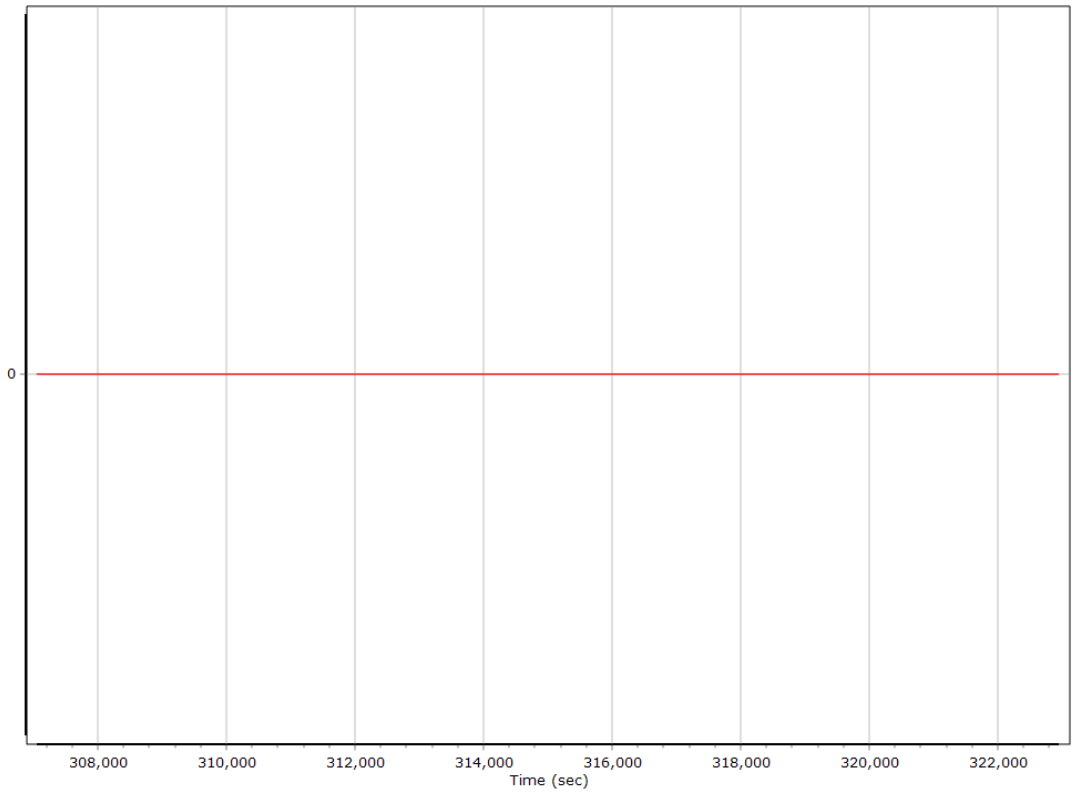

IN-Fusion QC

Forward Processed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

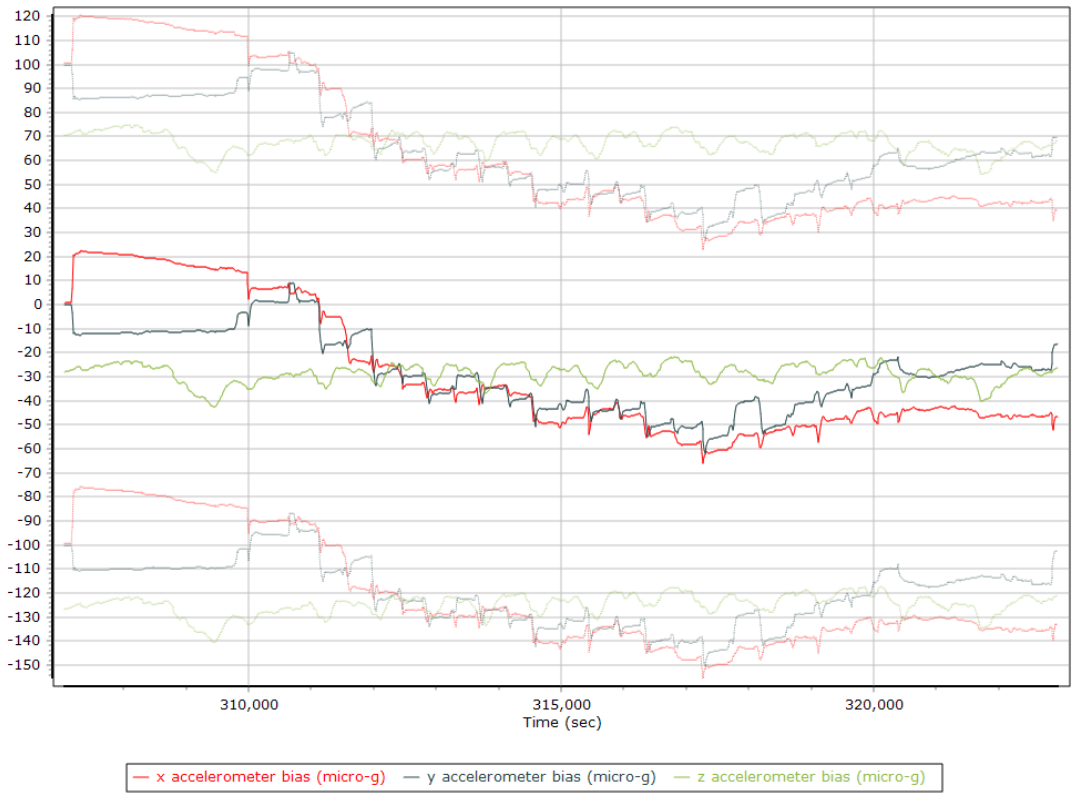

X Accelerometer Bias (micro-g)

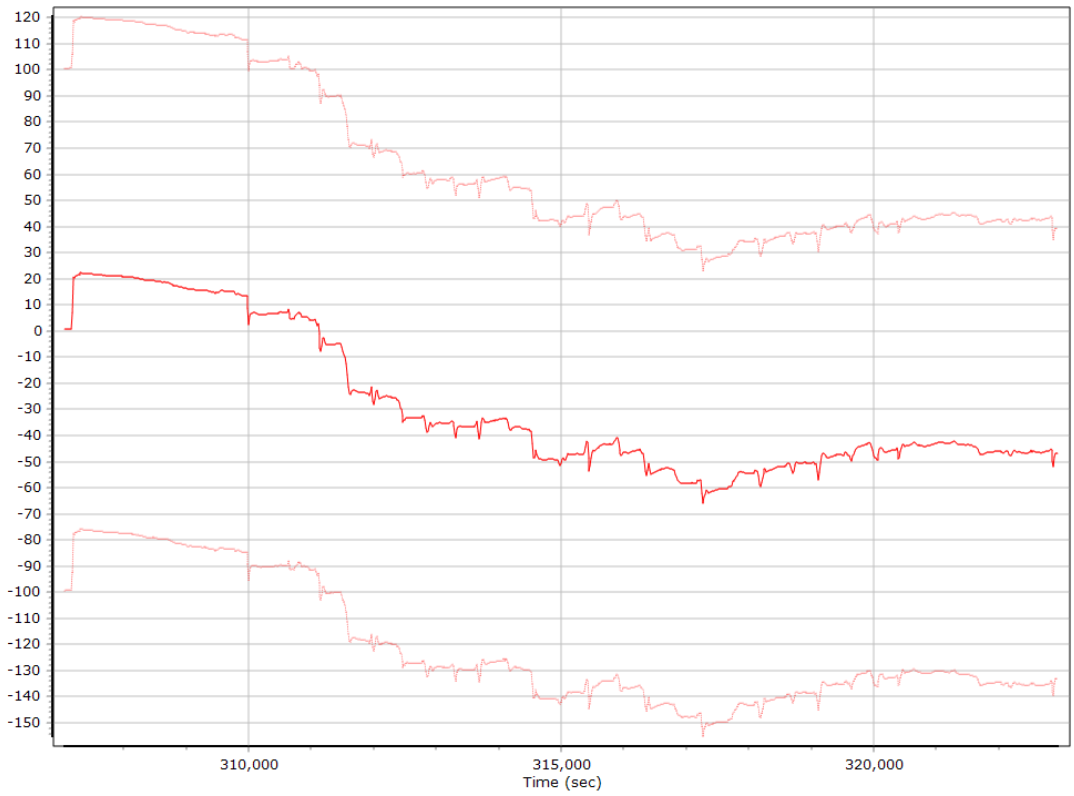

Y Accelerometer Bias (micro-g)

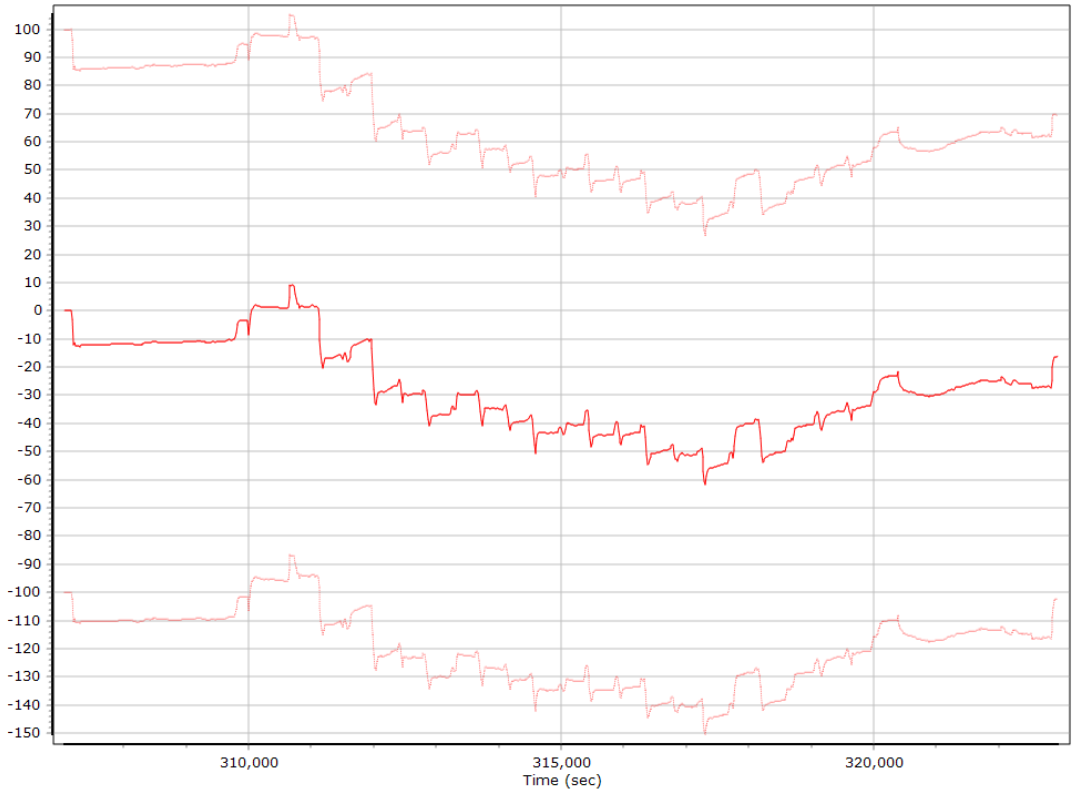

Z Accelerometer Bias (micro-g)

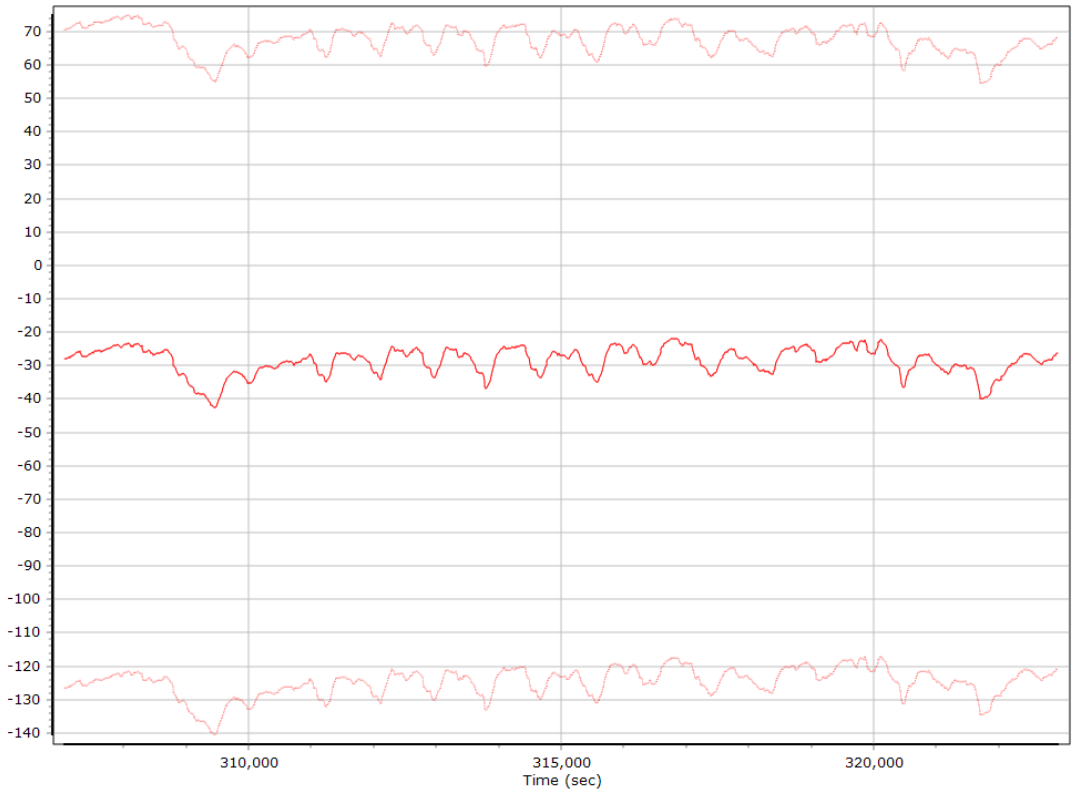

Accelerometer Scale Error (ppm)

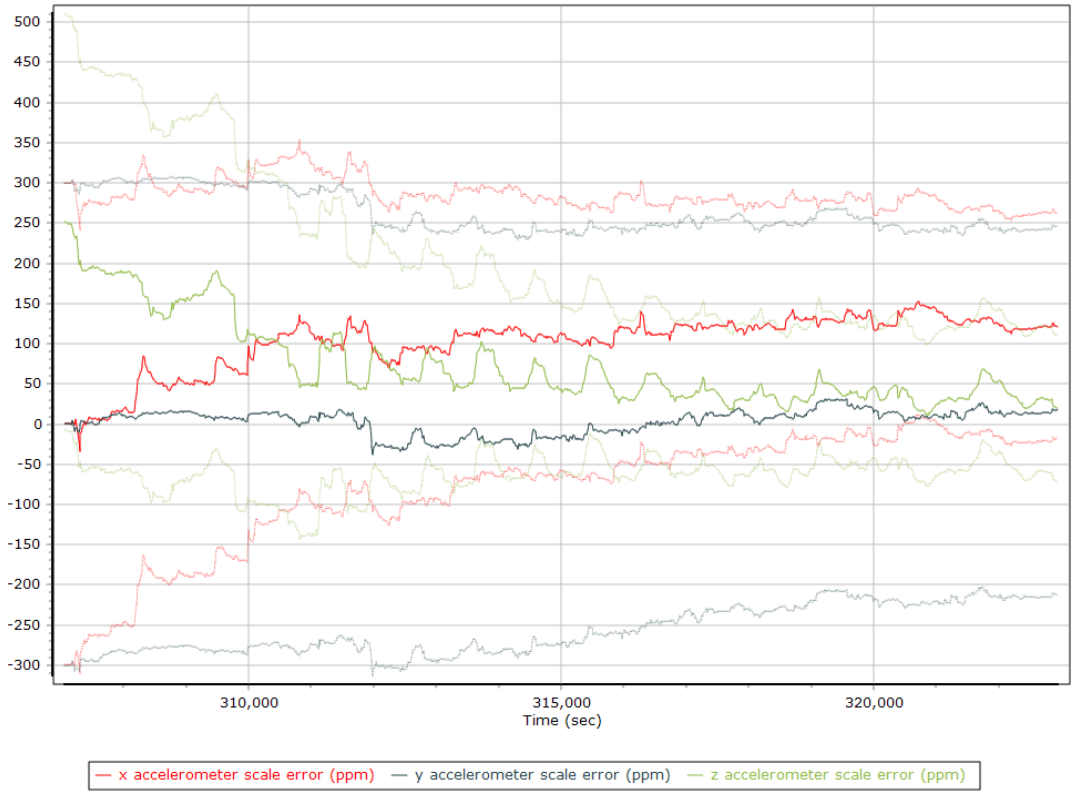

X Accelerometer Scale Error (ppm)

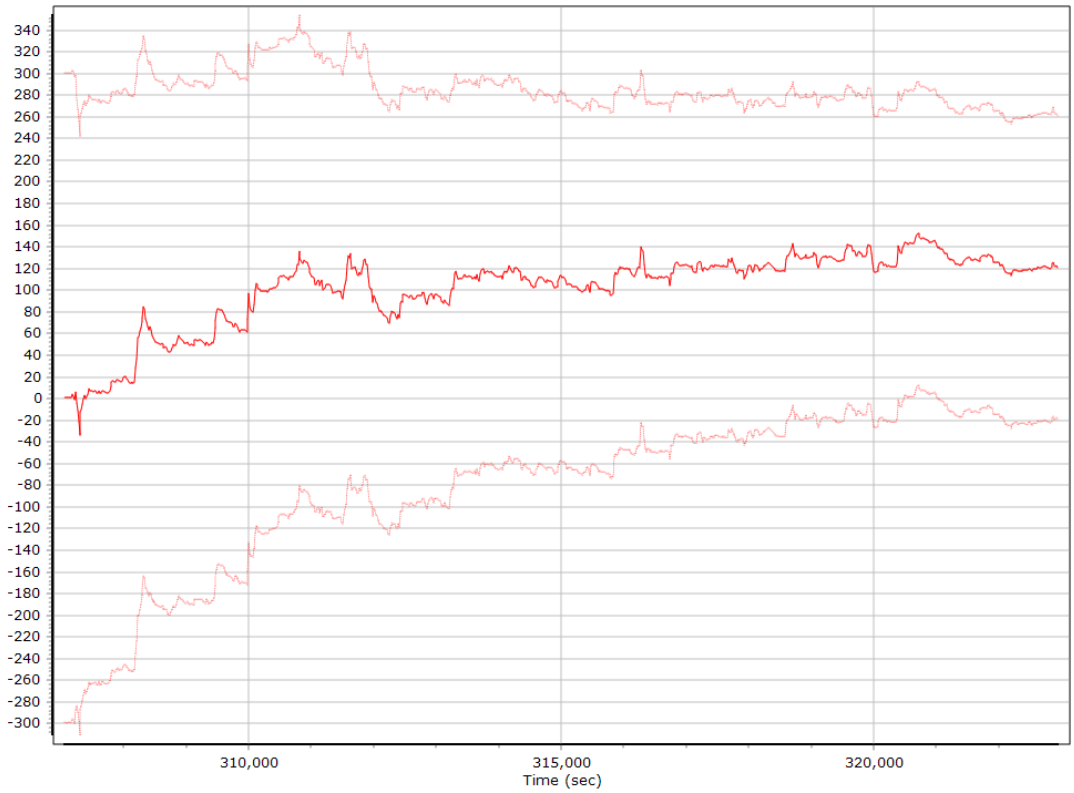

Y Accelerometer Scale Error (ppm)

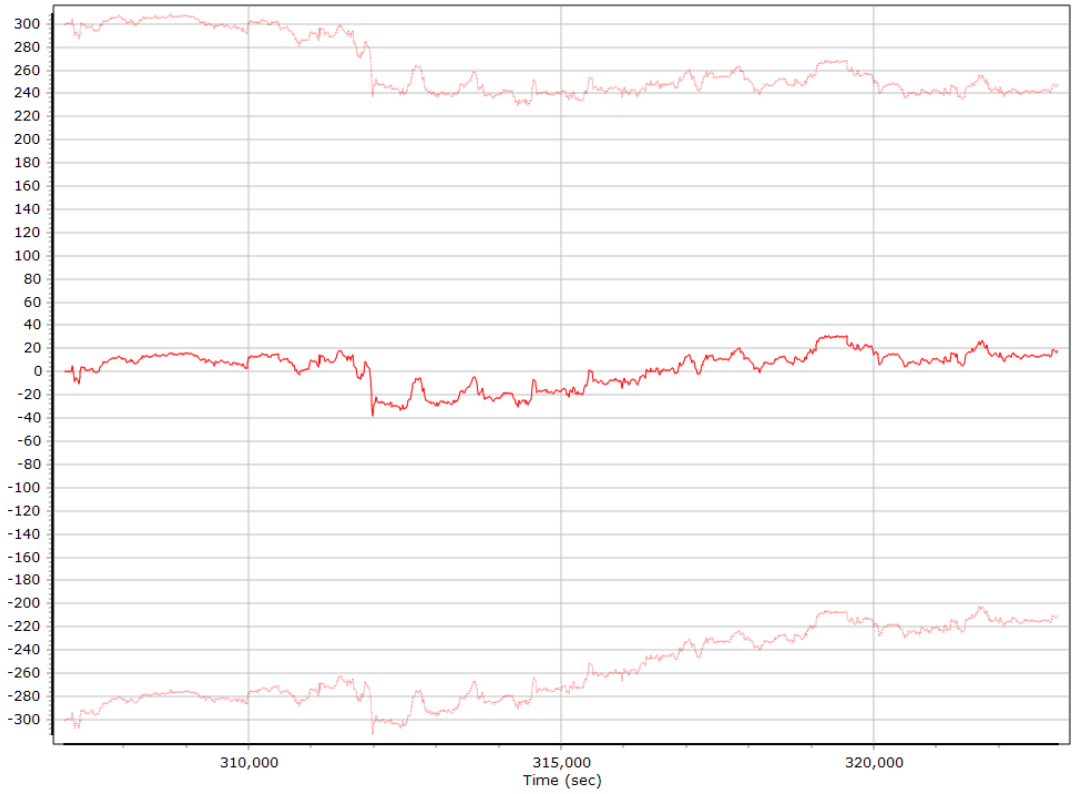

Z Accelerometer Scale Error (ppm)

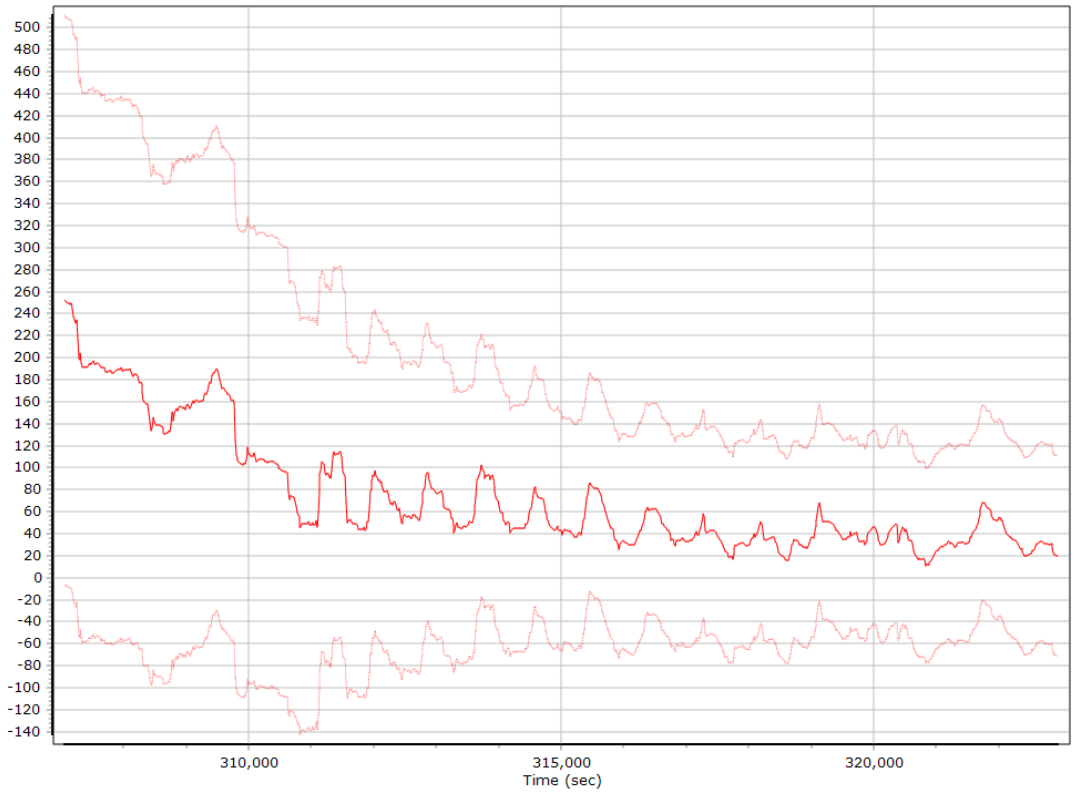

Gyro Bias (deg/h)

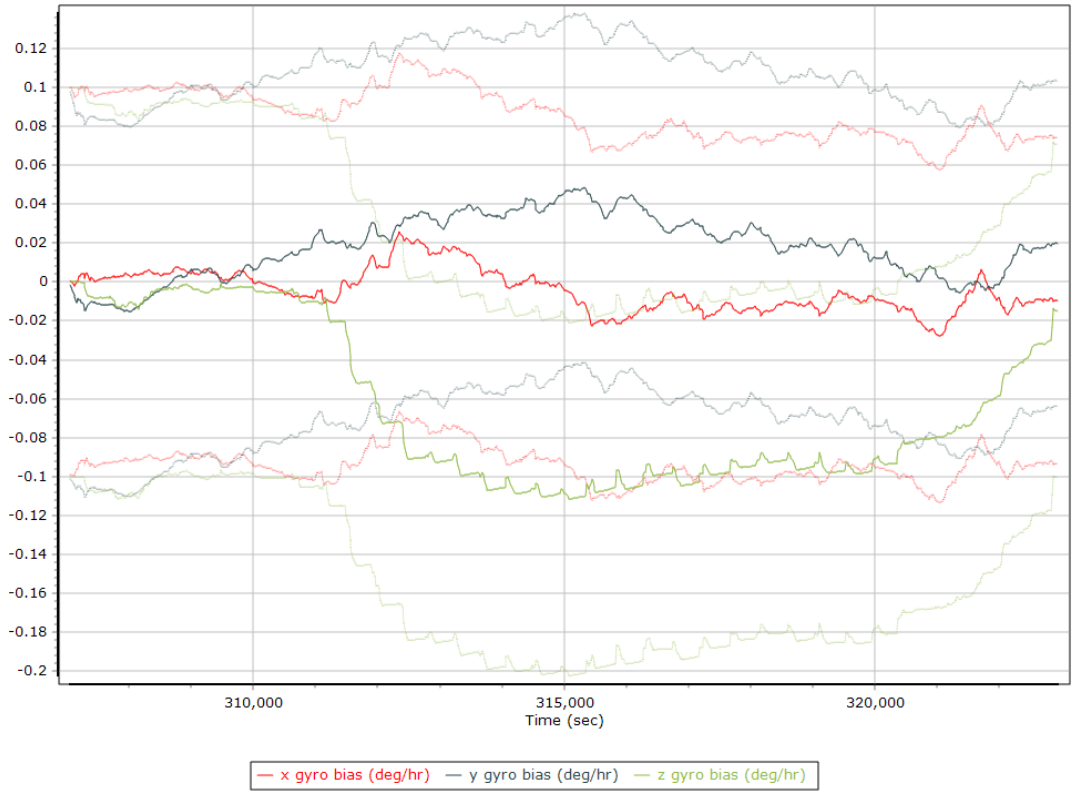

X Gyro Bias (deg/h)

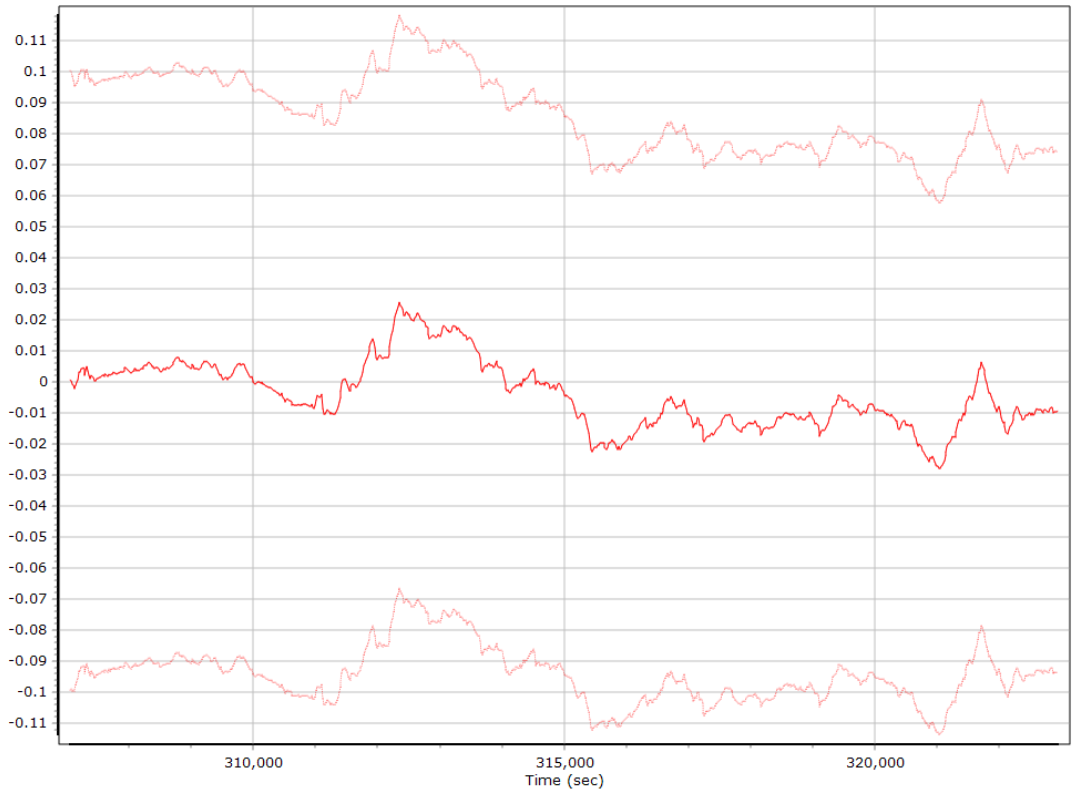

Y Gyro Bias (deg/h)

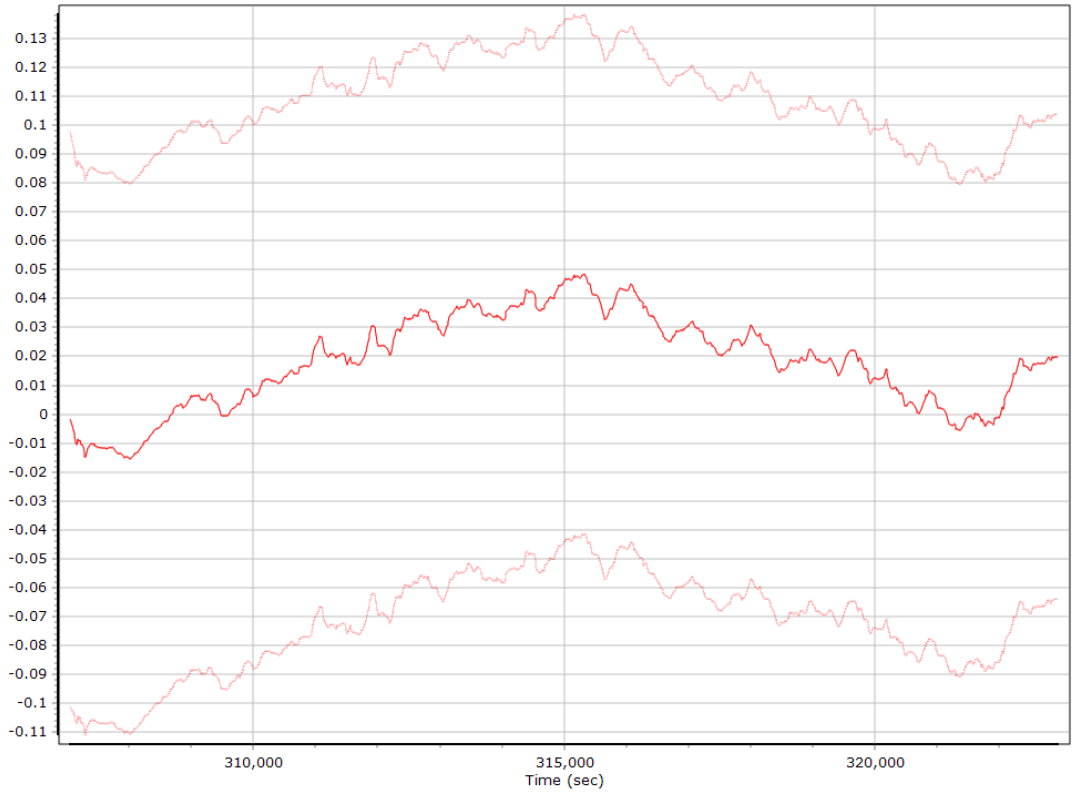

Z Gyro Bias (deg/h)

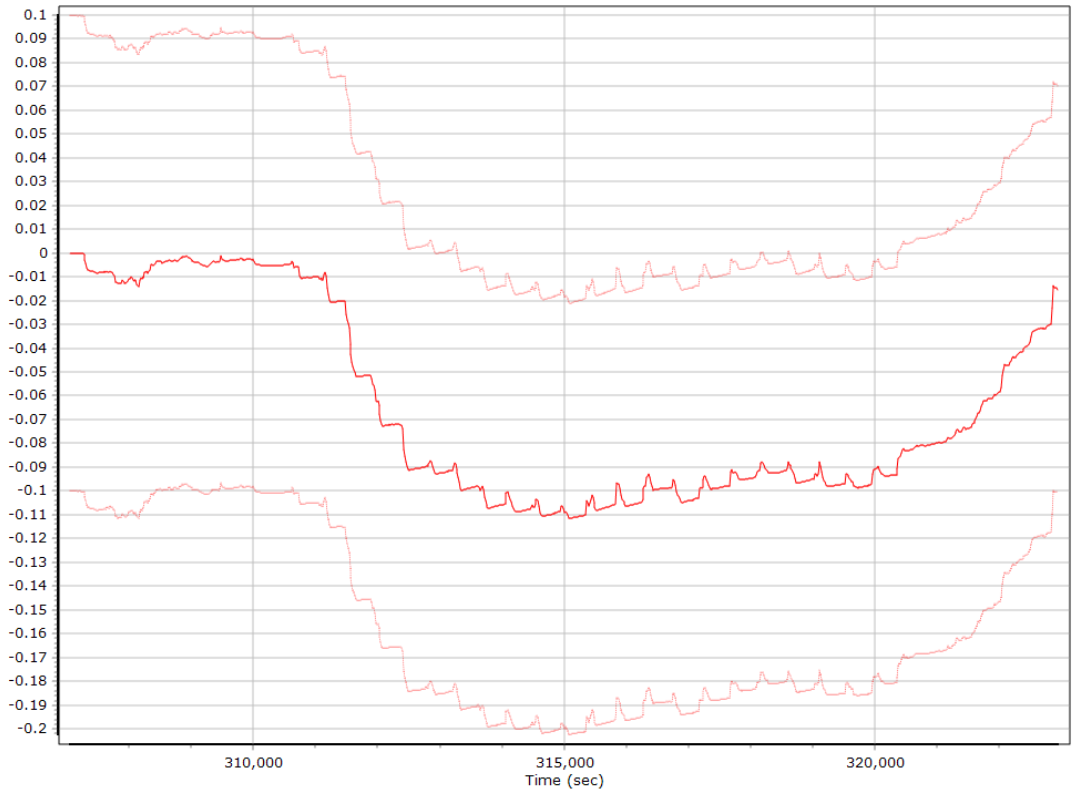

Gyro Scale Error (ppm)

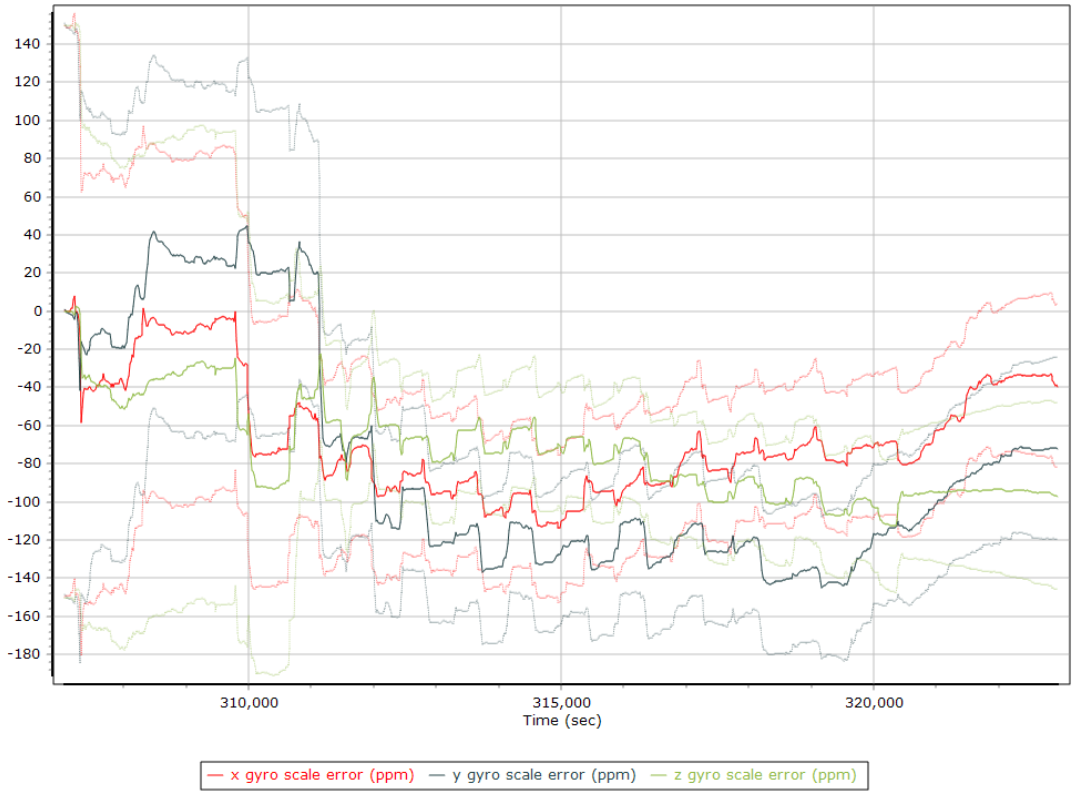

X Gyro Scale Error (ppm)

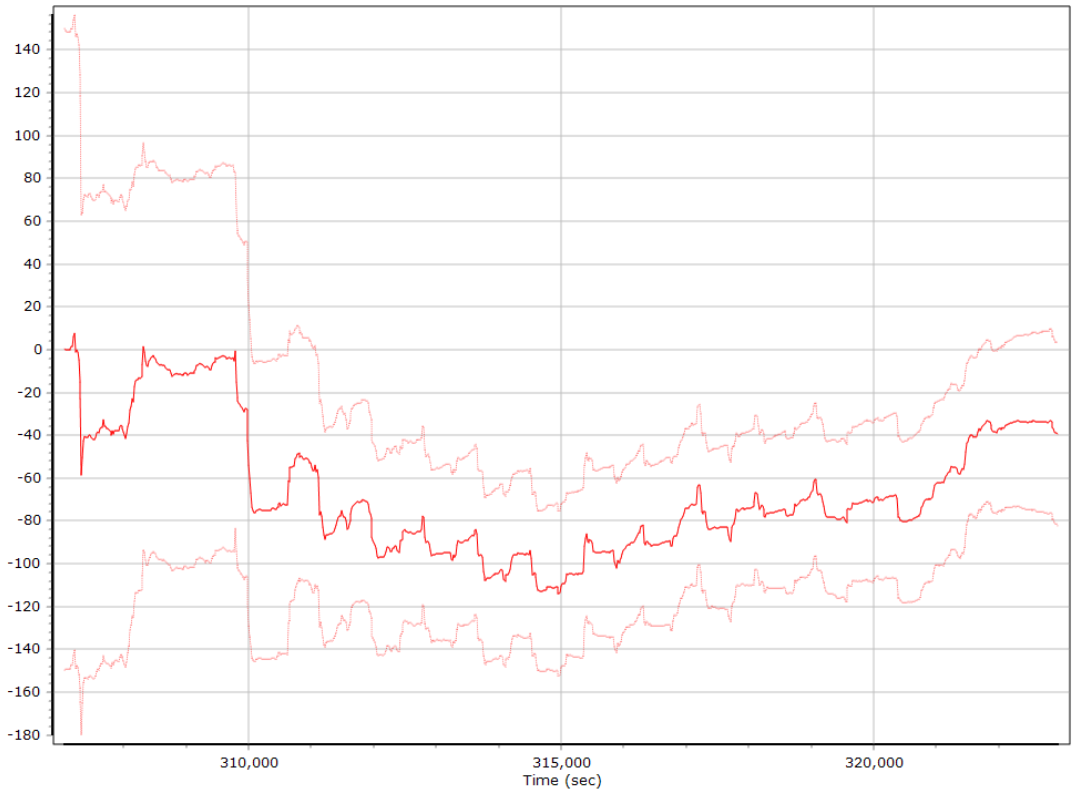

Y Gyro Scale Error (ppm)

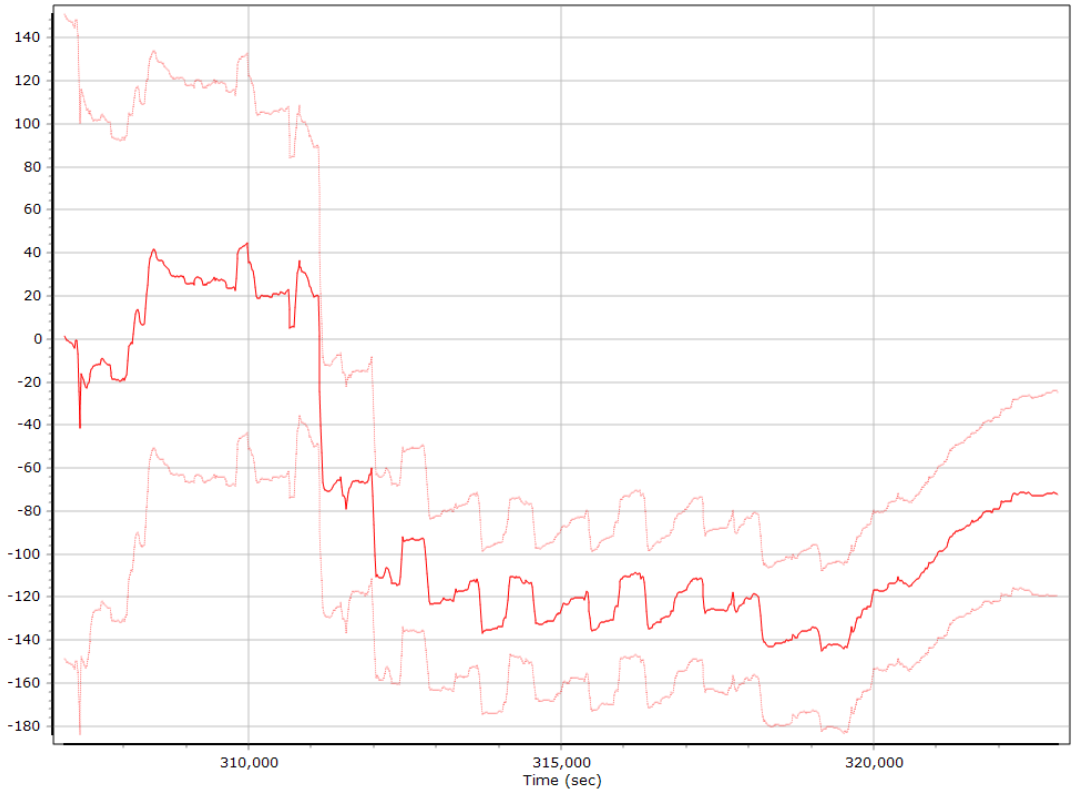

Z Gyro Scale Error (ppm)

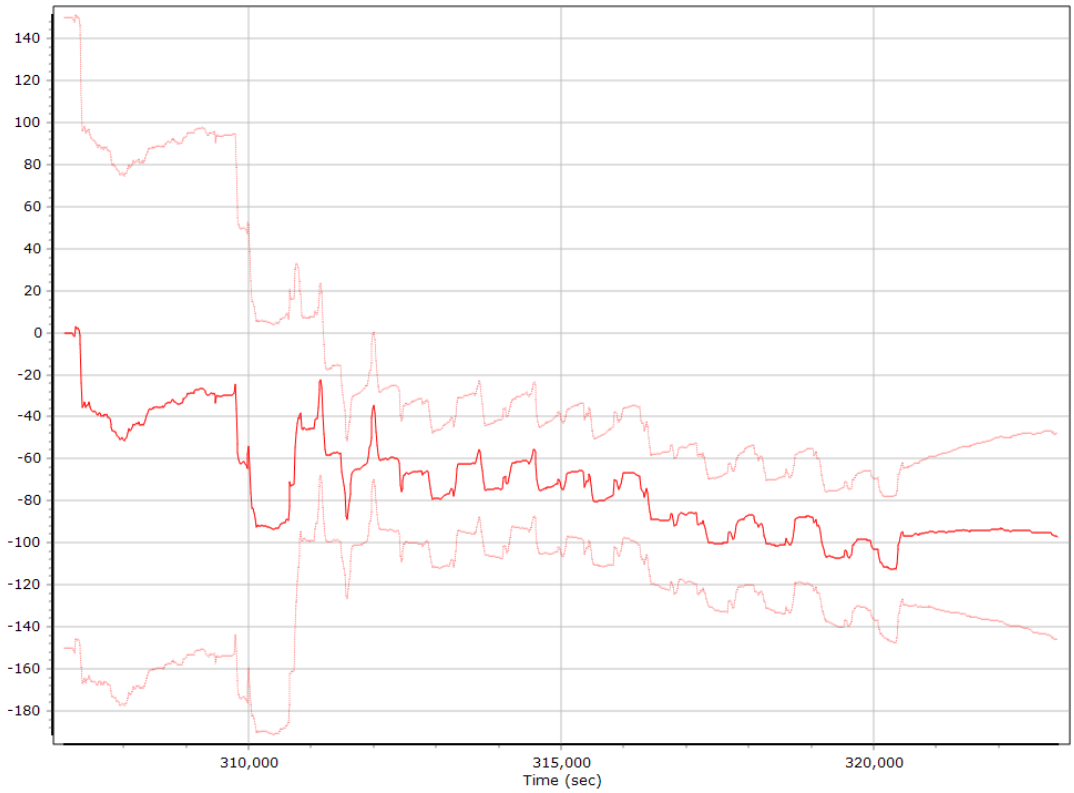

Forward Processed Estimated Constant Errors, Reference Frame

Accelerometer Bias (micro-g)

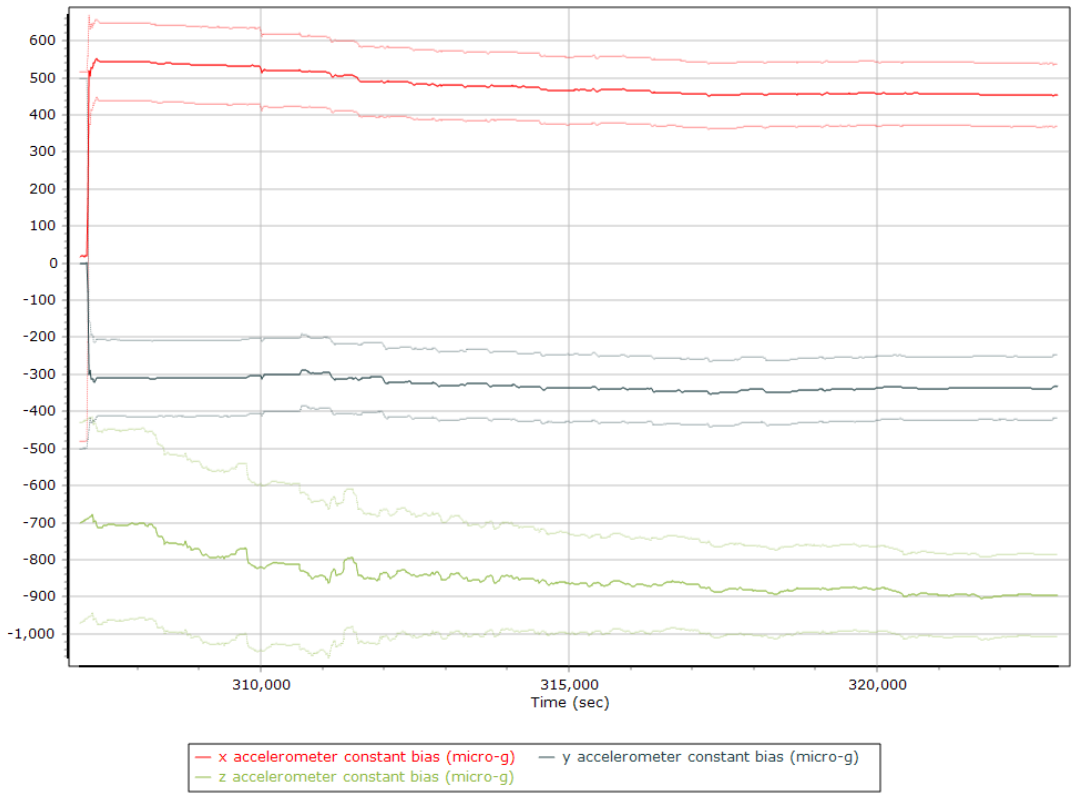

X Accelerometer Bias (micro-g)

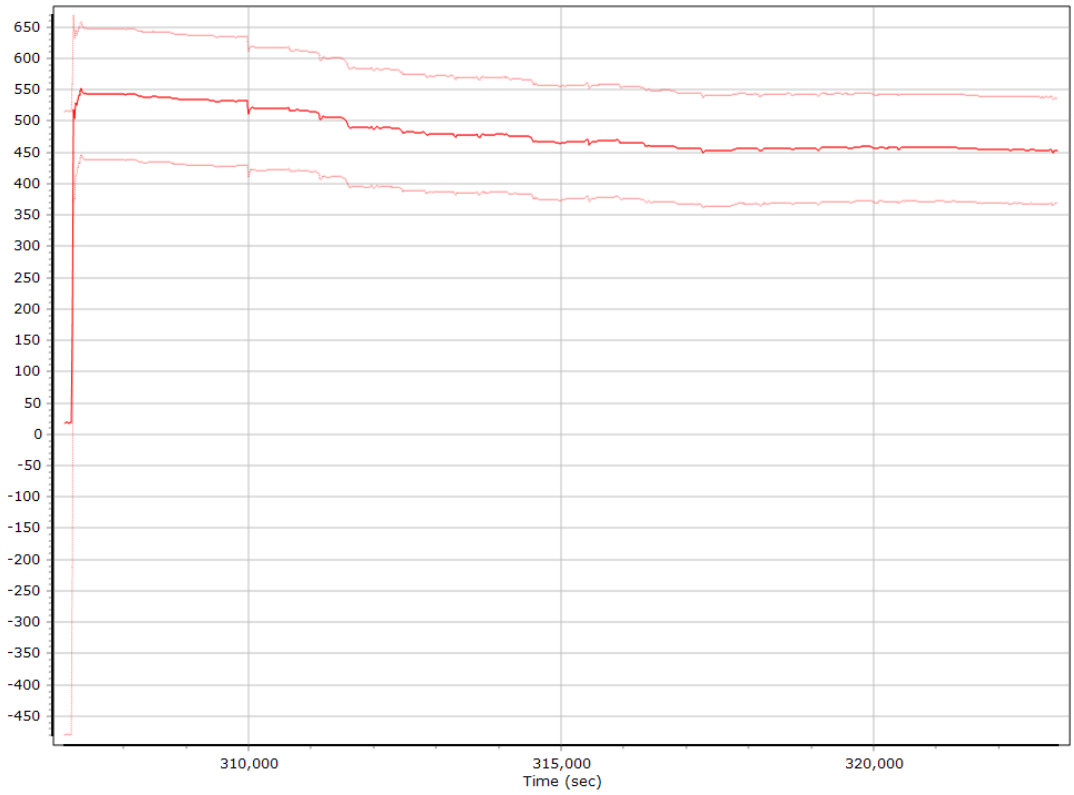

Y Accelerometer Bias (micro-g)

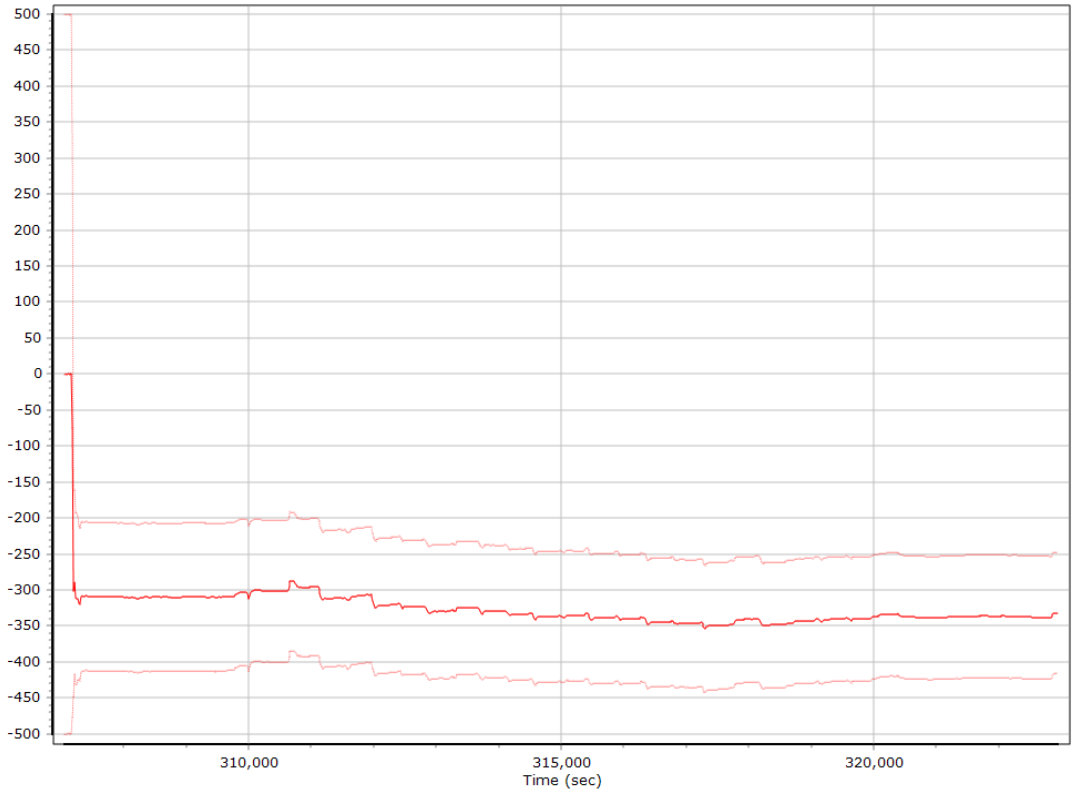

Z Accelerometer Bias (micro-g)

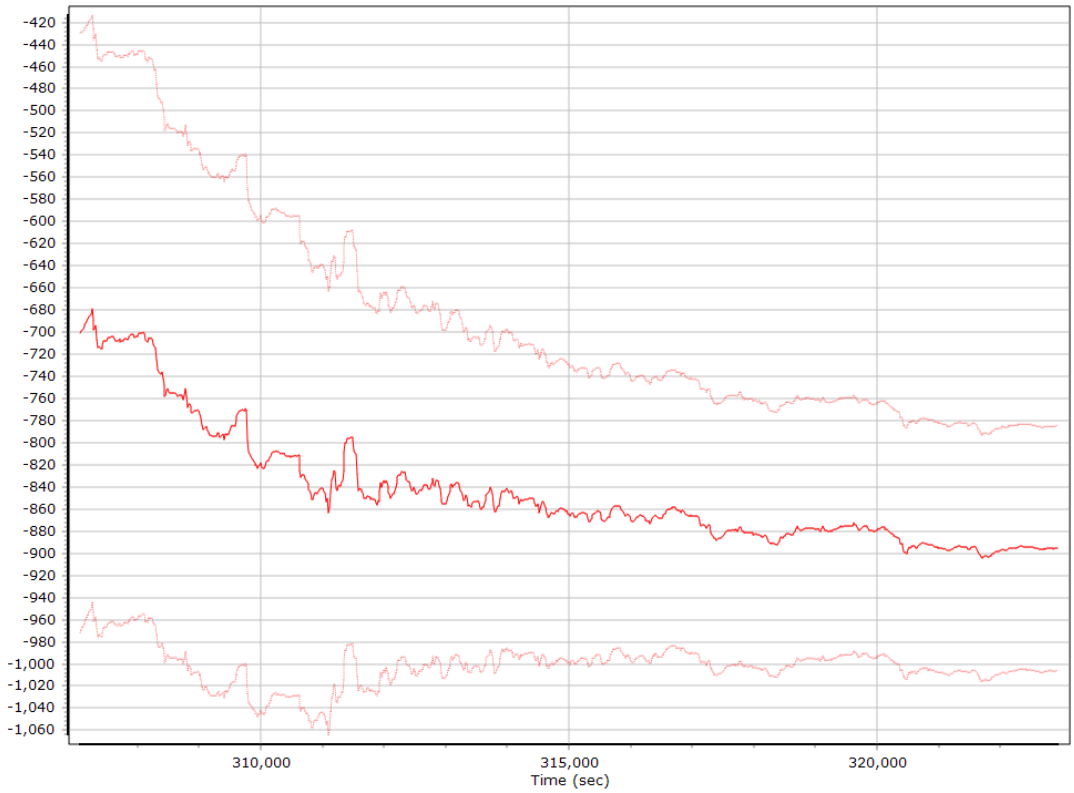

Gyro Bias (deg/h)

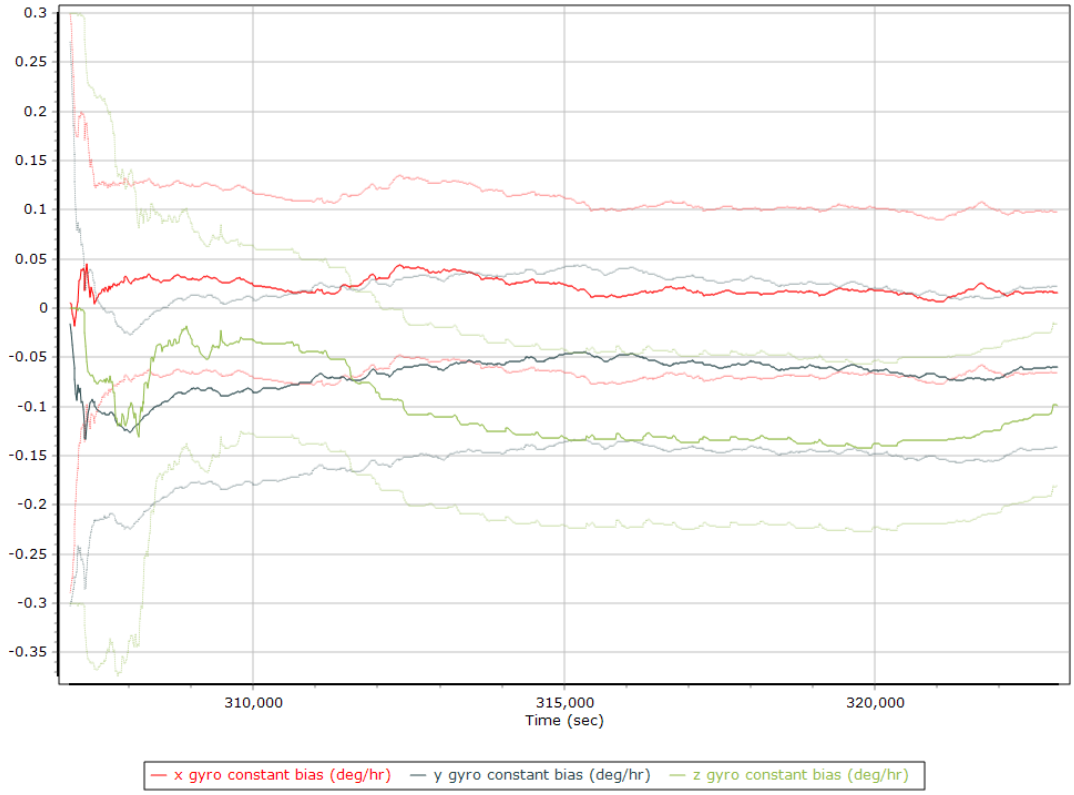

X Gyro Bias (deg/h)

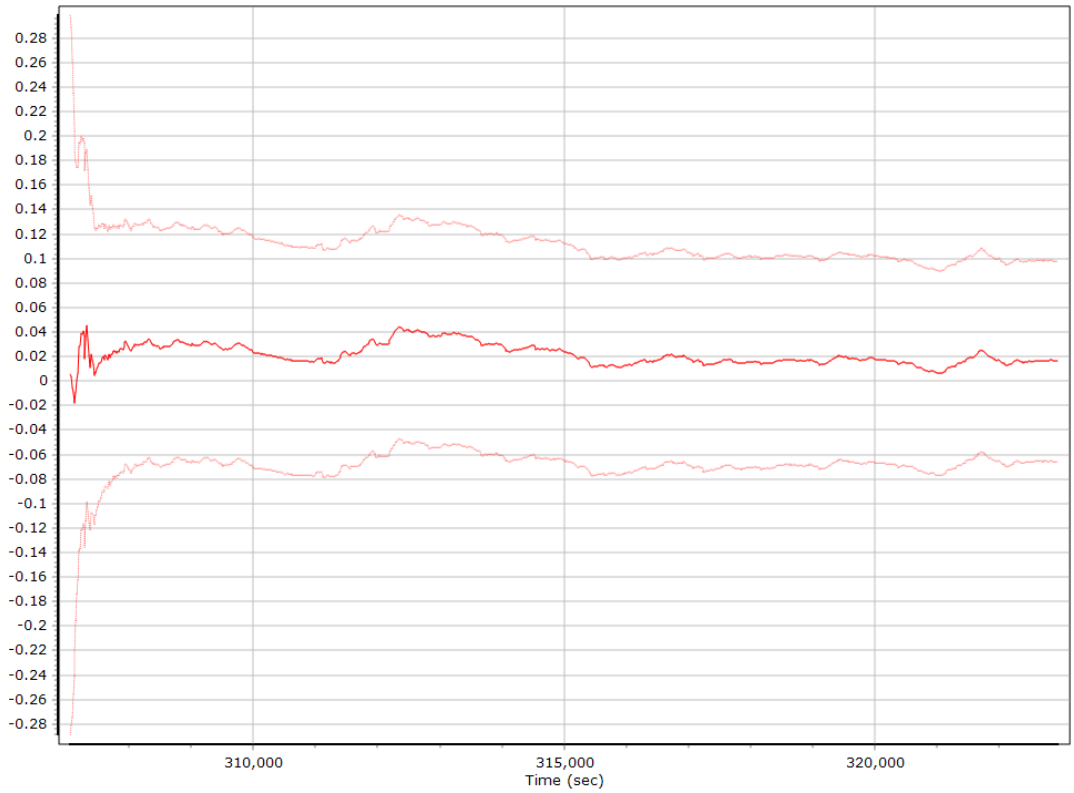

Y Gyro Bias (deg/h)

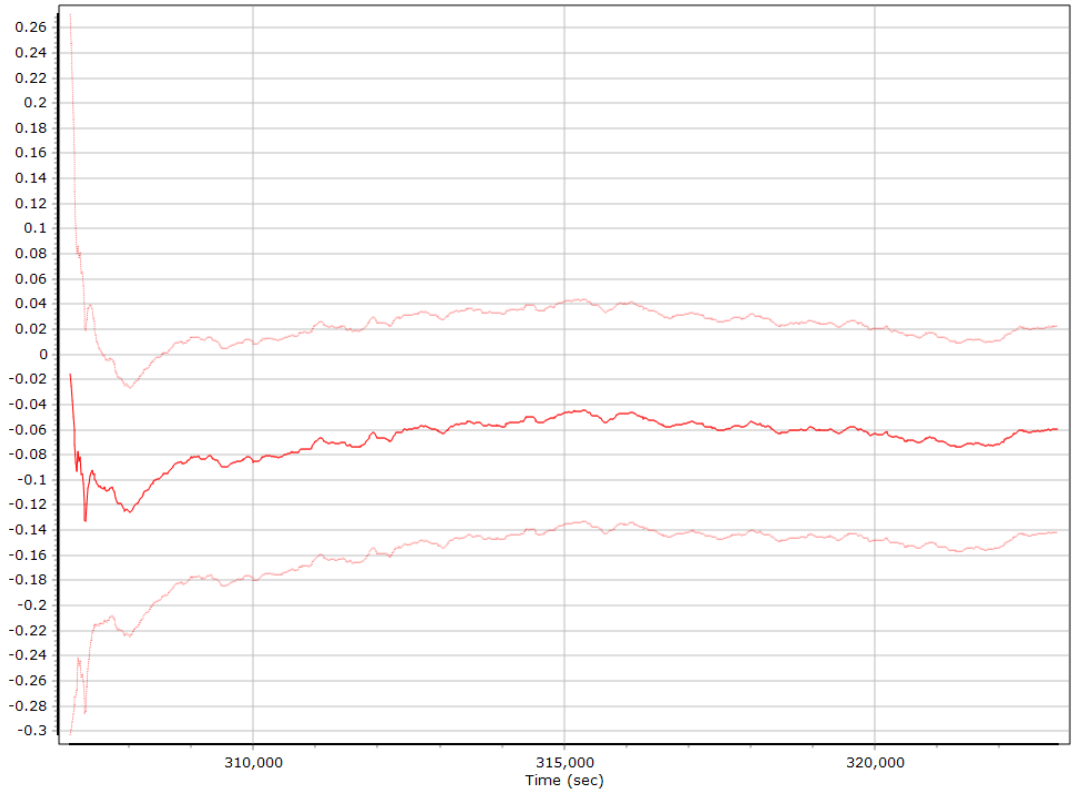

Z Gyro Bias (deg/h)

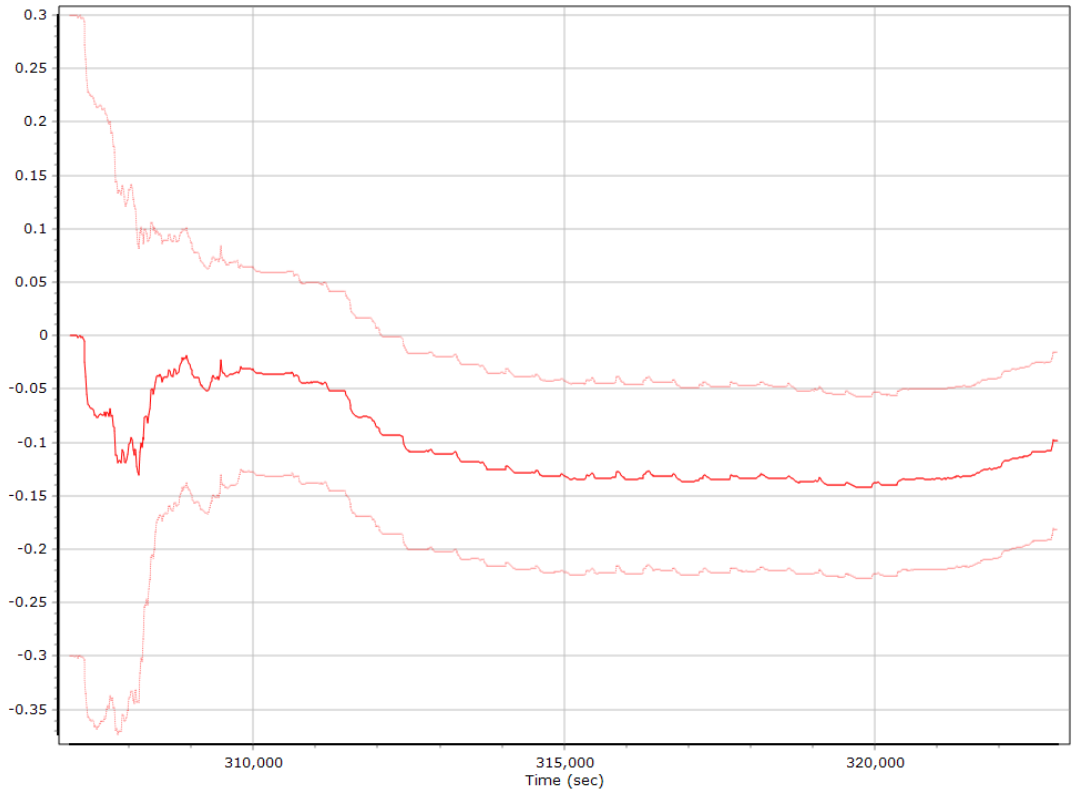

Smoothed Performance Metrics

Position Error RMS (m)

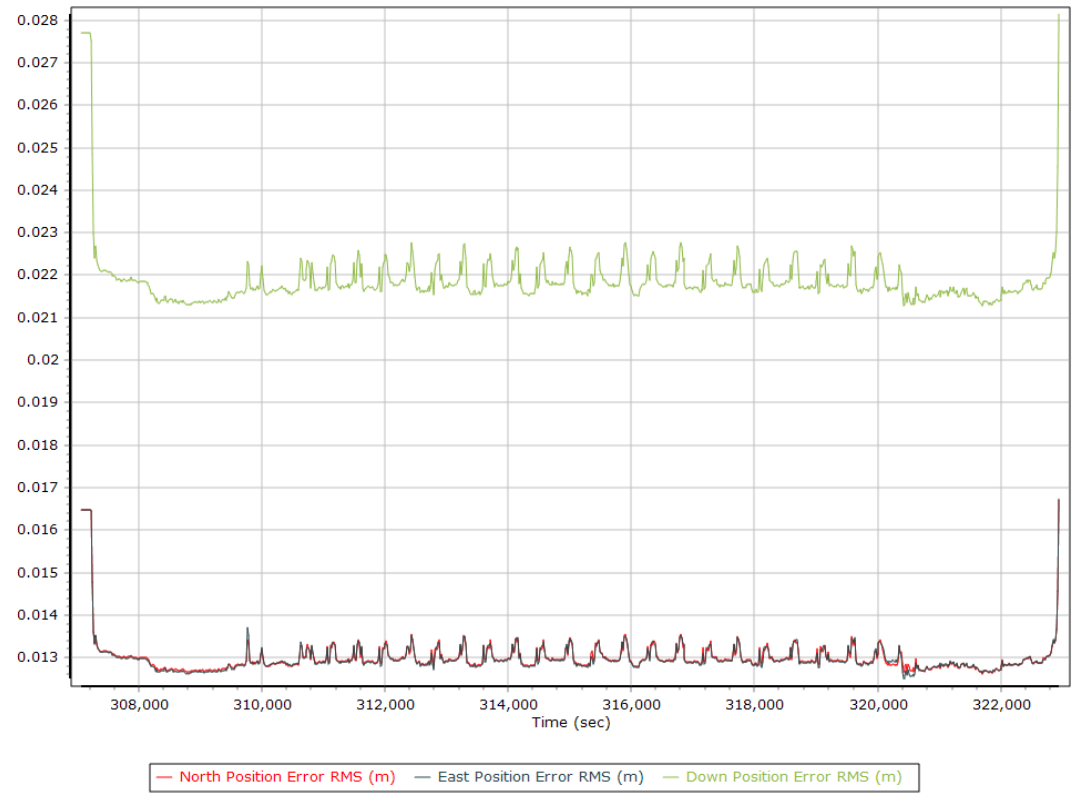

Velocity Error RMS (m/s)

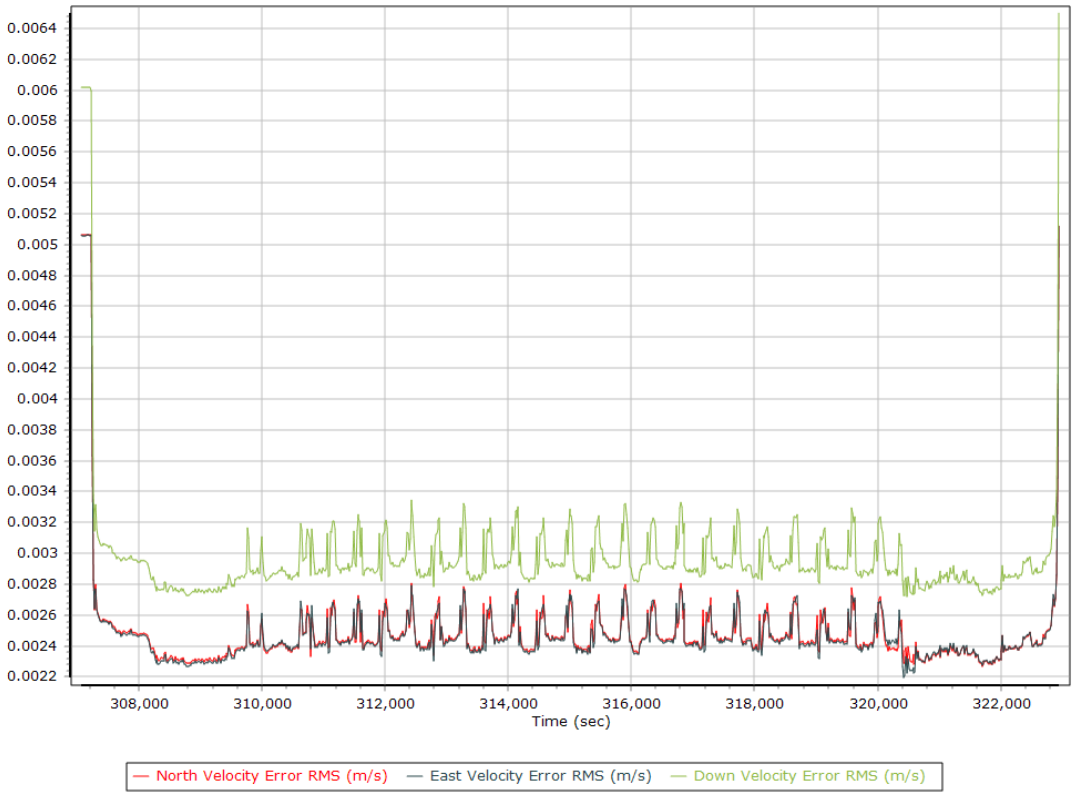

Roll/Pitch Error RMS (arc-min)

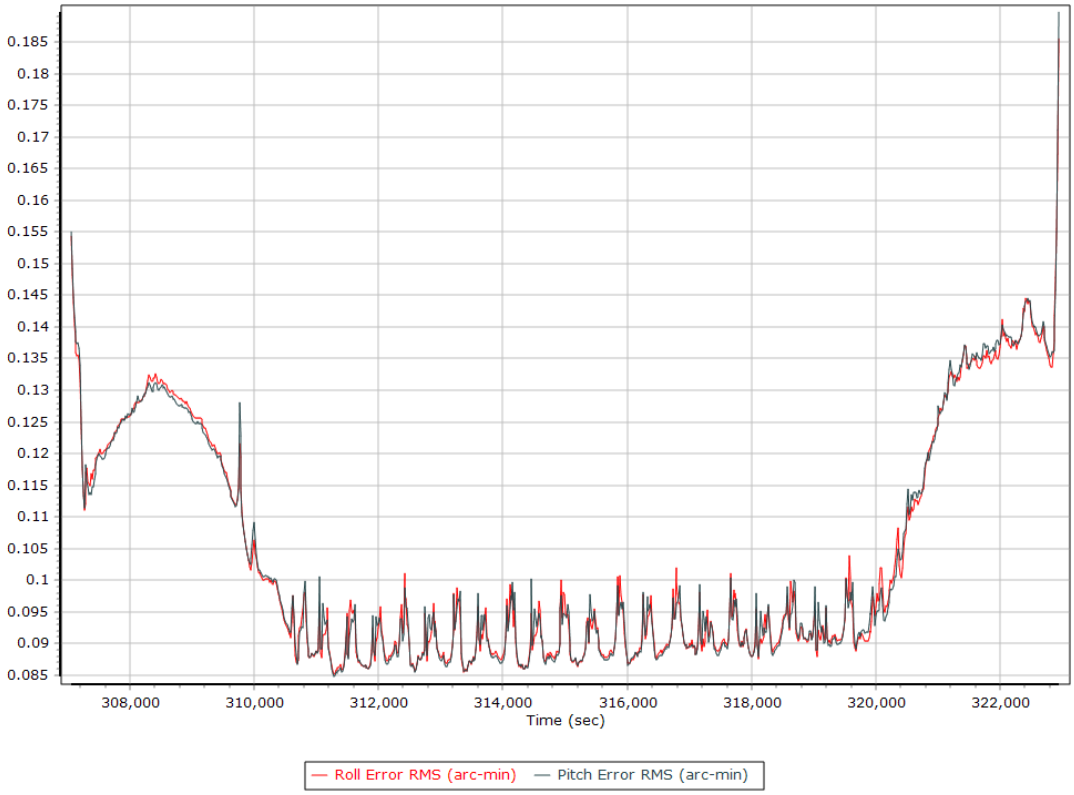

Heading Error RMS (arc-min)

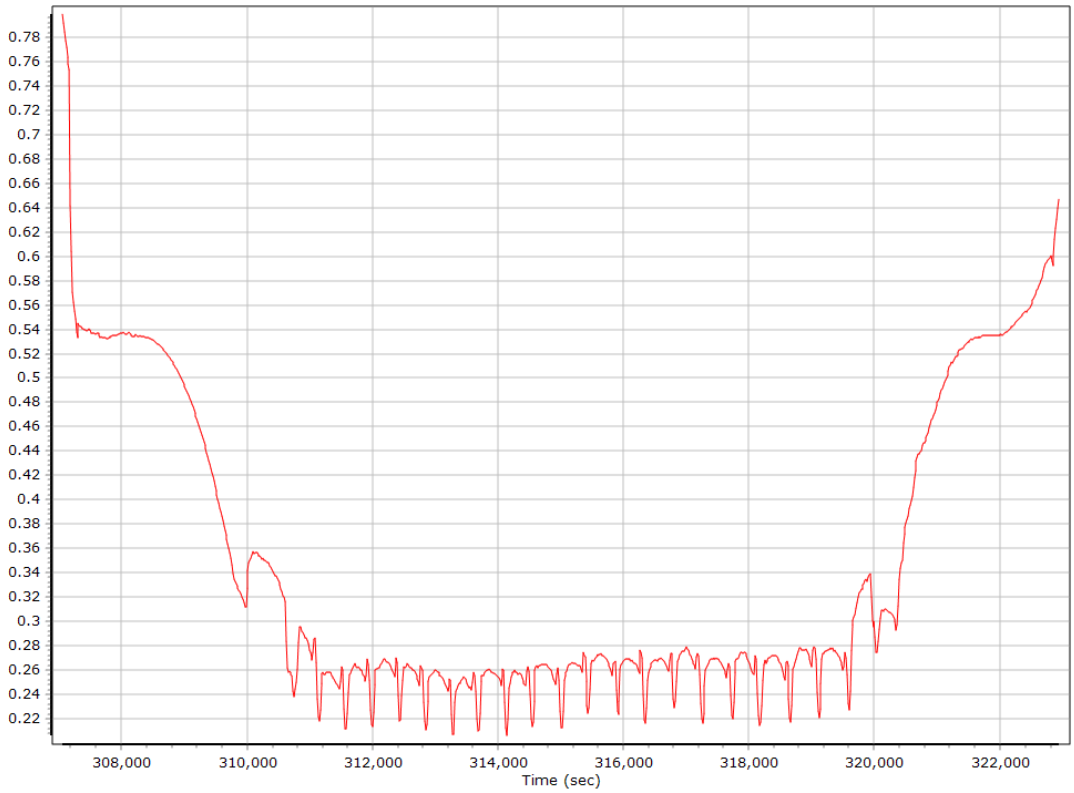

Forward Processed Performance Metrics

Position Error RMS (m)

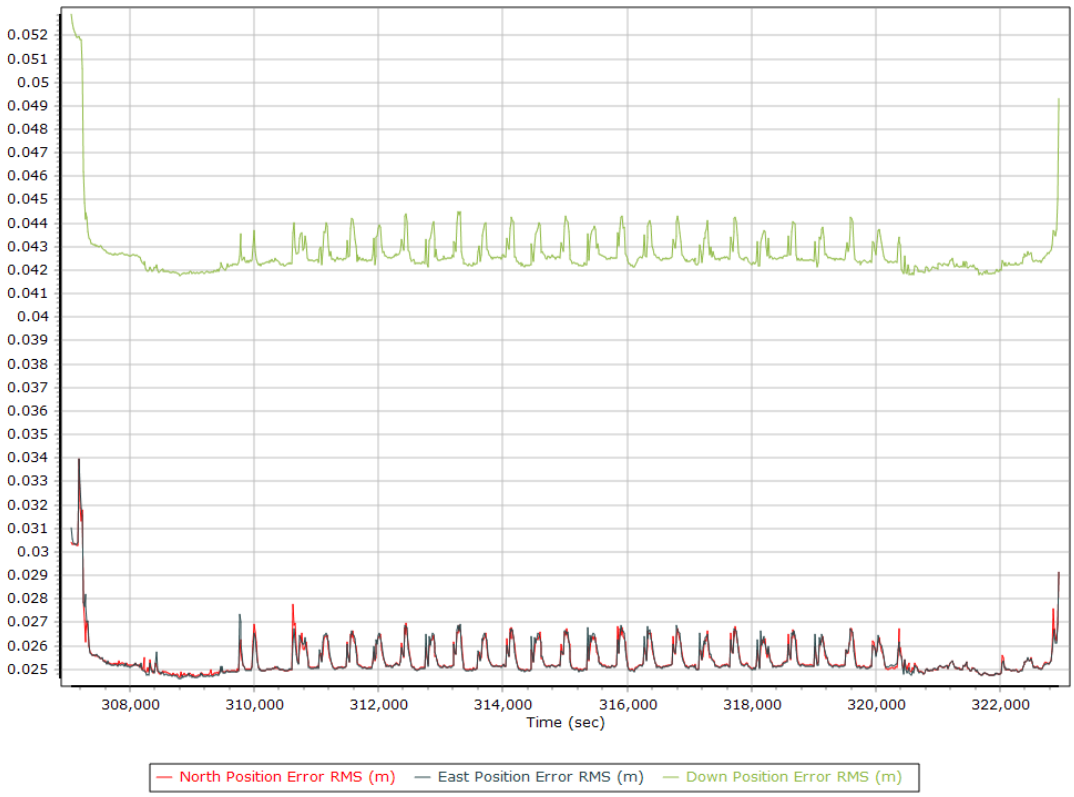

Velocity Error RMS (m/s)

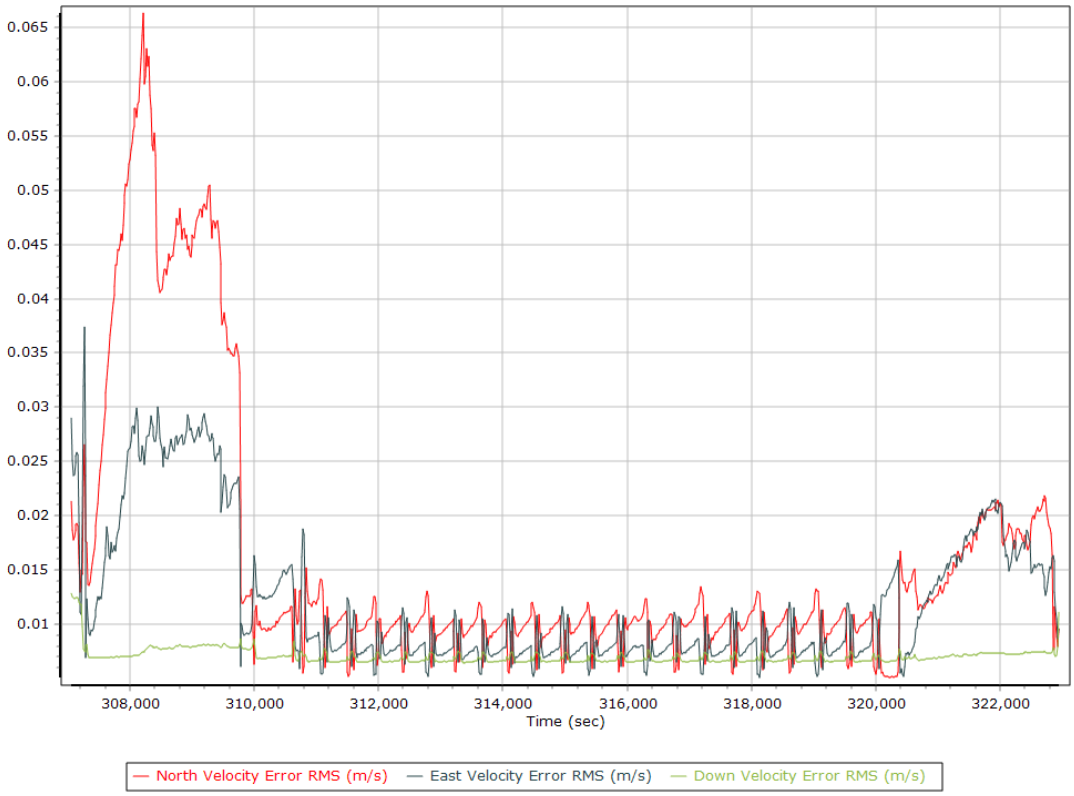

Roll/Pitch Error RMS (arc-min)

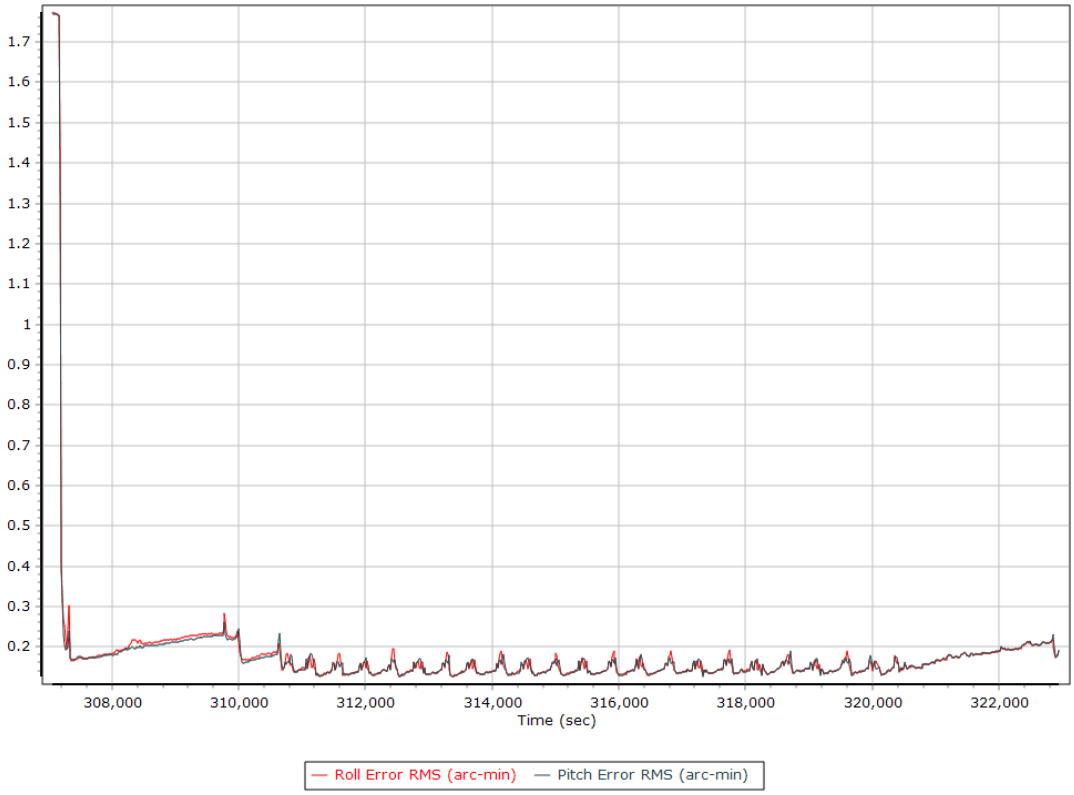

Heading Error RMS (arc-min)

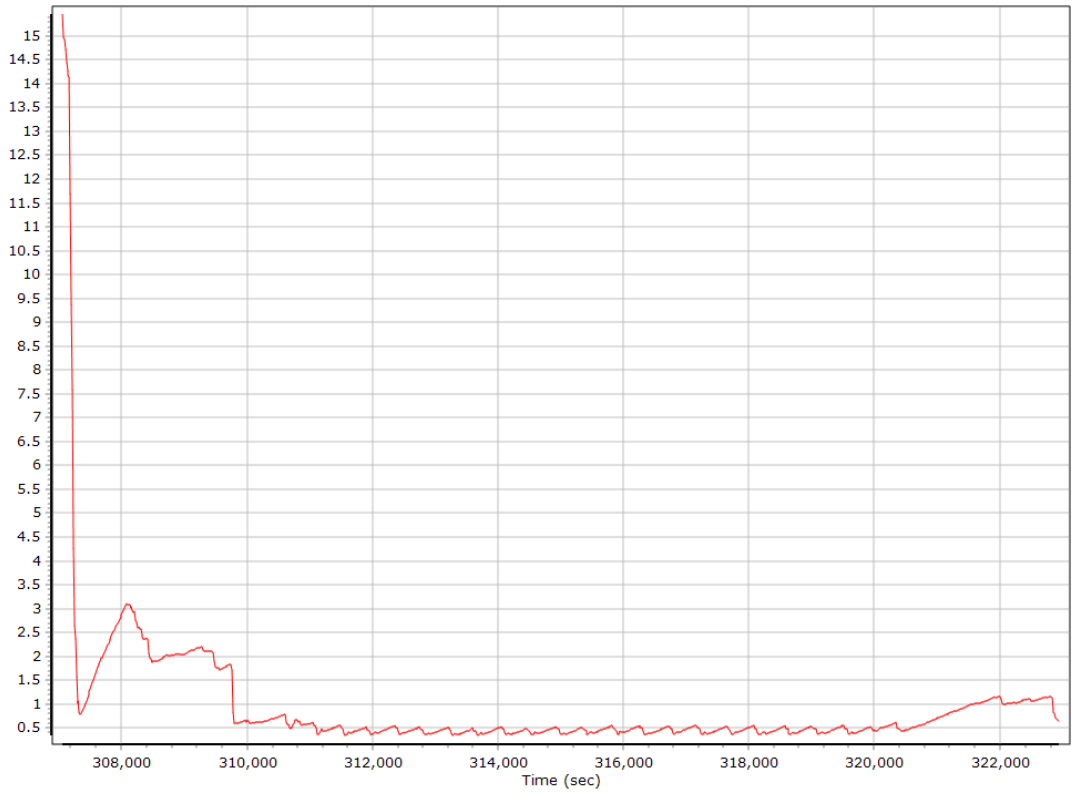

Forward Processed Solution Status

Processing Mode

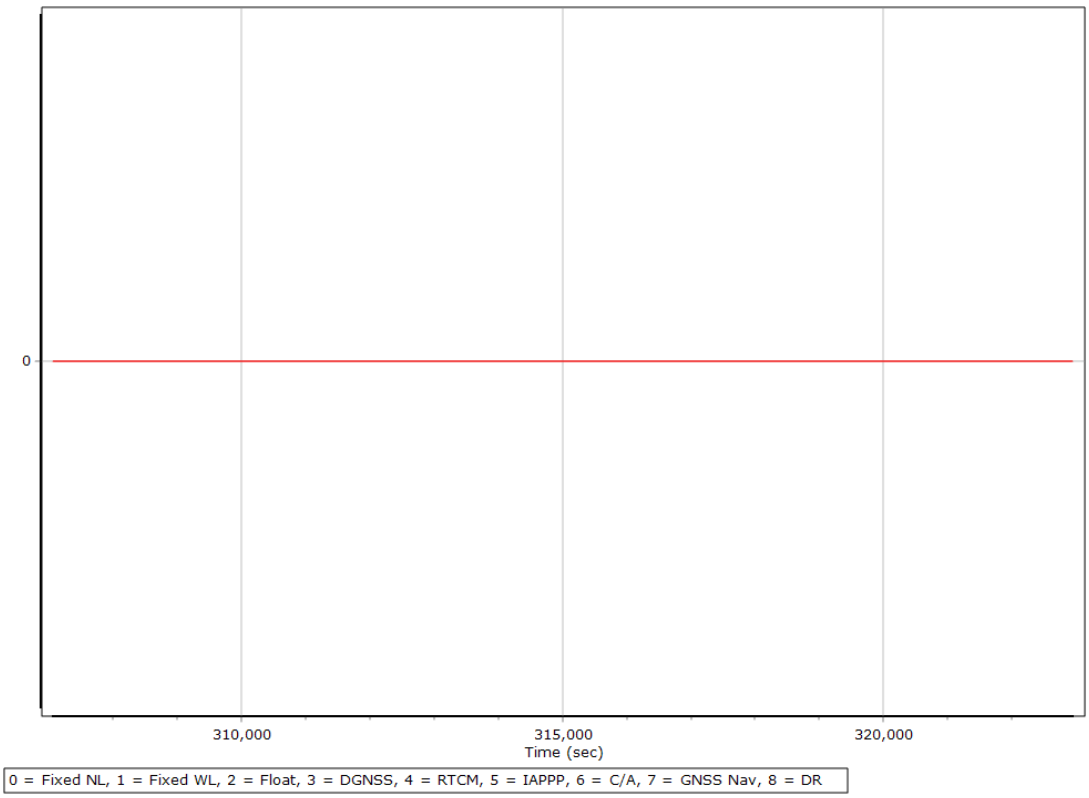

Number of Satellites

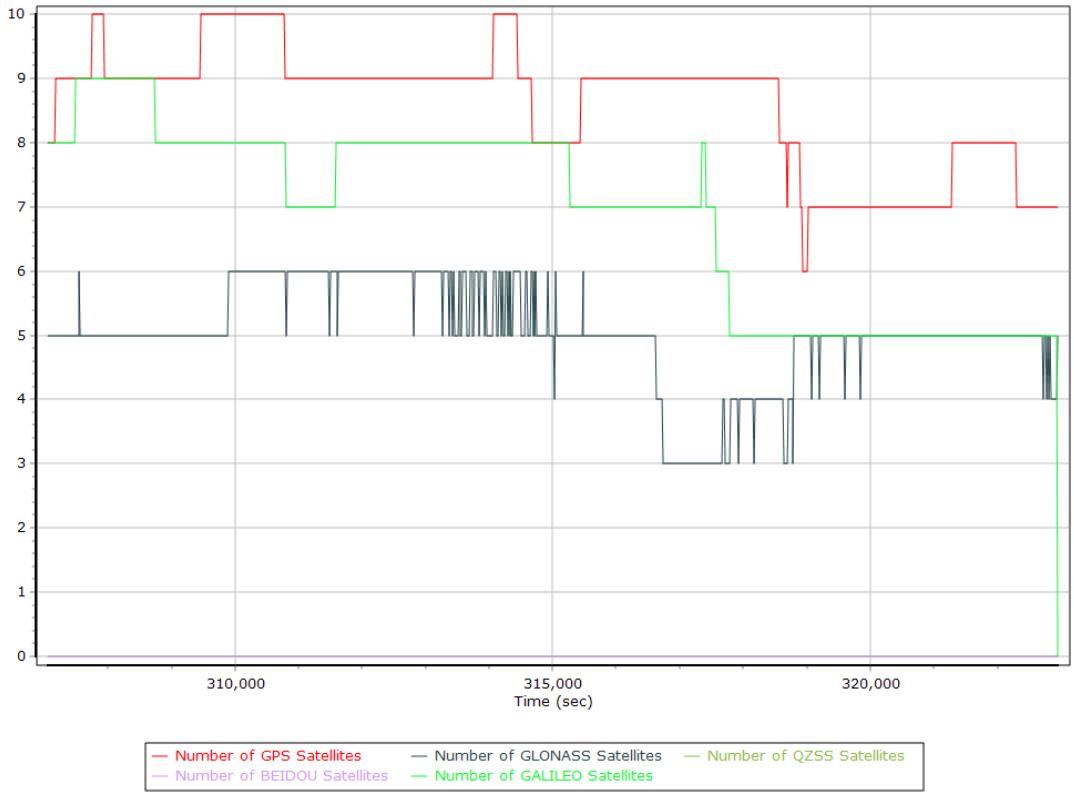
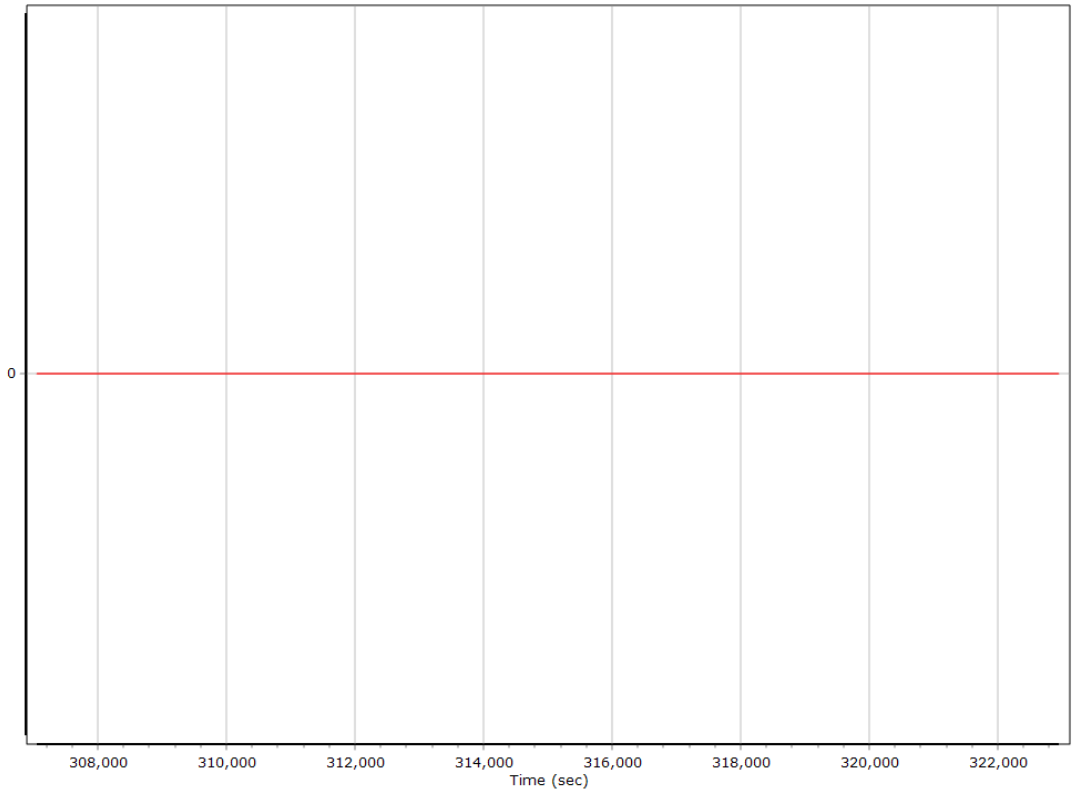
Baseline Length