General Information

Mission Information

Project name	200814_A_5060380_nad2011_FINAL
Processing date	2020-08-17 15:09:47
Mission date	2020-08-14 12:55:29
Mission duration	05:24:25.000
Processing mode	IN-Fusion PP-RTX

Rover Hardware Information

Product	POS AV 610 VER6 HW2.5-12
Serial number	S/N7769
IMU type	57
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
200814_A.144	POS Data
200814_A.145	POS Data
200814_A.146	POS Data
200814_A.147	POS Data
200814_A.148	POS Data
200814_A.149	POS Data
200814_A.150	POS Data
200814_A.151	POS Data
200814_A.152	POS Data
200814_A.153	POS Data
200814_A.154	POS Data
200814_A.155	POS Data
200814_A.156	POS Data
200814_A.157	POS Data
200814_A.158	POS Data
200814_A.159	POS Data
200814_A.160	POS Data
200814_A.161	POS Data
200814_A.162	POS Data
200814_A.163	POS Data
200814_A.164	POS Data
200814_A.165	POS Data
200814_A.166	POS Data
200814_A.167	POS Data
200814_A.168	POS Data
200814_A.169	POS Data
200814_A.170	POS Data
200814_A.171	POS Data
200814_A.172	POS Data
200814_A.173	POS Data

Input Files

File Name	File Type
Ephm2270.20g	GLONASS Broadcast Ephemeris
Ephm2270.20n	GPS Broadcast Ephemeris

Output Files

Filename	File type
sbet_200814_A_5060380_nad2011_FINAL.out	SBET Trajectory File
sbet_200814_A_5060380_nad2011_FINAL.shp	Shapefile Export Output

Rover Data Summary

First raw data file	200814_A.144		
Last raw data file	200814_A.173		
Start GPS week	2118		
Start time	478528.767 (08/14/2020 12:55:28)		
End time	497992.453 (08/14/2020 18:19:52)		
Start of fine alignment	479437.341 (08/14/2020 13:10:37)		
Available subsystems	Primary GNSS, IMU		
POS Event Input	Event 1 Input		
Correction data	None		
IMU Installation Lever Arms & Mounting Angles			
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	180.000
Reference to Primary GNSS lever arm (m)	0.548	-0.432	-0.960
Reference to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Rover Data QC

Raw IMU Import QC Summary

IMU data input file	imu_200814_A_5060380_nad2011_FINAL.dat
IMU data check log file	imudt_200814_A_5060380_nad2011_FINAL.log
IMU Records Processed	3892634
Termination Status	Normal
IMU Anomalies	0

Primary Observables & Satellite Data

L1 Satellite Lock/Elevation

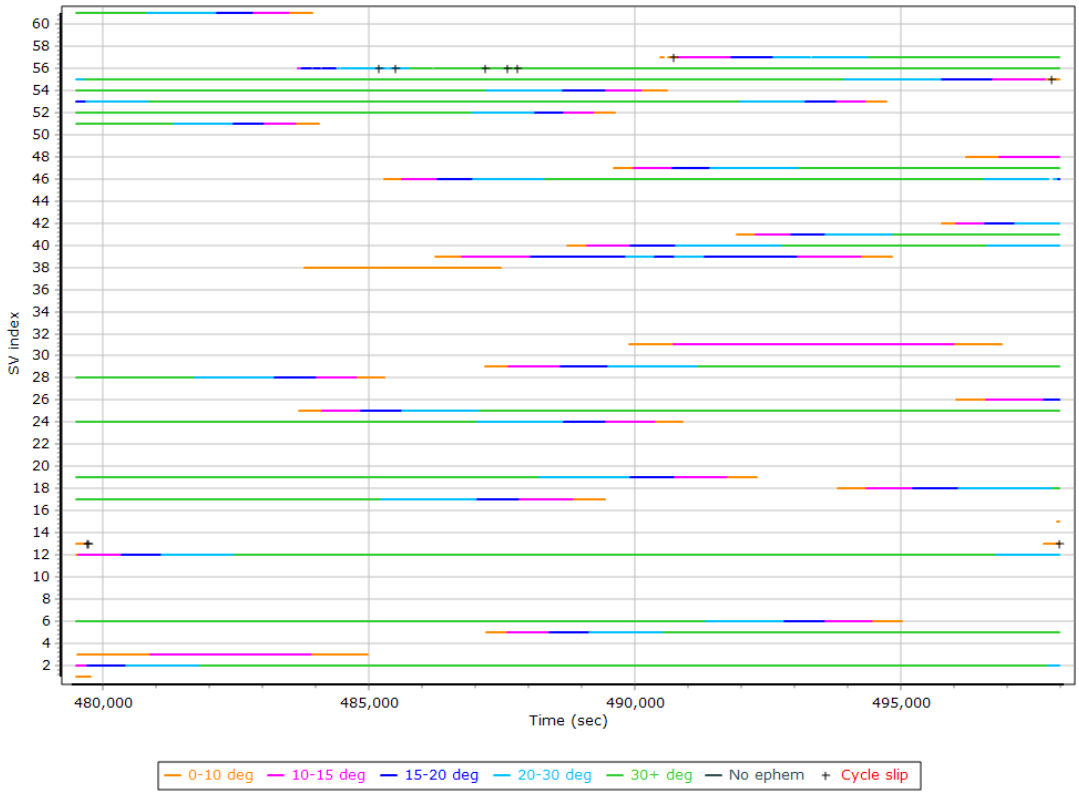

L2 Satellite Lock/Elevation

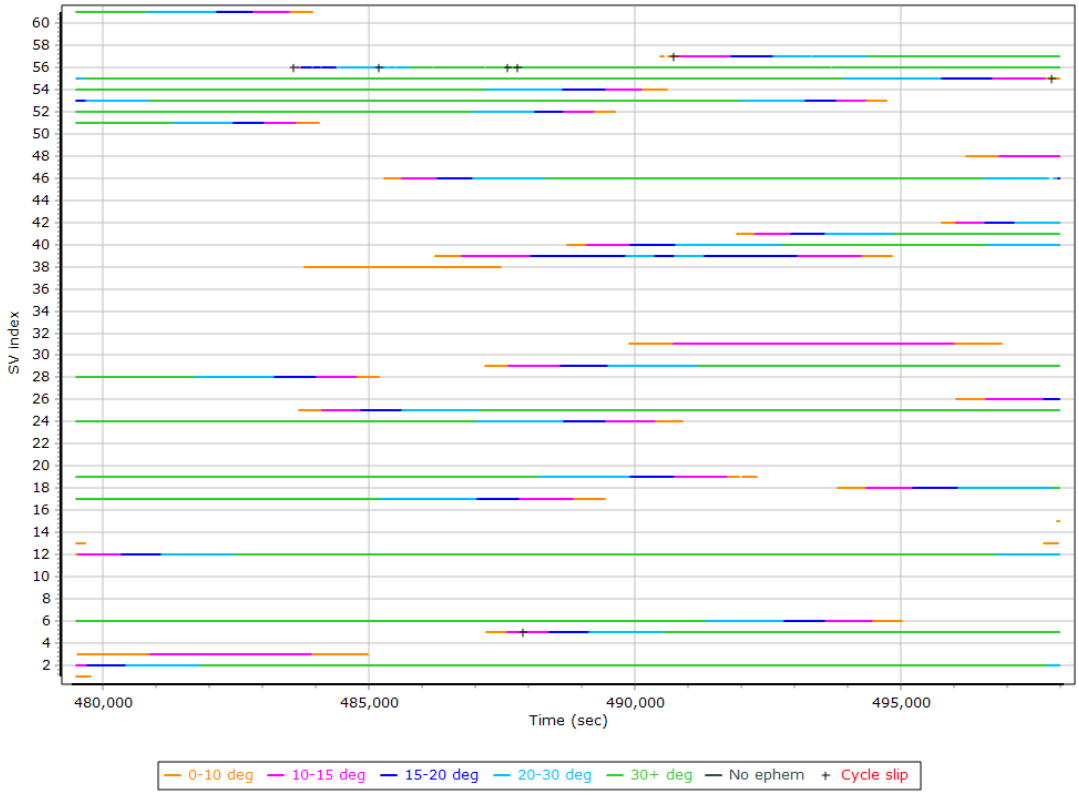

GPS L1 SNR

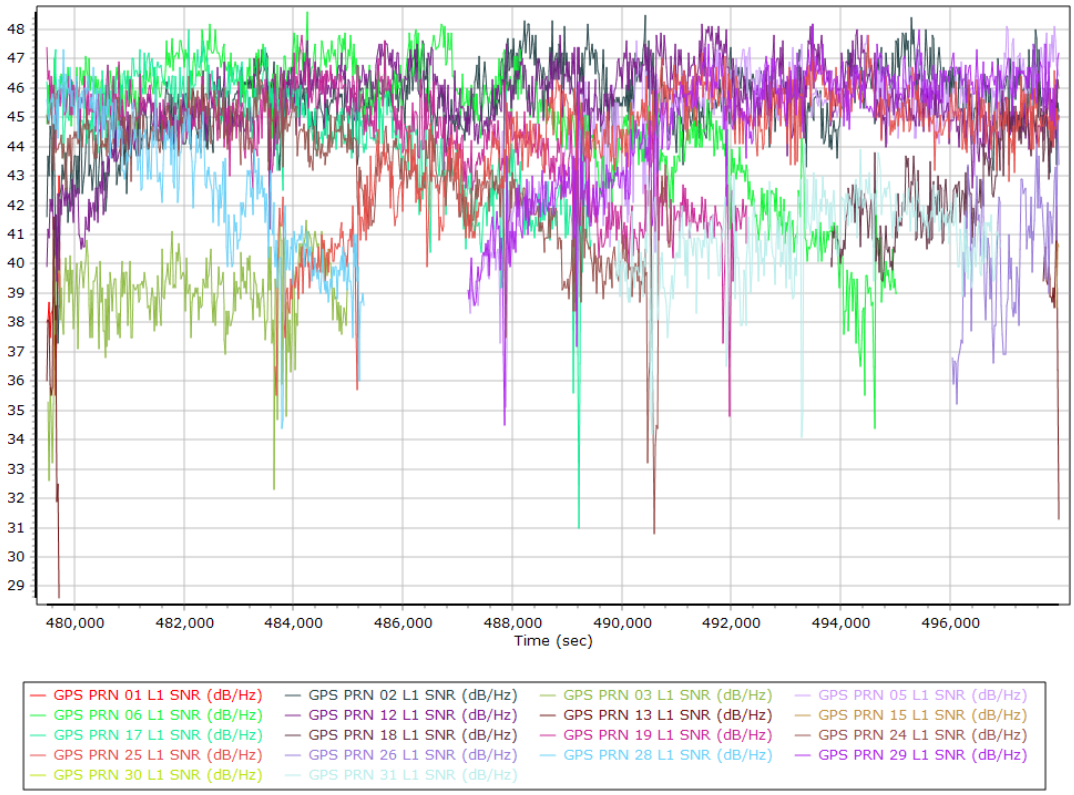

GPS L2 SNR

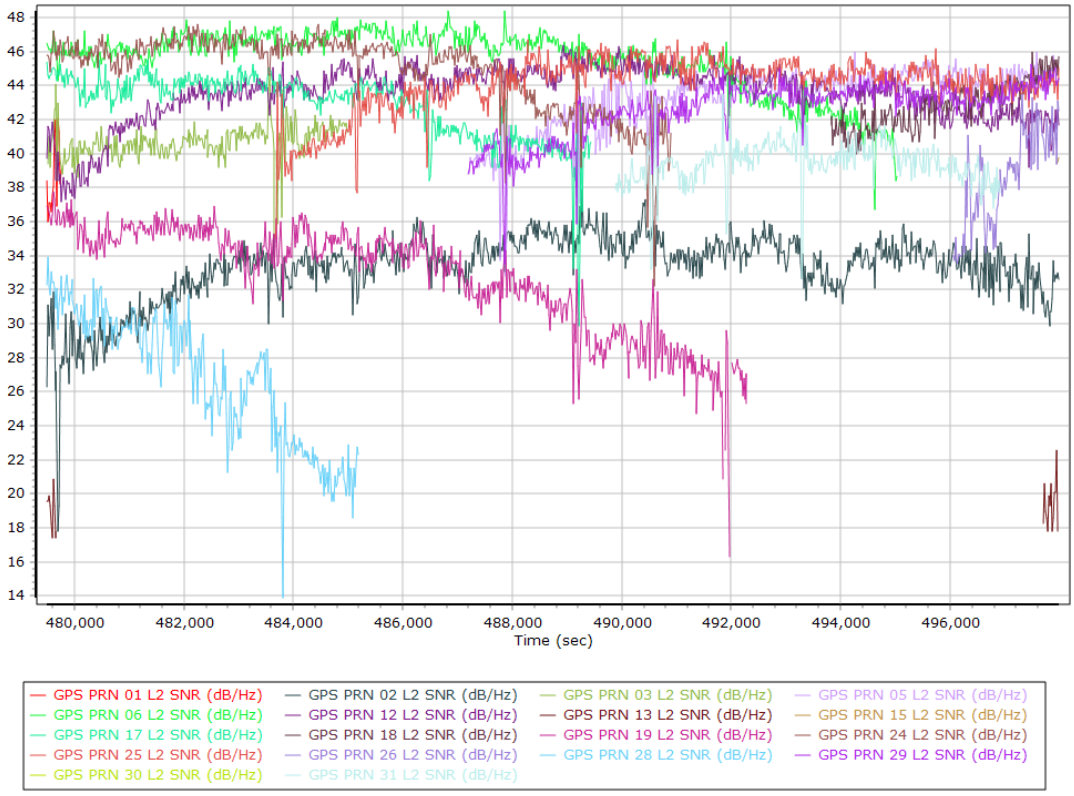

GLONASS L1 SNR

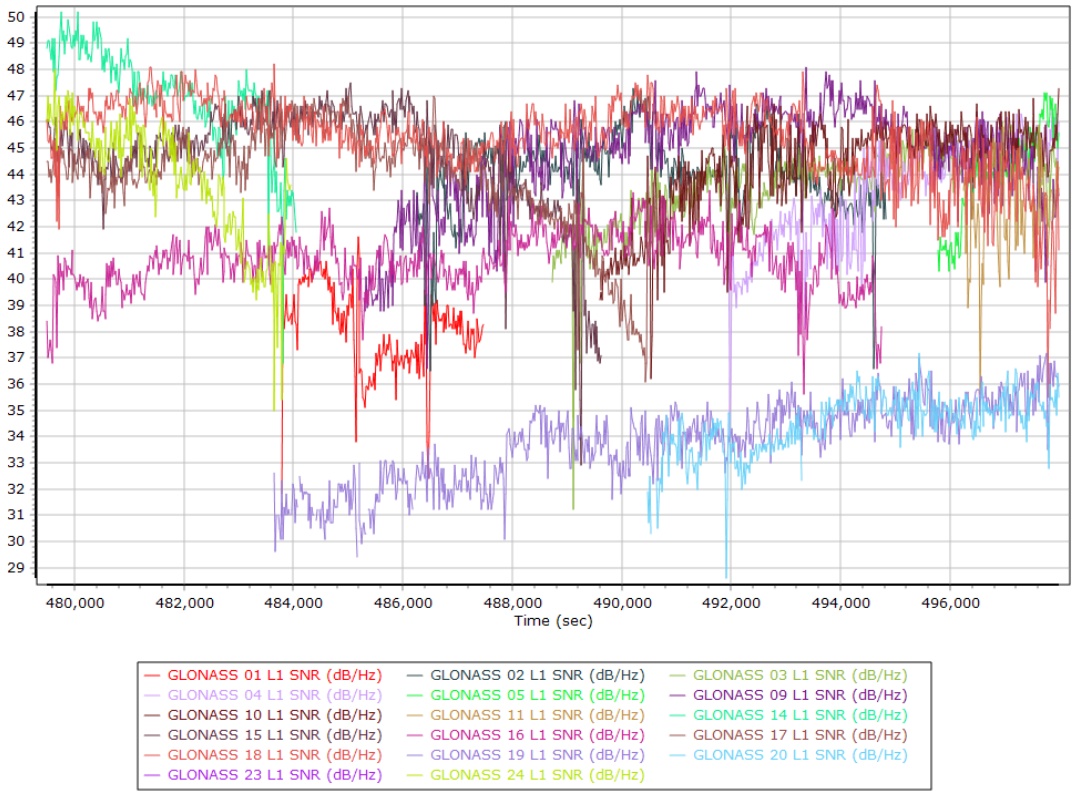

GLONASS L2 SNR

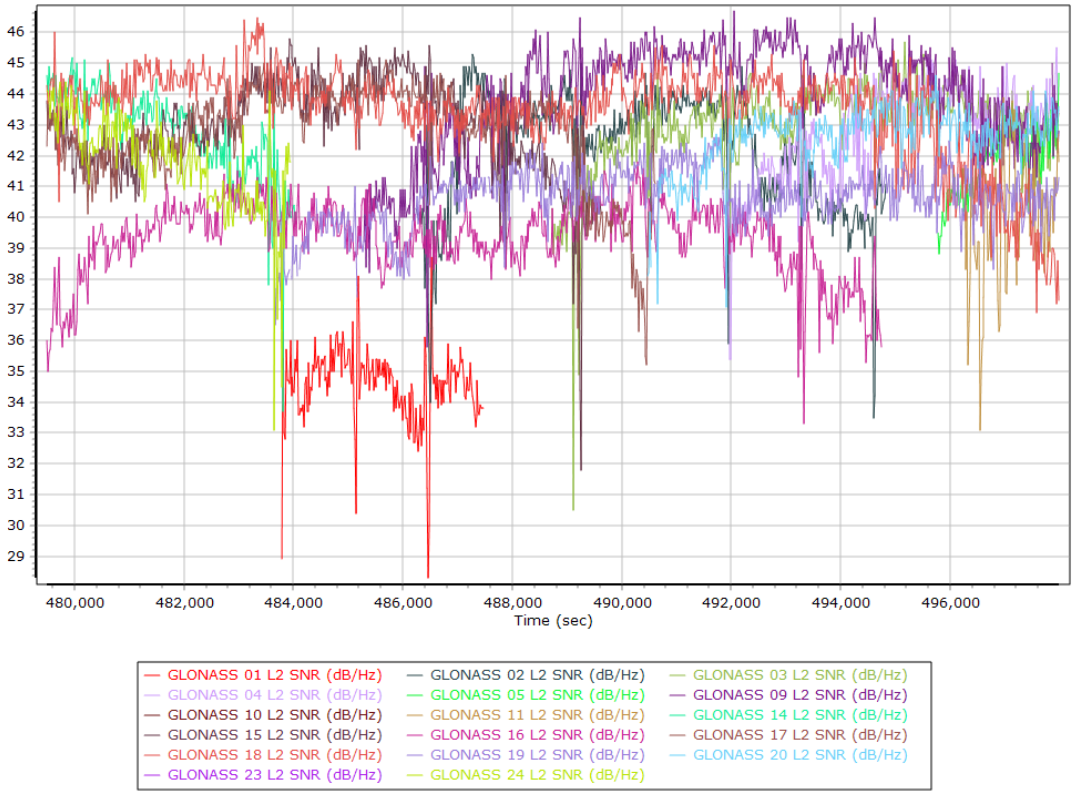

BEIDOU SNR

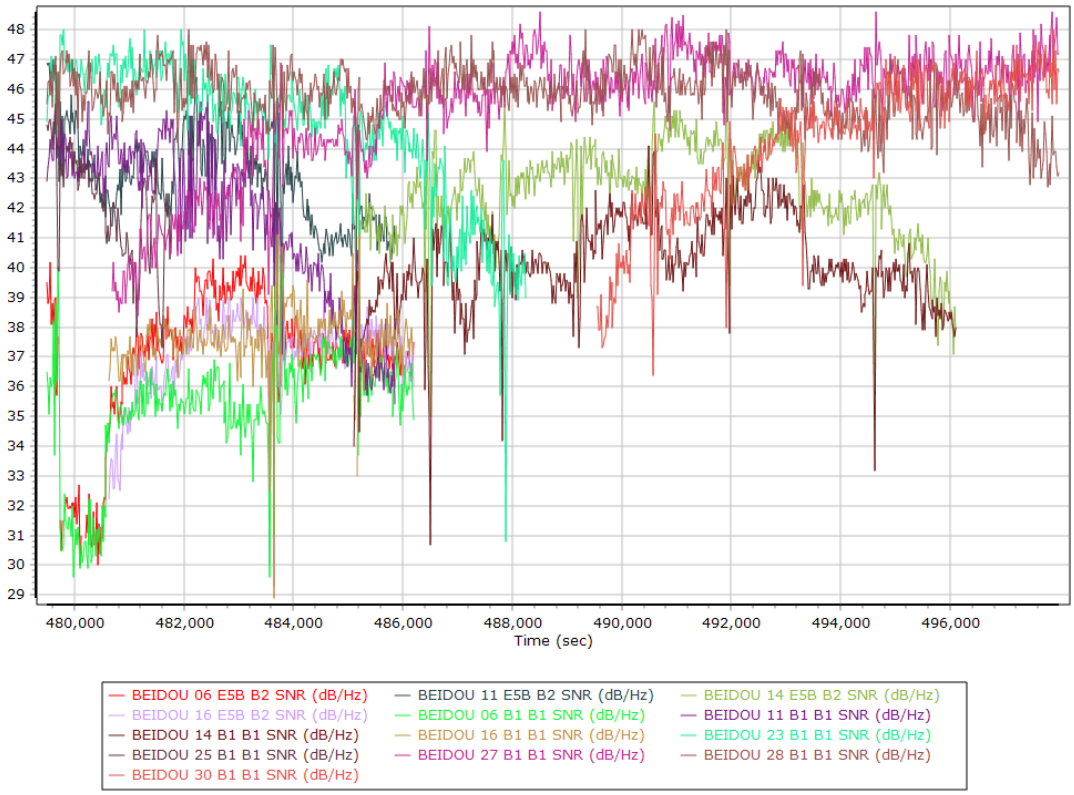

GALILEO SNR

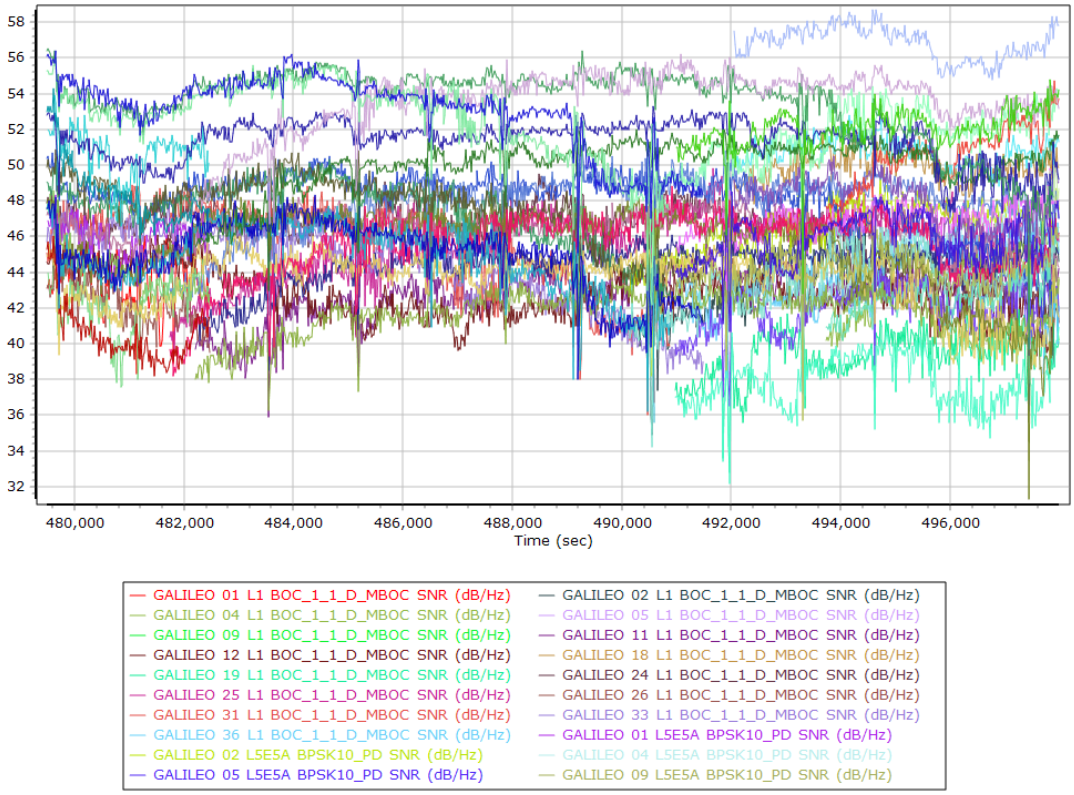
58
56
54
52
50
48
46
44
42
40
38
36
34
32
480,000
482,000
484,000
486,000
488,000
490,000
492,000
494,000
496,000
Time (sec)
GALILEO 01 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 02 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 04 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 05 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 09 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 11 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 12 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 18 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 19 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 24 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 25 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 26 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 31 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 33 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 36 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 01 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 02 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 04 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 05 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 09 L5E5A BPSK10_PD SNR (dB/Hz)

Smoothed Trajectory Information

Top View

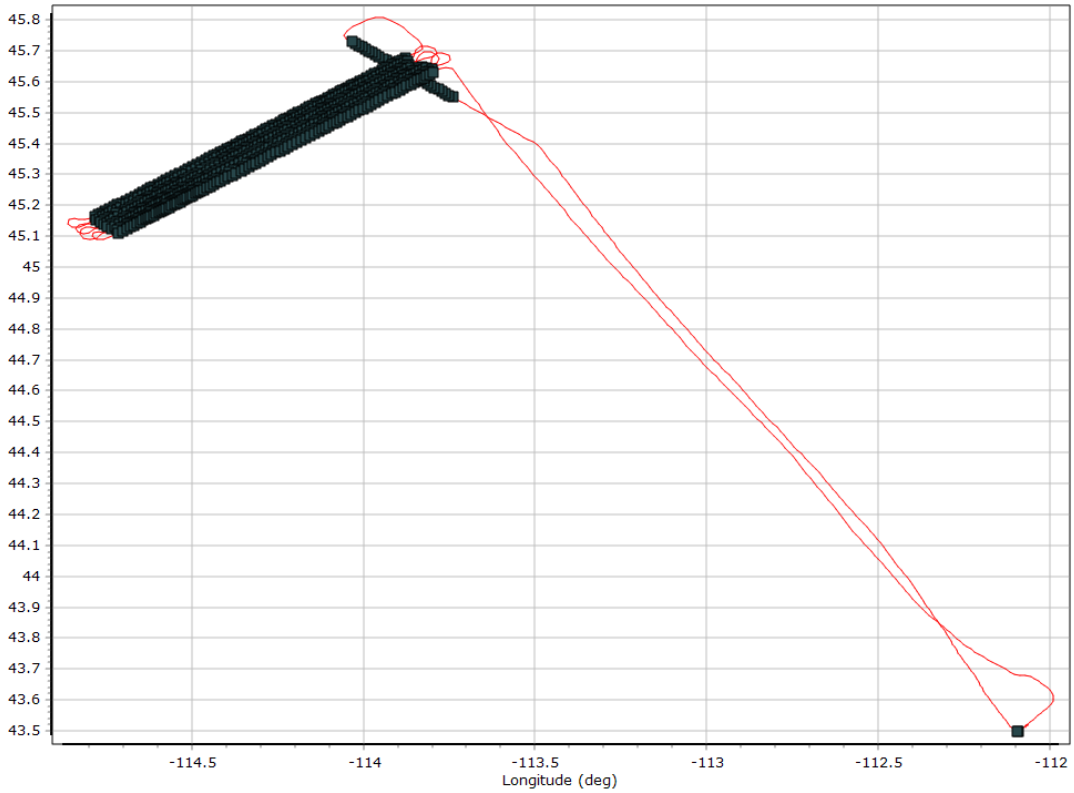

Altitude

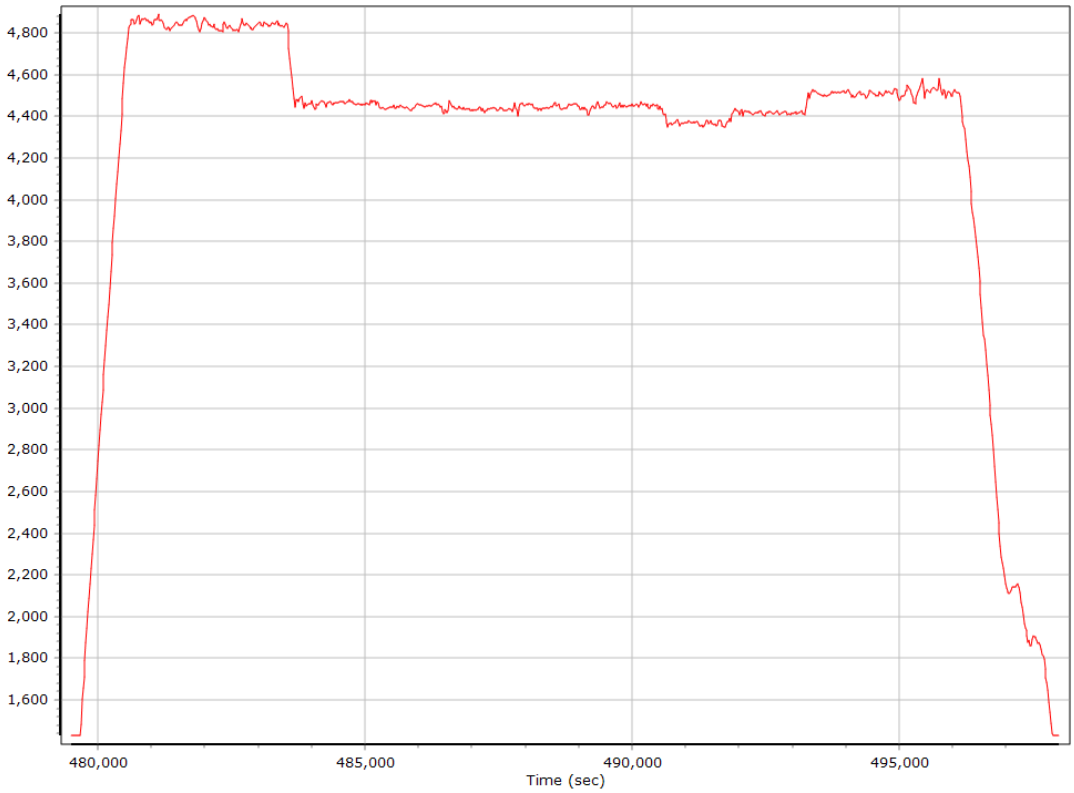

Roll/Pitch

Heading

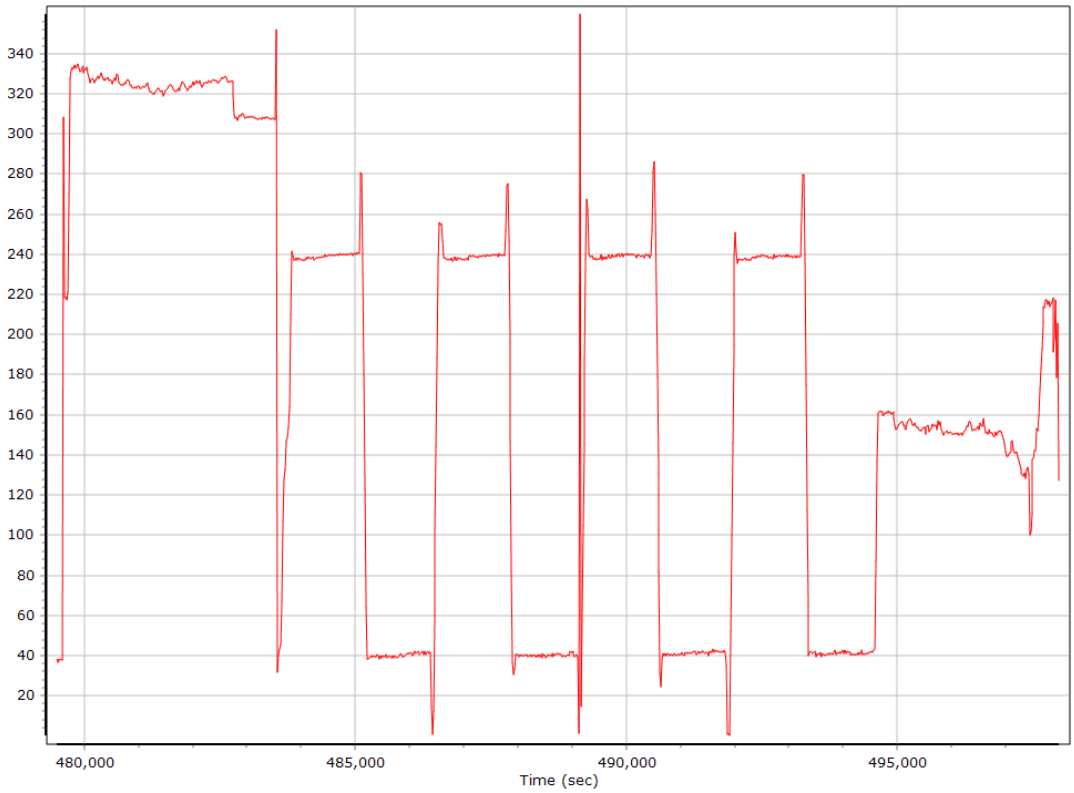

North/East Velocity

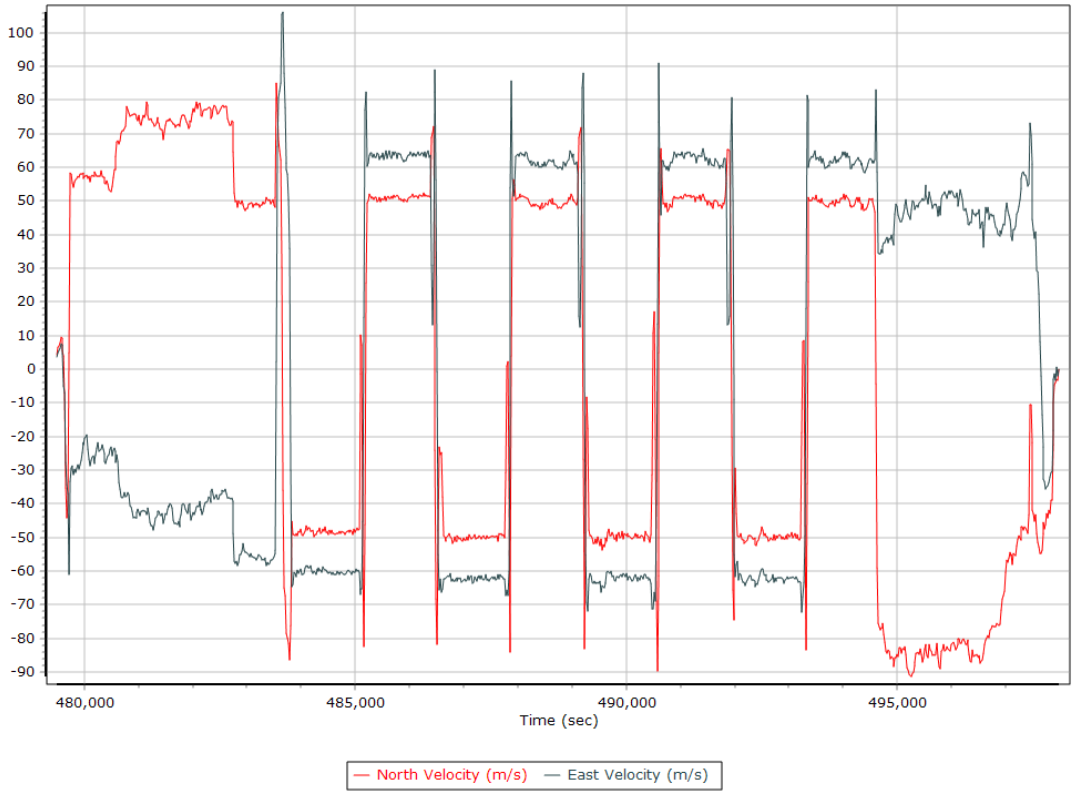

Down Velocity

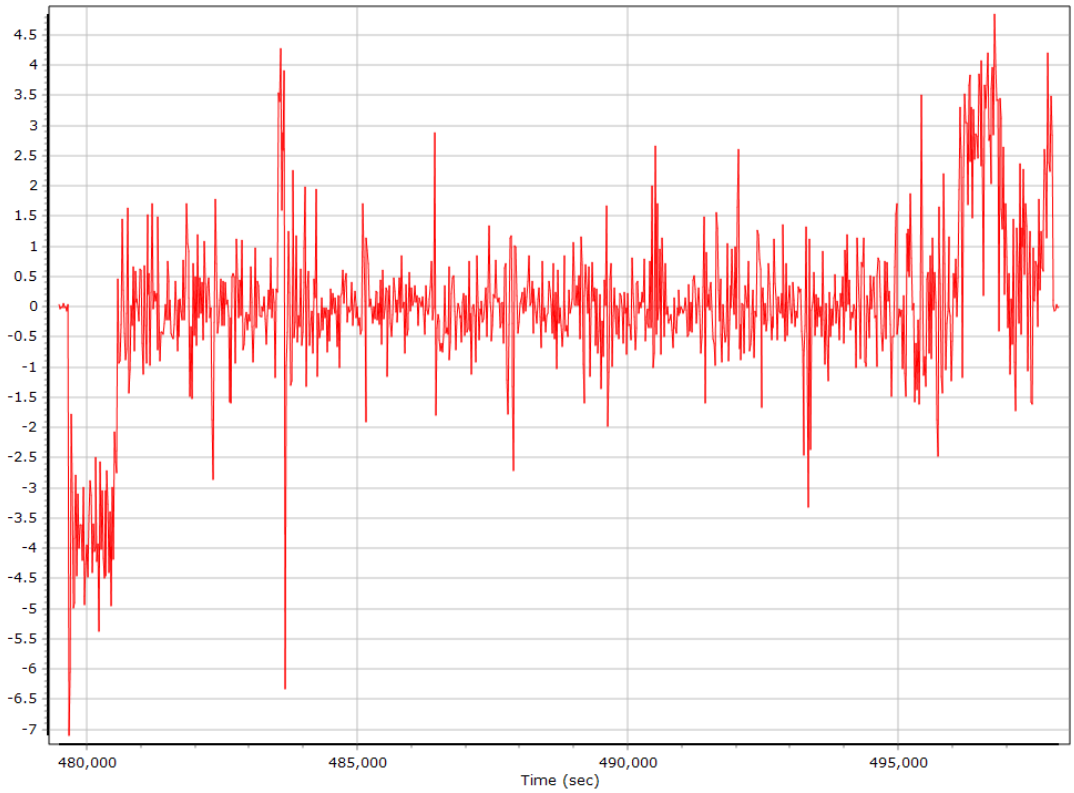

Total Speed

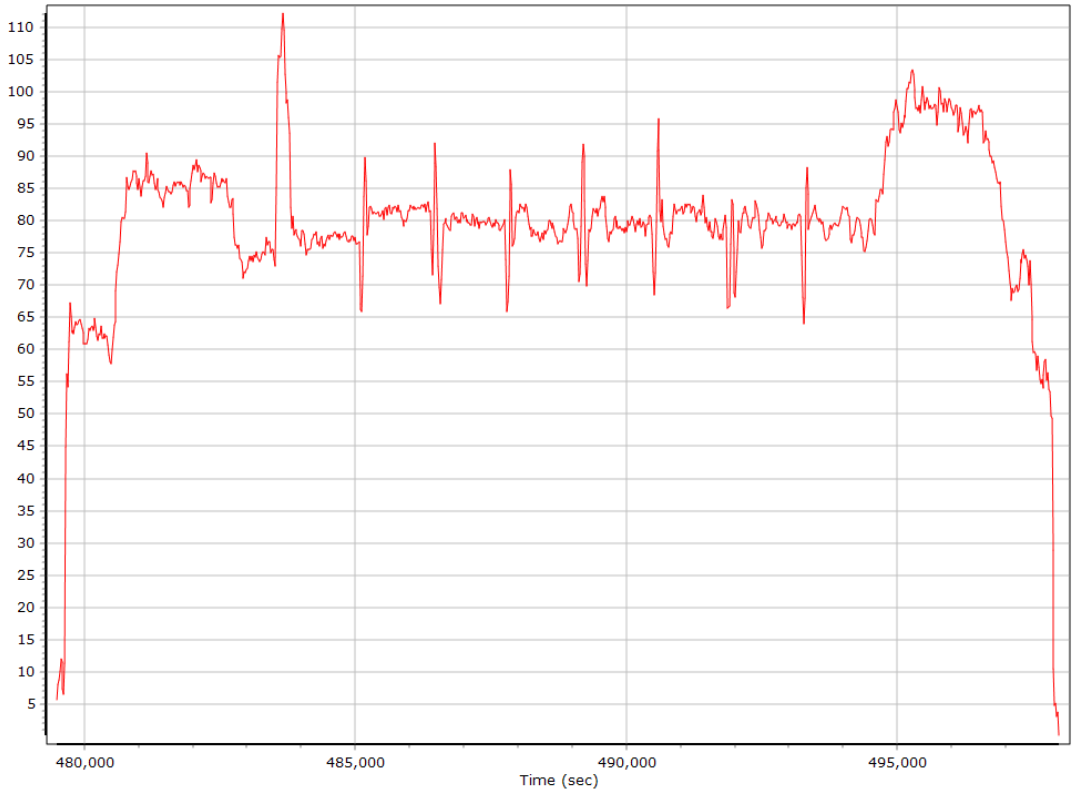

Ground Speed

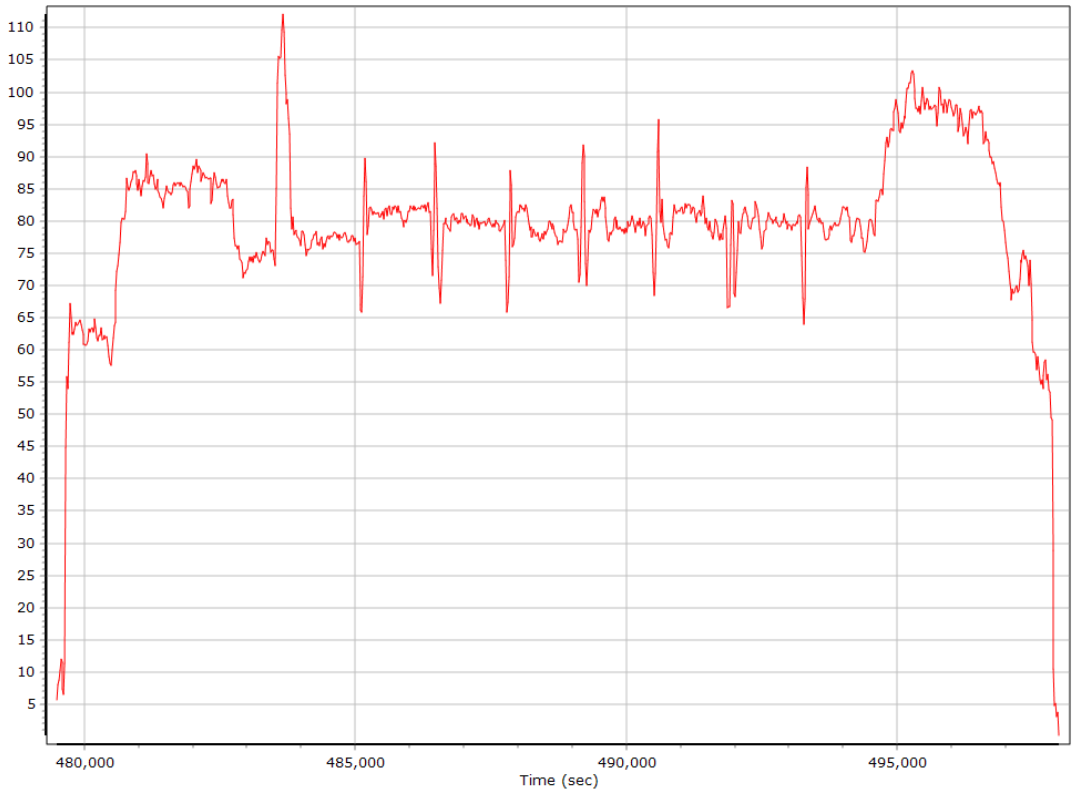

Body Acceleration

Total Body Acceleration

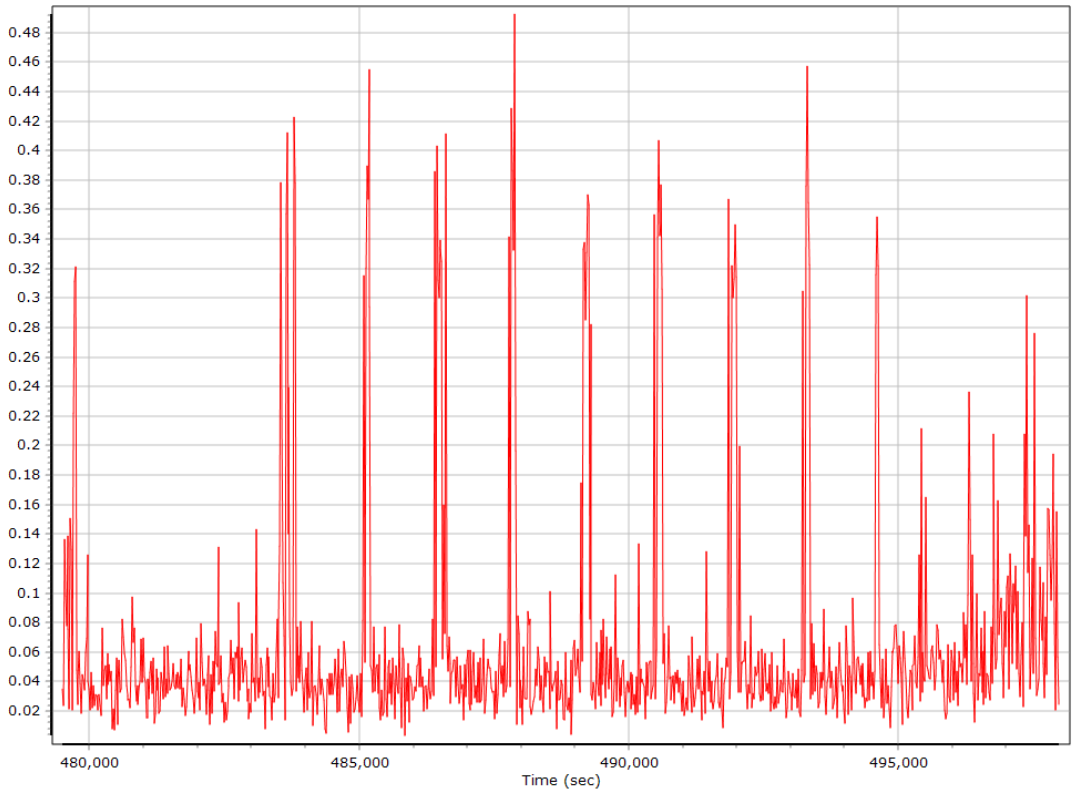

Body Angular Rate

Forward Processed Trajectory Information

Top View

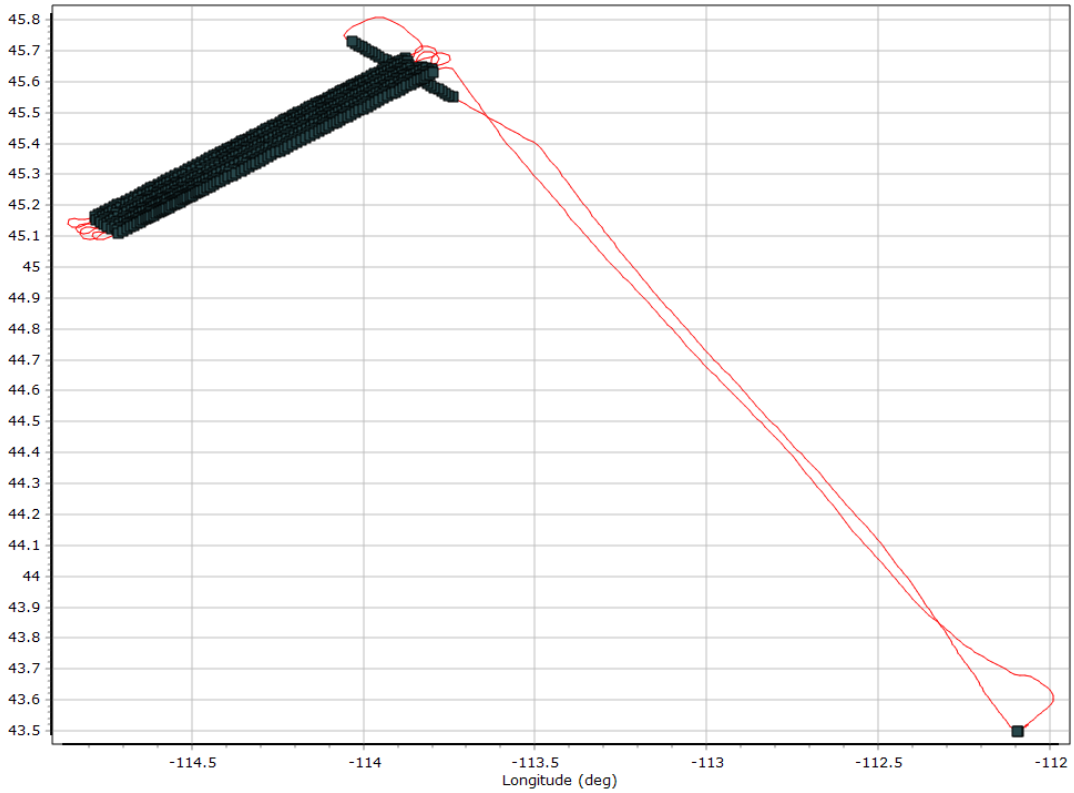

Altitude

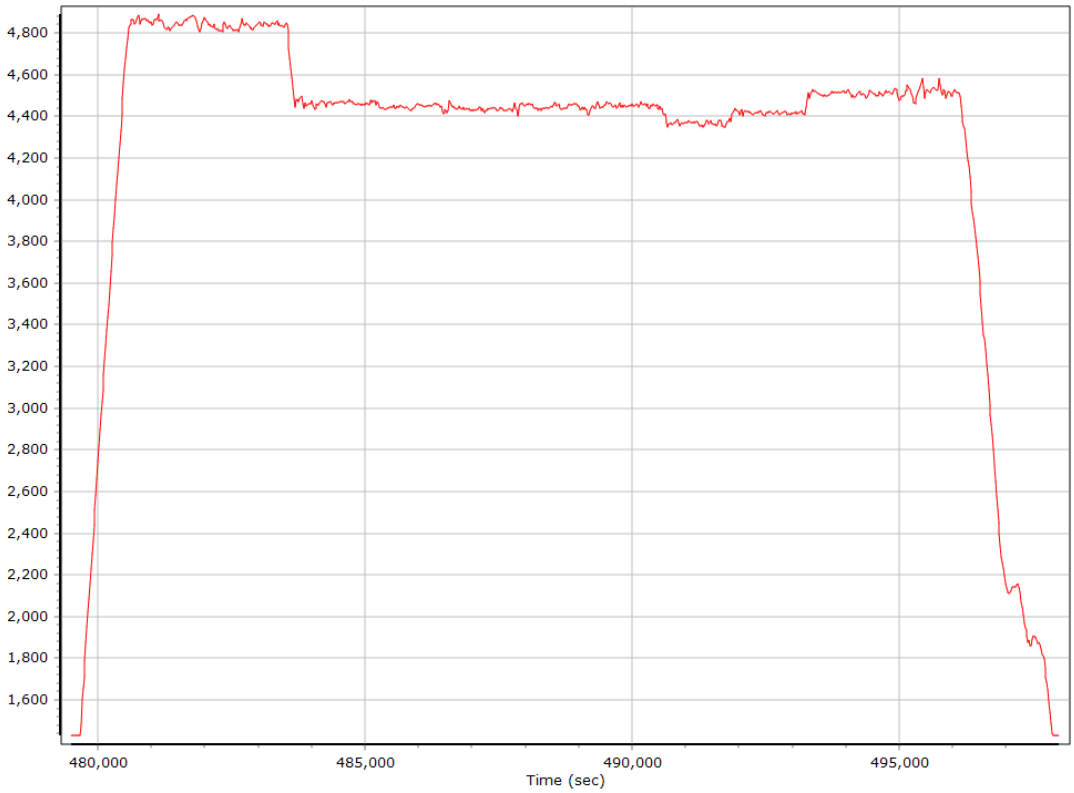

Roll/Pitch

Heading

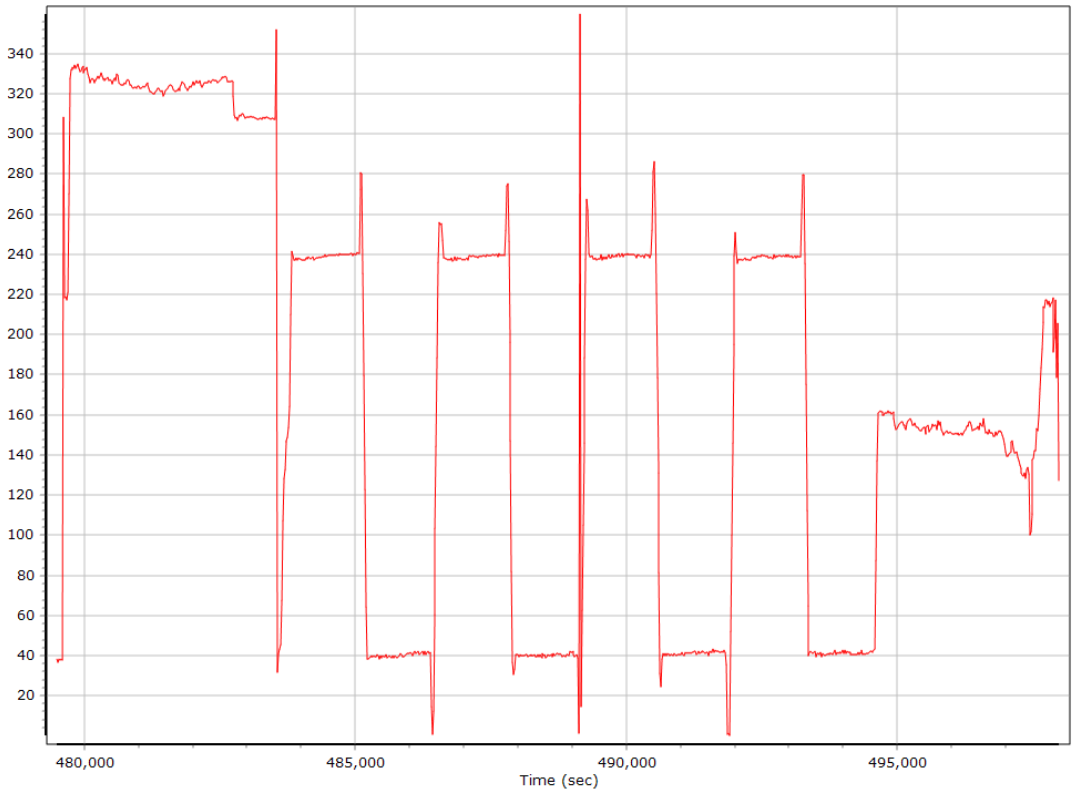

North/East Velocity

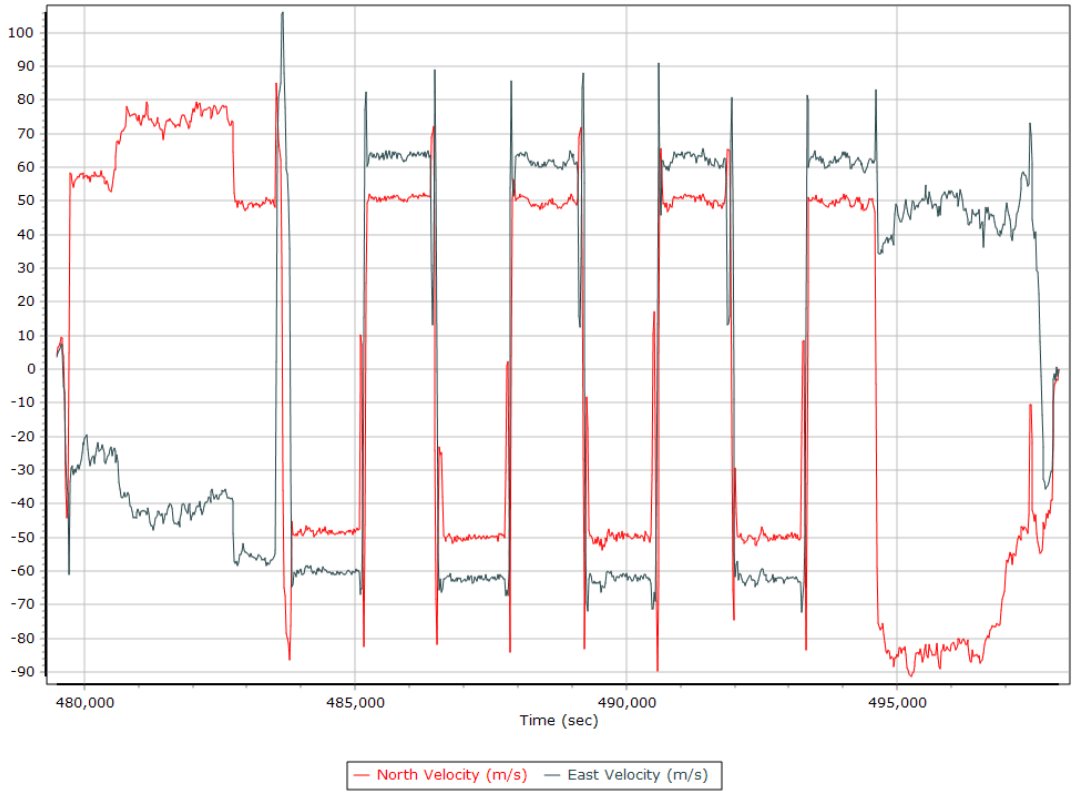

Down Velocity

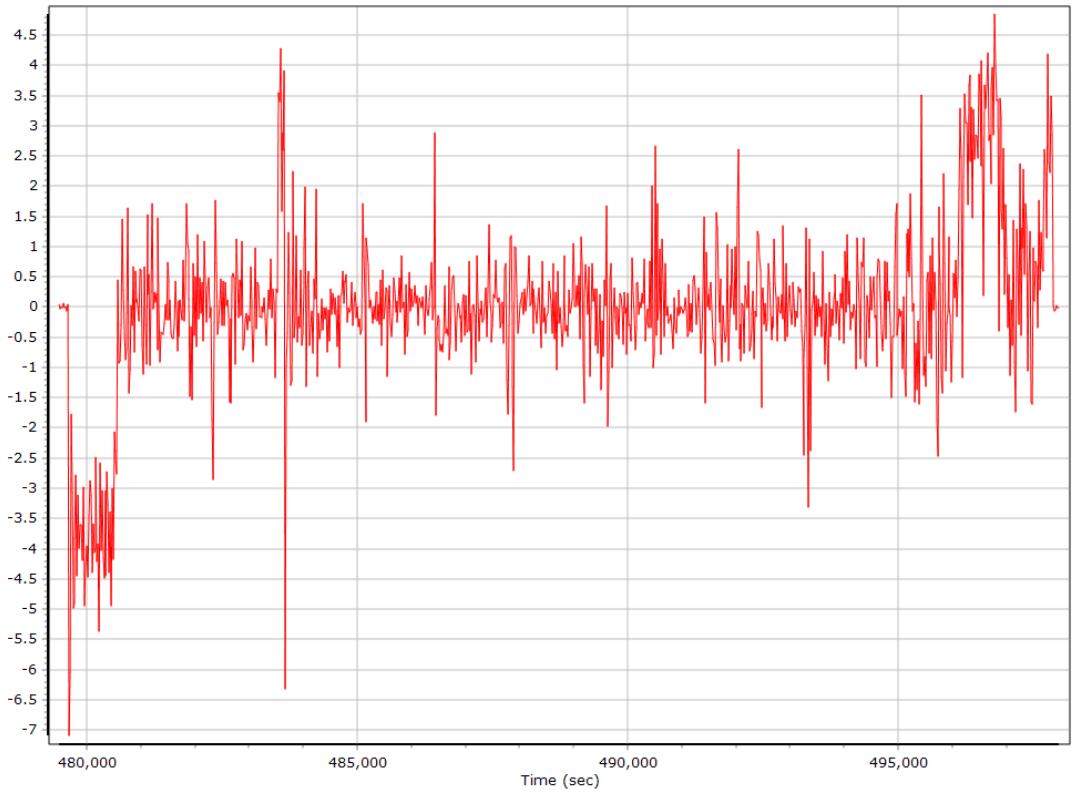

Total Speed

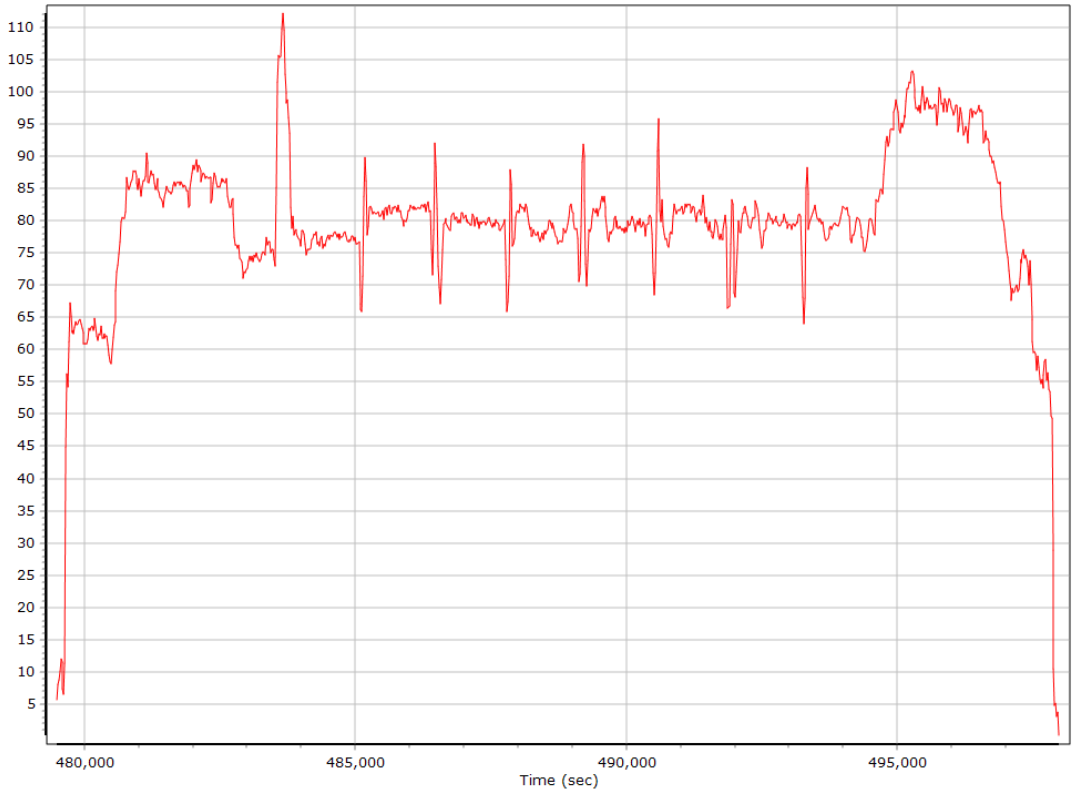

Ground Speed

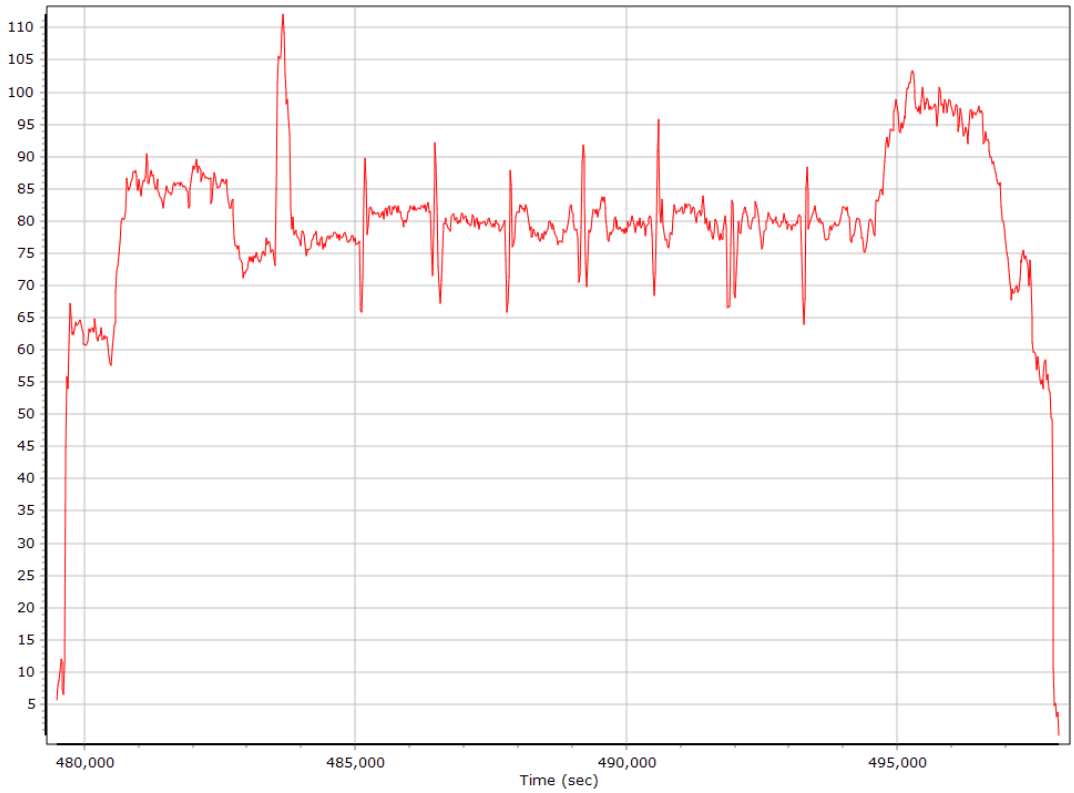

Body Acceleration

Total Body Acceleration

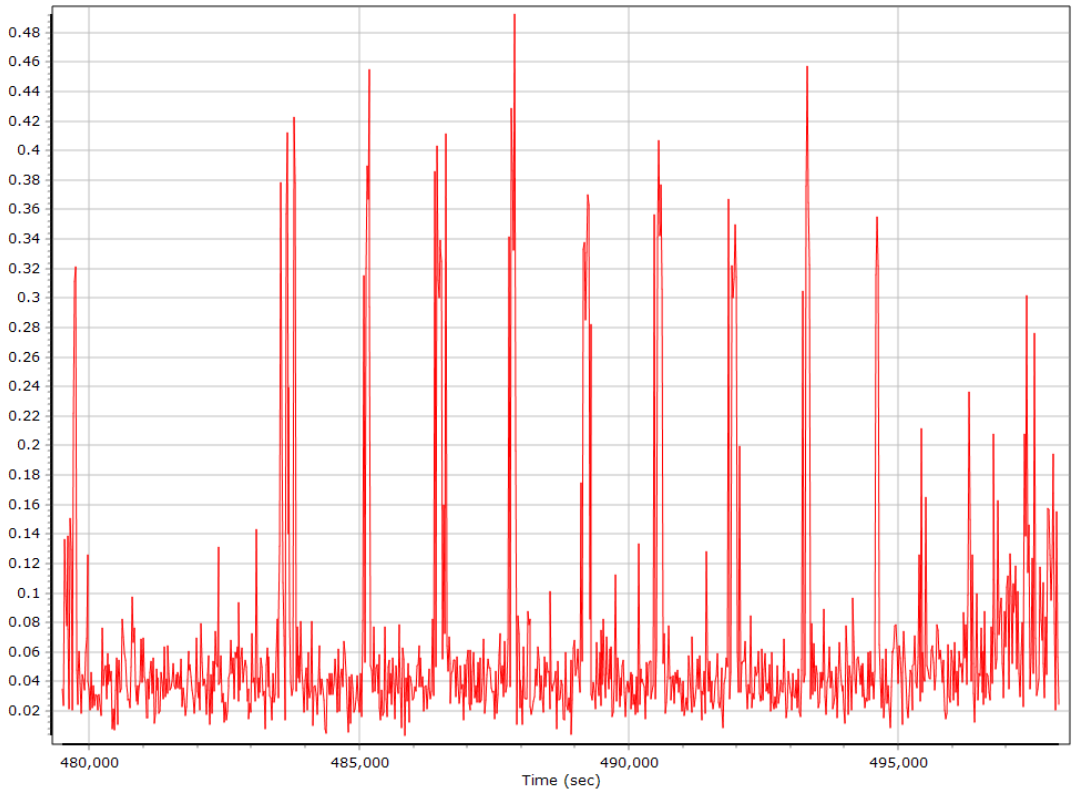

Body Angular Rate

GNSS QC

GNSS QC Statistics

Statistics	Min	Max	Mean
Baseline length (km)	0.00	0.00	
Number of GPS SV	5	9	7
Number of GLONASS SV	0	8	6
Number of QZSS SV	0	0	0
Number of BEIDOU SV	0	2	0
Number of GALILEO SV	0	8	5
Total number of SV	12	22	20
PDOP	1.00	1.69	1.21
QC Solution Gaps	0.00	0.00	
Solution Type	Fixed	Float	No solution
Epoch (sec)	19451.00	0.00	0.00
Percentage	100.00	0.00	0.00

Num SVs in solution

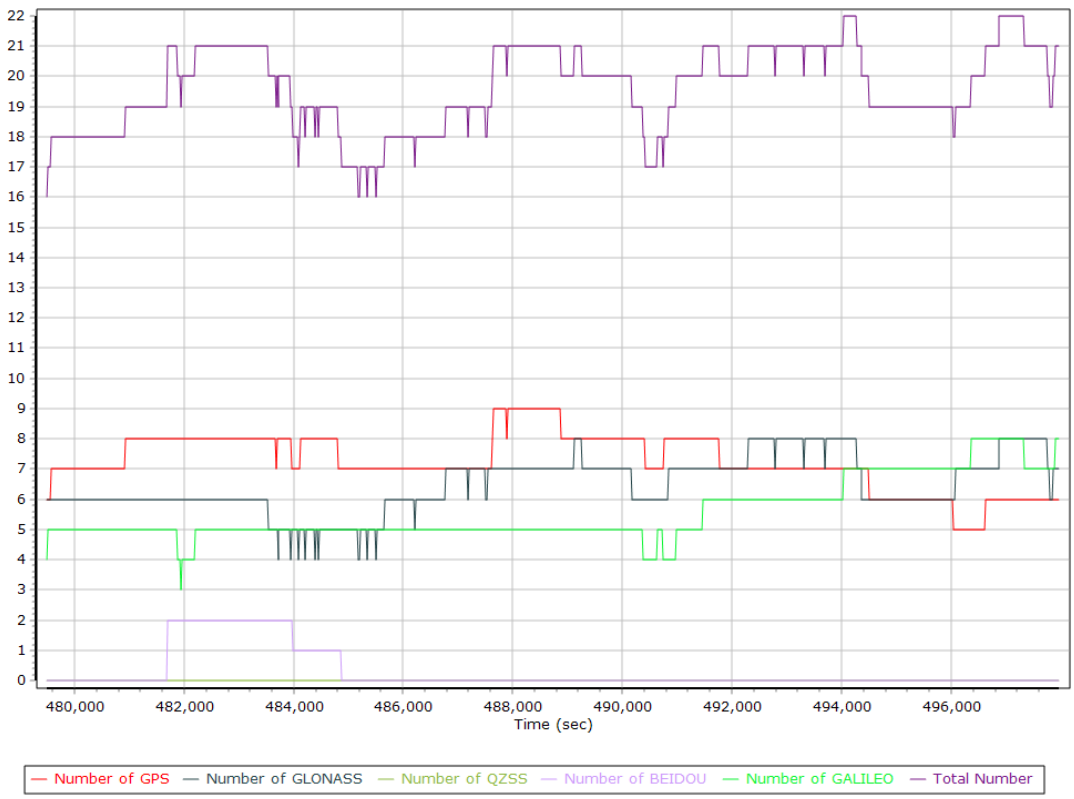

Forward/Reverse Separation

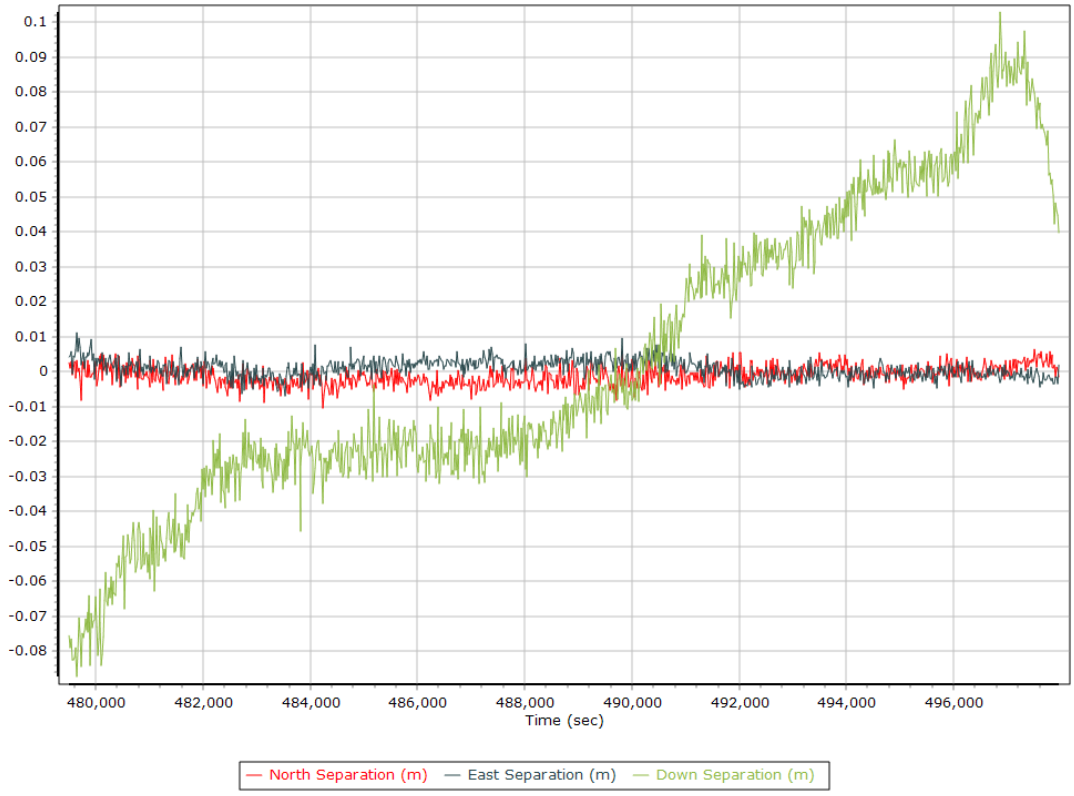

PDOP

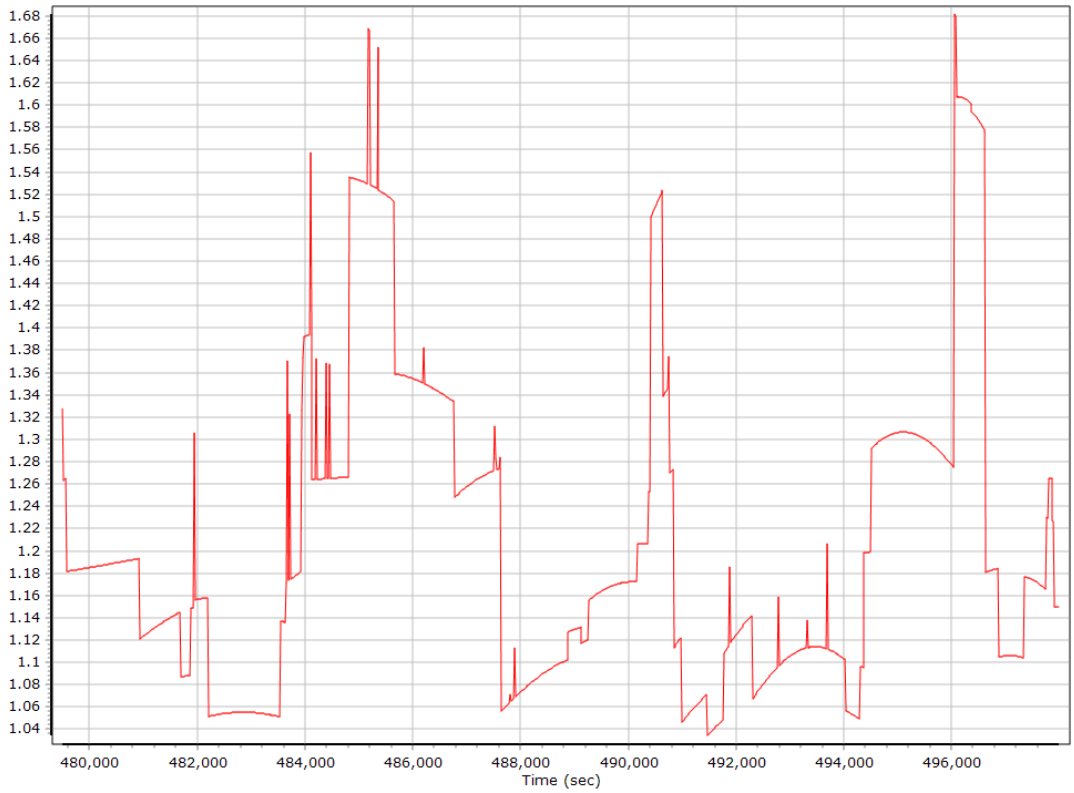

Estimated Position Accuracy

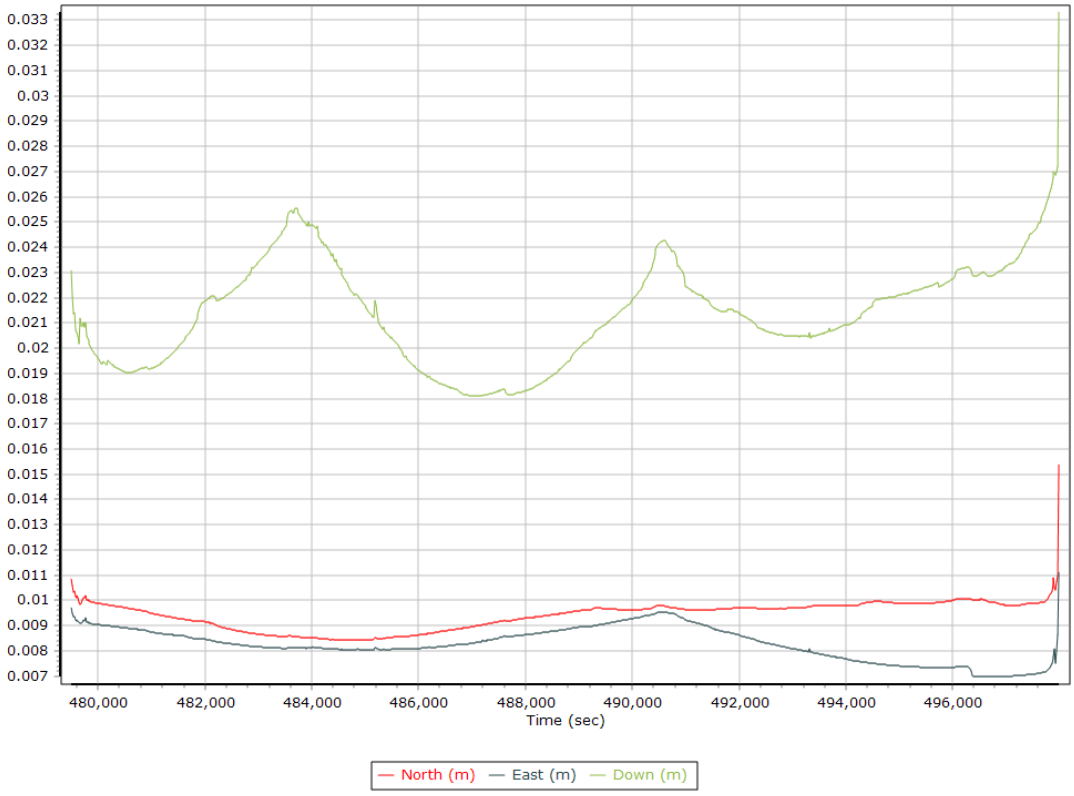

GPS Residuals

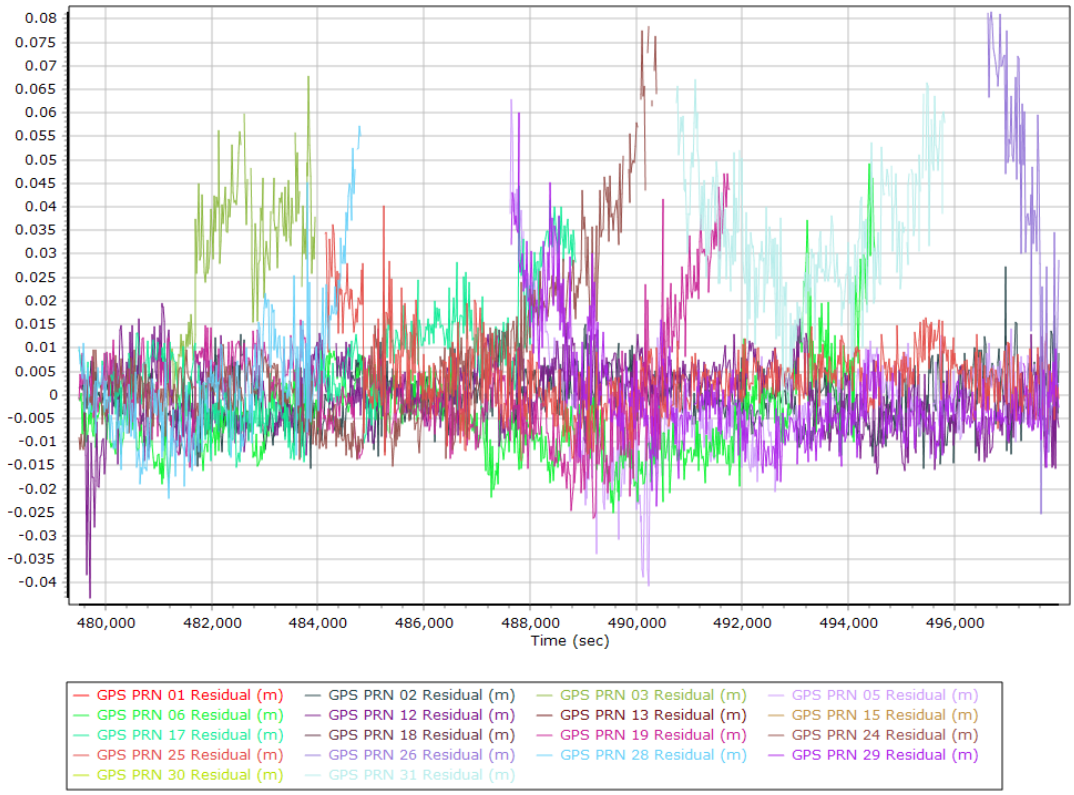

GLONASS Residuals

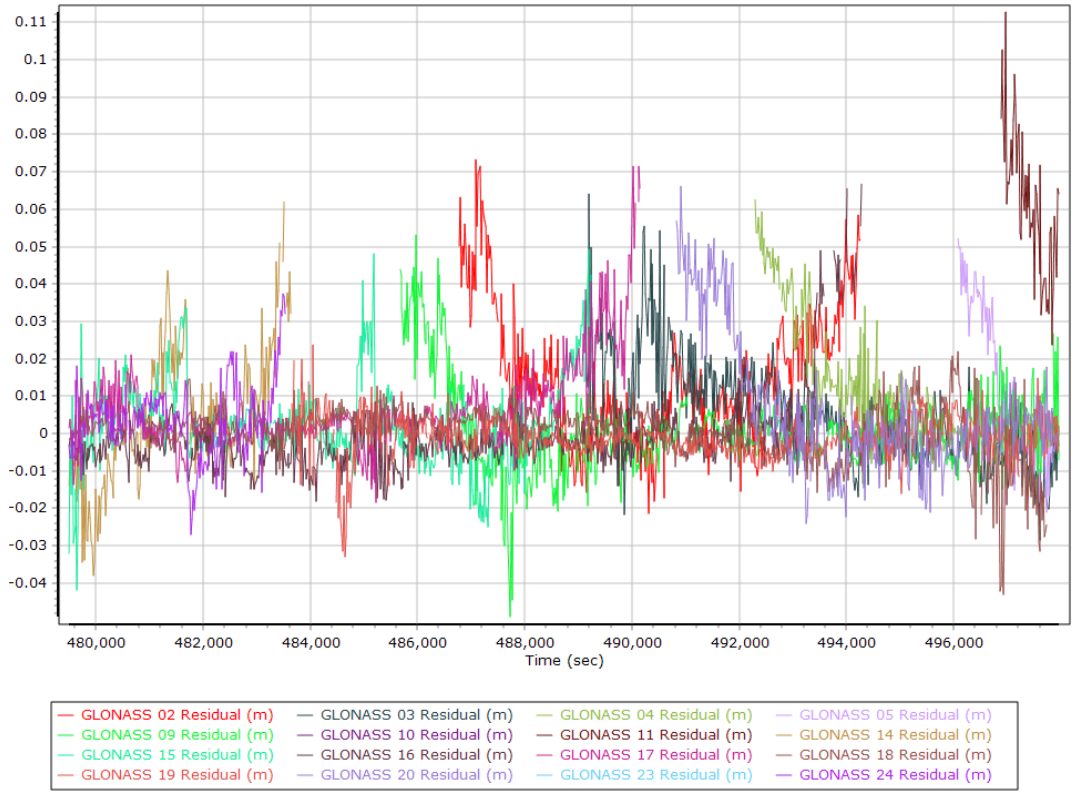

BEIDOU Residuals

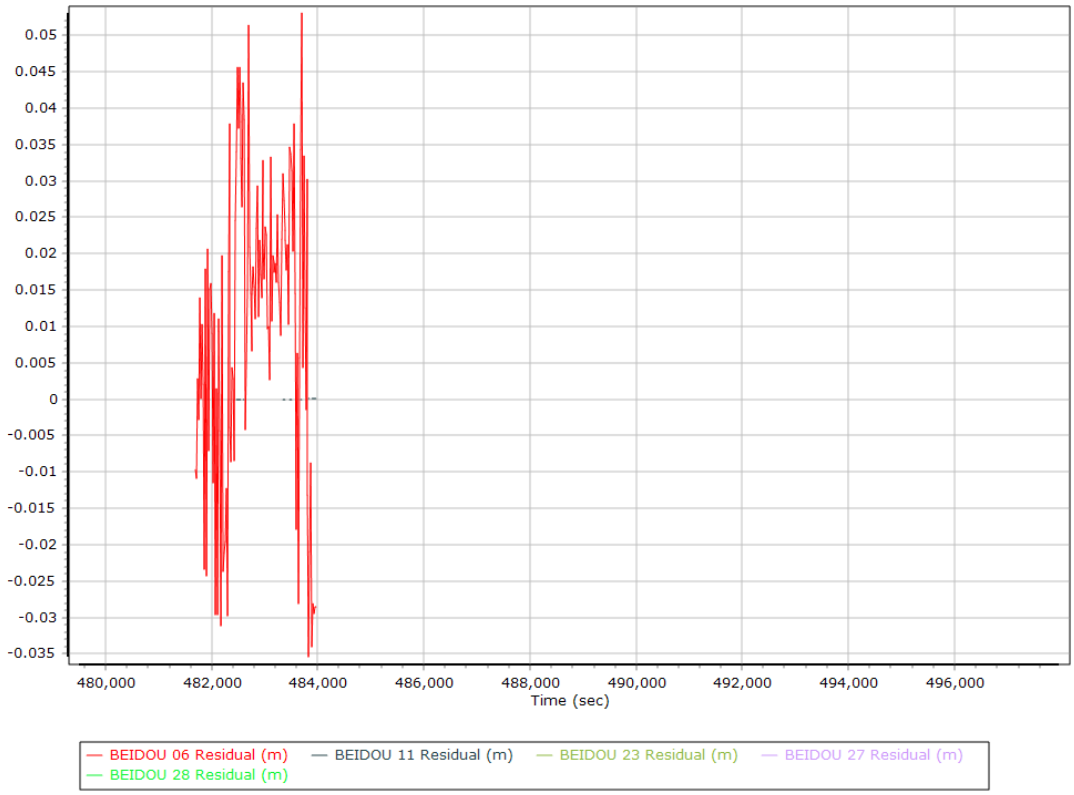

GALILEO Residuals

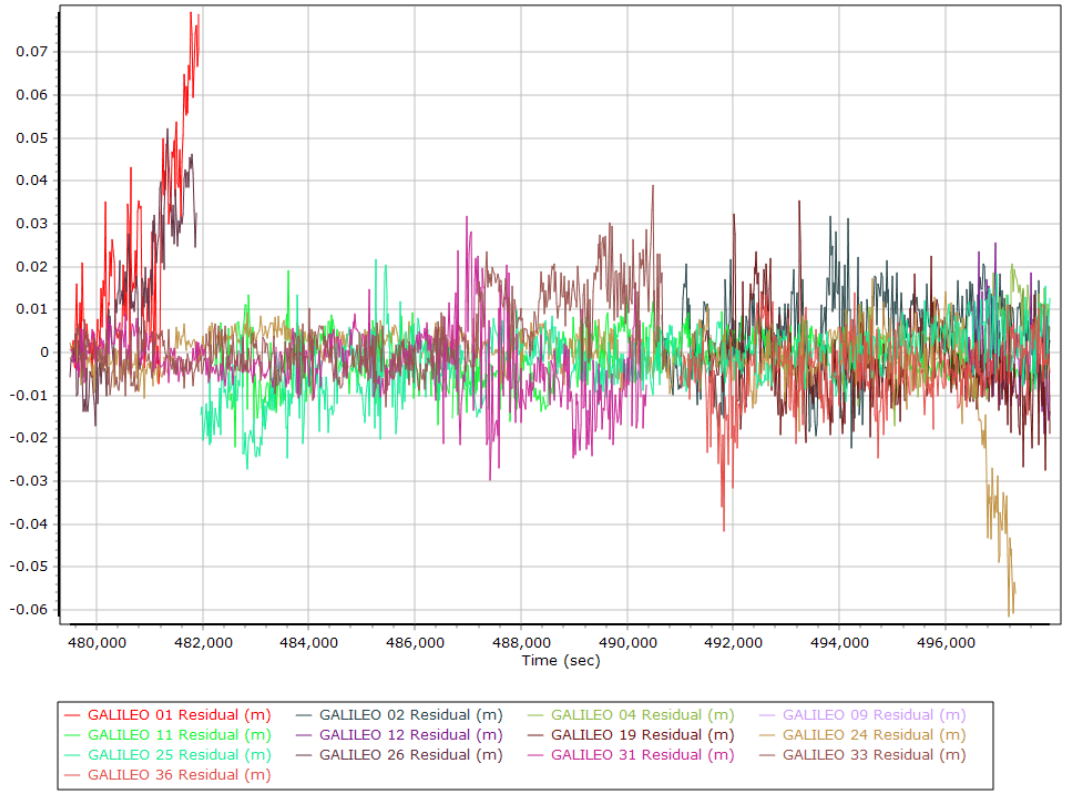

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion PP-RTX		
Stabilized mount	False		
Processing start time	478529.000 (08/14/2020 12:55:29)		
Processing end time	497994.000 (08/14/2020 18:19:54)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	180.000
Reference to Primary GNSS lever arm (m)	0.568	-0.422	-0.968
Reference to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm (m)

X Reference-Primary GNSS Lever Arm (m)

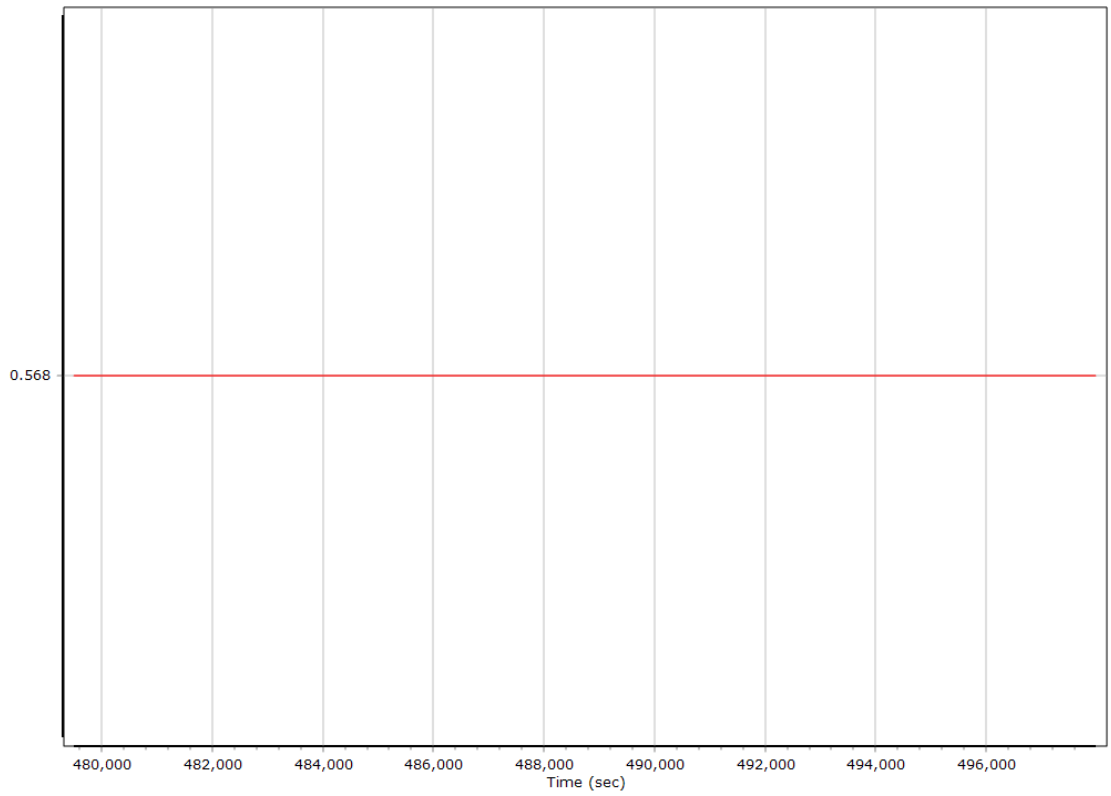

Y Reference-Primary GNSS Lever Arm (m)

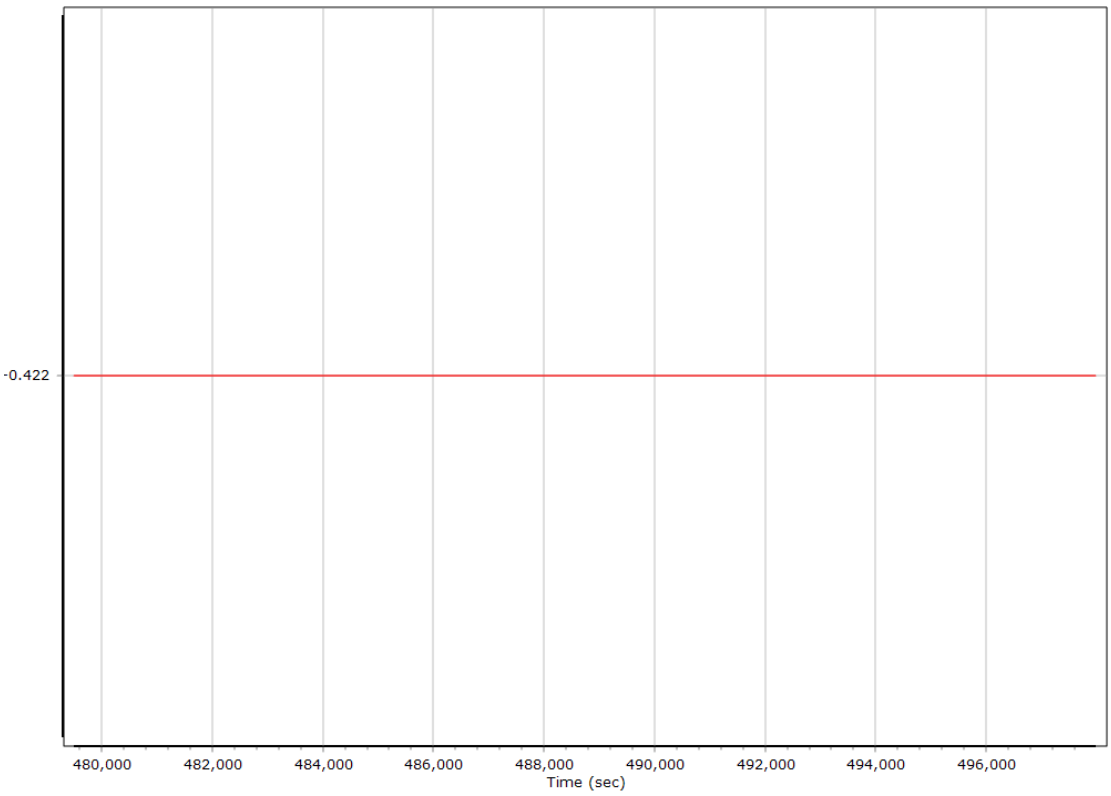

Z Reference-Primary GNSS Lever Arm (m)

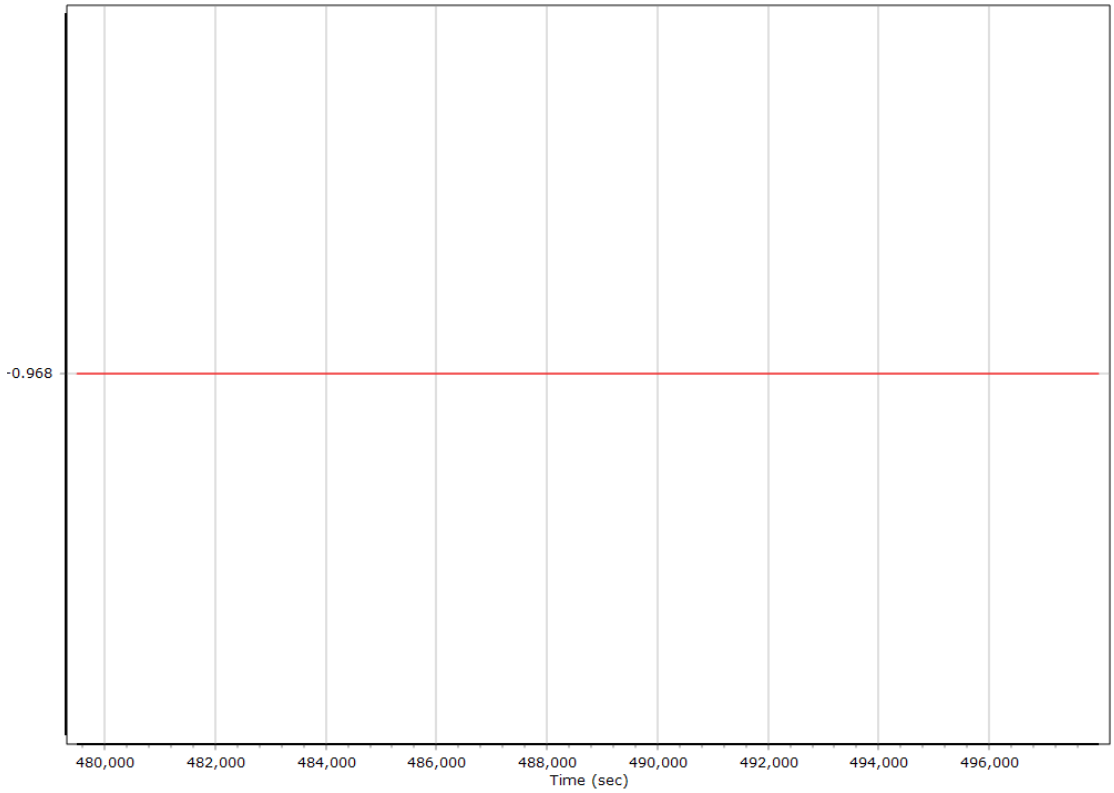

Reference-Primary GNSS Lever Arm Figure of Merit

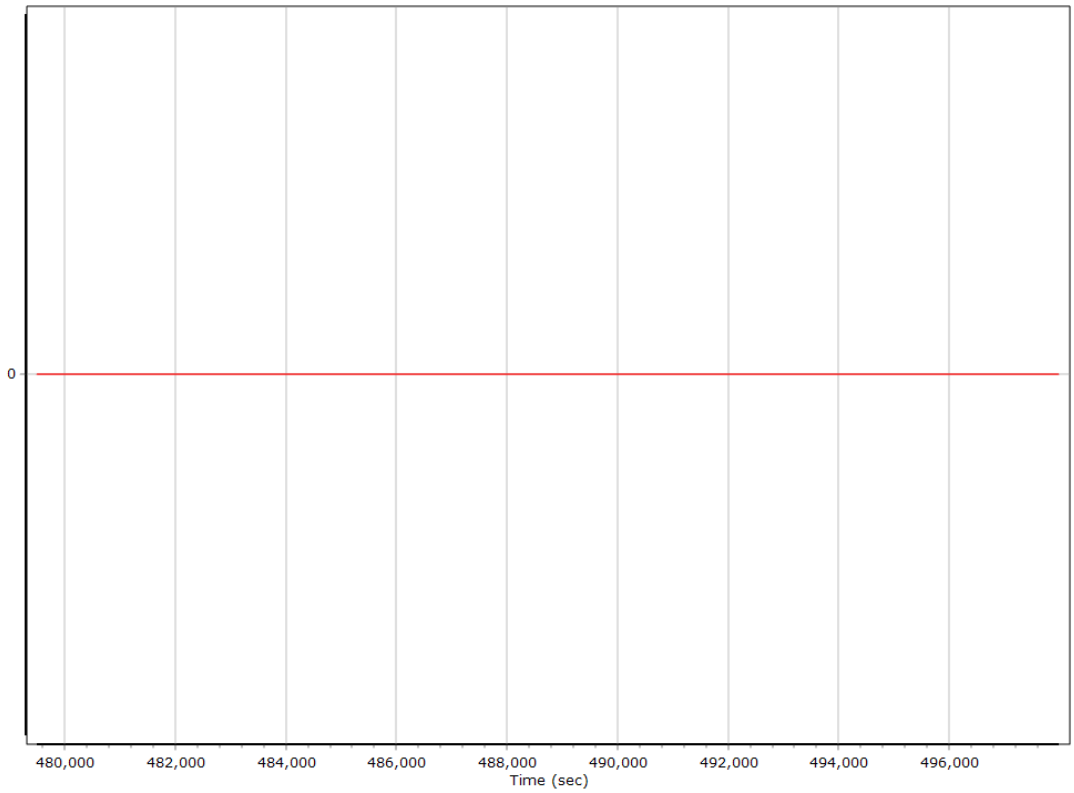

IN-Fusion QC

Forward Processed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

X Accelerometer Bias (micro-g)

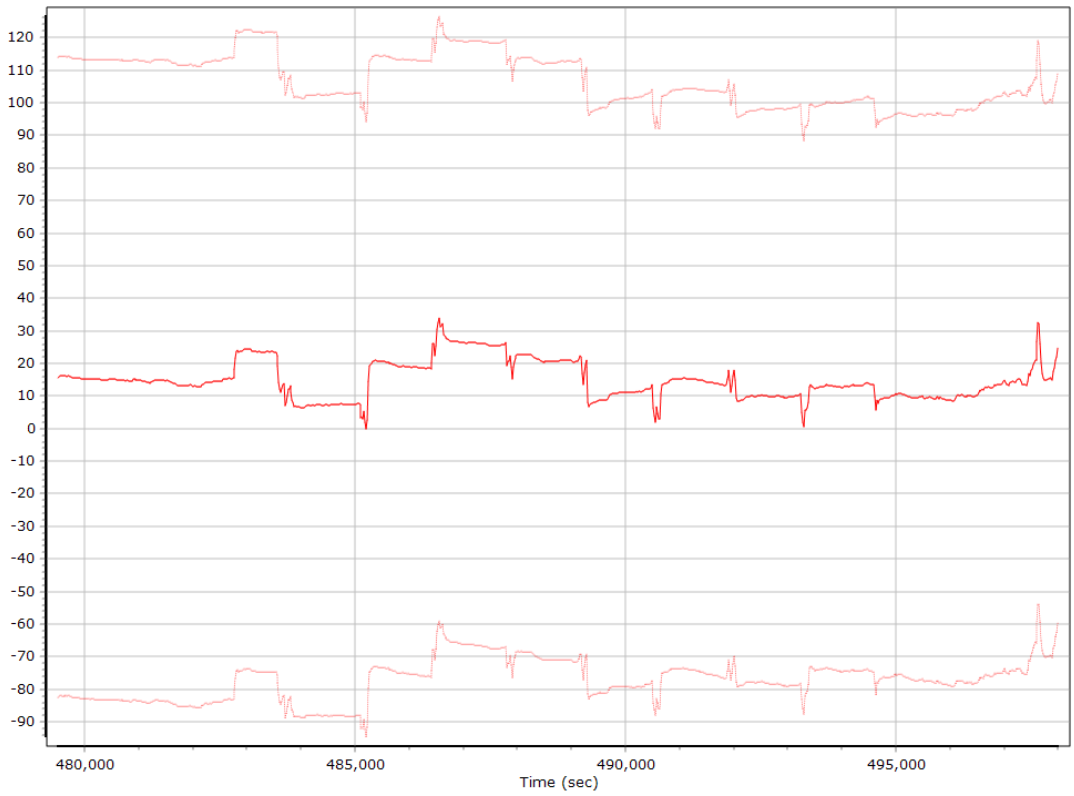

Y Accelerometer Bias (micro-g)

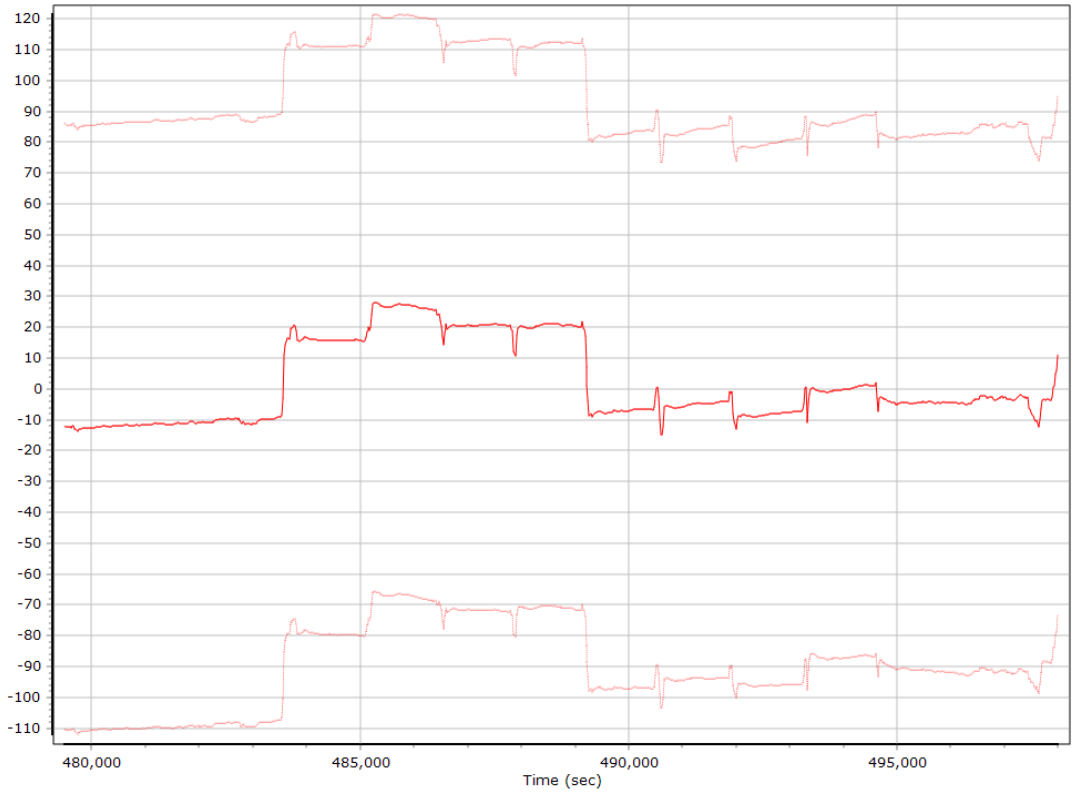

Z Accelerometer Bias (micro-g)

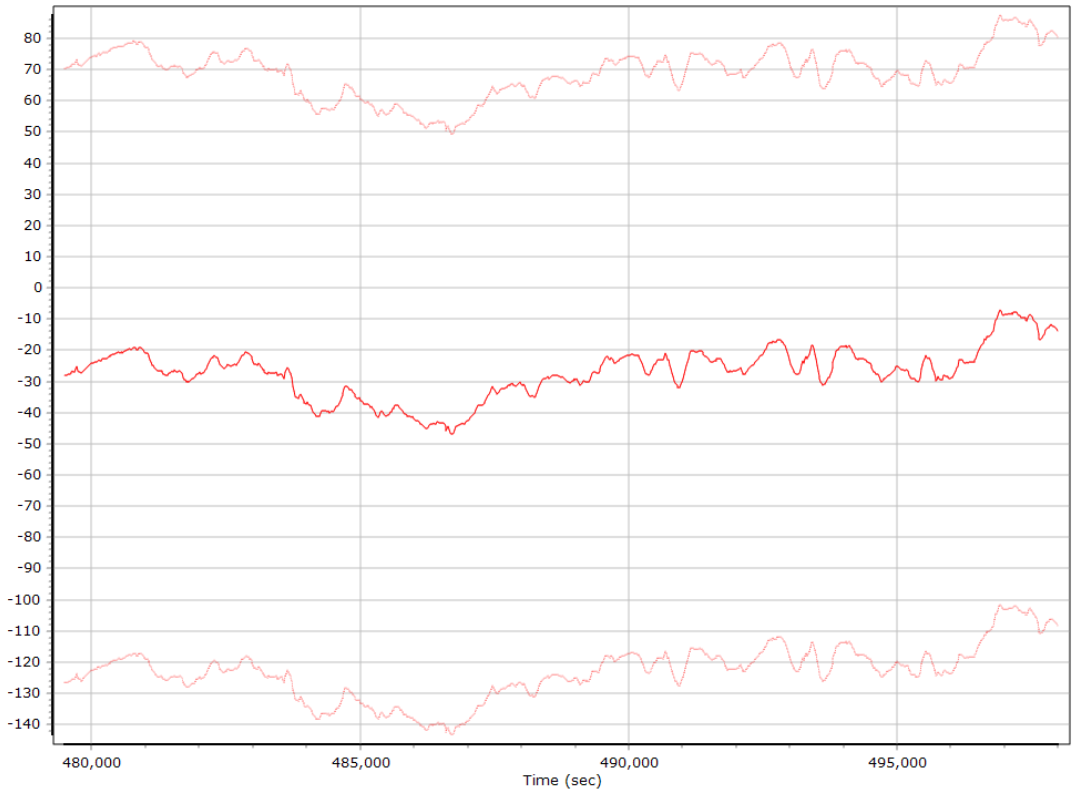

Accelerometer Scale Error (ppm)

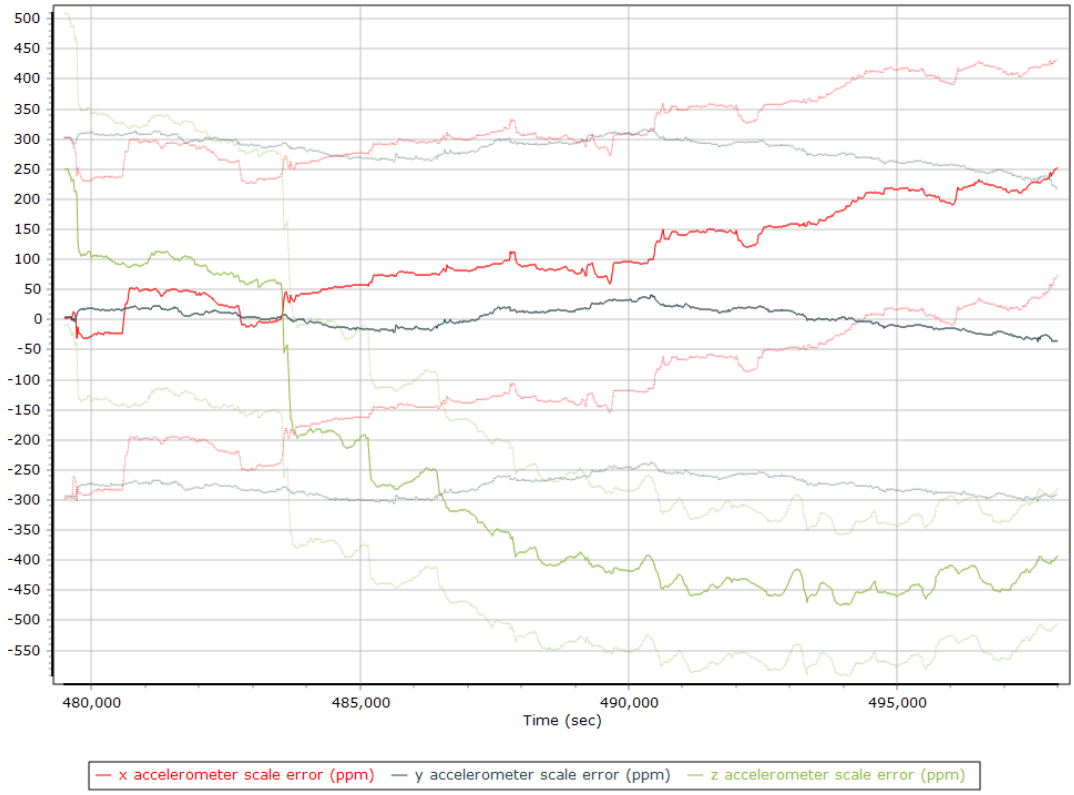

X Accelerometer Scale Error (ppm)

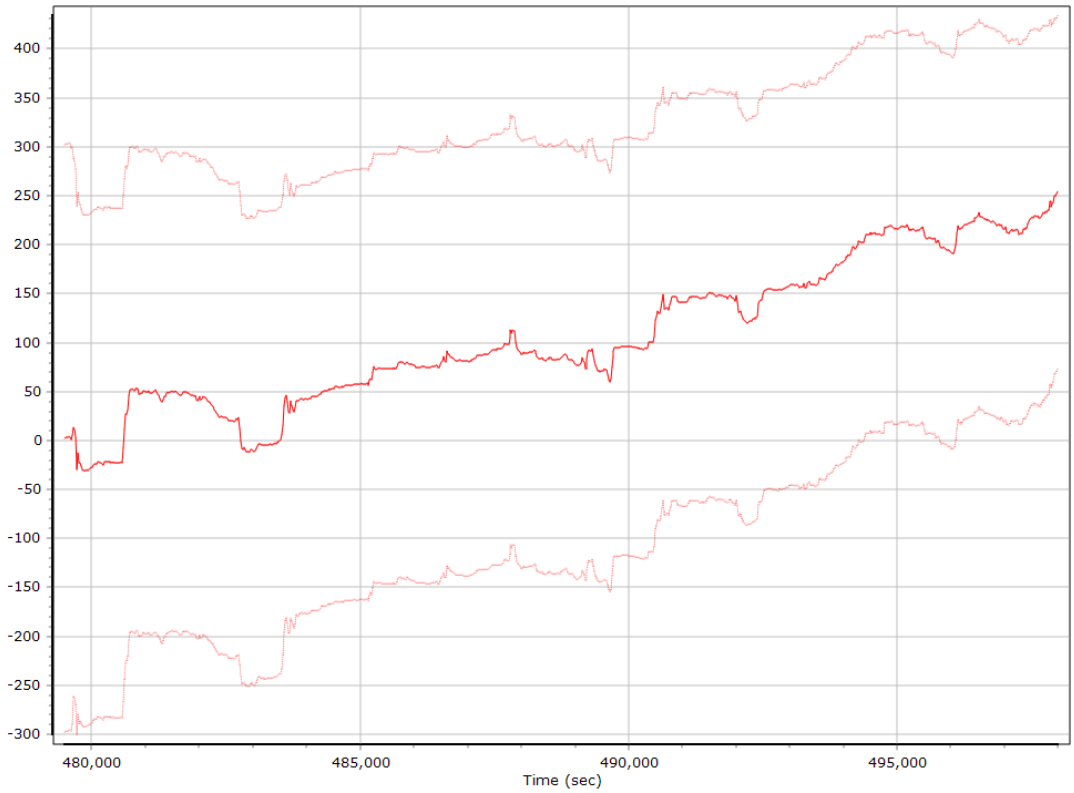

Y Accelerometer Scale Error (ppm)

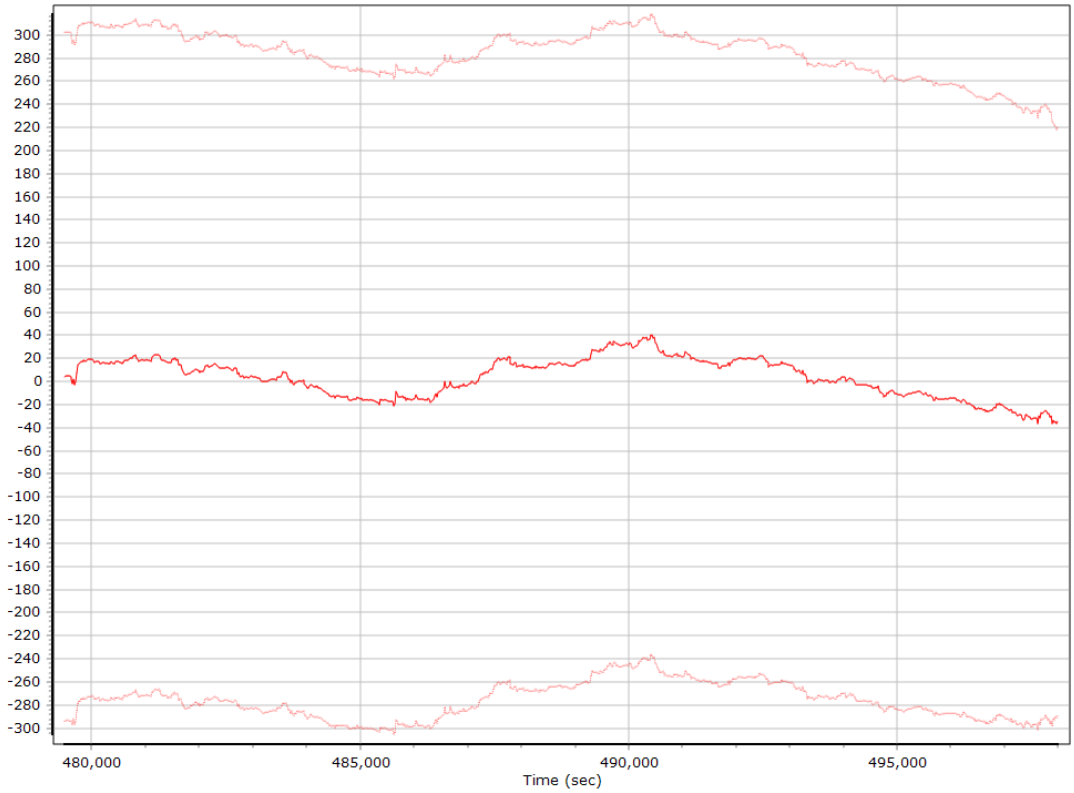

Z Accelerometer Scale Error (ppm)

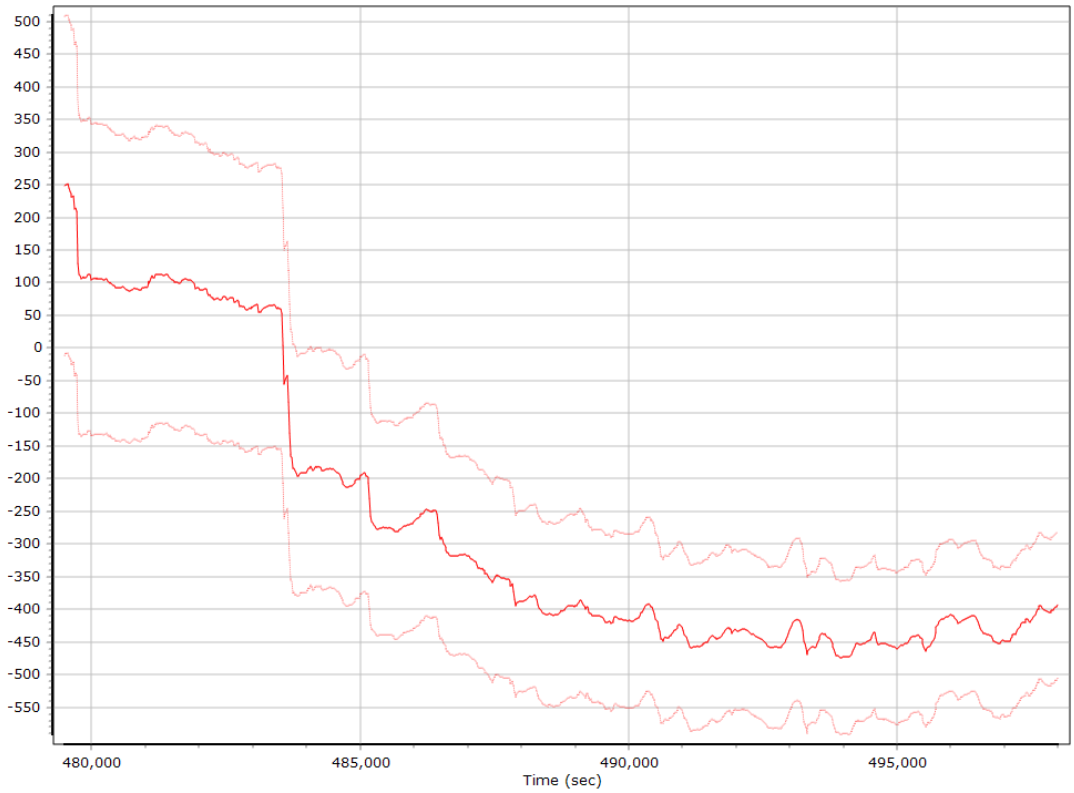

Gyro Bias (deg/h)

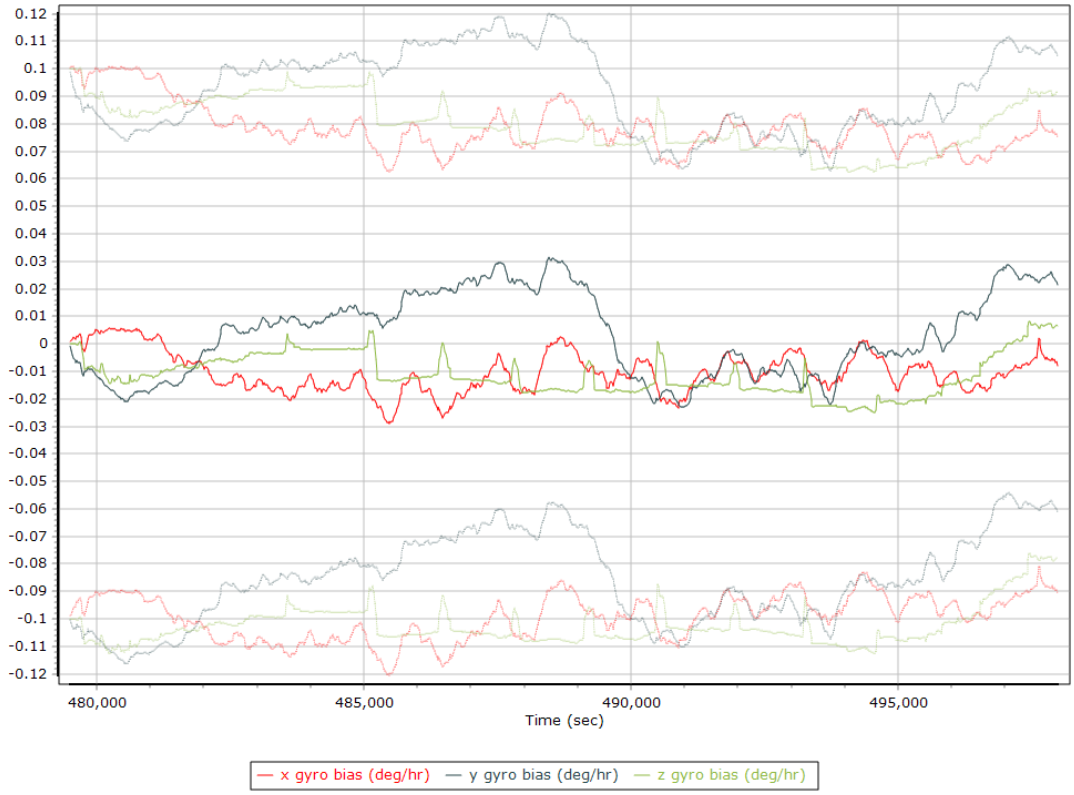

X Gyro Bias (deg/h)

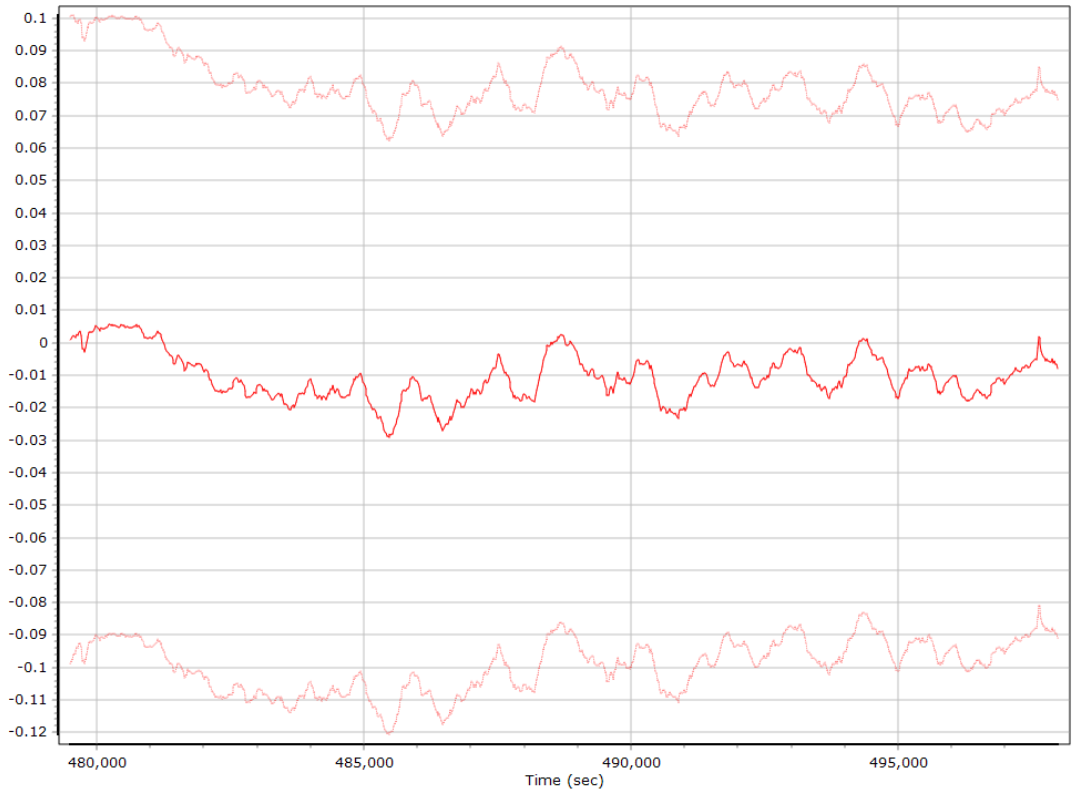

Y Gyro Bias (deg/h)

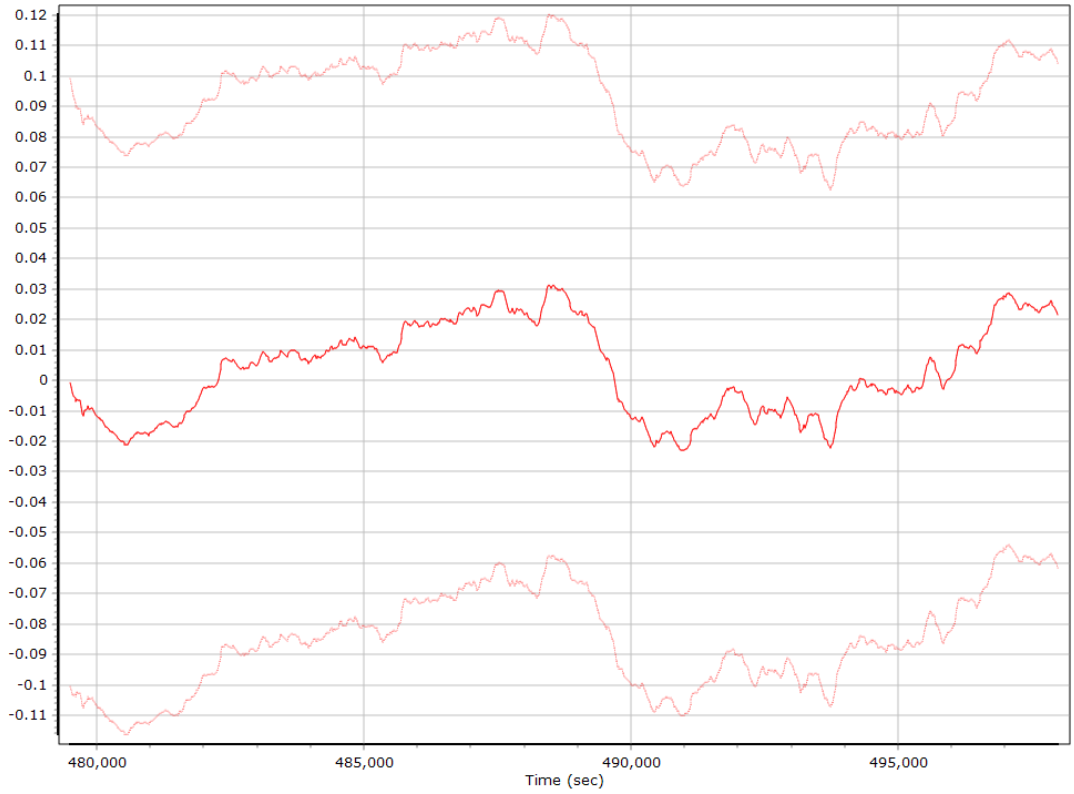

Z Gyro Bias (deg/h)

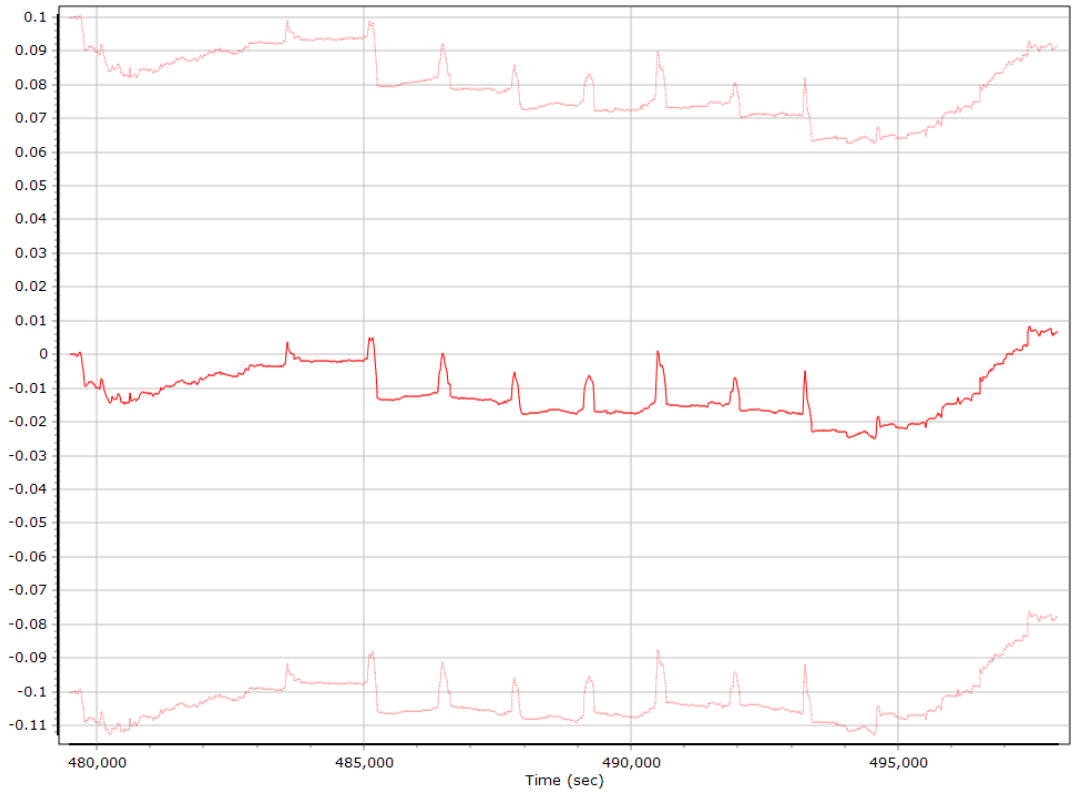

Gyro Scale Error (ppm)

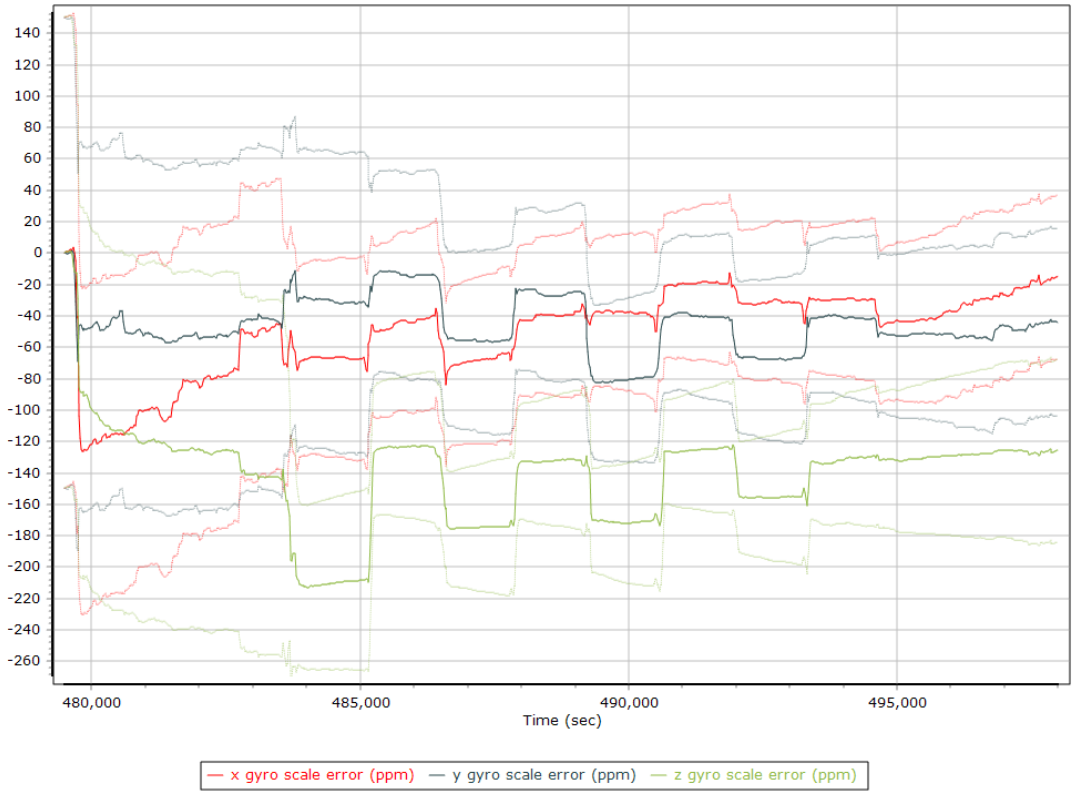

X Gyro Scale Error (ppm)

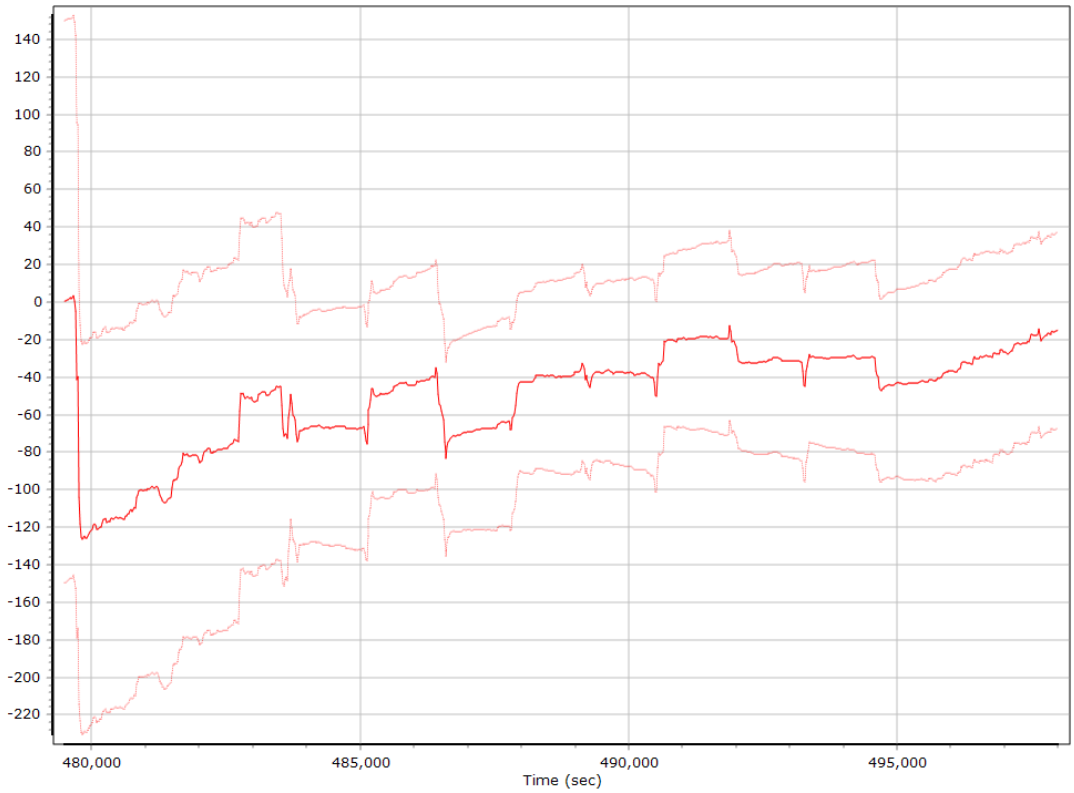

Y Gyro Scale Error (ppm)

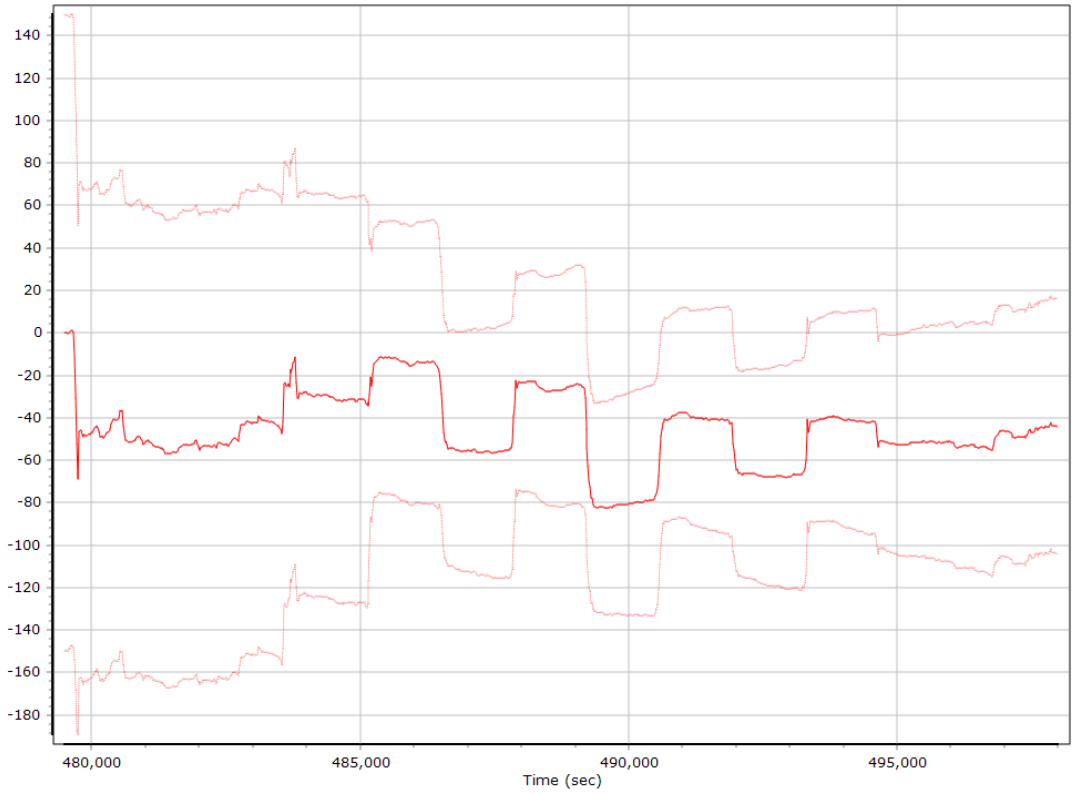

Z Gyro Scale Error (ppm)

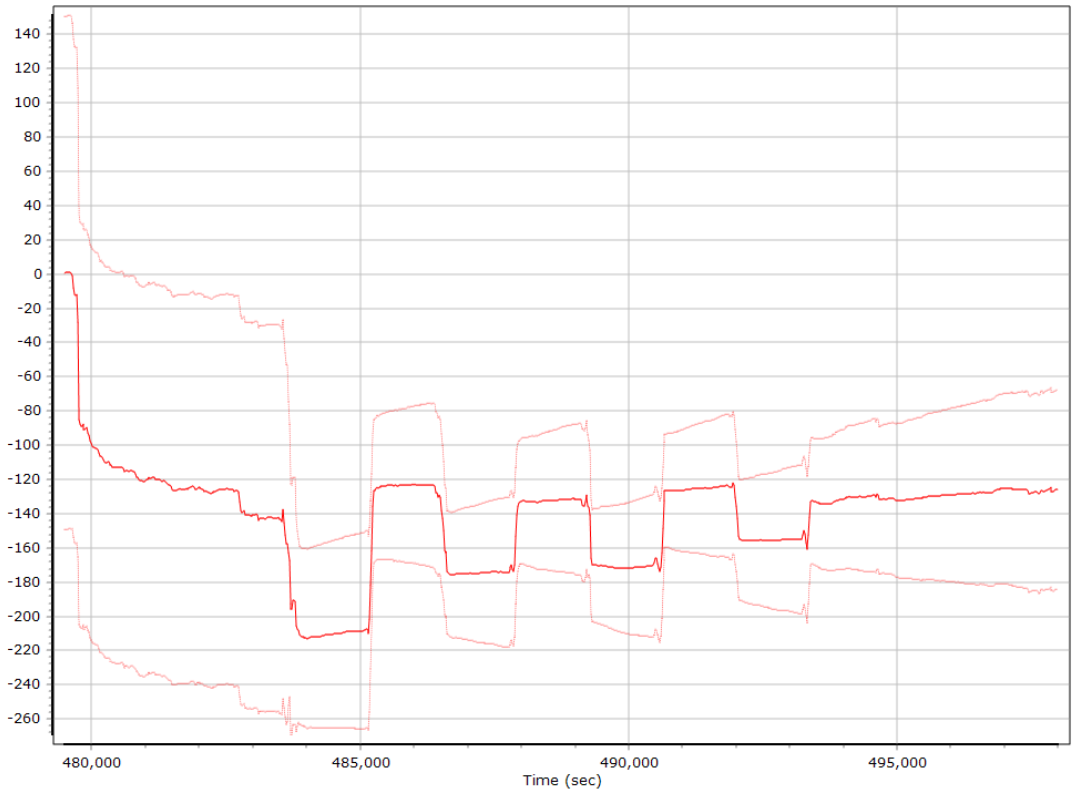

Forward Processed Estimated Constant Errors, Reference Frame

Accelerometer Bias (micro-g)

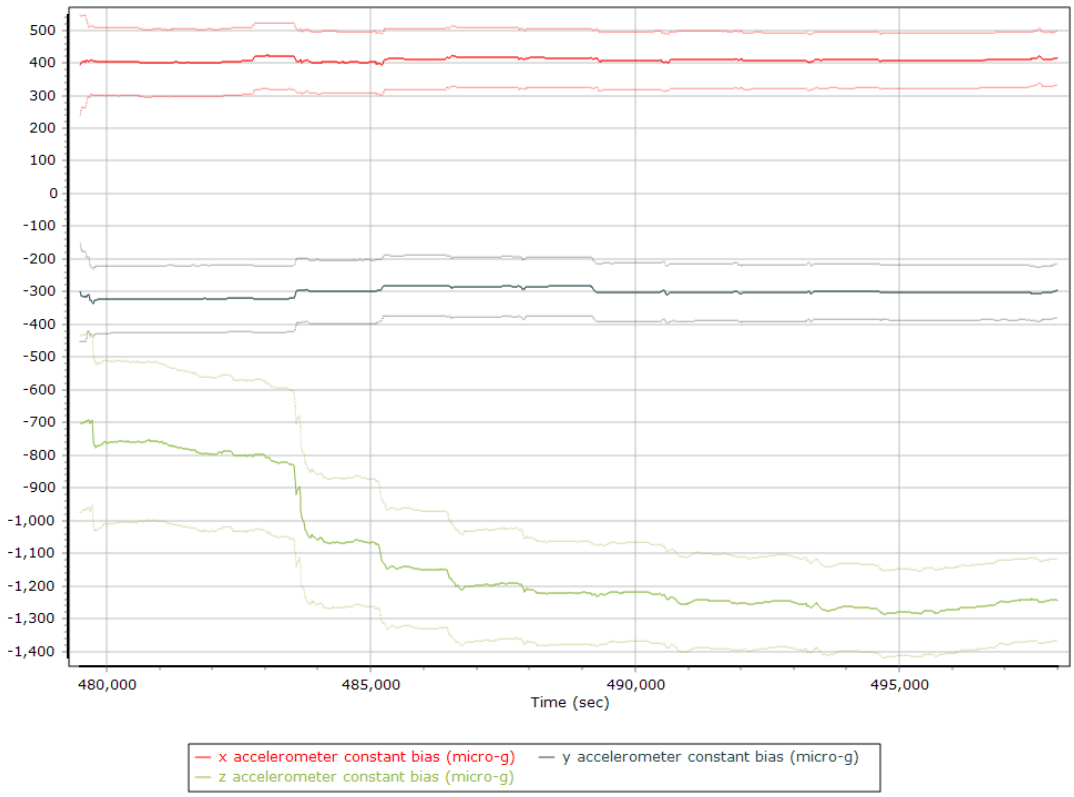

X Accelerometer Bias (micro-g)

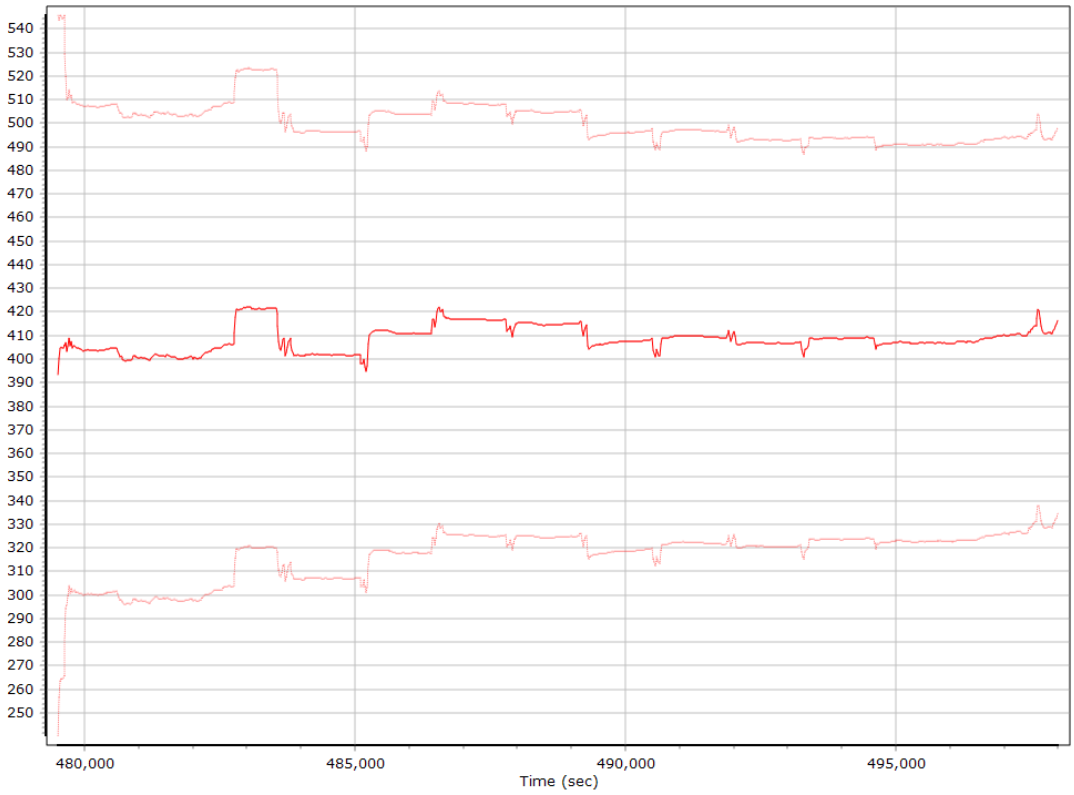

Y Accelerometer Bias (micro-g)

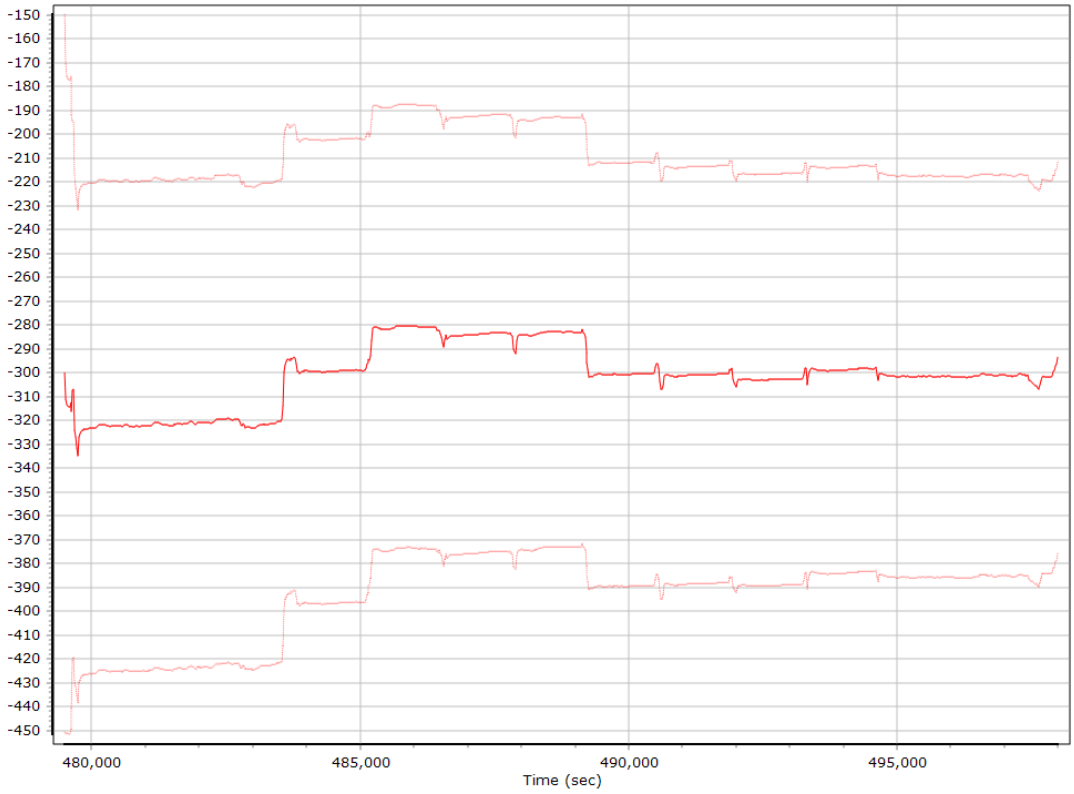

Z Accelerometer Bias (micro-g)

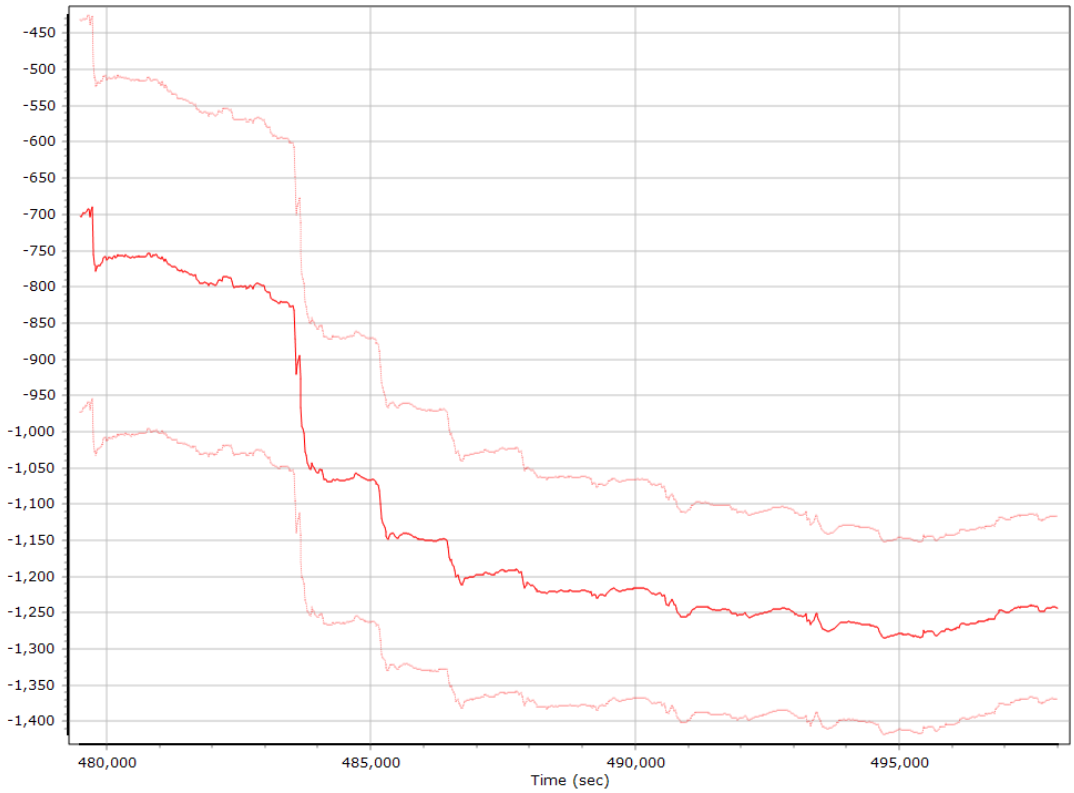

Gyro Bias (deg/h)

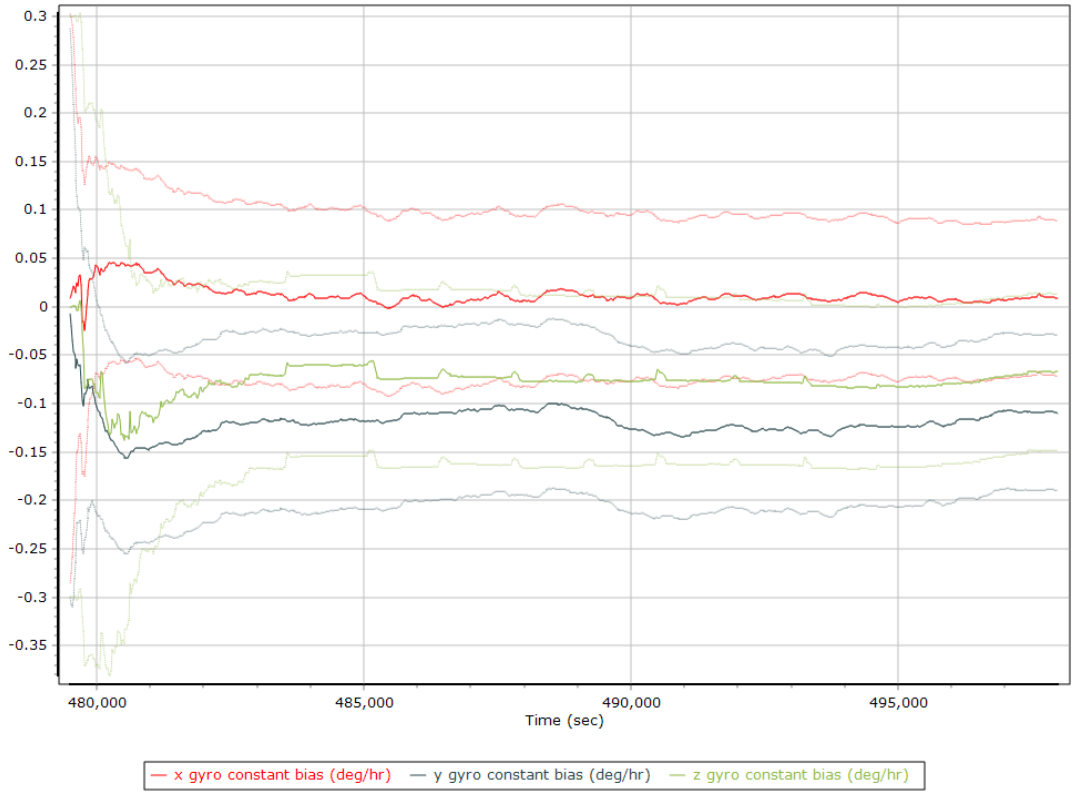

X Gyro Bias (deg/h)

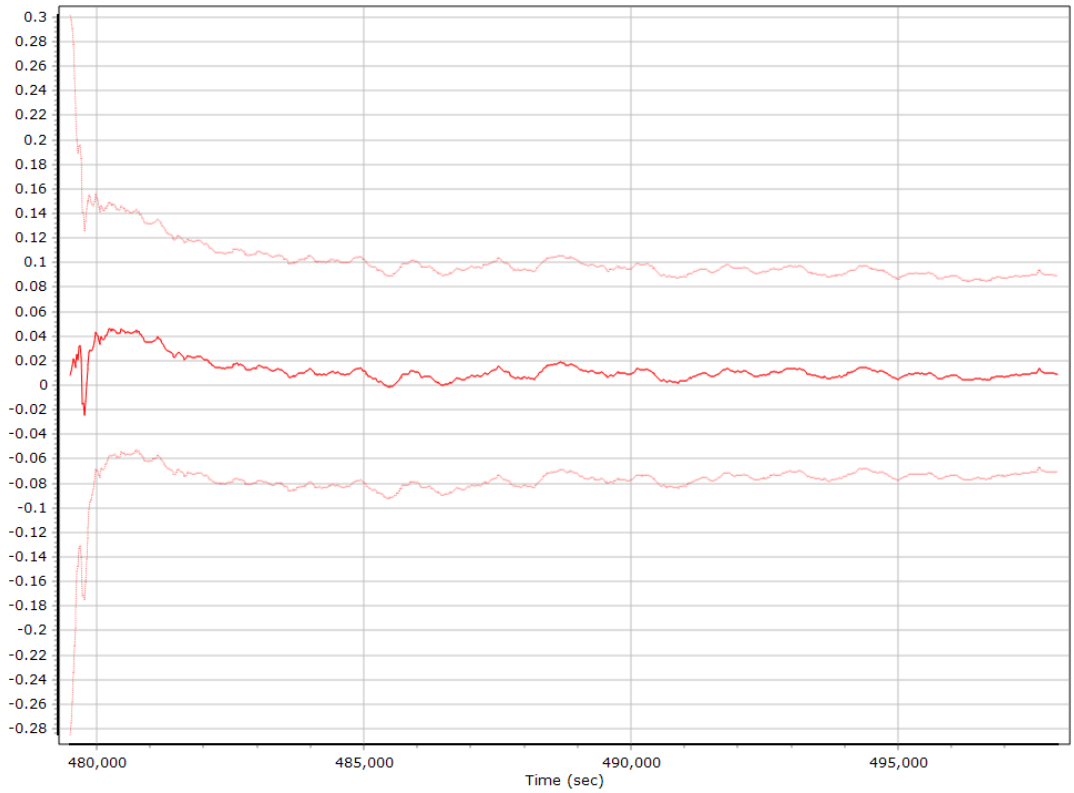

Y Gyro Bias (deg/h)

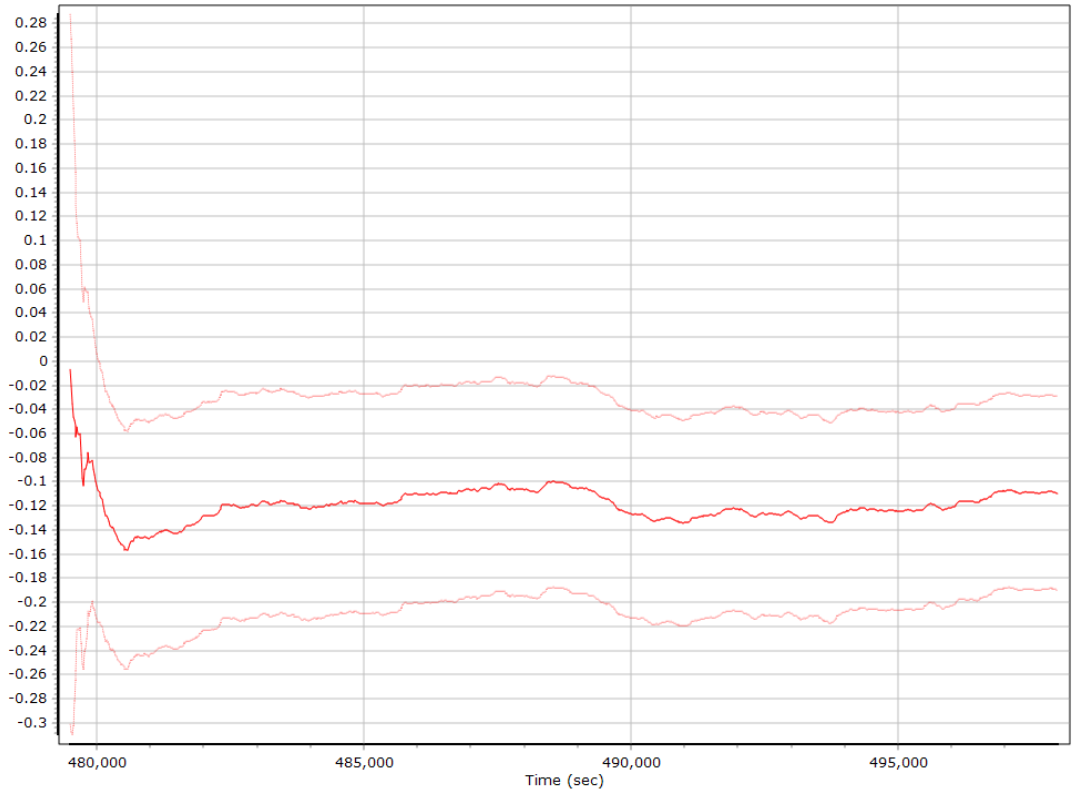

Z Gyro Bias (deg/h)

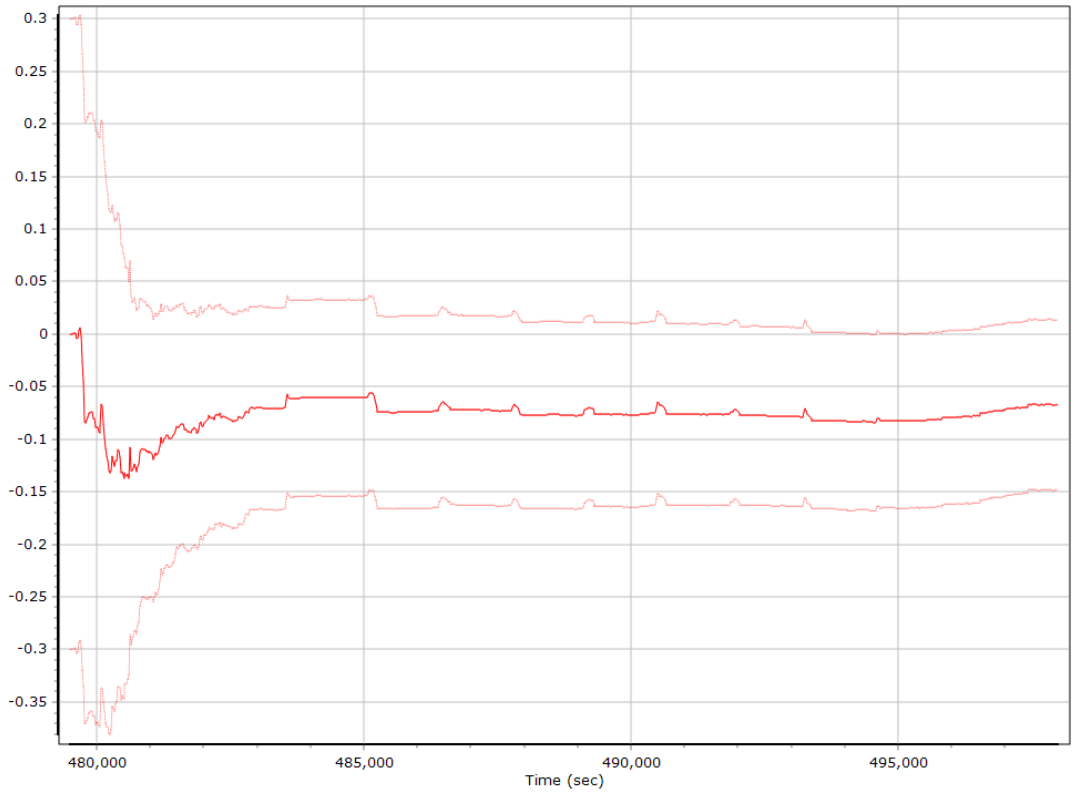

Smoothed Performance Metrics

Position Error RMS (m)

Velocity Error RMS (m/s)

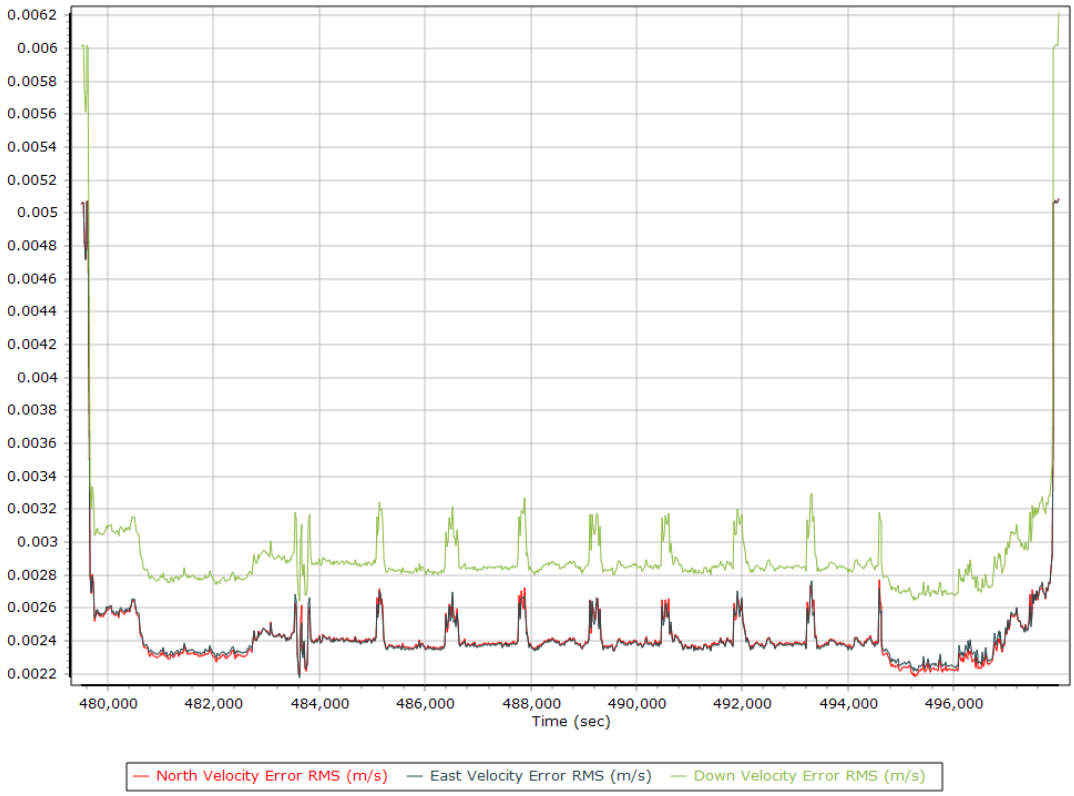

Roll/Pitch Error RMS (arc-min)

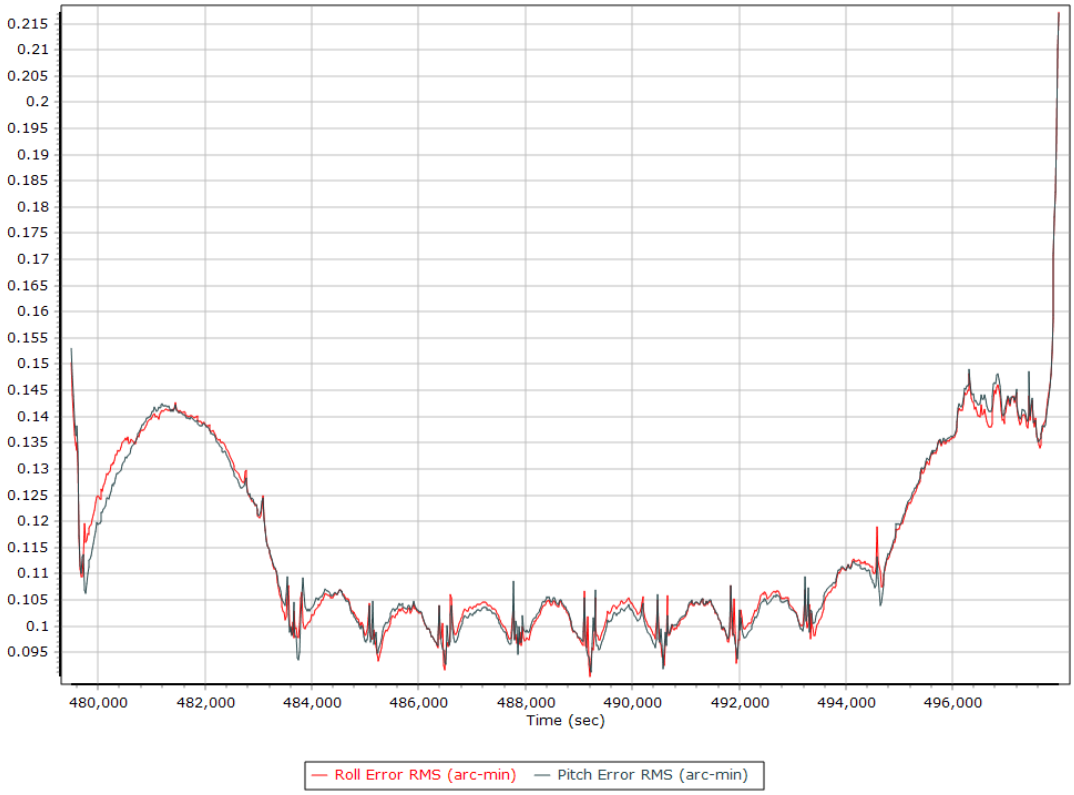

Heading Error RMS (arc-min)

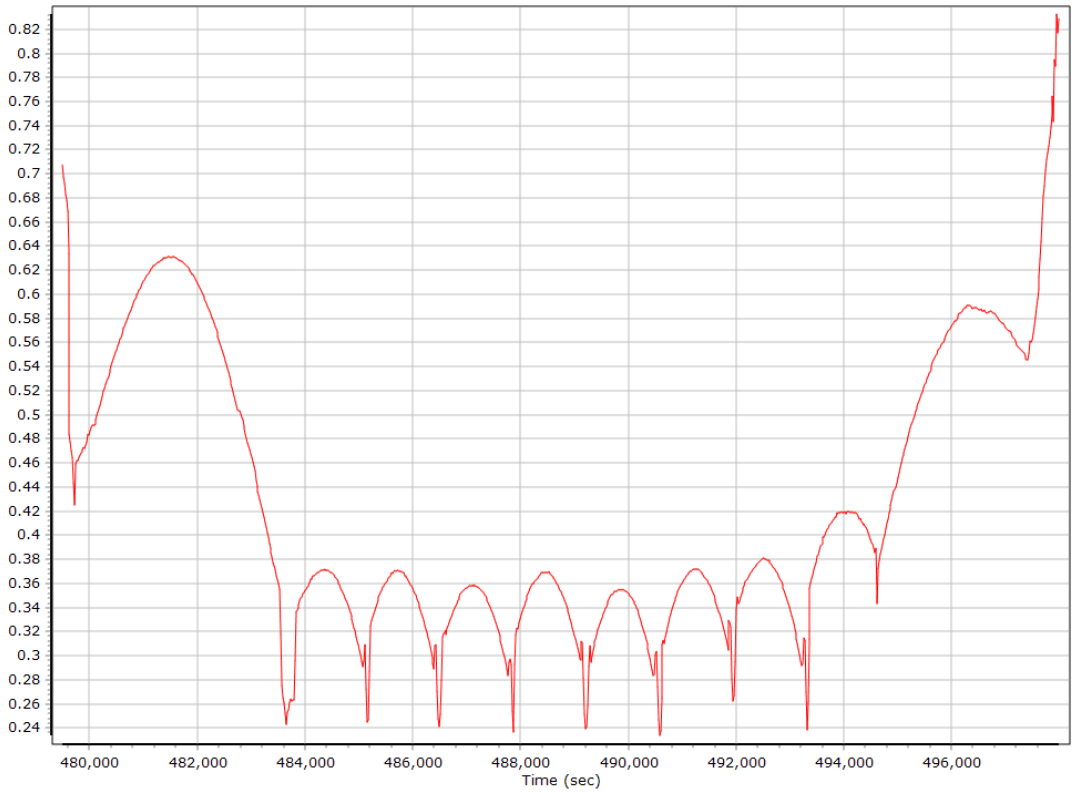

Forward Processed Performance Metrics

Position Error RMS (m)

Velocity Error RMS (m/s)

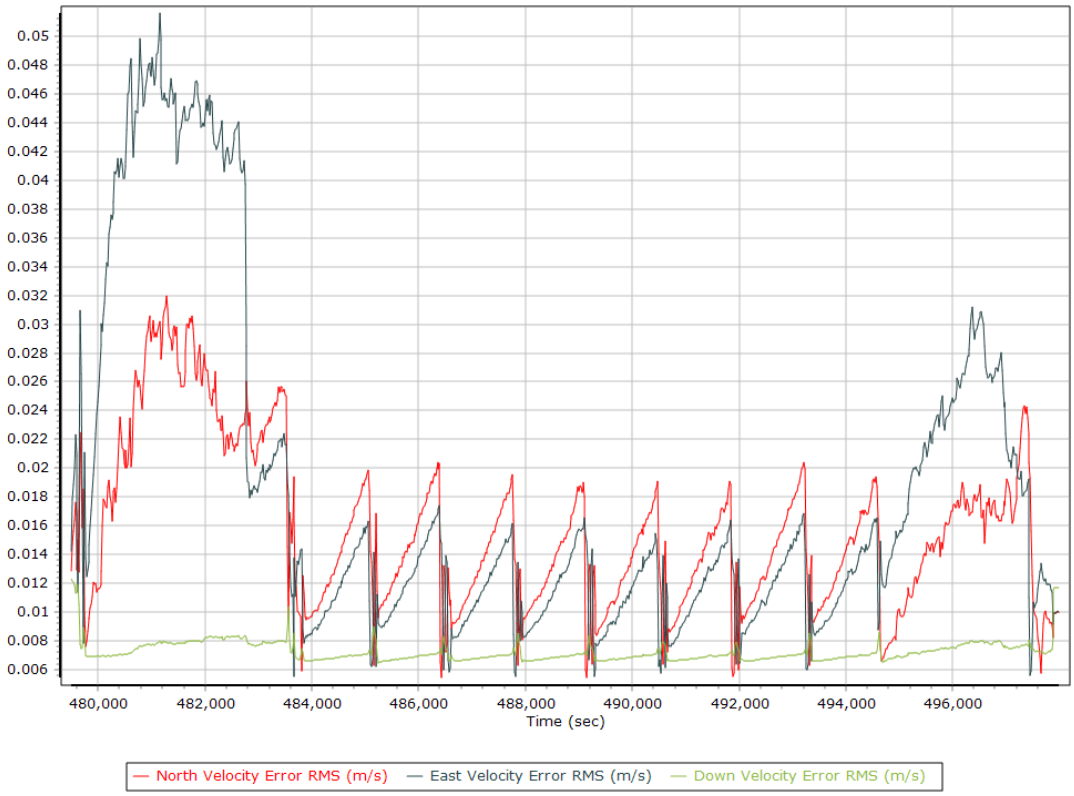

Roll/Pitch Error RMS (arc-min)

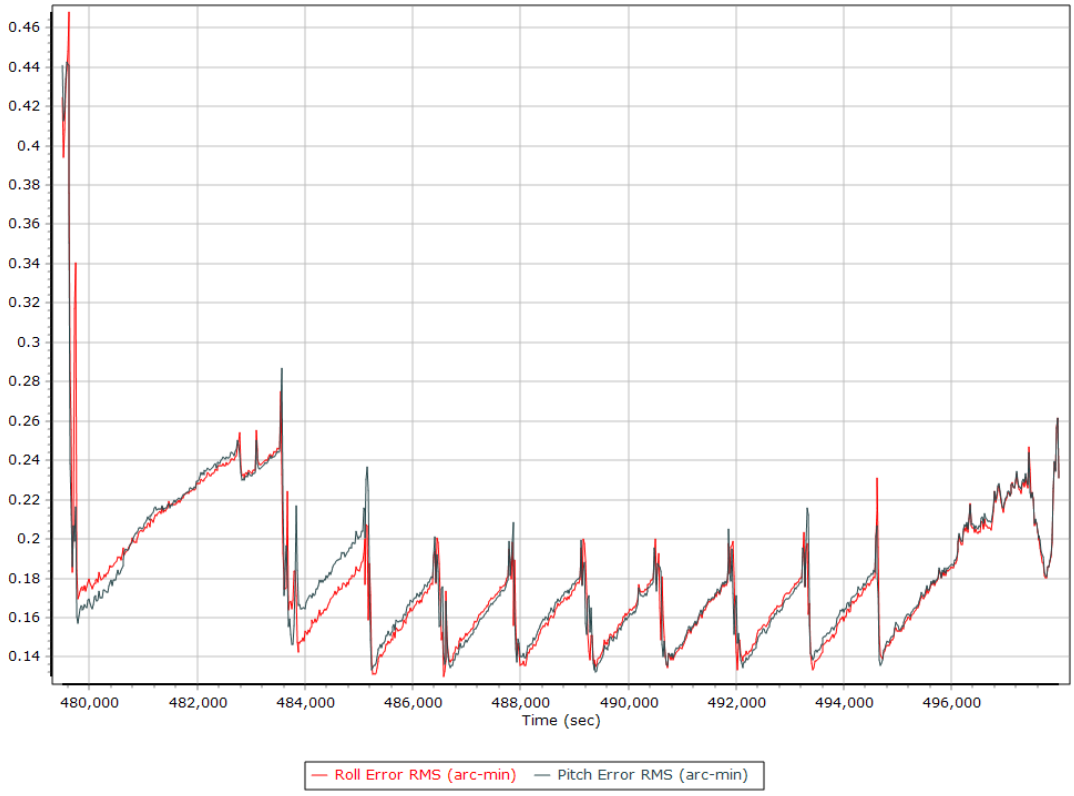

Heading Error RMS (arc-min)

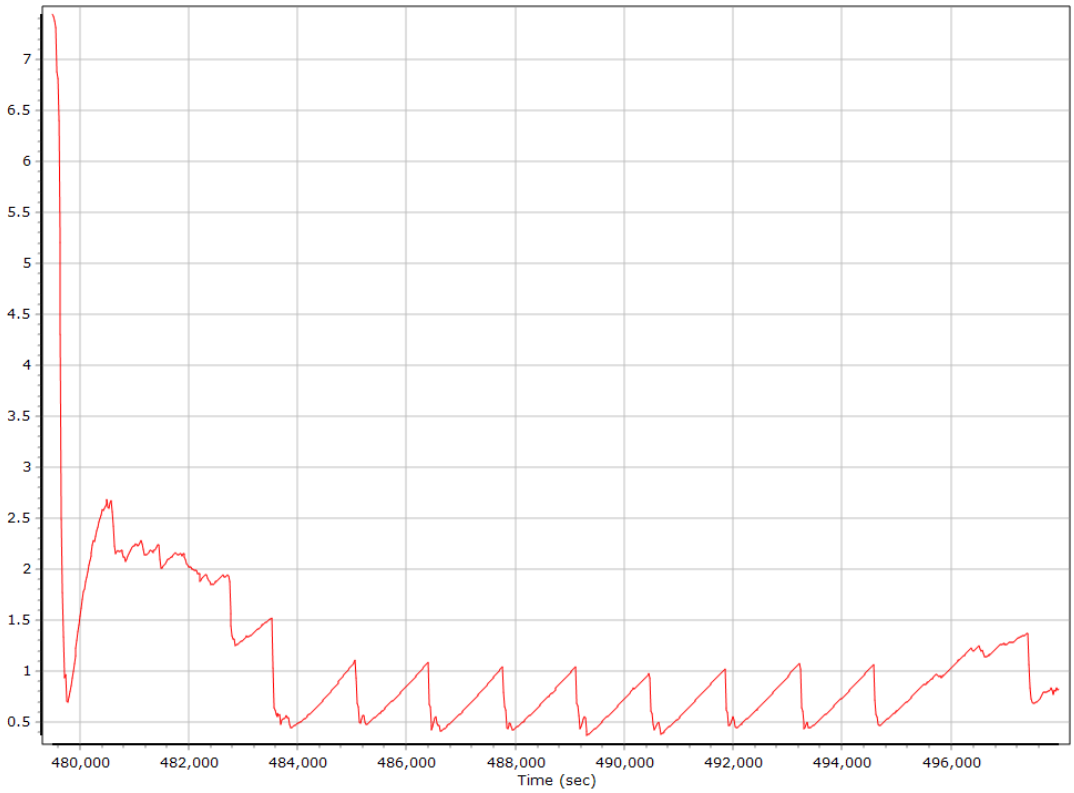

Forward Processed Solution Status

Processing Mode

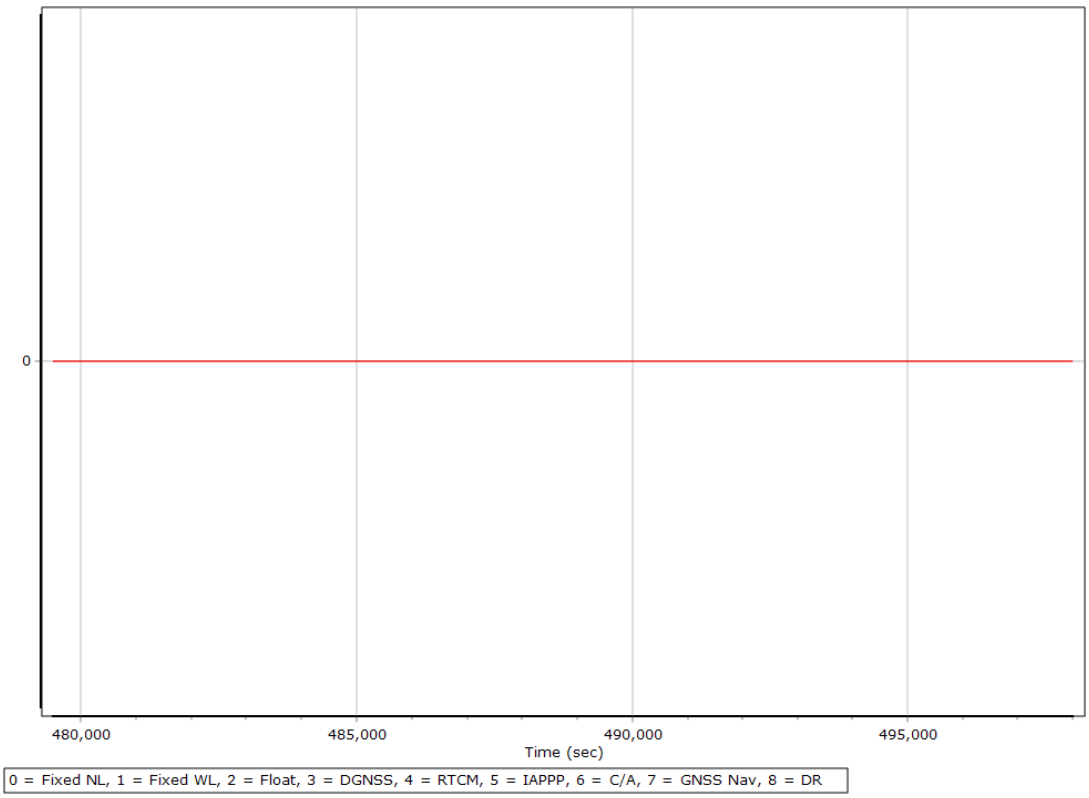

Number of Satellites

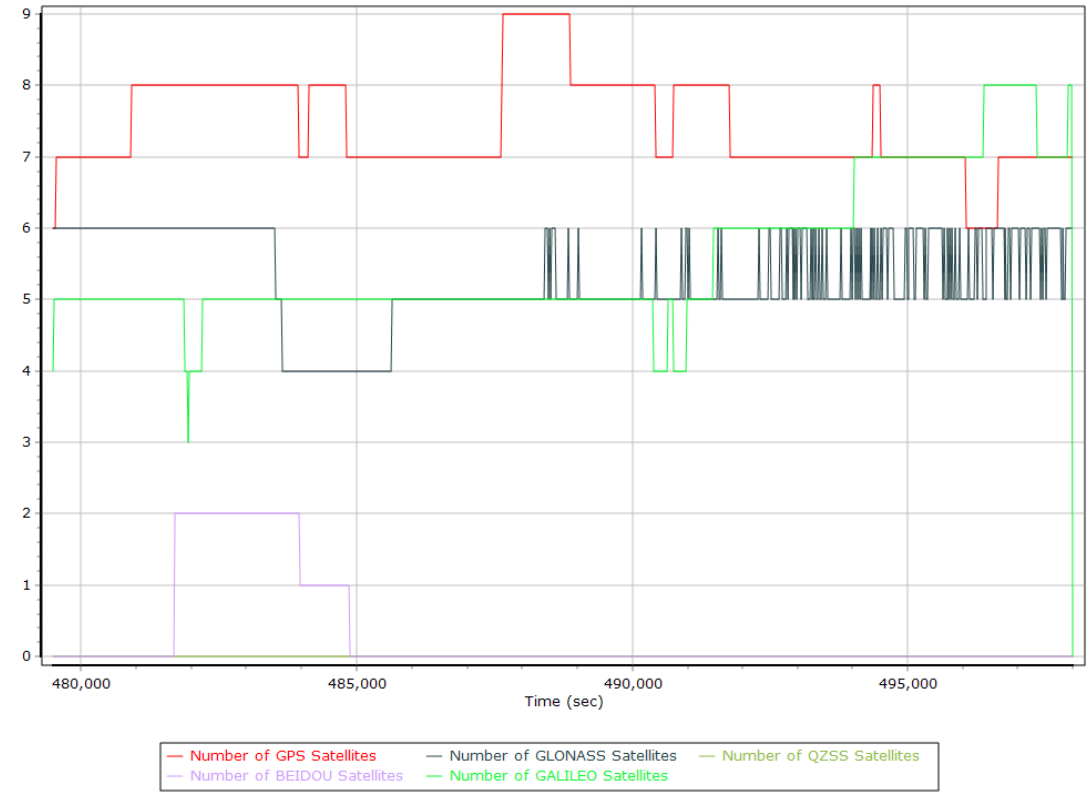

Baseline Length

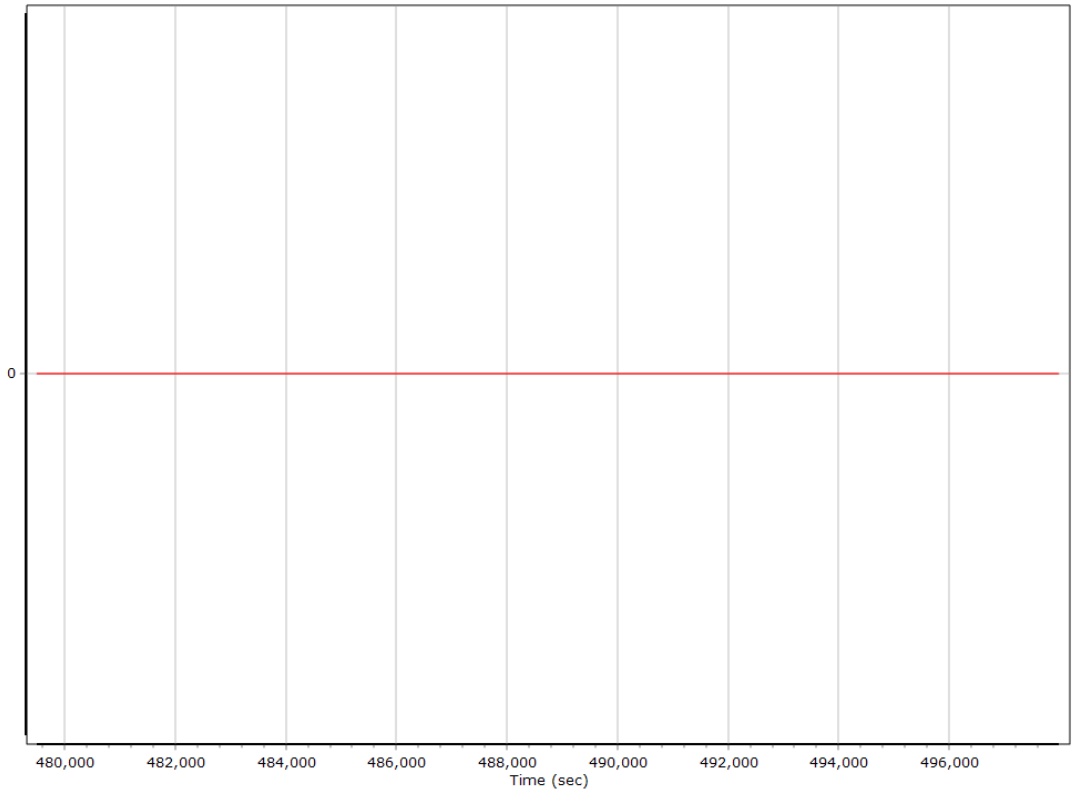

Export Summary

Export file	sbet_200814_A_5060380_nad2011_FINAL.shp		
Export format	Shapefile		
Solution in use	Post-processed		
Output rate	Specified Distance Interval		
Distance Interval (m)	10.000		
Reference to Output lever arm (m)	0.000	0.000	0.000
Reference mounting angles (deg)	0.000	0.000	0.000
Output units (Coordinate / Lat & Lon)	Meter	Deg Decimal	
Export start time	479439.002 (08/14/2020 13:10:39)		
Export end time	497994.003 (08/14/2020 18:19:54)		
Height option	Ellipsoid Height		
WGS84 height flag	False		
Grid	CONUS Albers		
Zone	CONUS Albers		
Datum	NAD83 (2011)		
Ellipsoid	GRS 1980		
Local Transformation	NONE		
Target Epoch	2010		