General Information

Mission Information

Project name	19-058_110619
Processing date	2019-11-13 20:24:20
Mission date	2019-11-06 16:20:11
Mission duration	07:59:38.000
Processing mode	IN-Fusion Trimble RTX Nav

Rover Hardware Information

Product	POS AV 510 VER6 HW2.4-11
Serial number	S/N6310
IMU type	46
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
191106_161952_AV510_5361.raw	POS Data

Input Files

File Name	File type
Ephm3100.19g	GLONASS Broadcast Ephemeris
Ephm3100.19n	GPS Broadcast Ephemeris
Ephm3110.19g	GLONASS Broadcast Ephemeris
Ephm3110.19n	GPS Broadcast Ephemeris

Output Files

Filename	File type
sbet_19-058_110619.out	SBET Trajectory File
export_19-058_110619.out	Custom Smoothed BET Export Output

Rover Data Summary

First raw data file	191106_161952_AV510_5361.raw		
Last raw data file	191106_161952_AV510_5361.raw		
Start GPS week	2078		
Start time	317992.430 (11/6/2019 4:19:52 PM)		
End time	346758.742 (11/7/2019 12:19:18 AM)		
Start of fine alignment	318404.576 (11/6/2019 4:26:44 PM)		
Available subsystems	Primary GNSS, IMU		
POS Event Input	Event 1 Input		
Correction data	Trimble RTX		
IMU Installation Lever Arms & Mounting Angles			
Reference to IMU lever arm [m]	0.000	0.000	0.000
Reference to IMU mounting angles [deg]	0.000	0.000	0.000
Reference to Primary GNSS lever arm [m]	-0.011	0.039	-1.017
Reference to Primary GNSS lever arm std dev [m]	-1.000		
Aircraft to Reference mounting angles [deg]	0.000	0.000	0.000

Raw Data QC

L1 Satellite Lock/Elevation

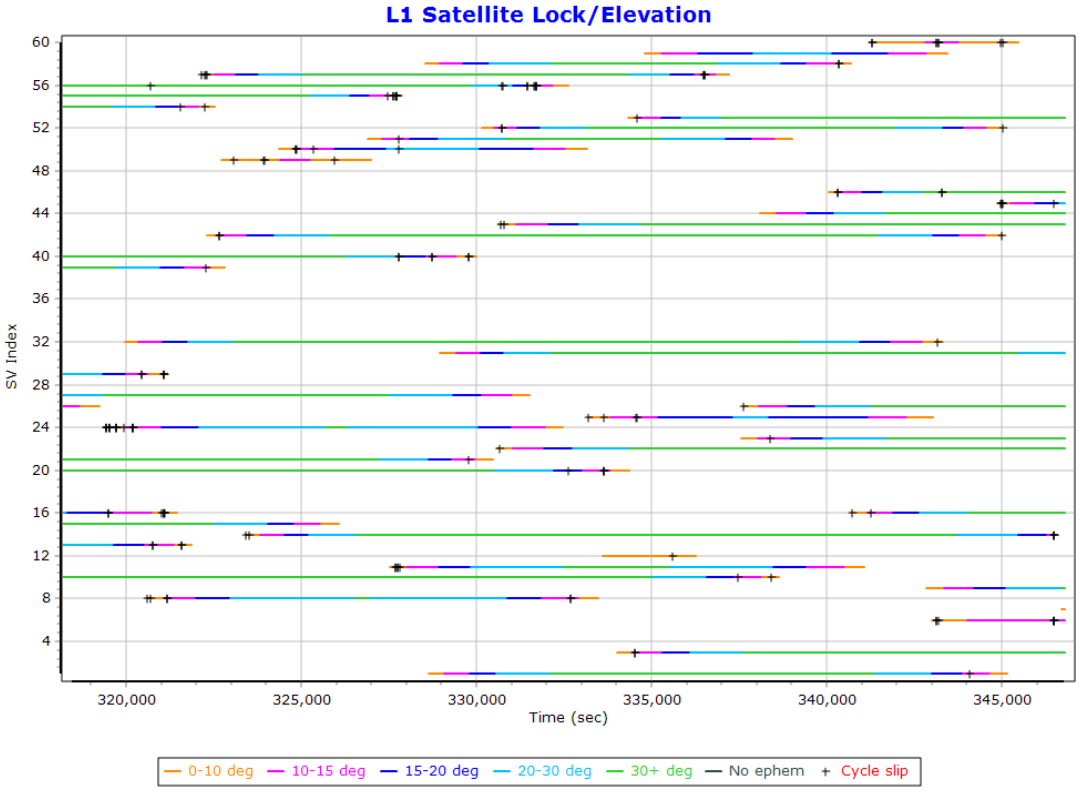

L2 Satellite Lock/Elevation

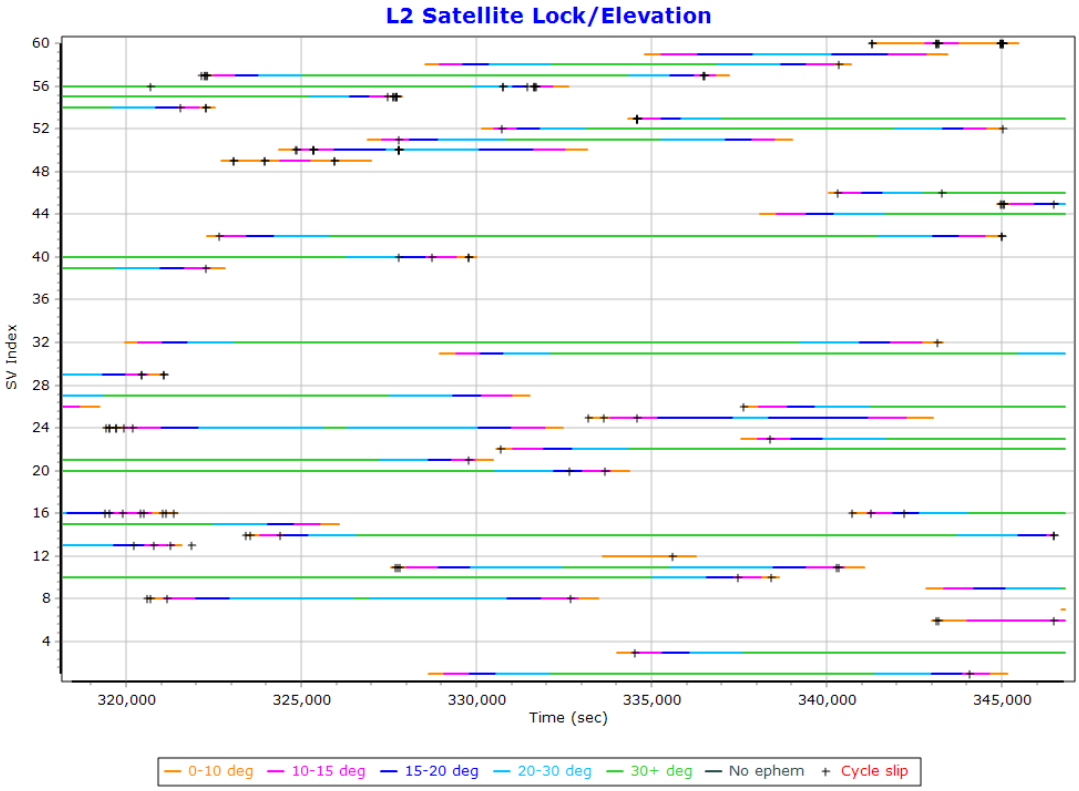

GPS L1 SNR

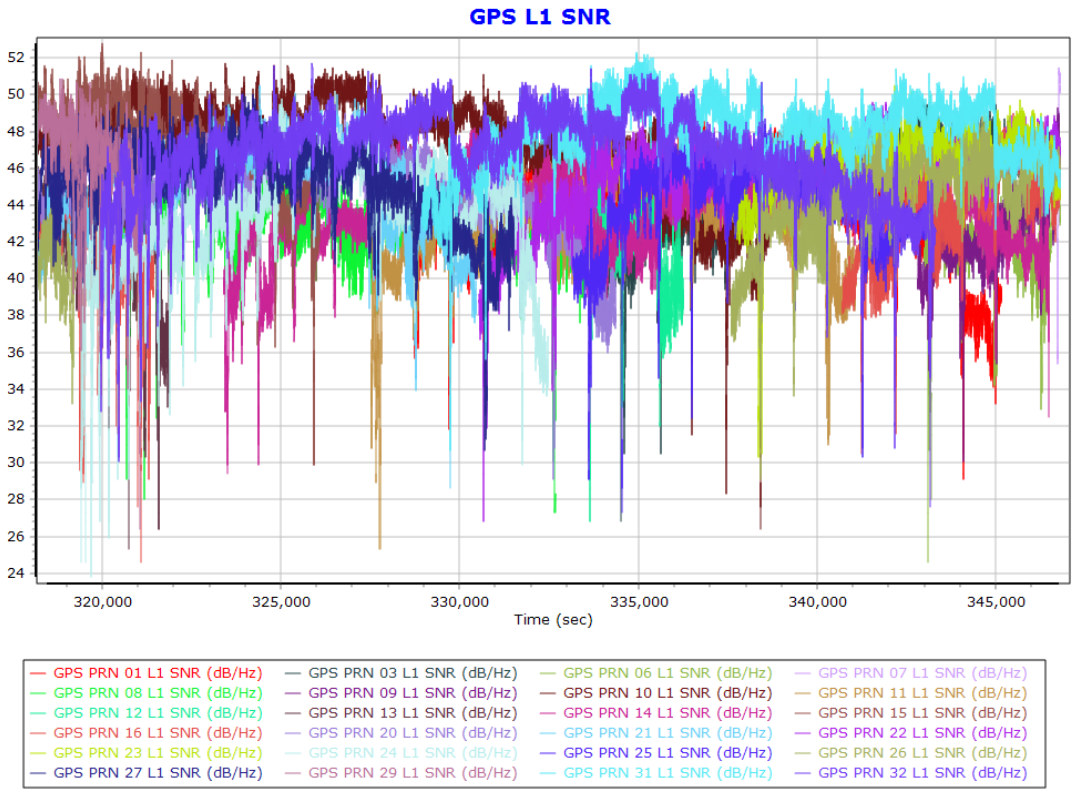

GPS L2 SNR

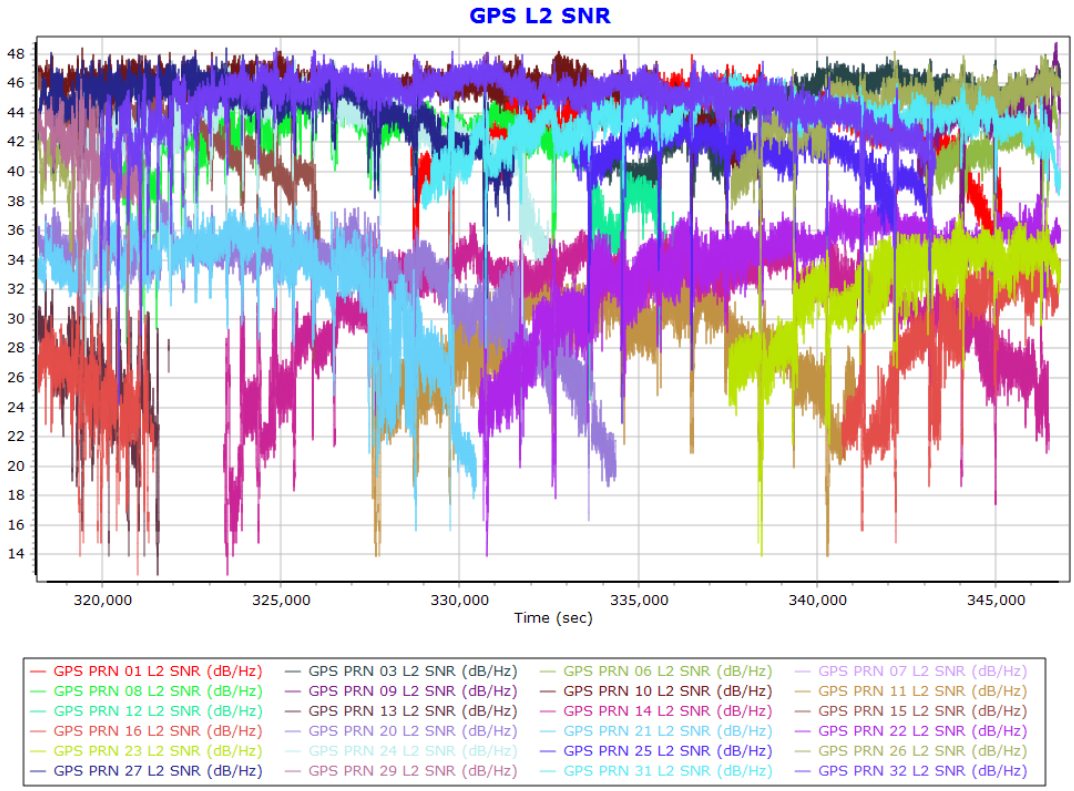

GLONASS L1 SNR

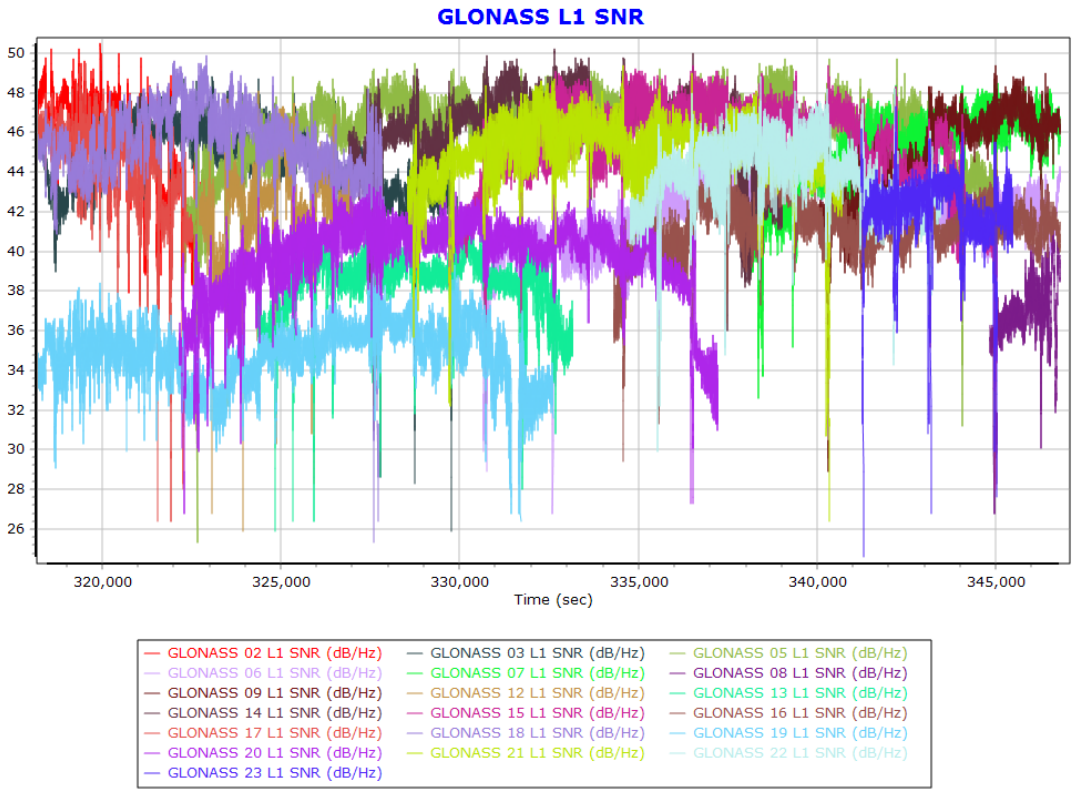

GLONASS L2 SNR

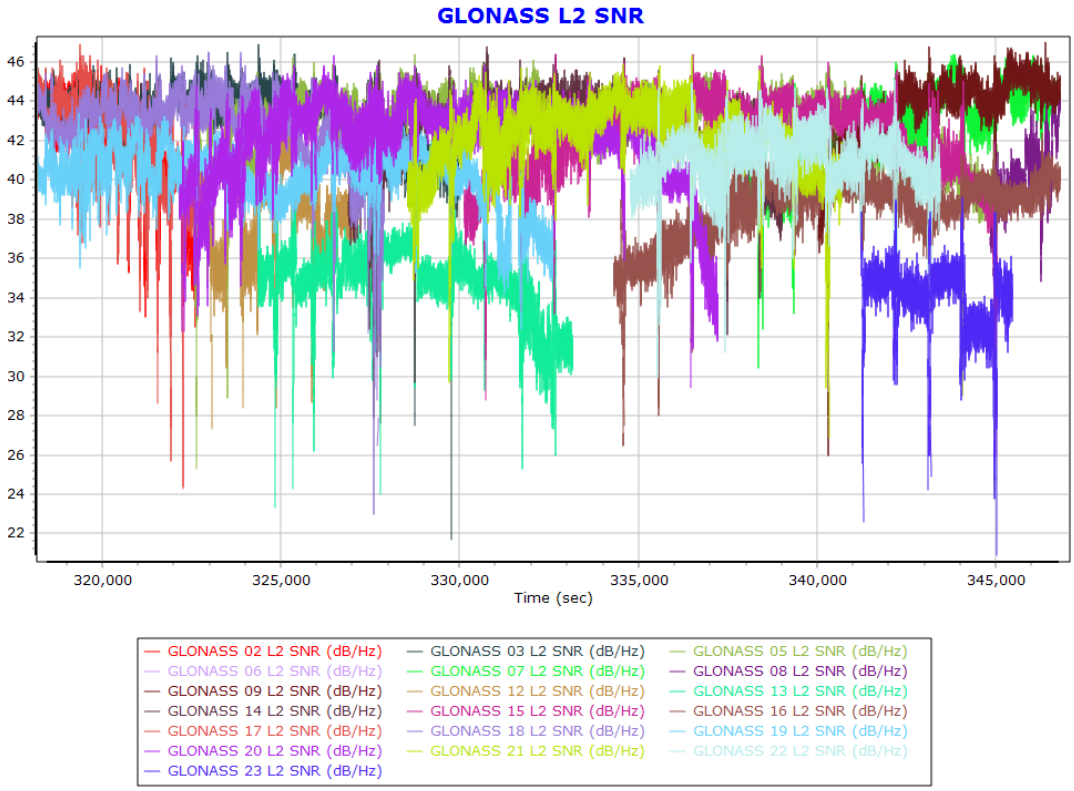

BEIDOU SNR

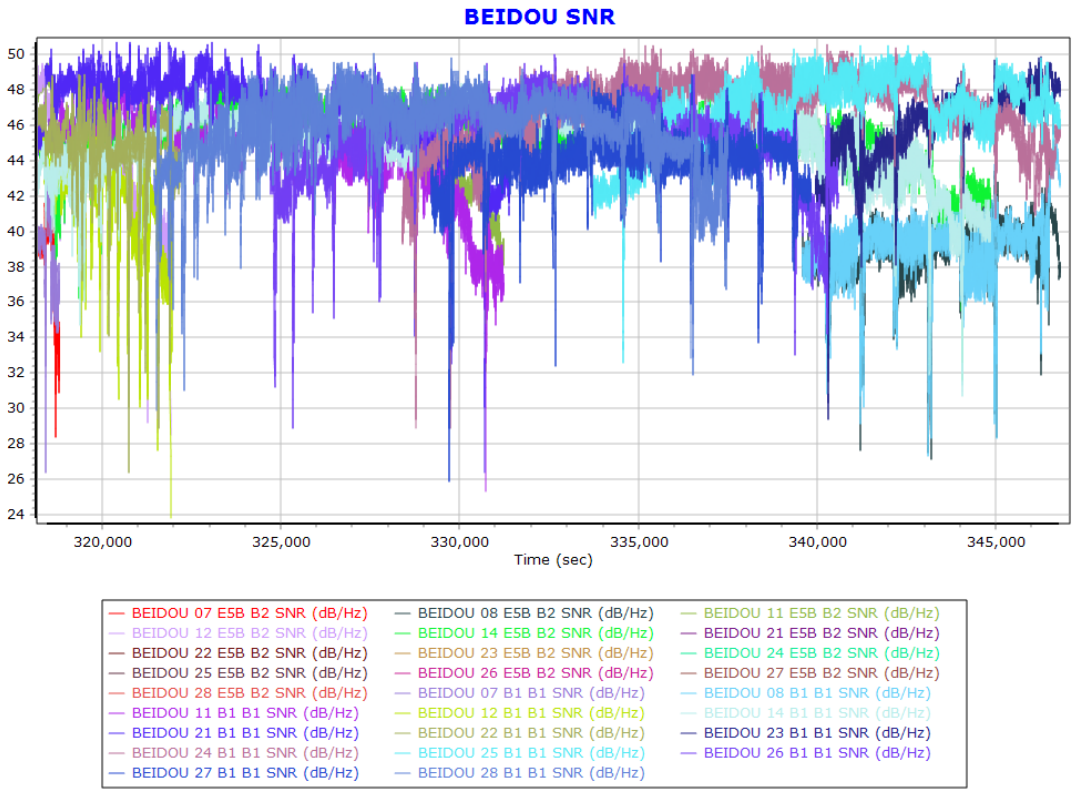
BEIDOU SNR
50
48
46
44
42
40
38
36
34
32
30
28
26
24
320,000
325,000
330,000
335,000
340,000
345,000
Time (sec)
BEIDOU 07 E5B B2 SNR (dB/Hz)
BEIDOU 08 E5B B2 SNR (dB/Hz)
BEIDOU 11 E5B B2 SNR (dB/Hz)
BEIDOU 12 E5B B2 SNR (dB/Hz)
BEIDOU 14 E5B B2 SNR (dB/Hz)
BEIDOU 21 E5B B2 SNR (dB/Hz)
BEIDOU 22 E5B B2 SNR (dB/Hz)
BEIDOU 23 E5B B2 SNR (dB/Hz)
BEIDOU 24 E5B B2 SNR (dB/Hz)
BEIDOU 25 E5B B2 SNR (dB/Hz)
BEIDOU 26 E5B B2 SNR (dB/Hz)
BEIDOU 27 E5B B2 SNR (dB/Hz)
BEIDOU 28 E5B B2 SNR (dB/Hz)
BEIDOU 07 B1 B1 SNR (dB/Hz)
BEIDOU 08 B1 B1 SNR (dB/Hz)
BEIDOU 11 B1 B1 SNR (dB/Hz)
BEIDOU 12 B1 B1 SNR (dB/Hz)
BEIDOU 14 B1 B1 SNR (dB/Hz)
BEIDOU 21 B1 B1 SNR (dB/Hz)
BEIDOU 22 B1 B1 SNR (dB/Hz)
BEIDOU 23 B1 B1 SNR (dB/Hz)
BEIDOU 24 B1 B1 SNR (dB/Hz)
BEIDOU 25 B1 B1 SNR (dB/Hz)
BEIDOU 26 B1 B1 SNR (dB/Hz)
BEIDOU 27 B1 B1 SNR (dB/Hz)
BEIDOU 28 B1 B1 SNR (dB/Hz)

Trajectory Information

Top View

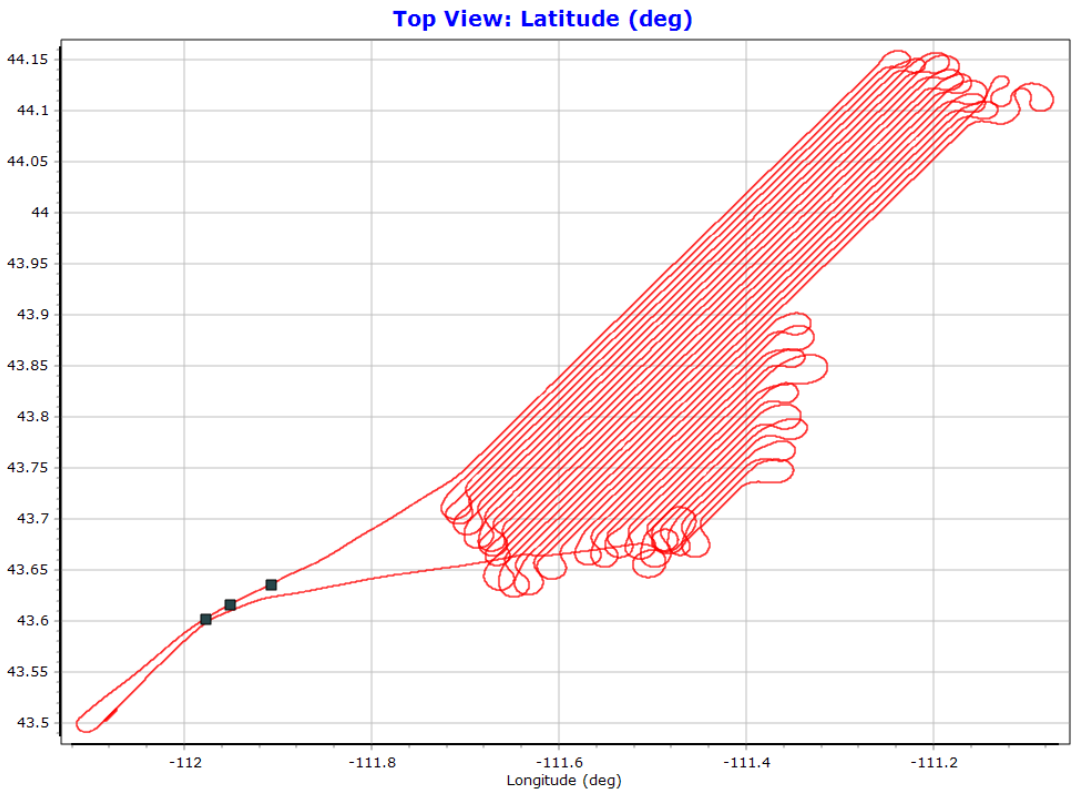

Altitude

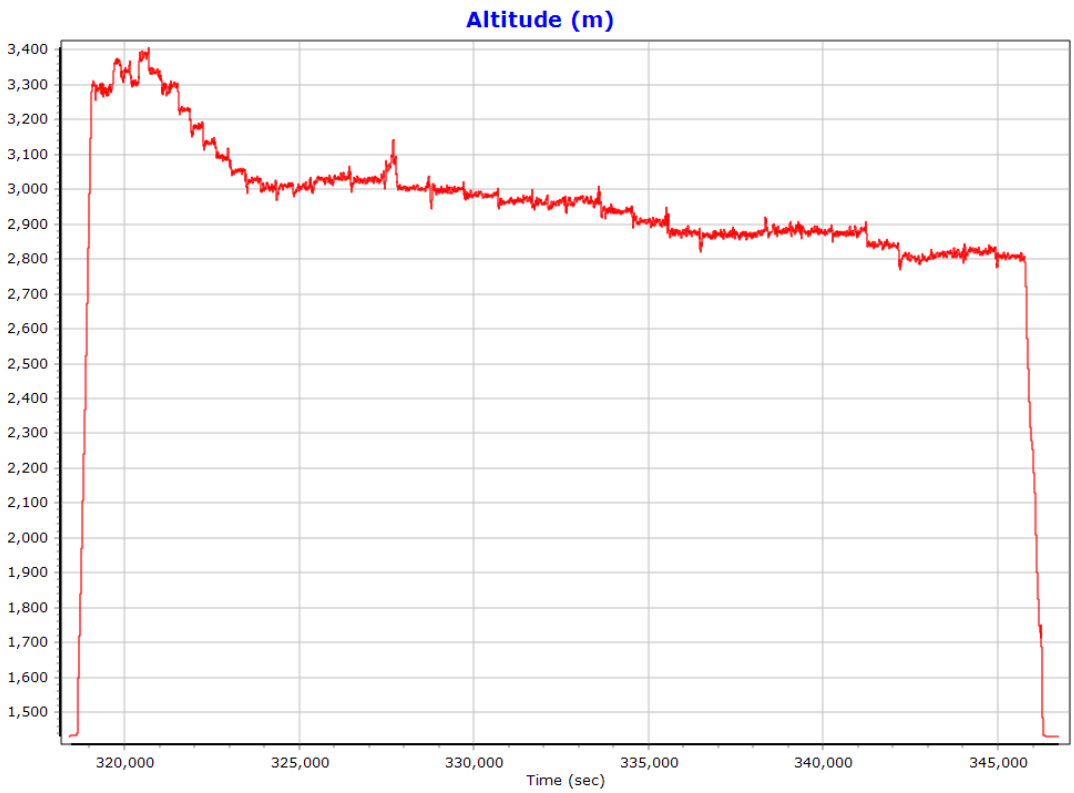

Roll/Pitch

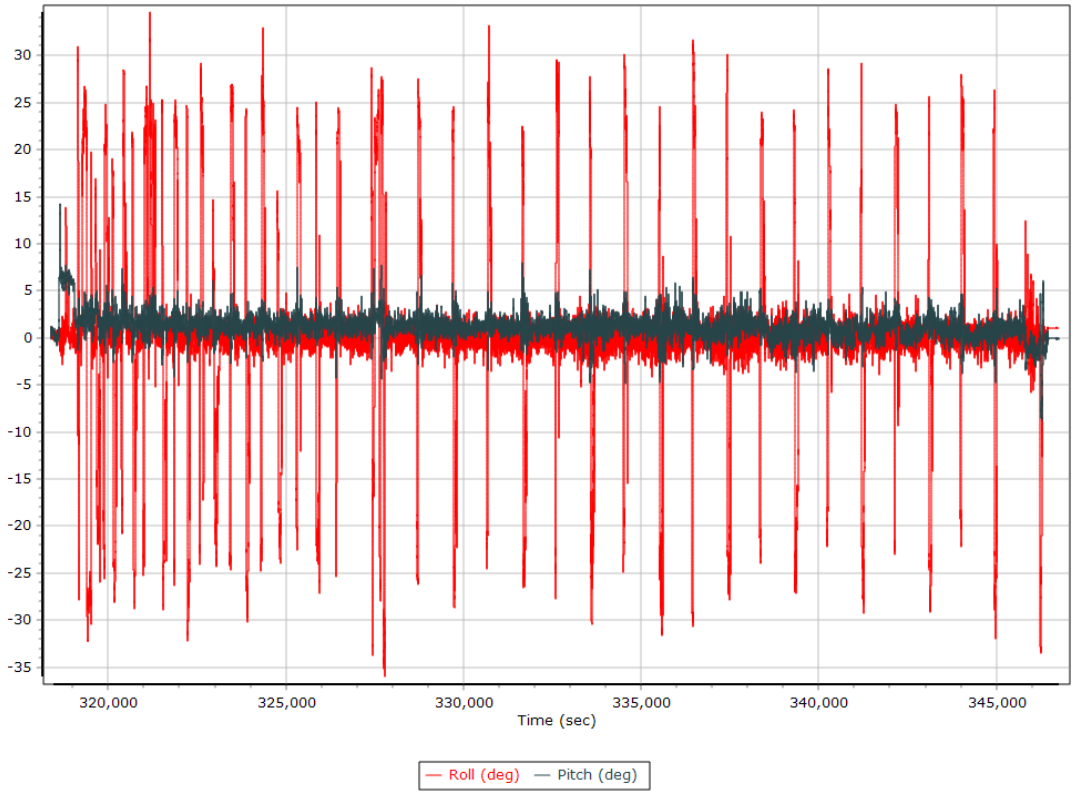

Heading

North/East Velocity

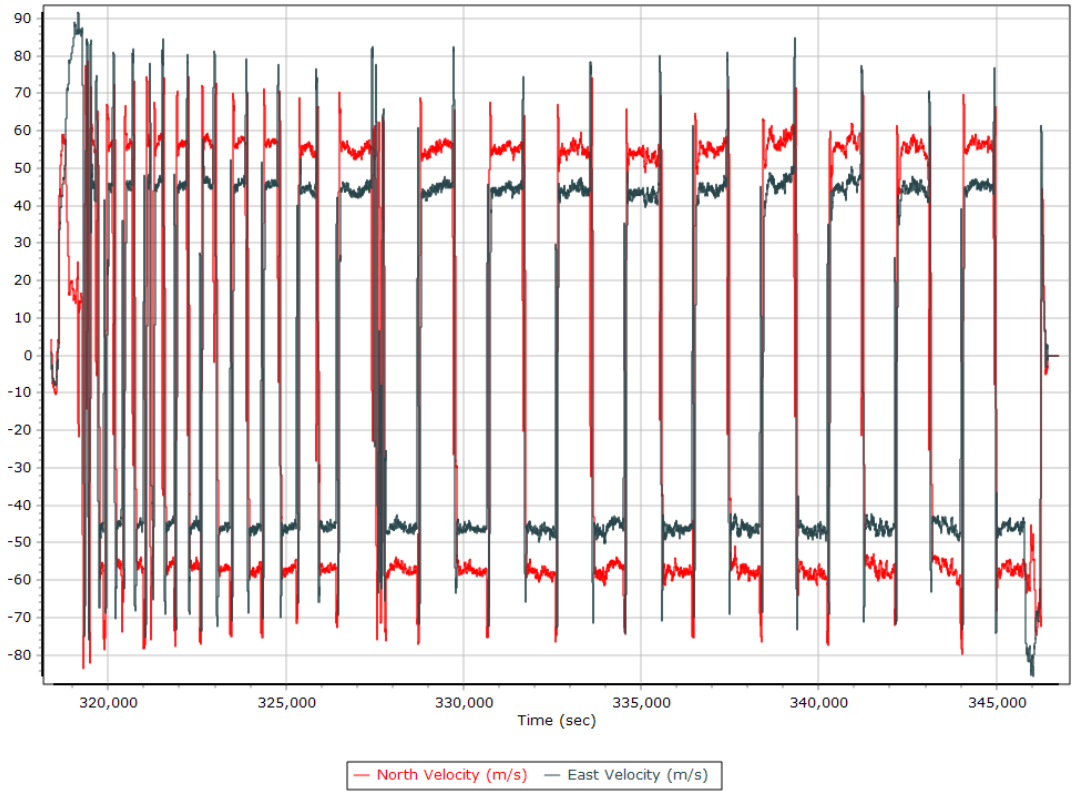

Down Velocity

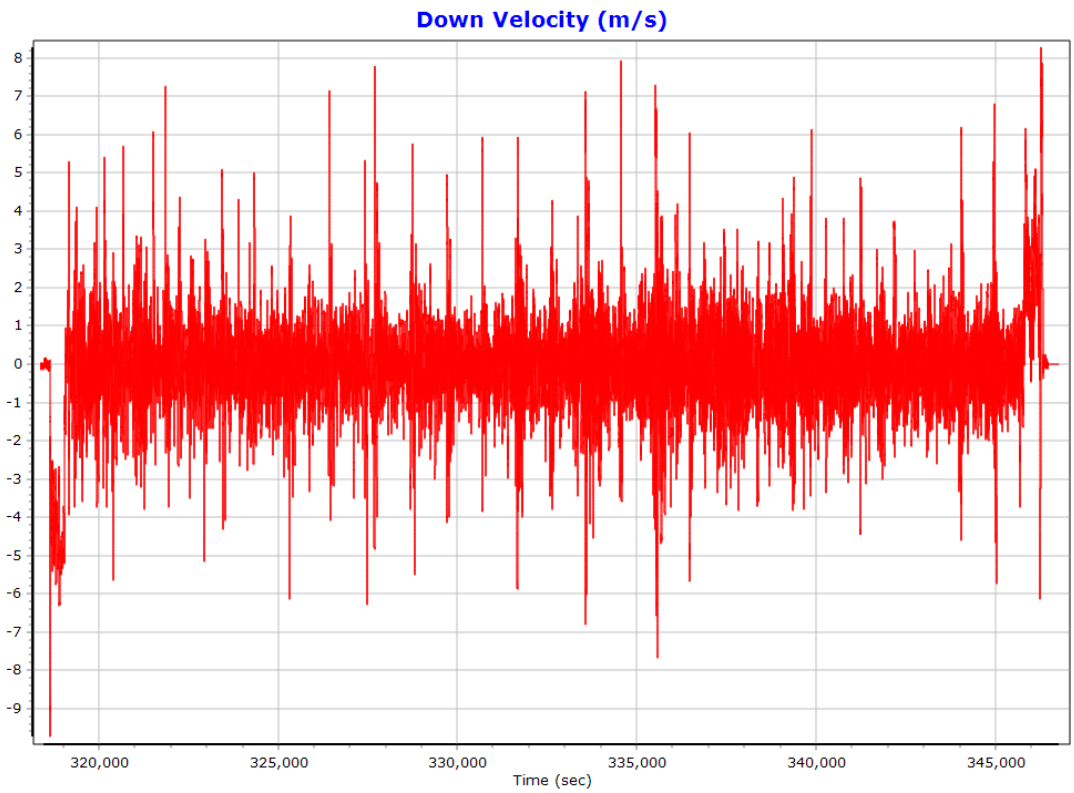

Total Speed

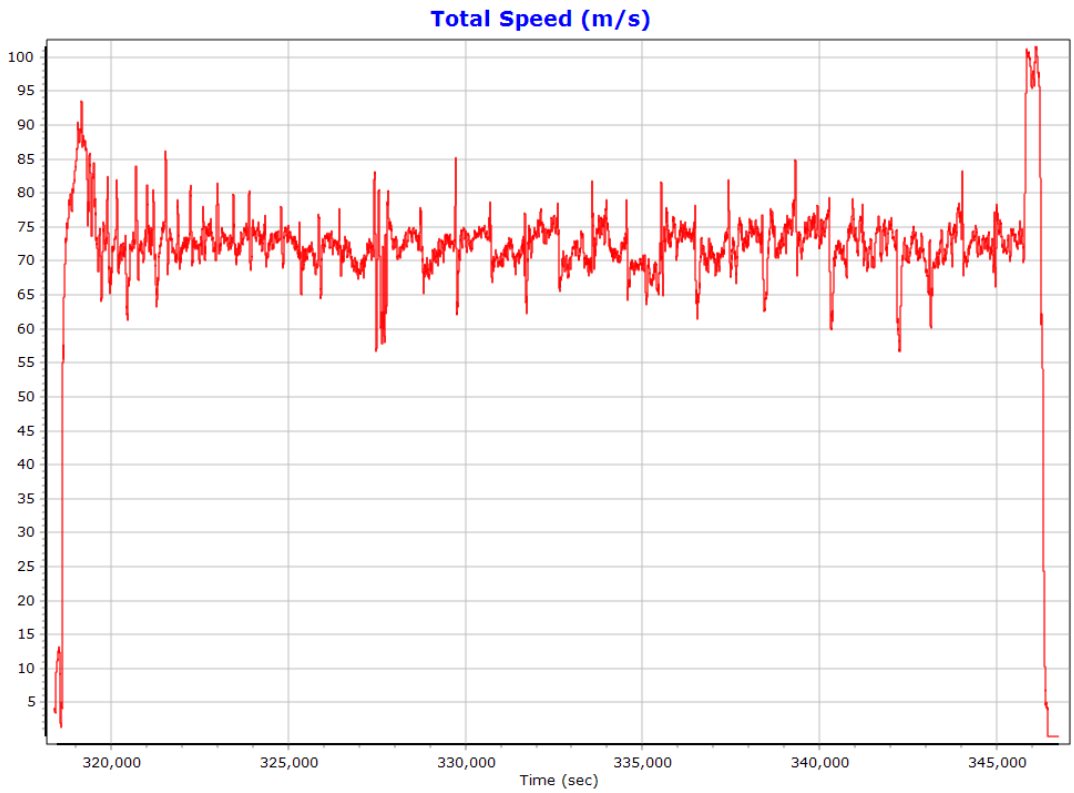

Ground Speed

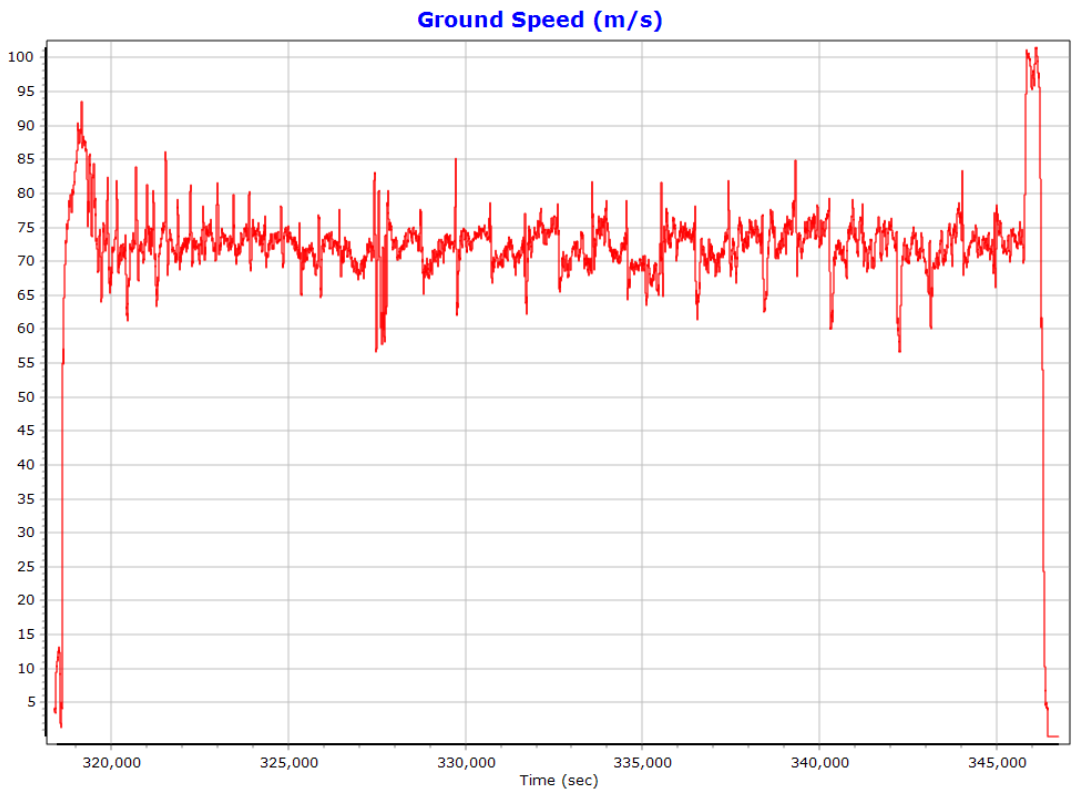

Body Acceleration

Total Body Acceleration

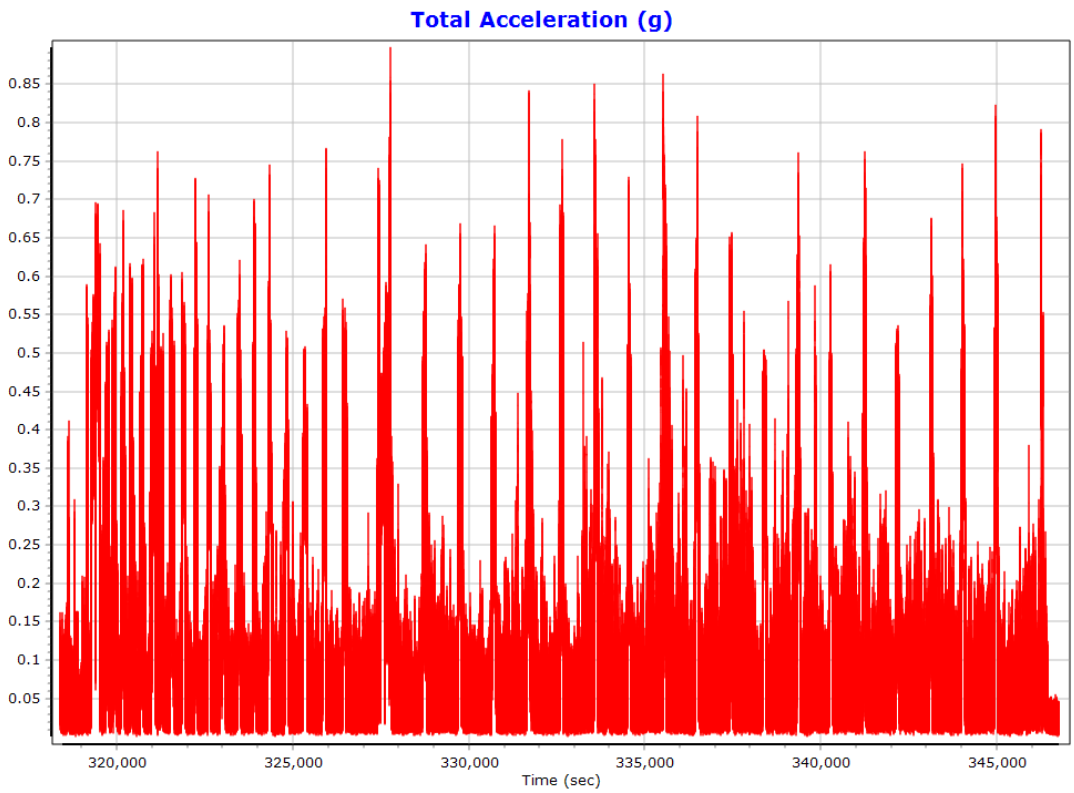

Body Angular Rate

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion Trimble RTX Nav		
Stabilized mount	False		
Processing start time	317993.000 (11/6/2019 4:19:53 PM)		
Processing end time	346771.000 (11/7/2019 12:19:31 AM)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Reference to IMU lever arm [m]	0.000	0.000	0.000
Reference to IMU mounting angles [deg]	0.000	0.000	0.000
Reference to Primary GNSS lever arm [m]	-0.008	0.046	-1.014
Reference to Primary GNSS lever arm std dev [m]	0.030	0.030	0.030
Aircraft to Reference mounting angles [deg]	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm

X Reference-Primary GNSS Lever Arm (m)

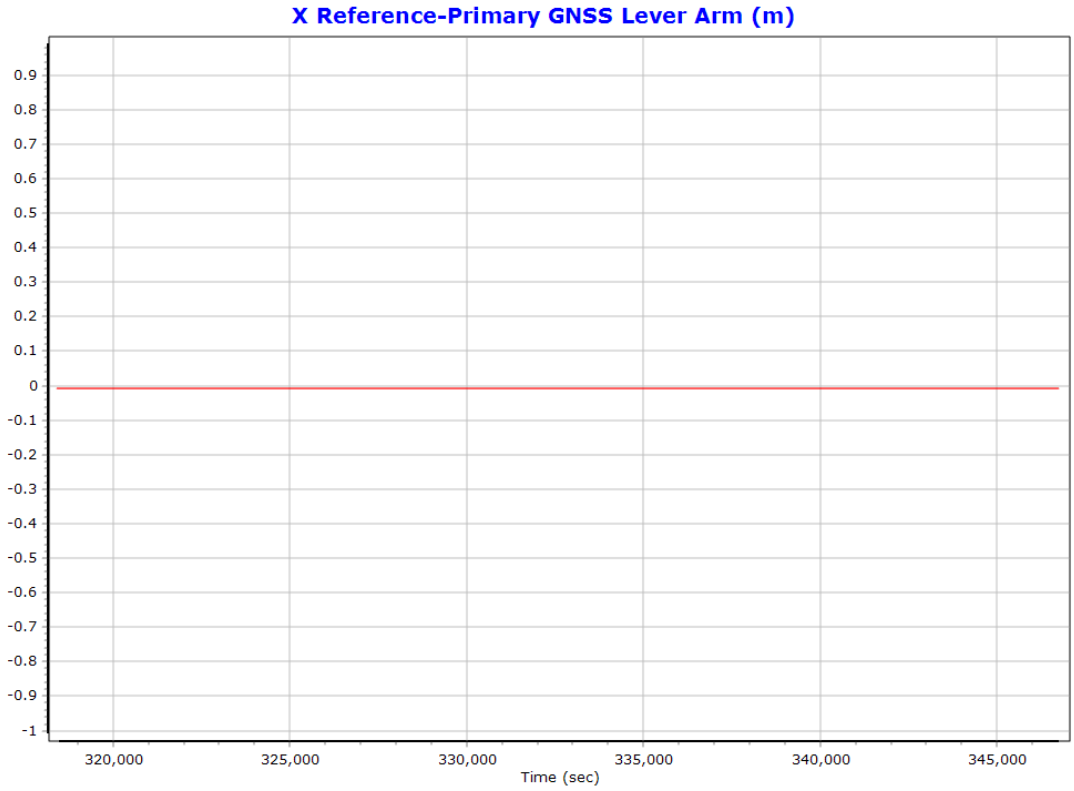

Y Reference-Primary GNSS Lever Arm (m)

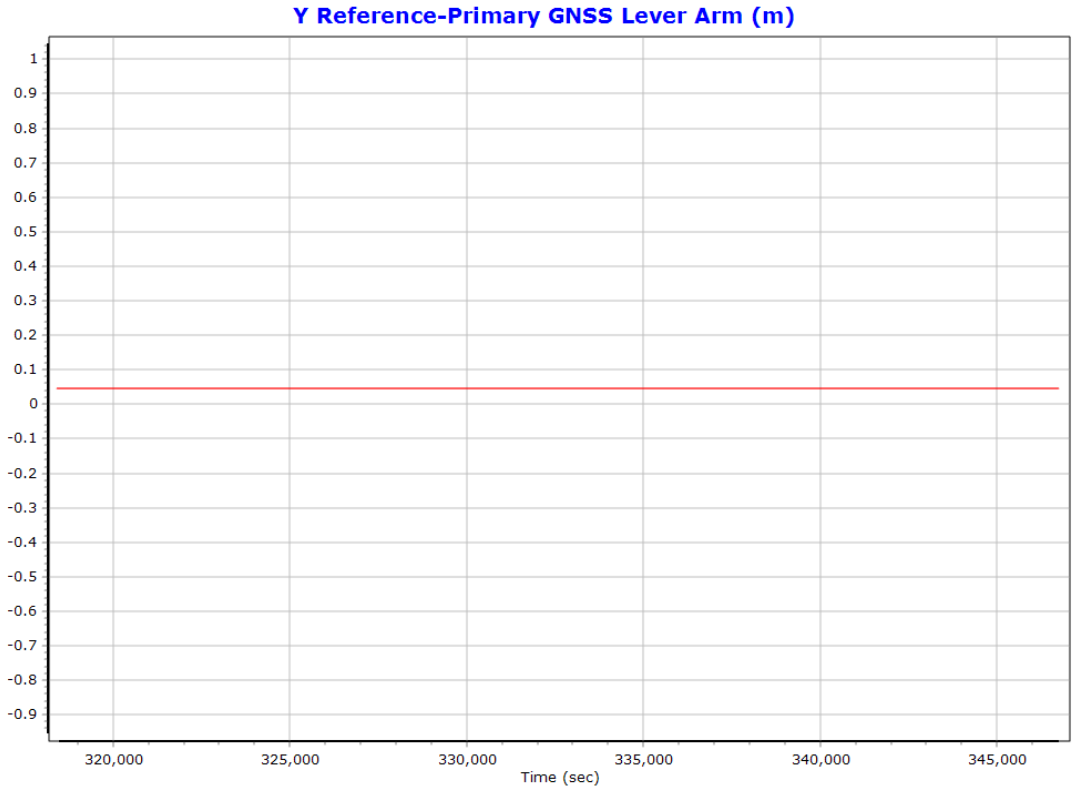

Z Reference-Primary GNSS Lever Arm (m)

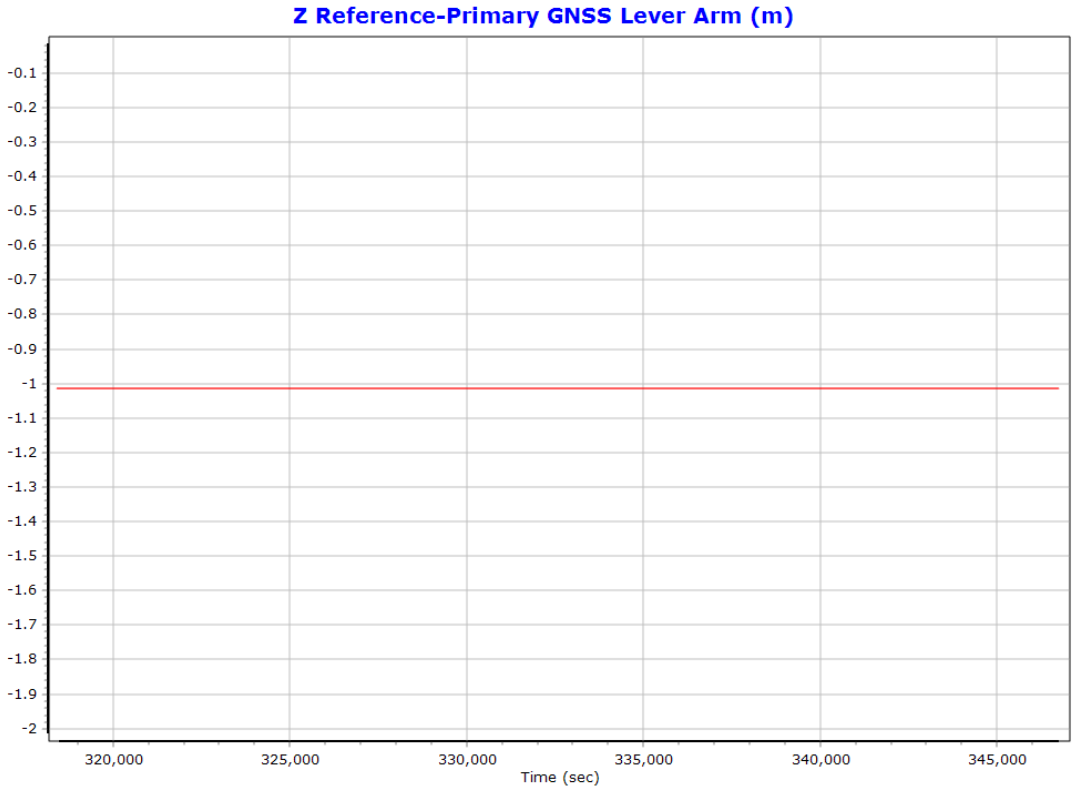

Reference-Primary GNSS Lever Arm Figure of Merit

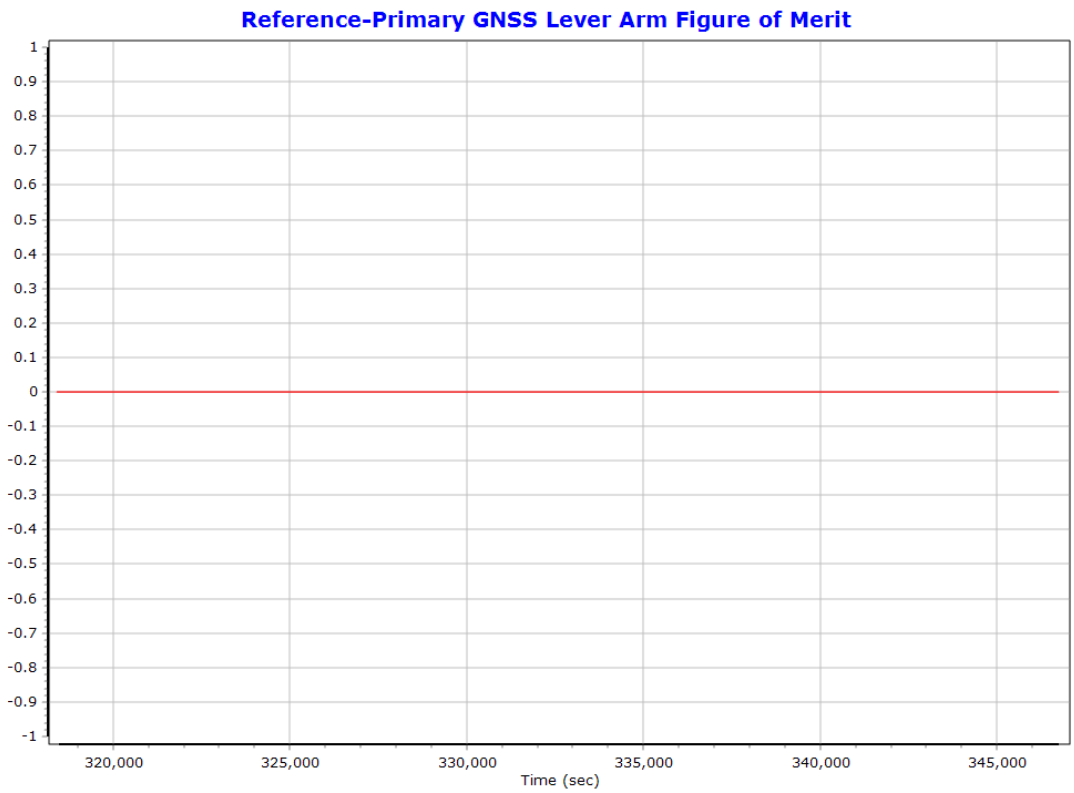

Smoothed IN-Fusion QC

Smoothed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

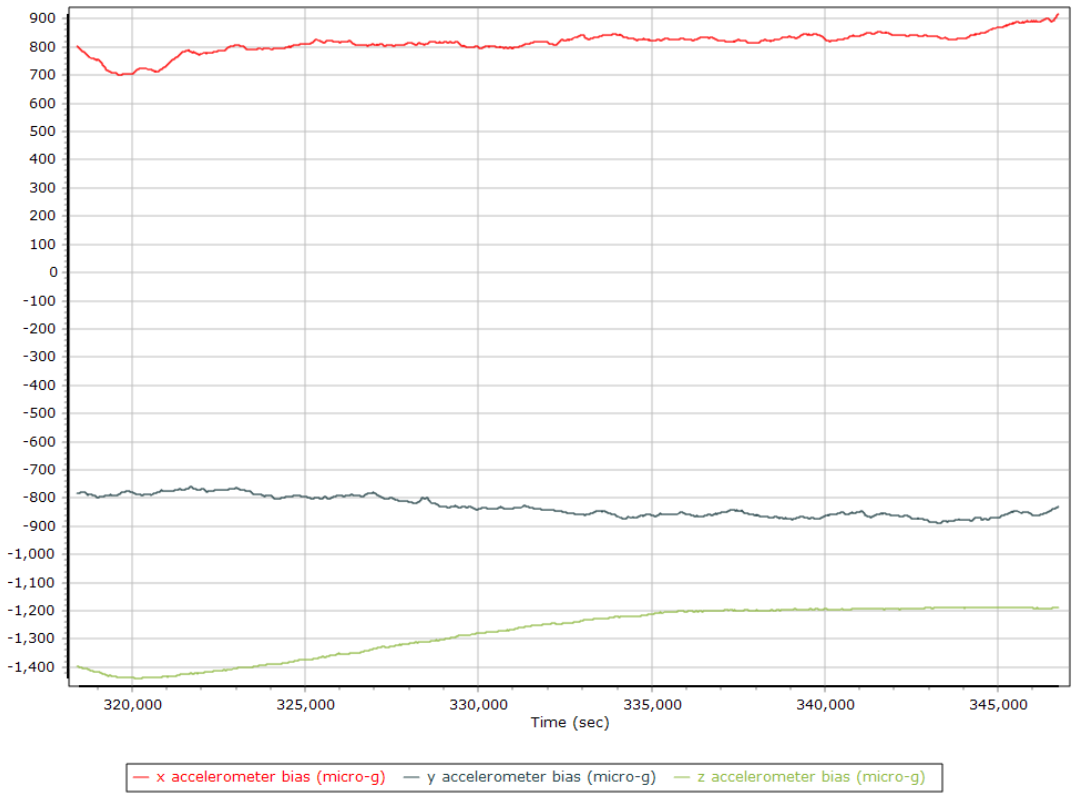

X Accelerometer Bias (micro-g)

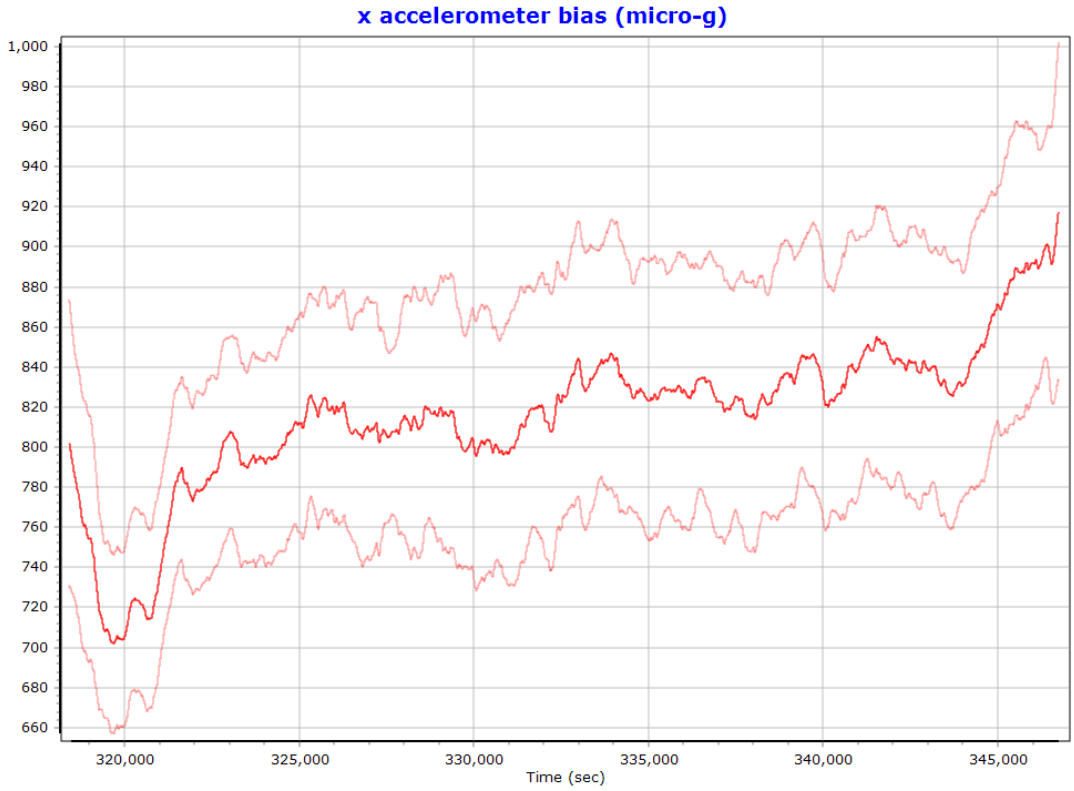

Y Accelerometer Bias (micro-g)

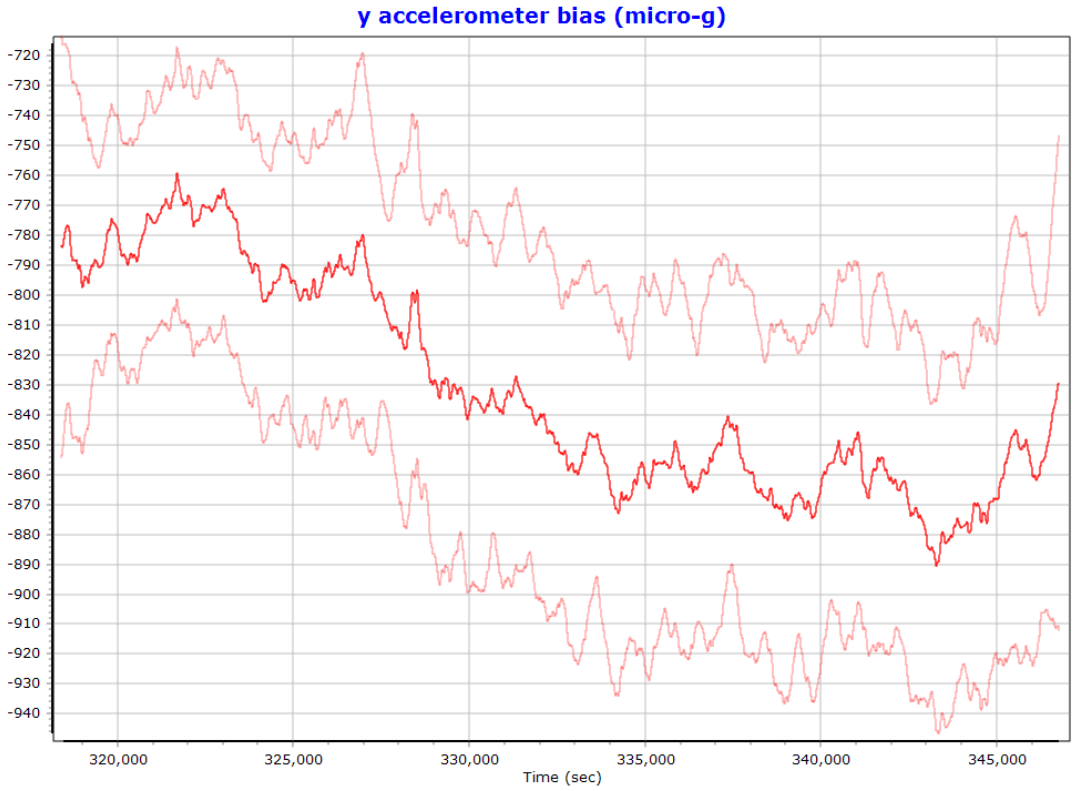

Z Accelerometer Bias (micro-g)

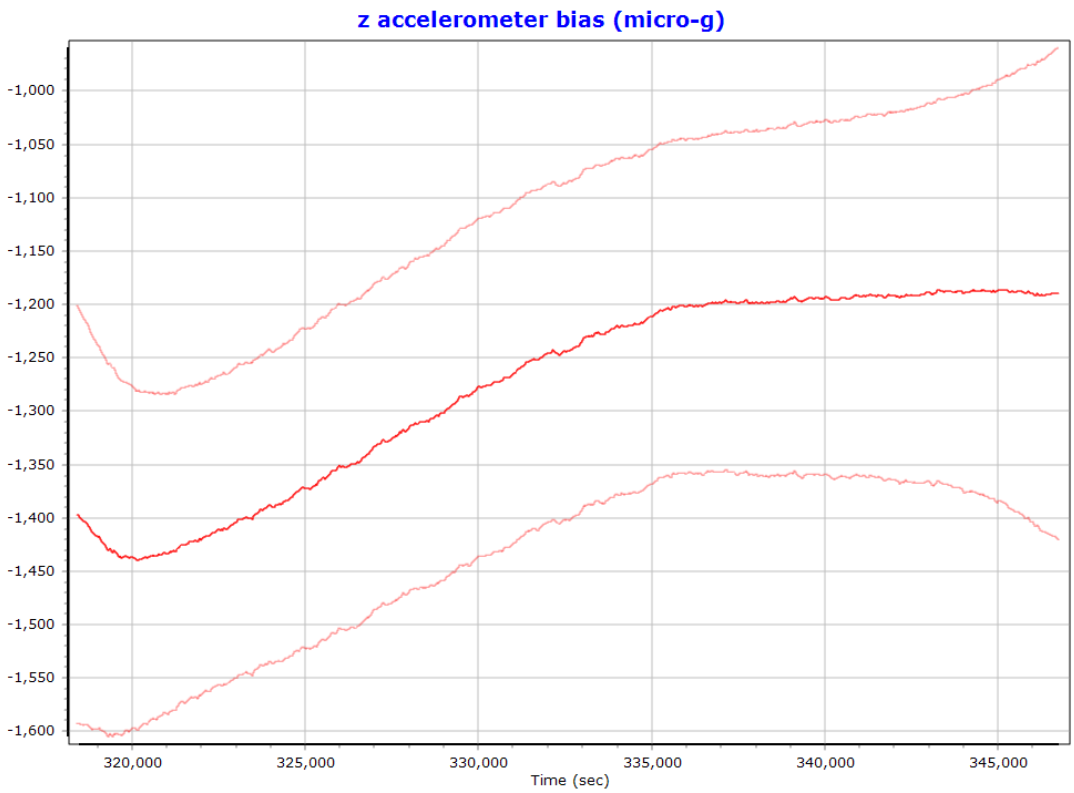

Accelerometer Scale Error (ppm)

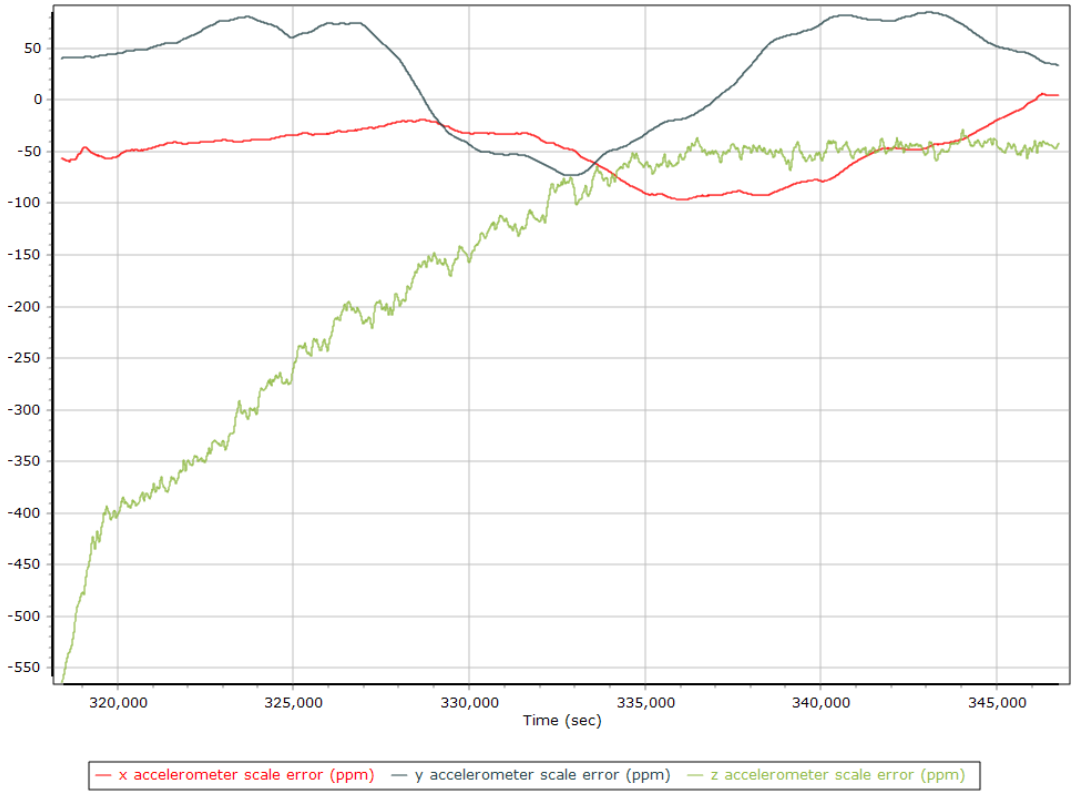

X Accelerometer Scale Error (ppm)

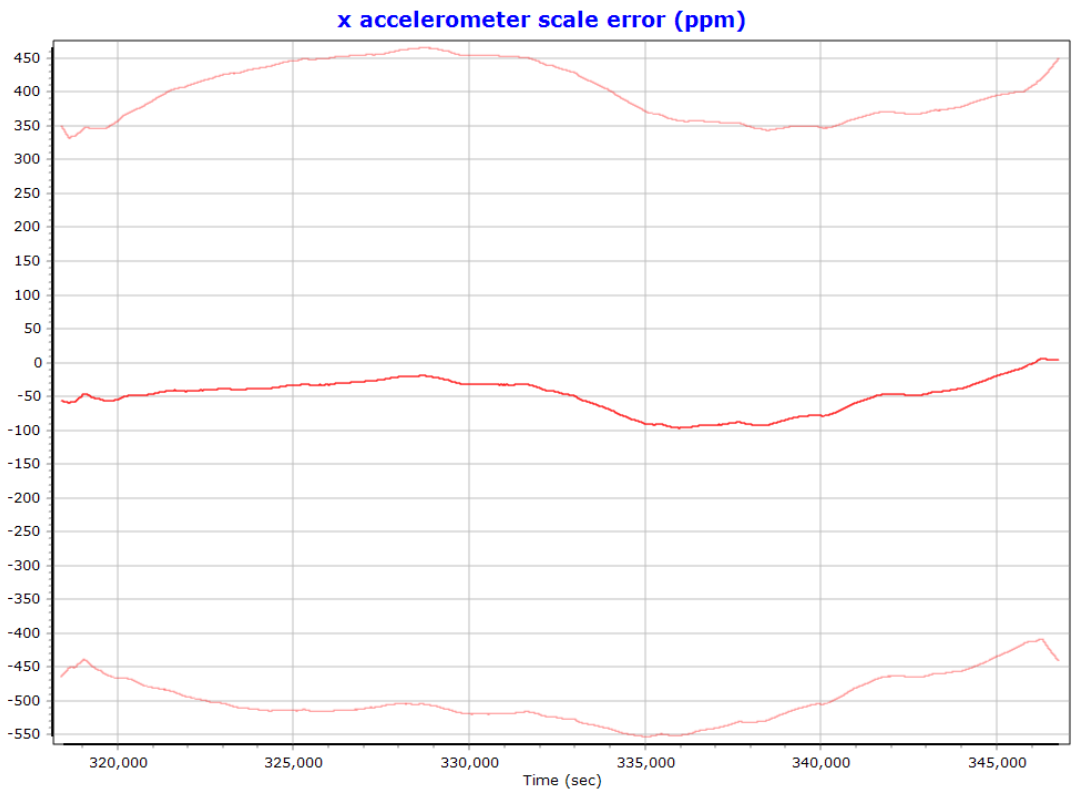

Y Accelerometer Scale Error (ppm)

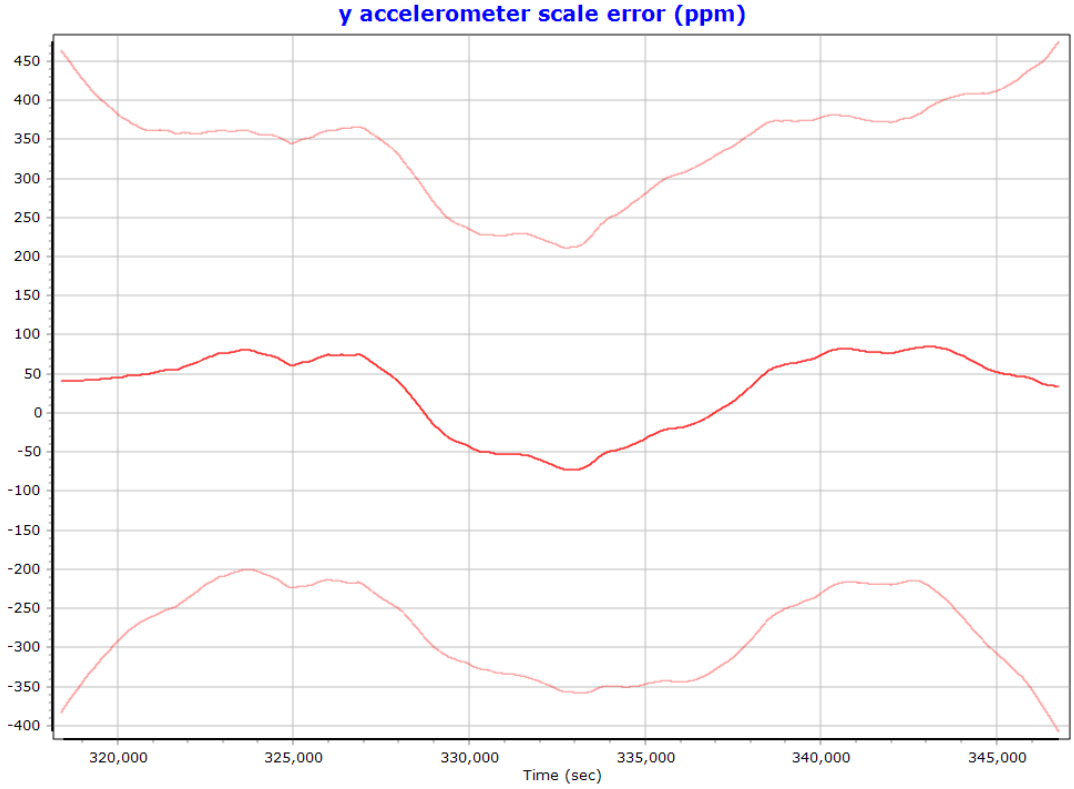

Z Accelerometer Scale Error (ppm)

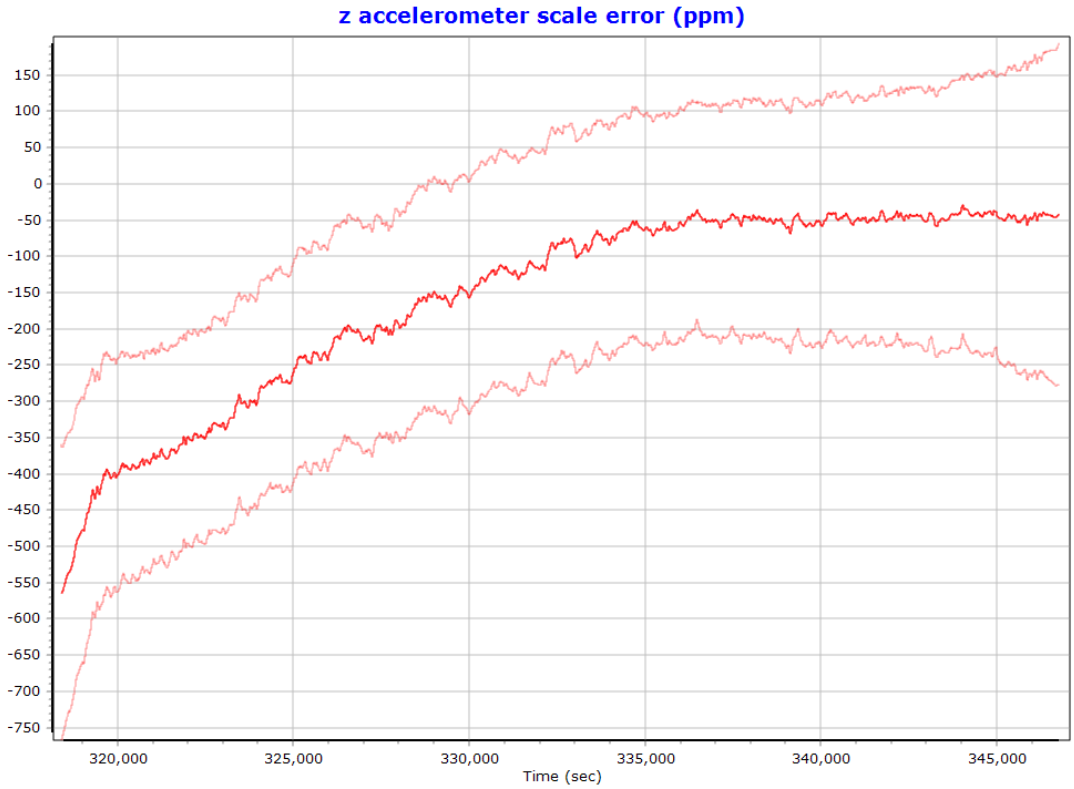

Gyro Bias (deg/h)

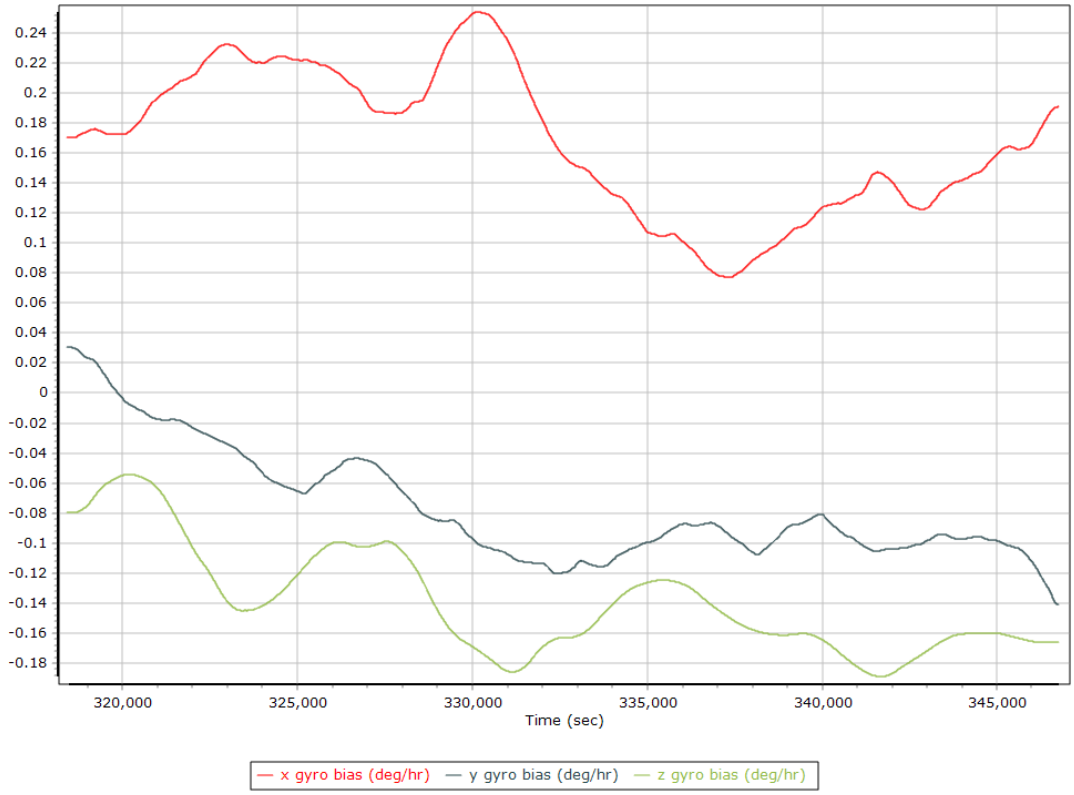

X Gyro Bias (deg/h)

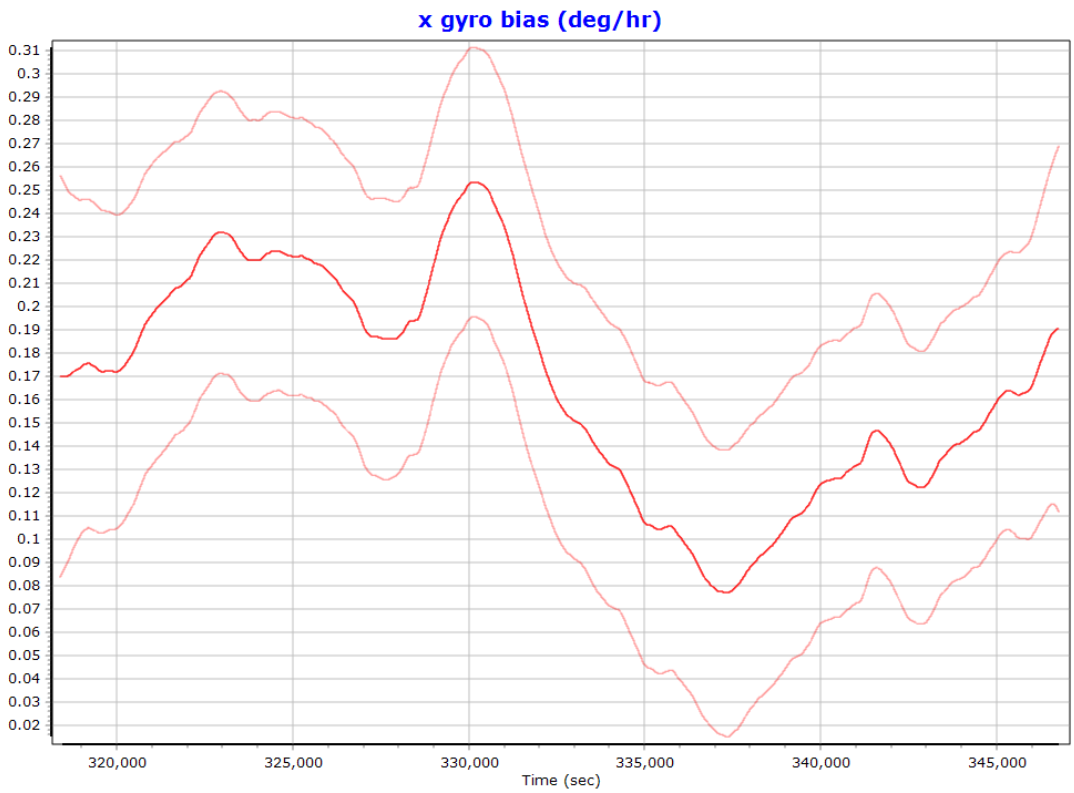

Y Gyro Bias (deg/h)

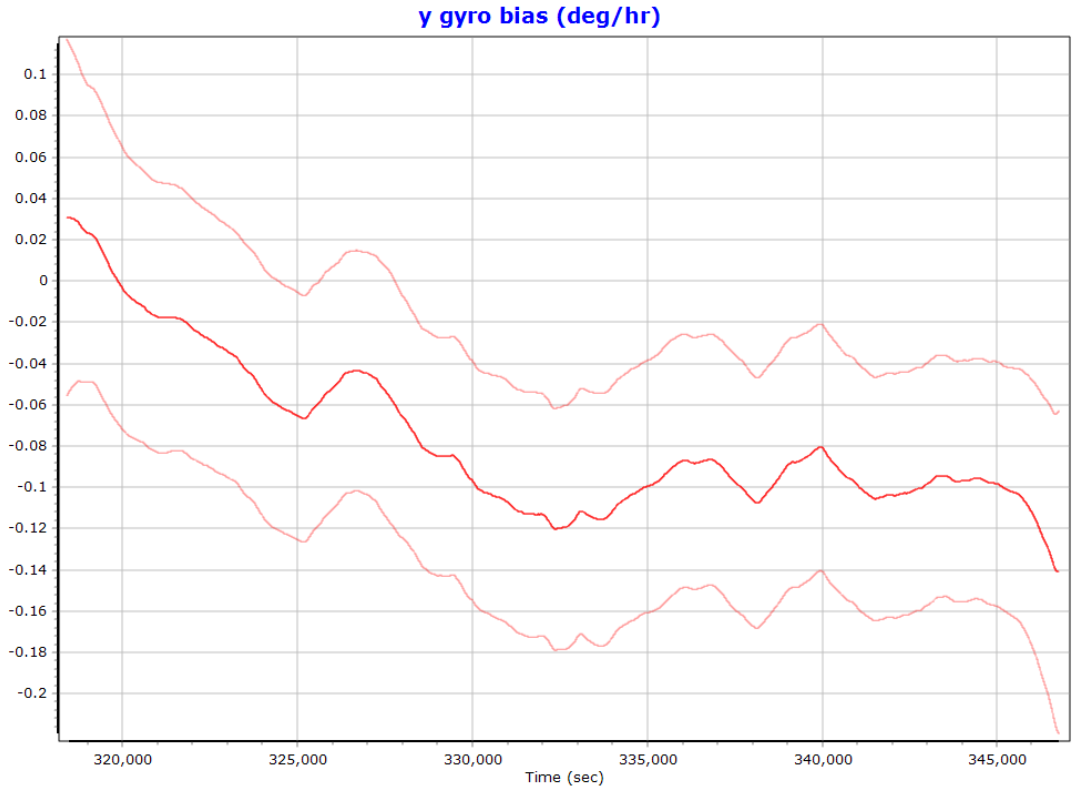

Z Gyro Bias (deg/h)

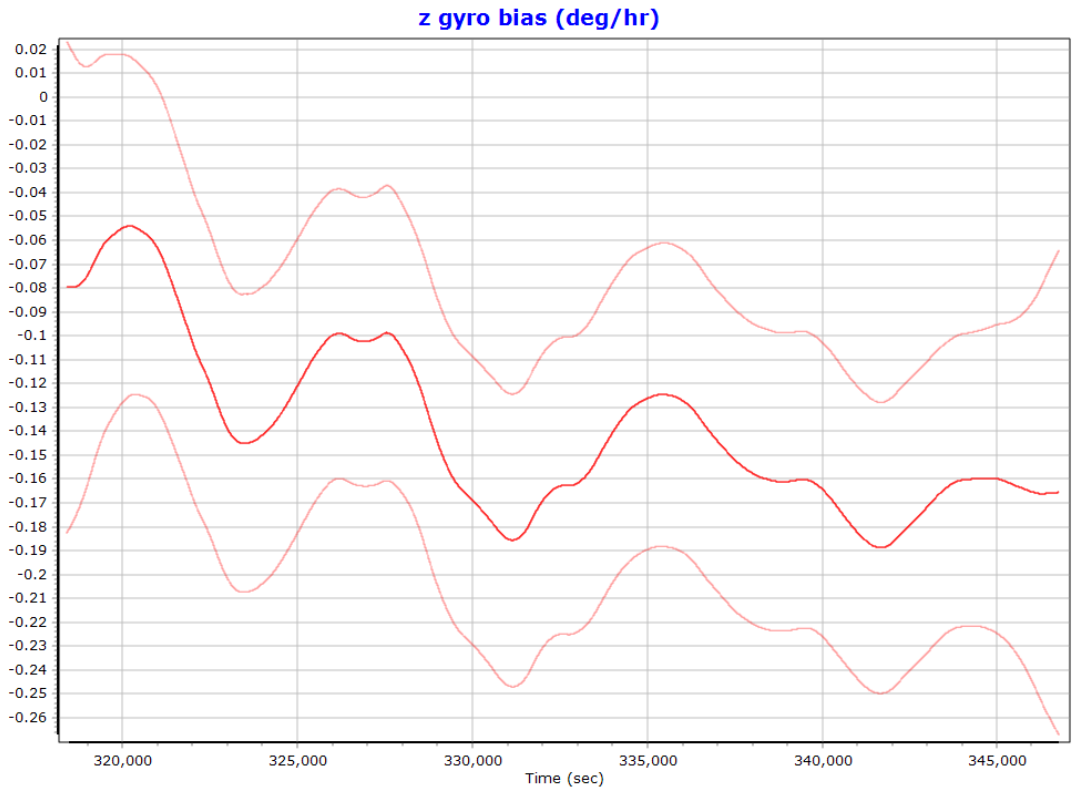

Gyro Scale Error (ppm)

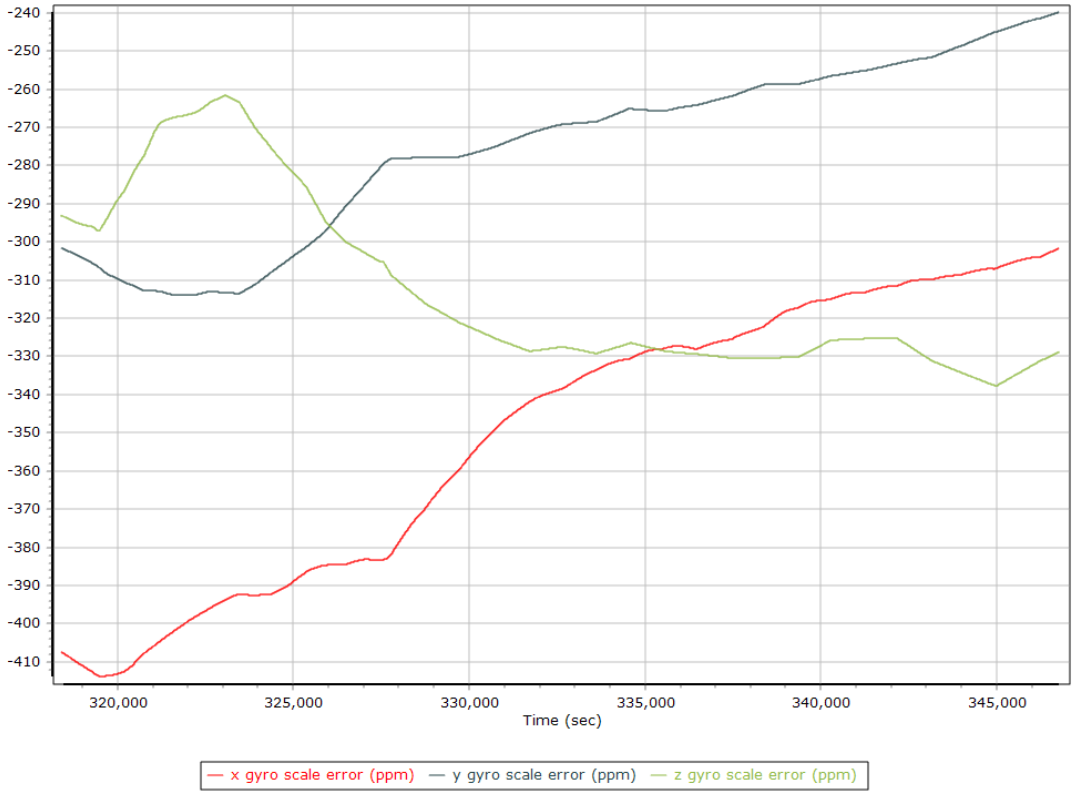

X Gyro Scale Error (ppm)

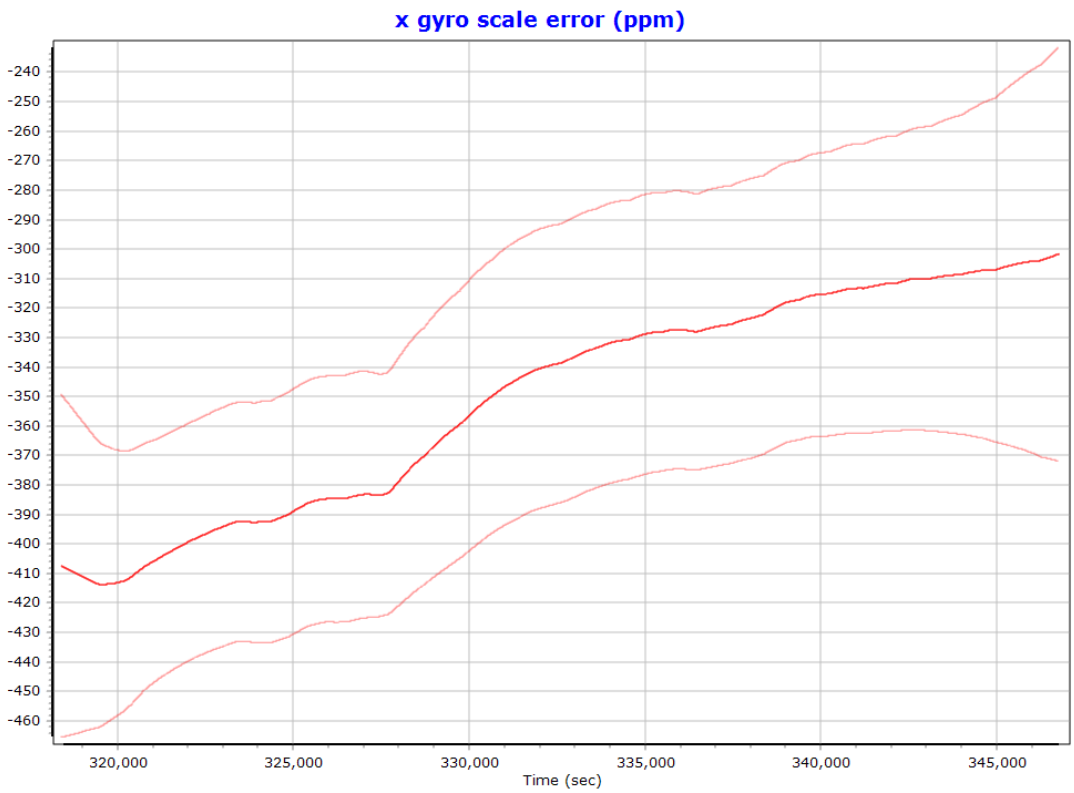

Y Gyro Scale Error (ppm)

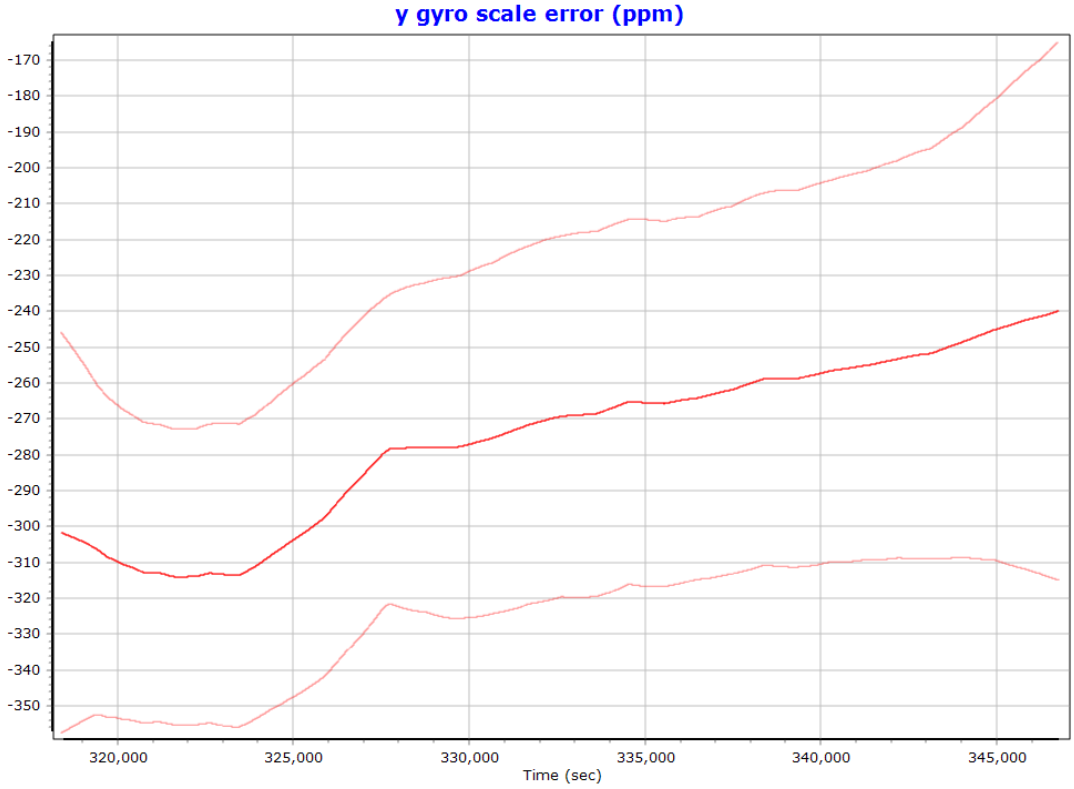

Z Gyro Scale Error (ppm)

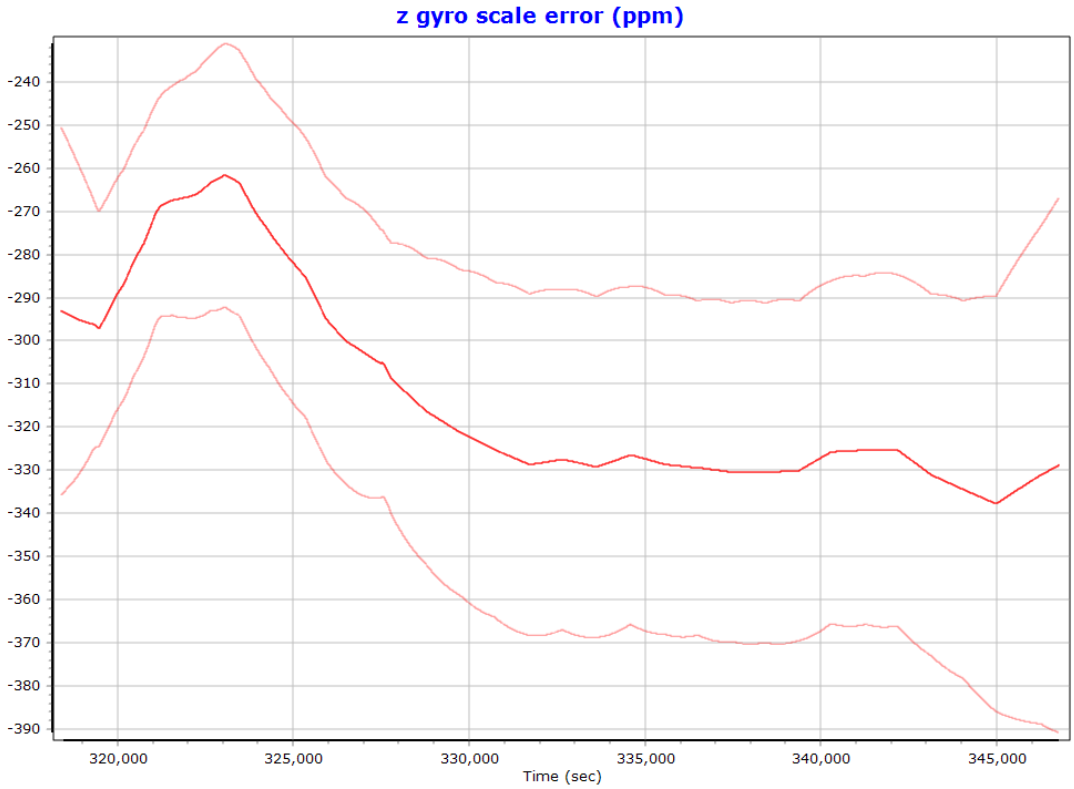

Smoothed Performance Metrics

Position Error RMS (m)

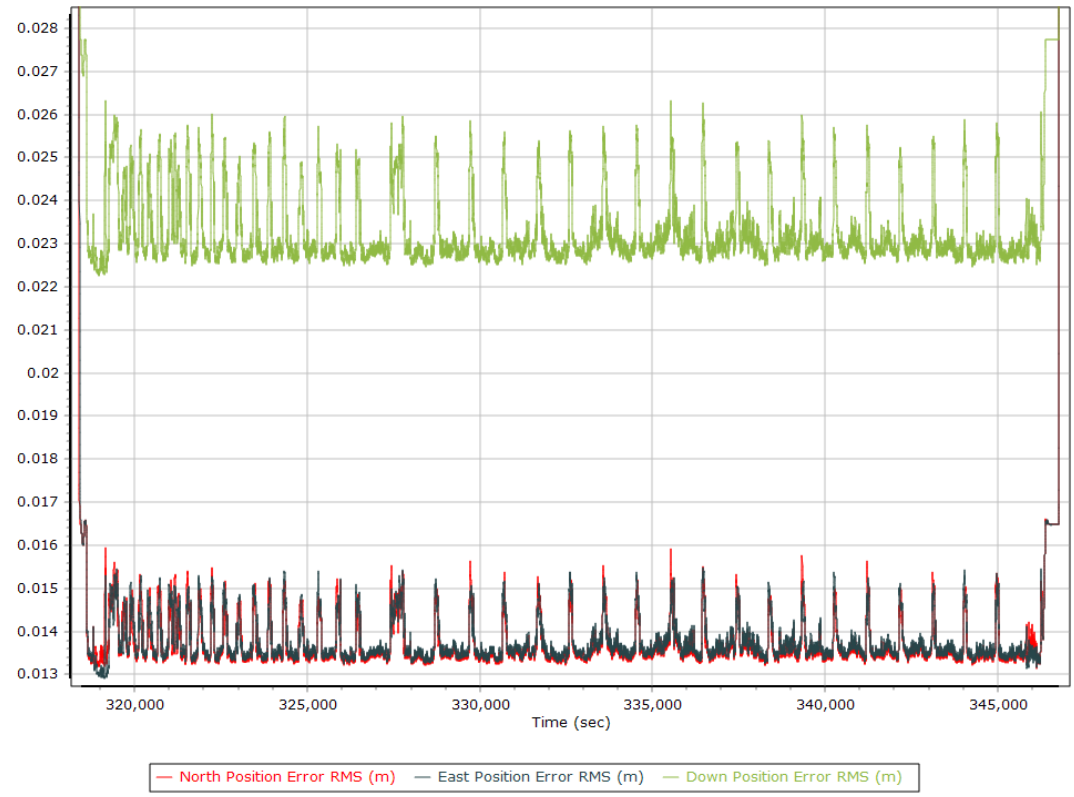

Velocity Error RMS (m/s)

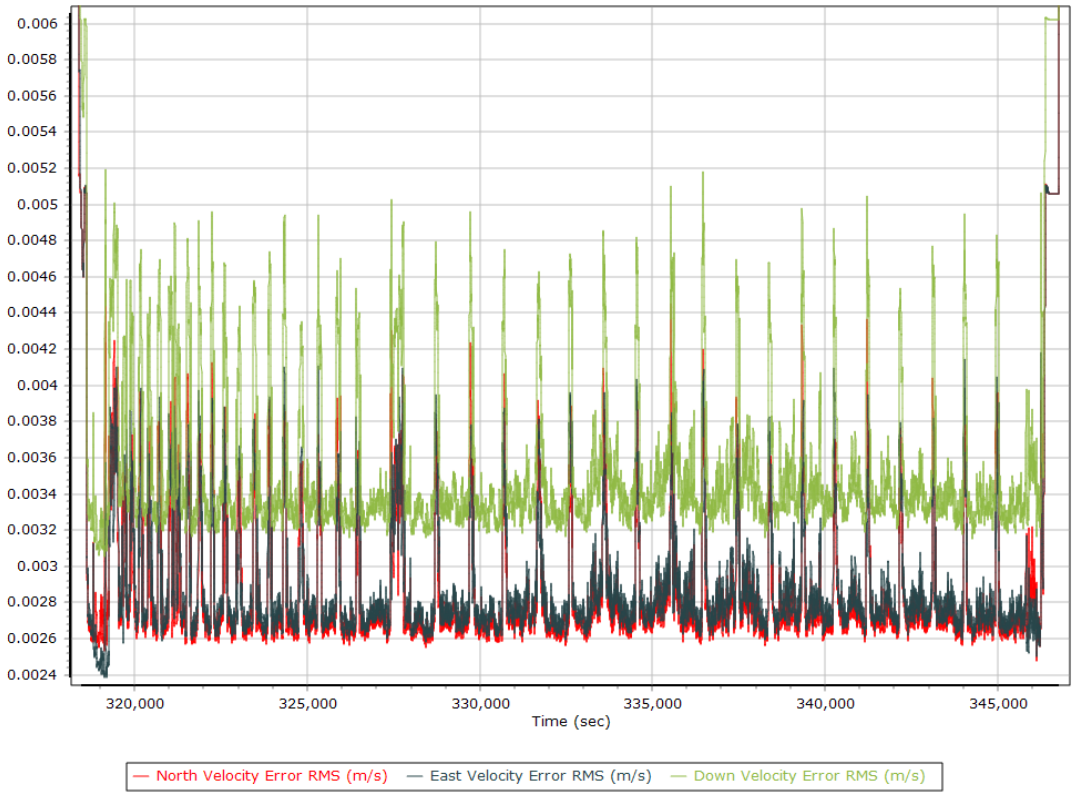

Roll/Pitch Error RMS (arc-min)

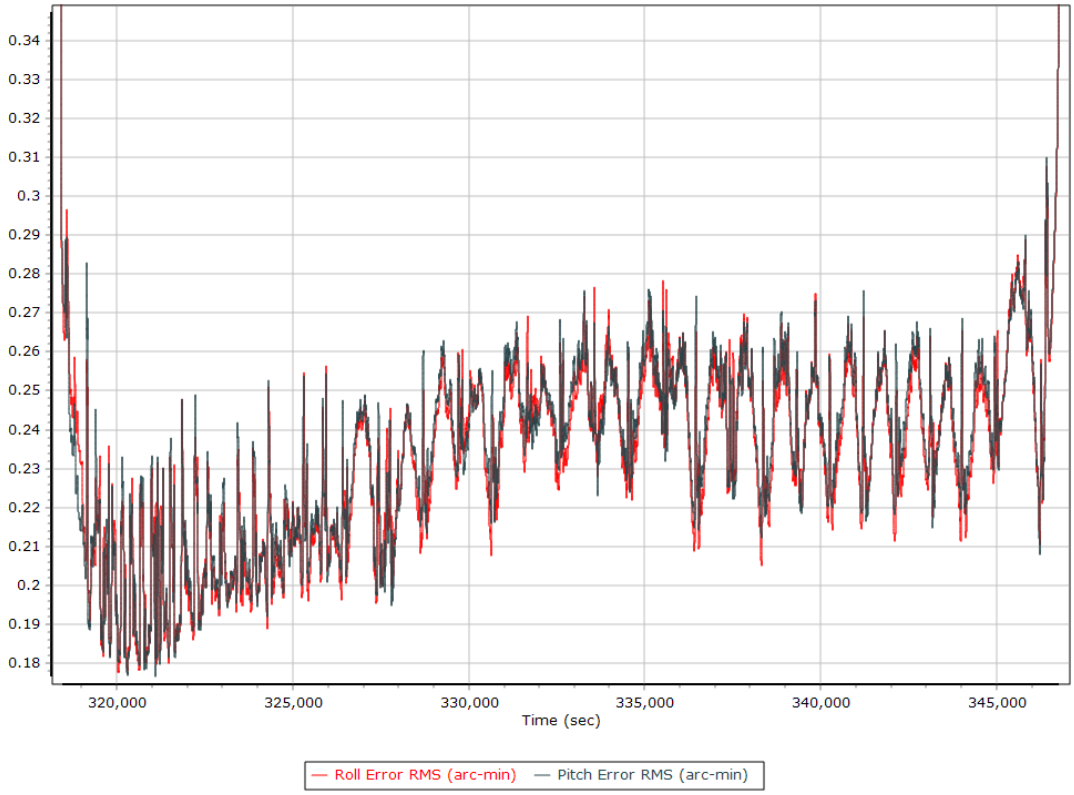

Heading Error RMS (arc-min)

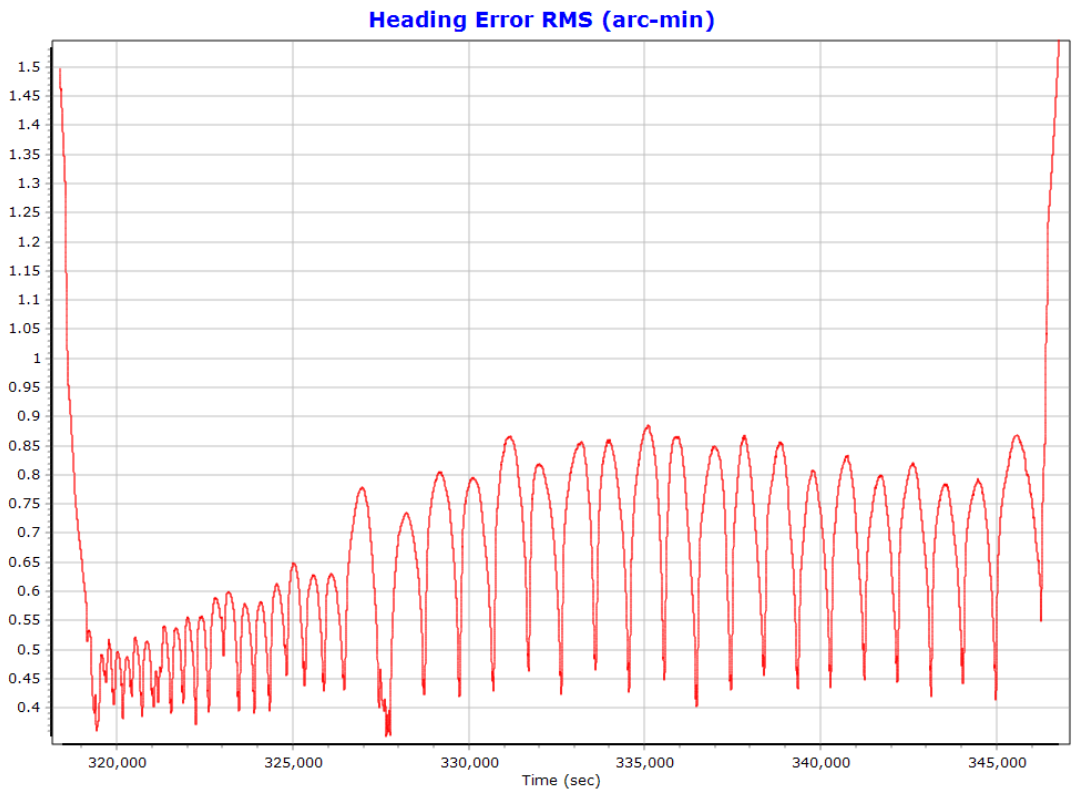

Export Summary

Export file	export_19-058_110619.out		
Export format	Custom Smoothed BET		
Solution in use	Post-processed		
Output rate	All Records		
Reference to Output lever arm [m]	0.000	0.000	0.000
Reference mounting angles [deg]	0.000	0.000	0.000
Output units (Coordinate / Lat & Lon)	Meter	Deg Decimal	
Export start time	317992.431 (11/6/2019 4:19:52 PM)		
Export end time	346758.742 (11/7/2019 12:19:18 AM)		
Height option	Ellipsoid Height		
WGS84 height flag	False		
Grid	Universal Transverse Mercator		
Zone	UTM North 12 (114W to 108W)		
Datum	NAD83 (2011)		
Ellipsoid	GRS 1980		
Local Transformation	NONE		
Target Epoch	2010		

EO Summary

EO file			
EO format			
Lever arm [m]	-0.032	0.010	-0.282
Boresight angles [arcmin]	302.837	-45.779	-1265.005
Output rate	Event 1 Time		
Rotation sequence	x omega	y phi	z kappa
Local shift [m]	0.000	0.000	0.000
Output units (coordinate / angle / lat & lon)	Meter	Degree	Deg Decimal
Height option	Ellipsoid Height		
WGS84 height flag	False		
Scale height option	False		
Kappa cardinal rotation [deg]	0		
Solution in use	Post-processed		
EO start time	318406.002 (11/6/2019 4:26:46 PM)		
EO end time	346771.001 (11/7/2019 12:19:31 AM)		
Grid	Universal Transverse Mercator		
Zone	UTM North 12 (114W to 108W)		
Datum	WGS84		
Ellipsoid	WGS84		
Local Transformation	NONE		
Target Epoch	2019.846575		