General Information

Mission Information

Project name	070720
Processing date	2020-08-11 15:54:48
Mission date	2020-07-07 18:32:47
Mission duration	02:05:00.000
Processing mode	IN-Fusion Trimble RTX Nav

Rover Hardware Information

Product	POS AV 610 VER6 HW2.4-12
Serial number	S/N6310
IMU type	57
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
ALS.887	POS Data
ALS.888	
ALS.889	
ALS.890	
ALS.891	
ALS.892	
ALS.893	
ALS.894	
ALS.895	
ALS.896	
ALS.897	
ALS.898	
ALS.899	
ALS.900	
ALS.901	
ALS.902	
ALS.903	

Input Files

File Name	File Type
Ephm1890.20g	GLONASS Broadcast Ephemeris
Ephm1890.20n	GPS Broadcast Ephemeris
igl21131.sp3	GLONASS Precise Ephemeris
igl21132.sp3	GLONASS Precise Ephemeris
igl21133.sp3	GLONASS Precise Ephemeris
igs21131.sp3	GPS Precise Ephemeris
igs21132.sp3	GPS Precise Ephemeris
igs21133.sp3	GPS Precise Ephemeris

Output Files

Filename	File type
sbet_070720.out	SBET Trajectory File

Rover Data Summary

First raw data file	ALS.887		
Last raw data file	ALS.903		
Start GPS week	2113		
Start time	239560.506 (07/07/2020 18:32:40)		
End time	247049.319 (07/07/2020 20:37:29)		
Start of fine alignment	240062.436 (07/07/2020 18:41:02)		
Available subsystems	Primary GNSS, Gimbal, IMU		
POS Event Input	Event 1 Input		
Correction data	Trimble RTX		
IMU Installation Lever Arms & Mounting Angles			
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	-0.011	0.039	-1.317
Gimbal to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Rover Data QC

Raw IMU Import QC Summary

IMU data input file	imu_Mission 1.dat
IMU data check log file	imudt_070720.log
IMU Records Processed	1499828
Termination Status	Warnings
IMU Anomalies	1
IMU Failure Messages	
239560.276 : WARNING : Gap of 239548.3148 seconds in CHECKDT input data	

Primary Observables & Satellite Data

L1 Satellite Lock/Elevation

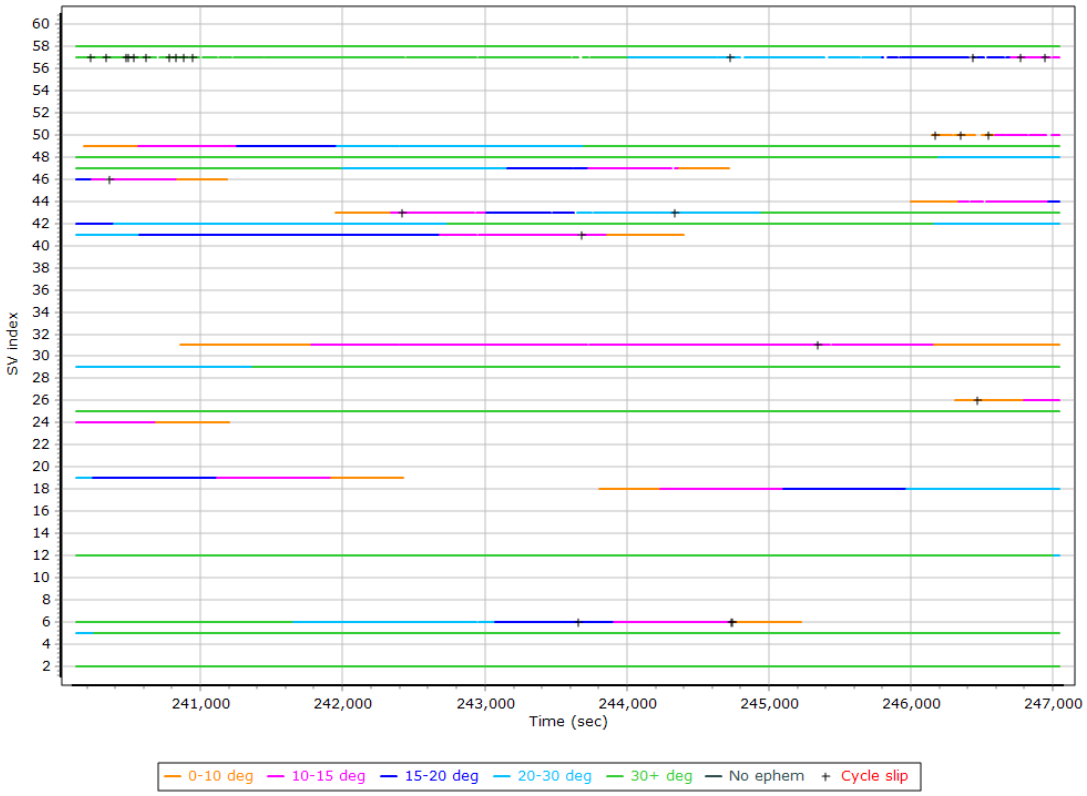

L2 Satellite Lock/Elevation

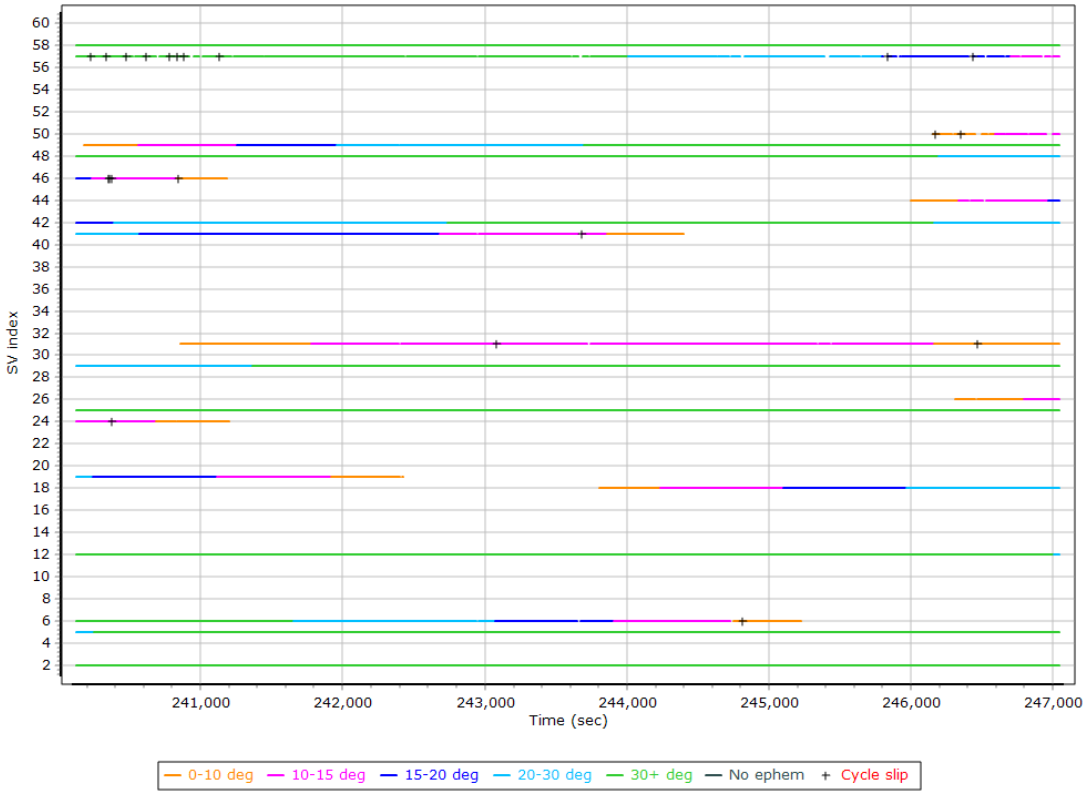

GPS L1 SNR

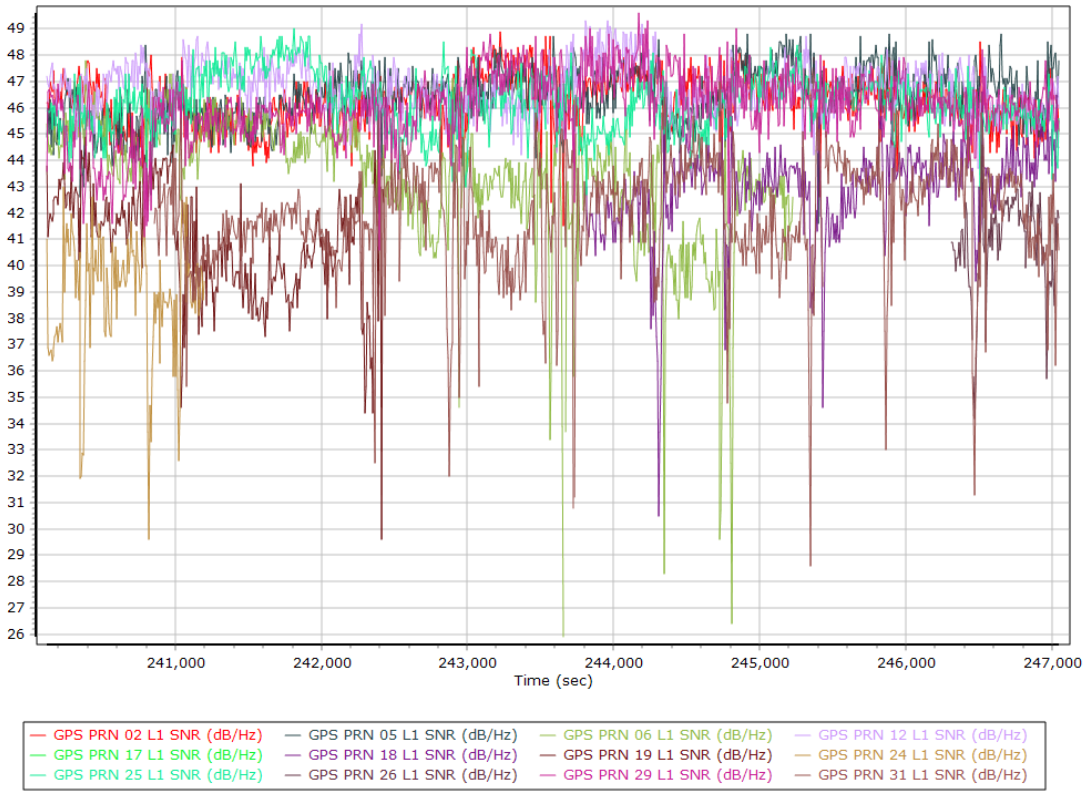

GPS L2 SNR

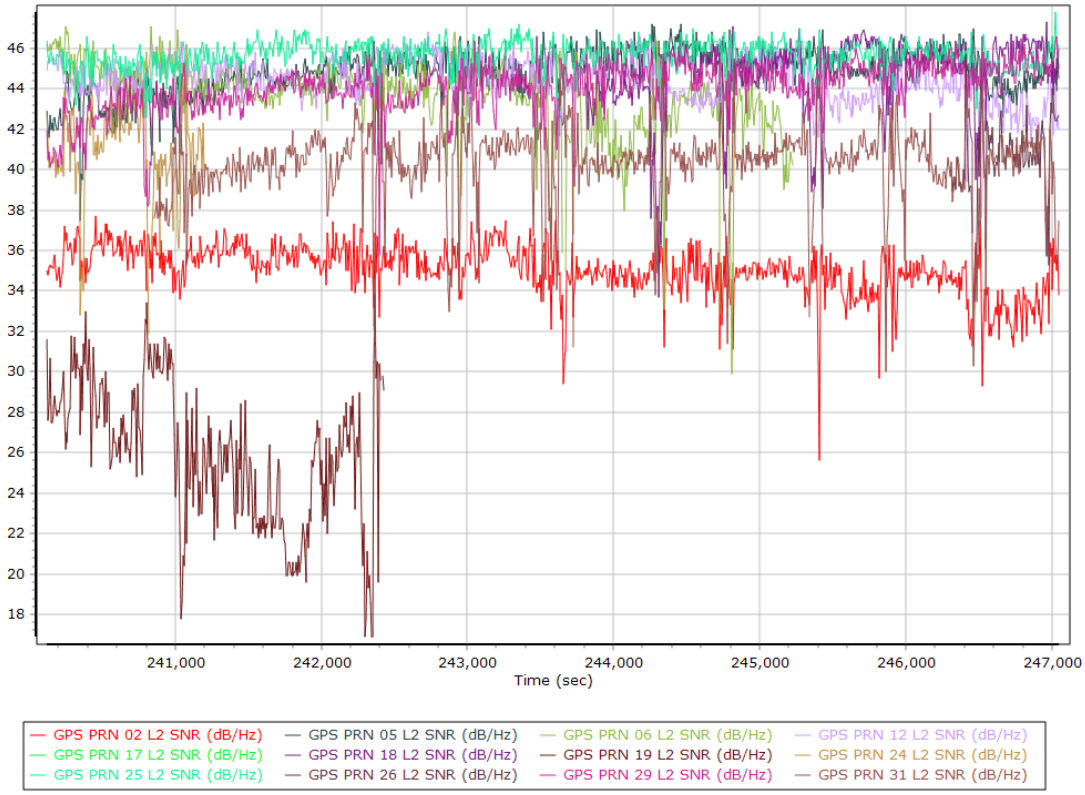

GLONASS L1 SNR

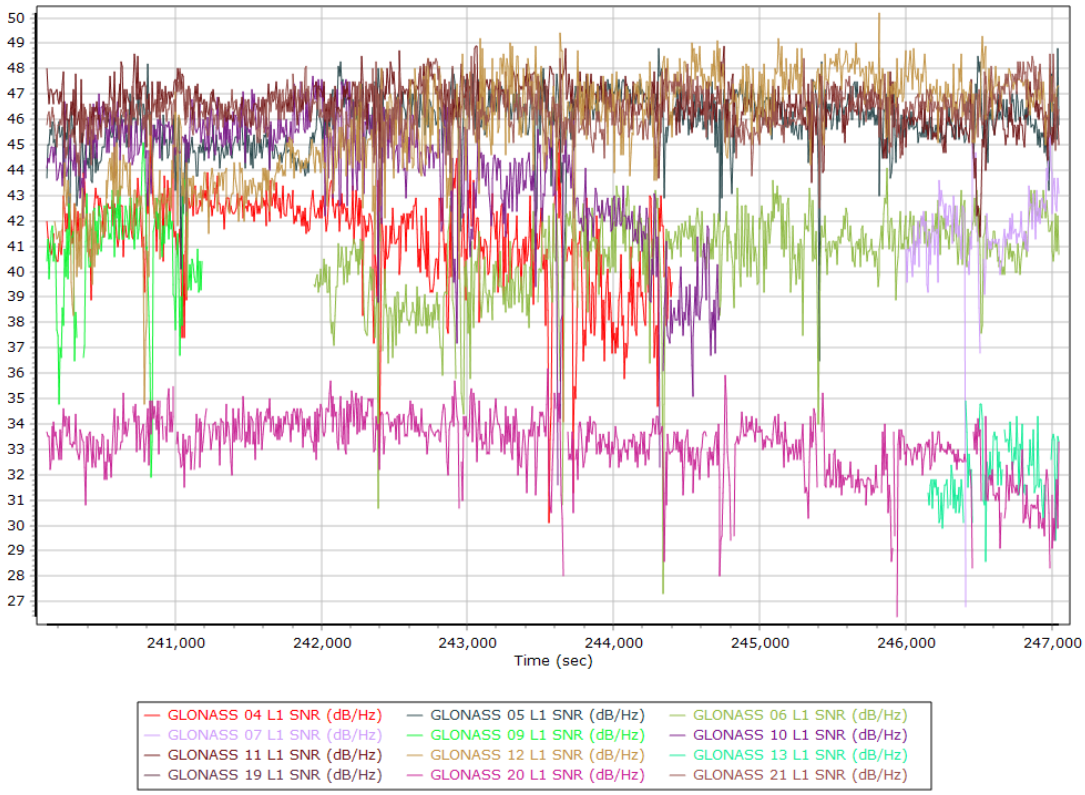

GLONASS L2 SNR

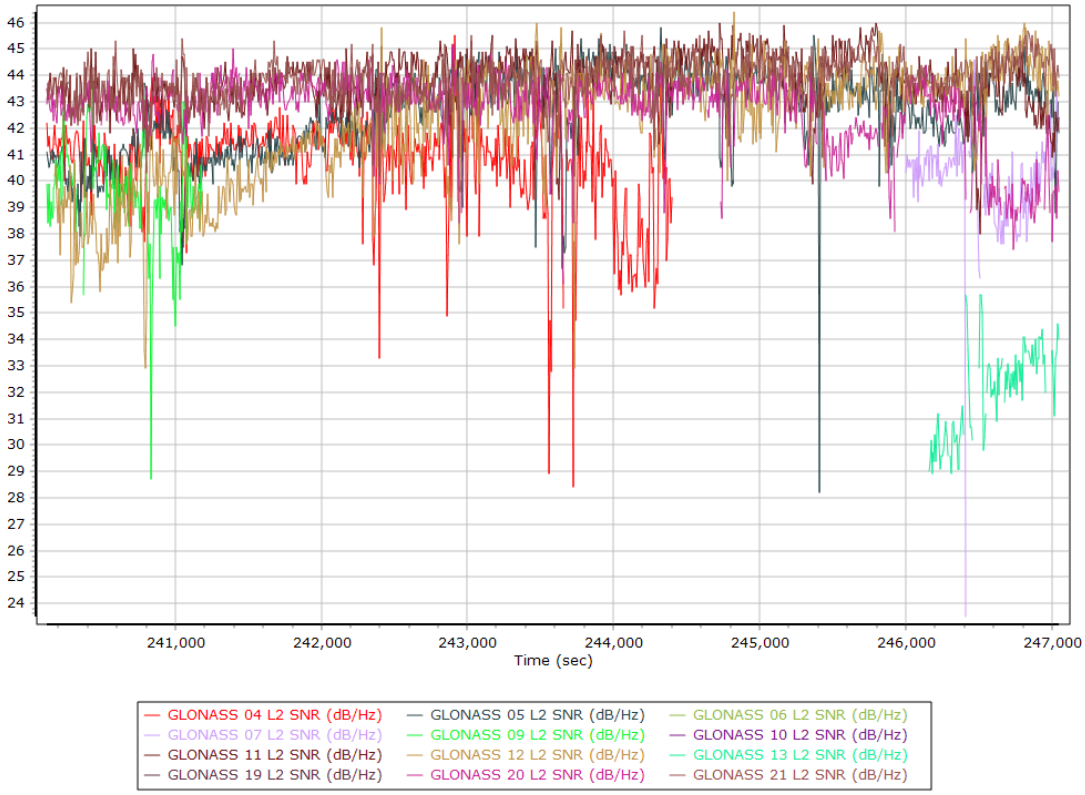

BEIDOU SNR

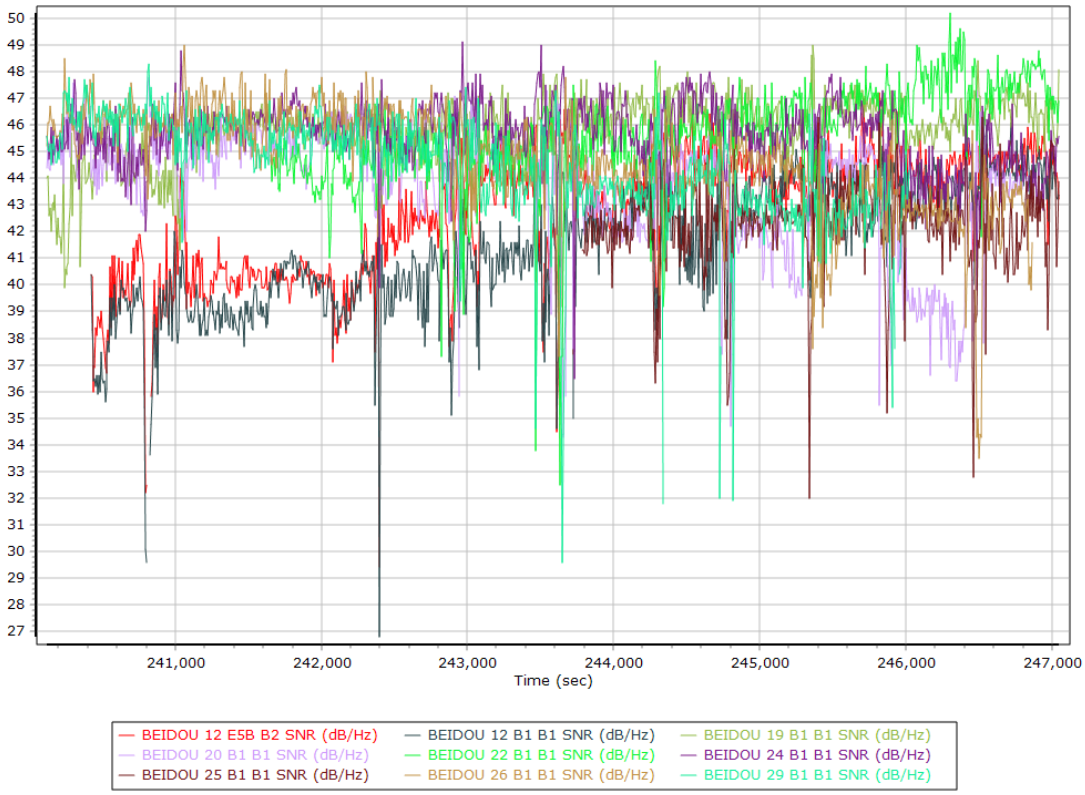

GALILEO SNR

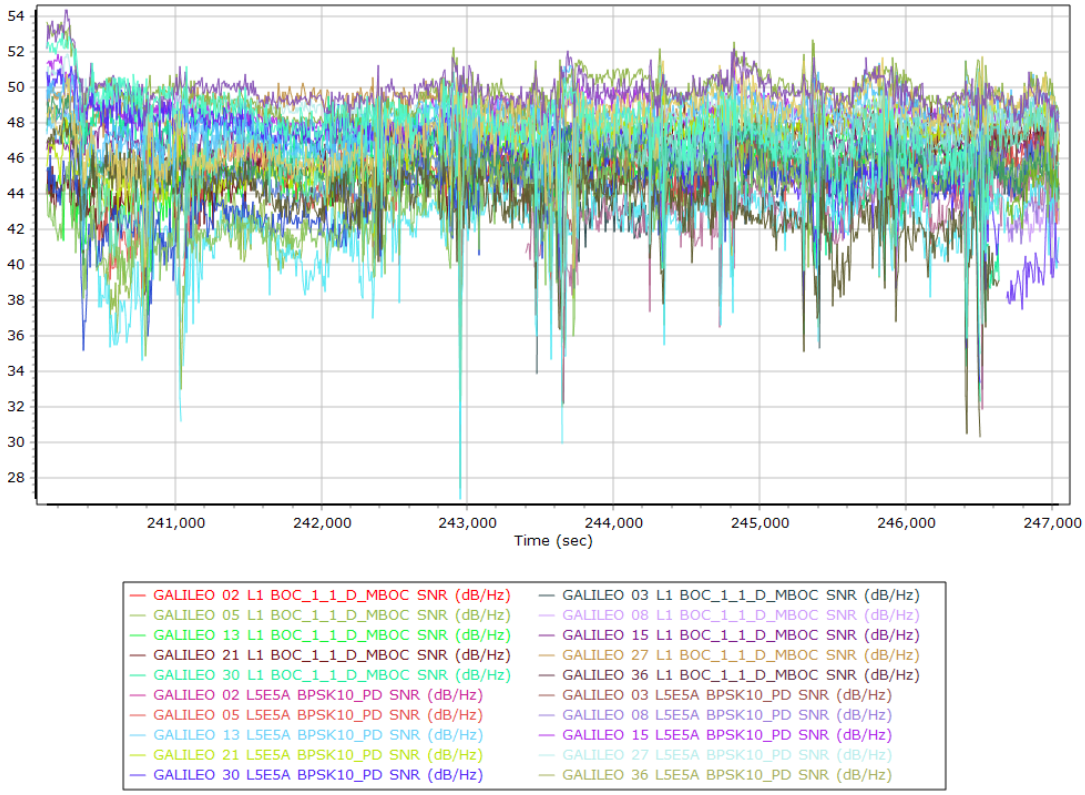
54
52
50
48
46
44
42
40
38
36
34
32
30
28
241,000
242,000
243,000
244,000
245,000
246,000
247,000
Time (sec)
GALILEO 02 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 03 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 05 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 08 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 13 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 15 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 21 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 27 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 30 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 36 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 02 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 03 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 05 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 08 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 13 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 15 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 21 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 27 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 30 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 36 L5E5A BPSK10_PD SNR (dB/Hz)

Smoothed Trajectory Information

Top View

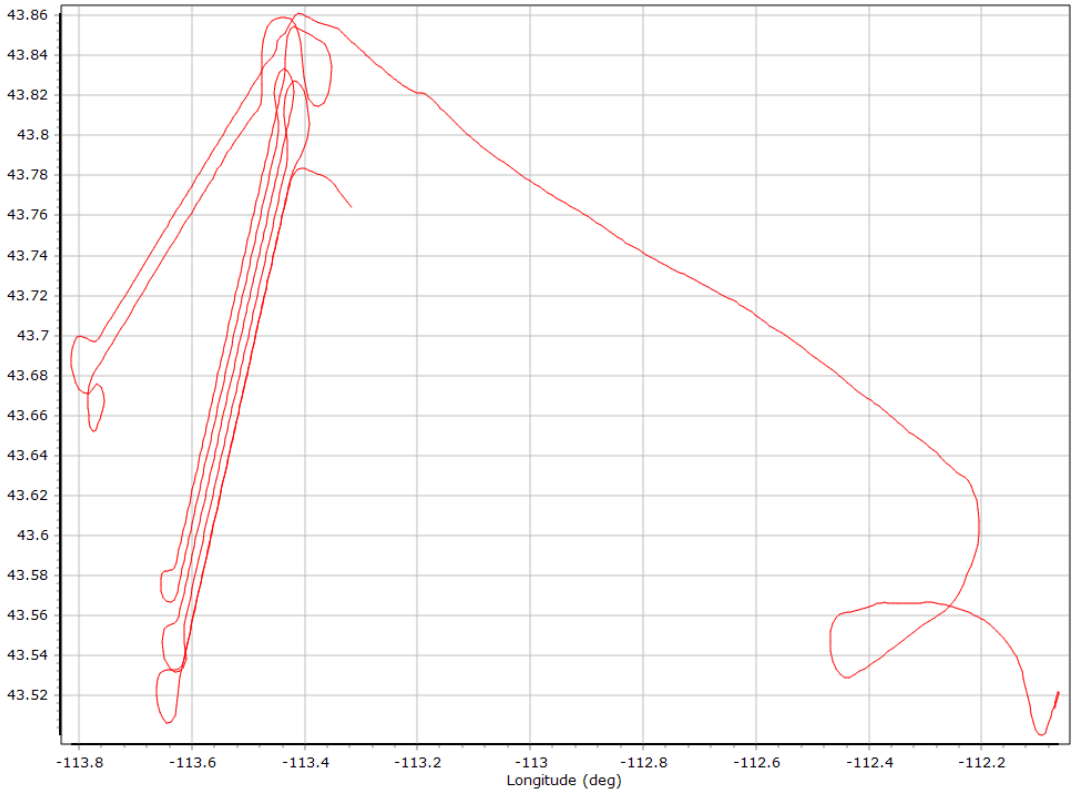

Altitude

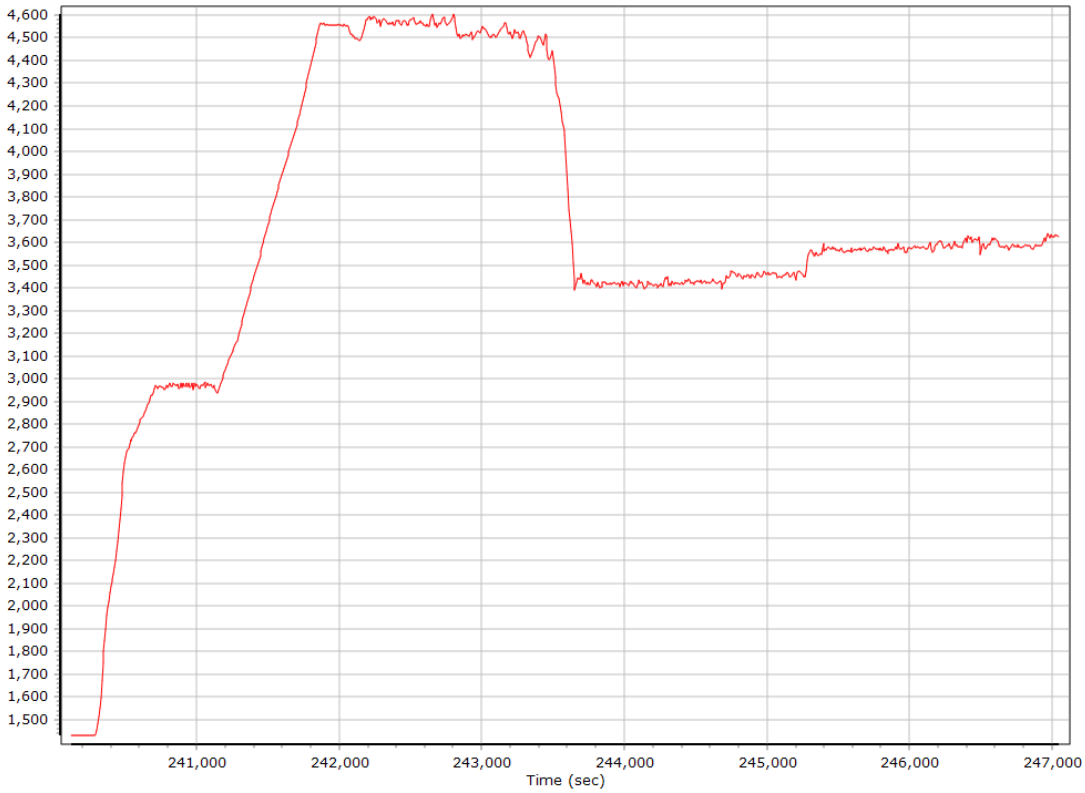

Roll/Pitch

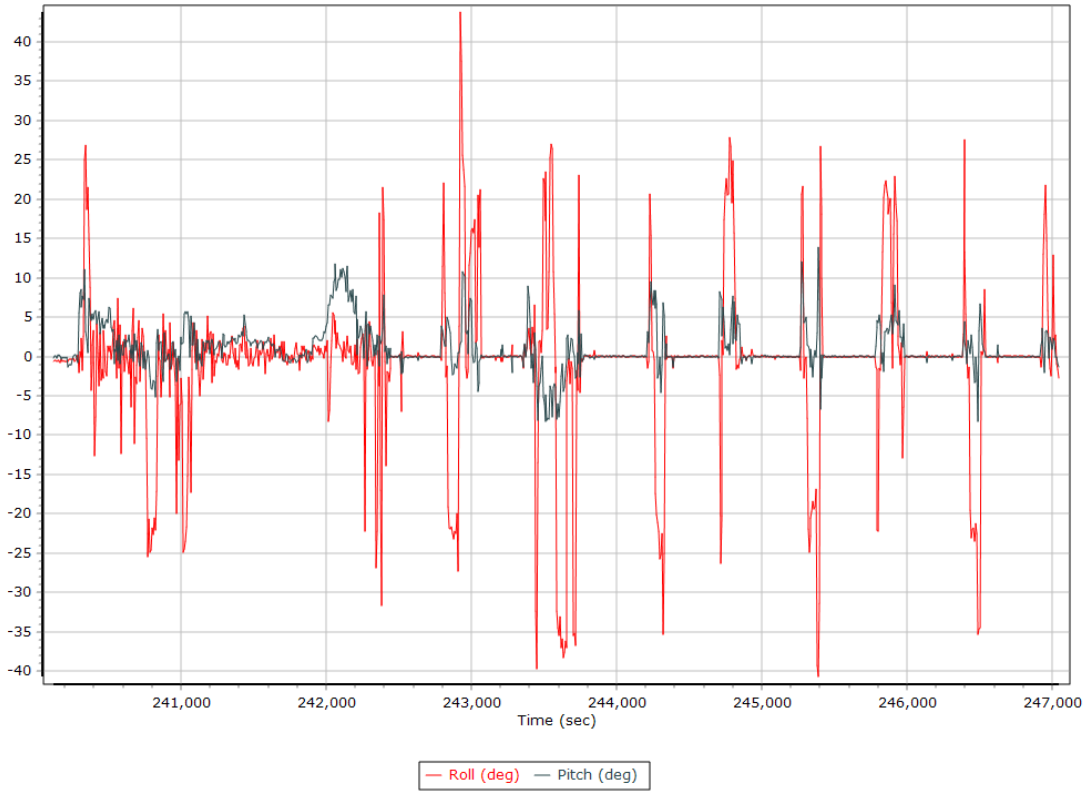

Heading

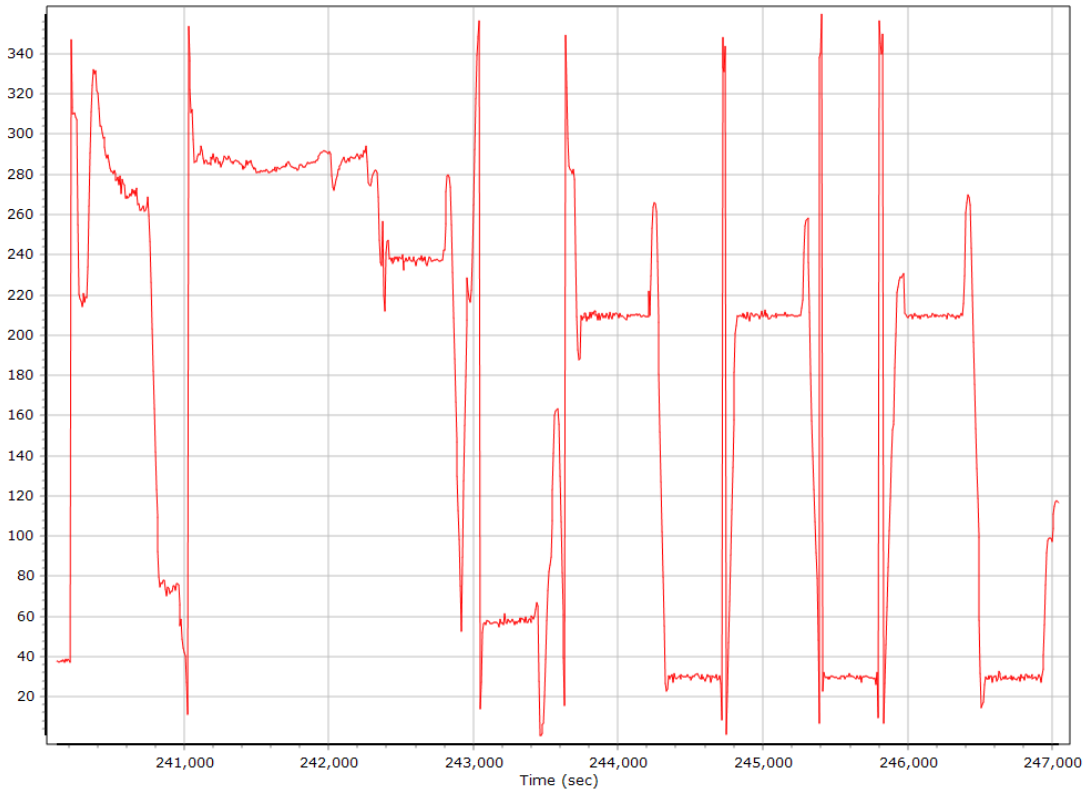

North/East Velocity

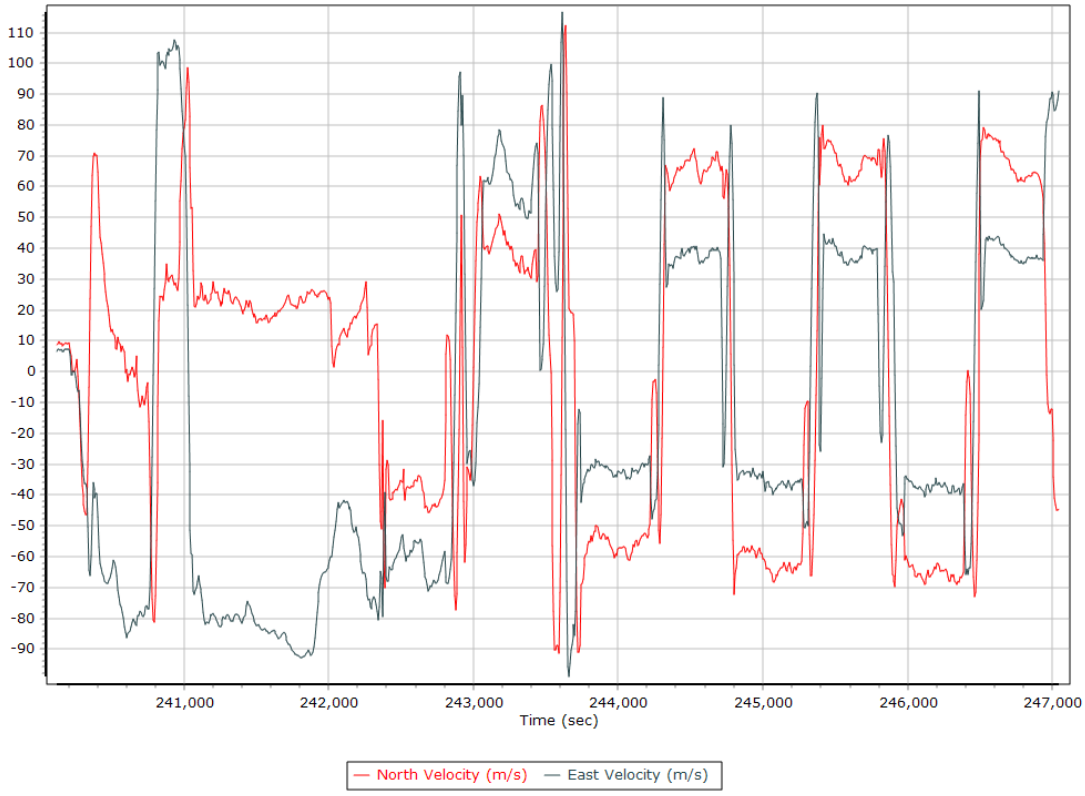

Down Velocity

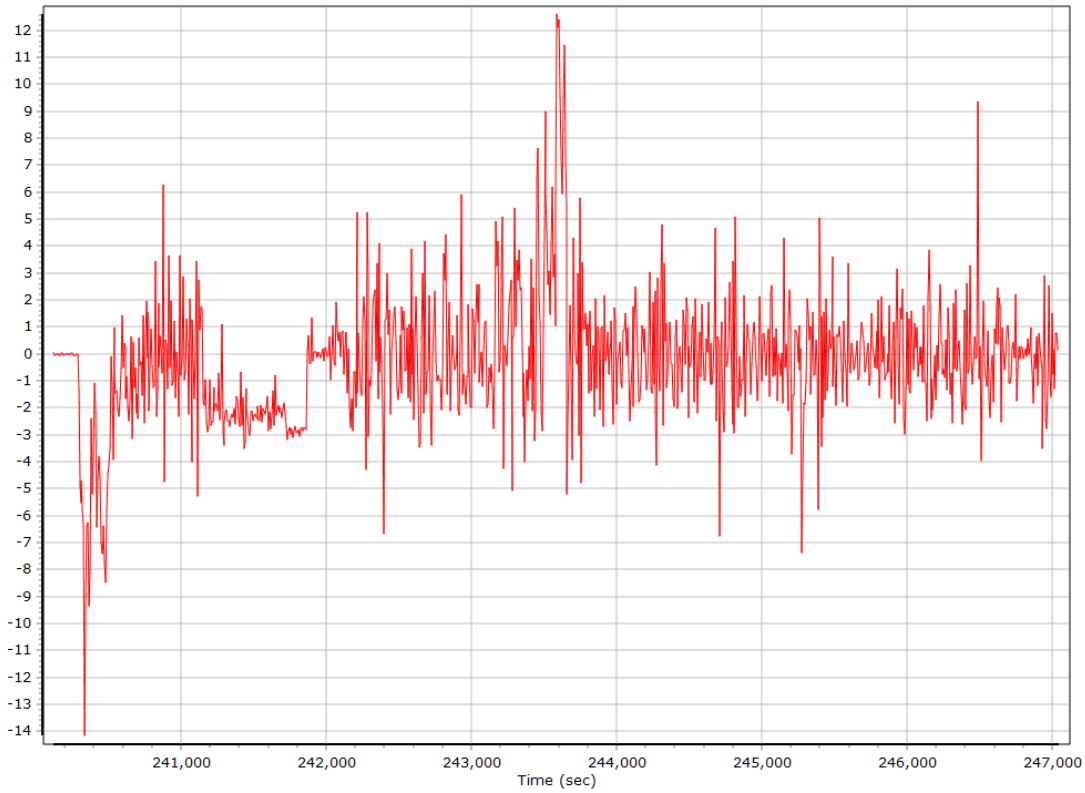

Total Speed

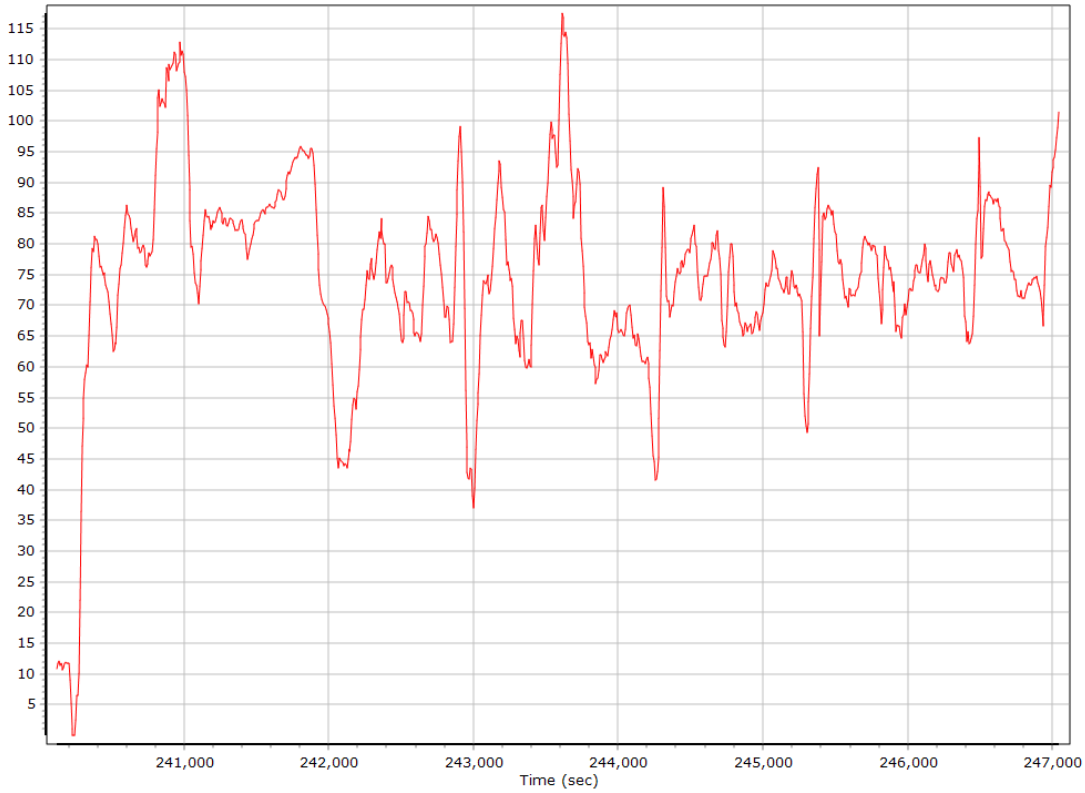

Ground Speed

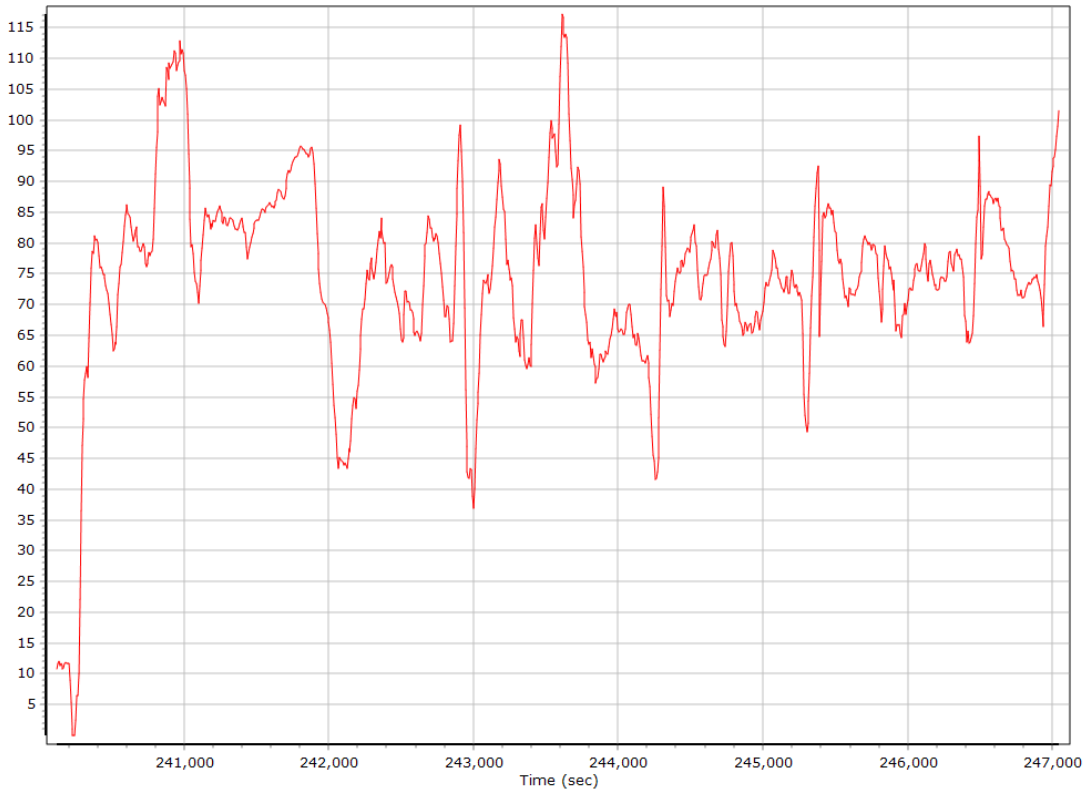

Body Acceleration

Total Body Acceleration

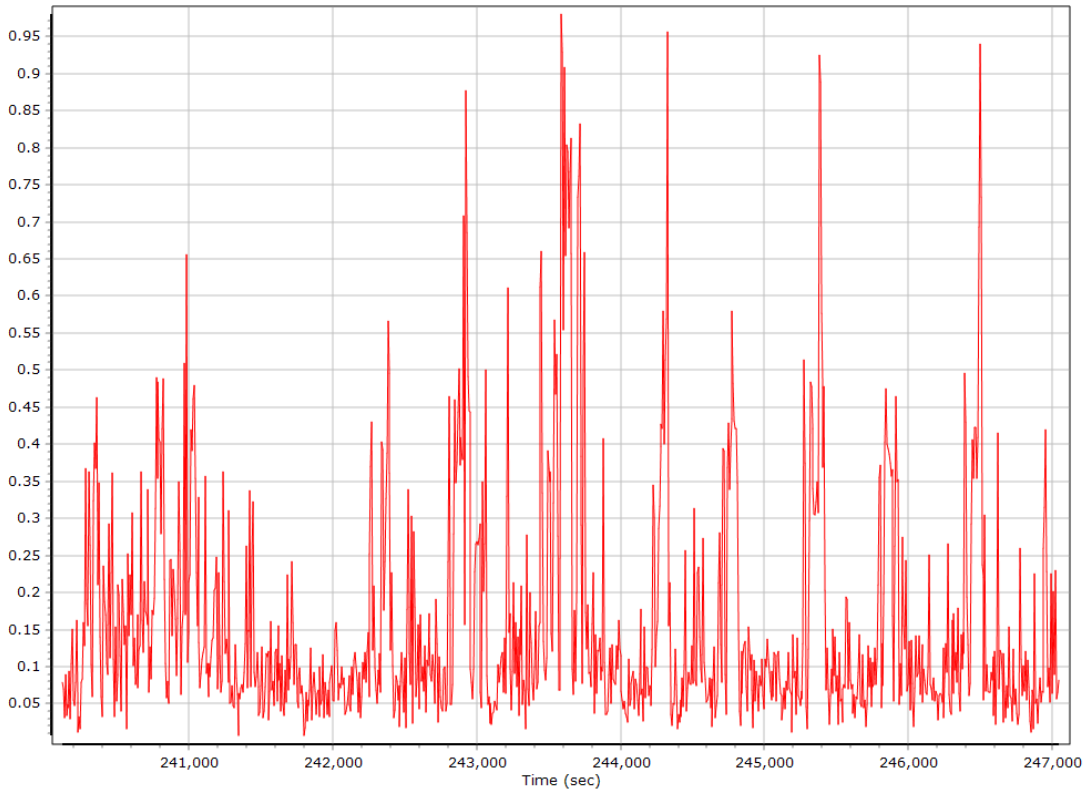

Body Angular Rate

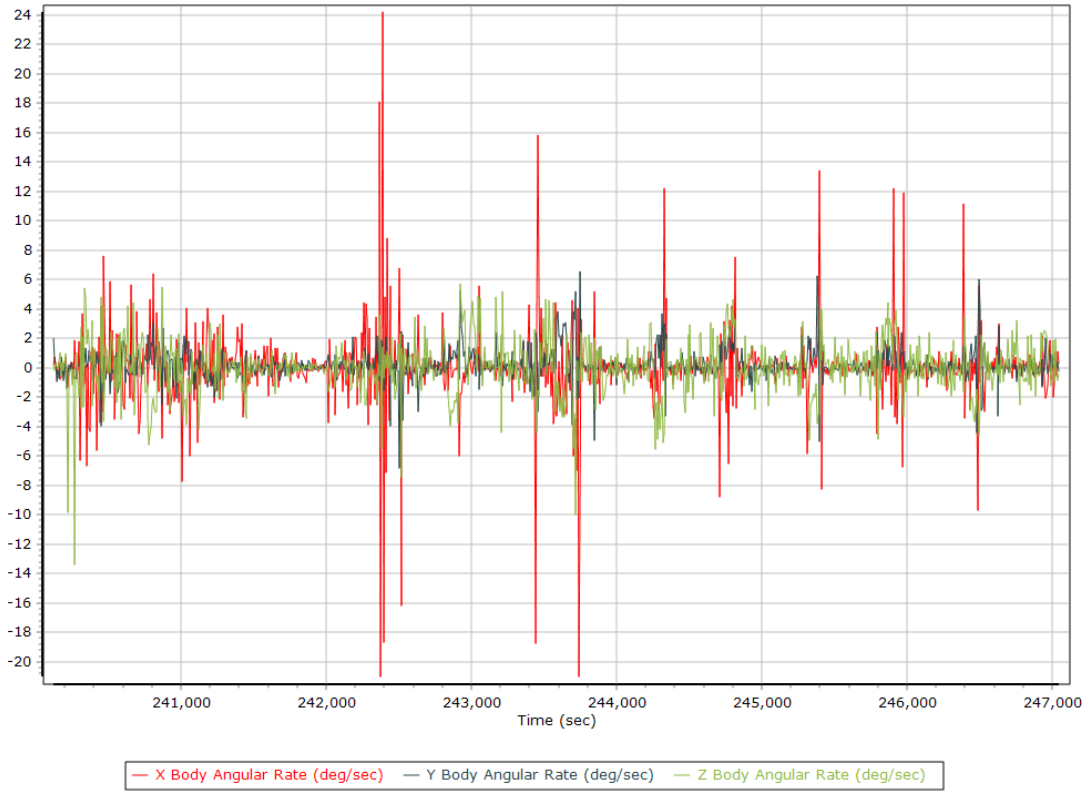

Forward Processed Trajectory Information

Top View

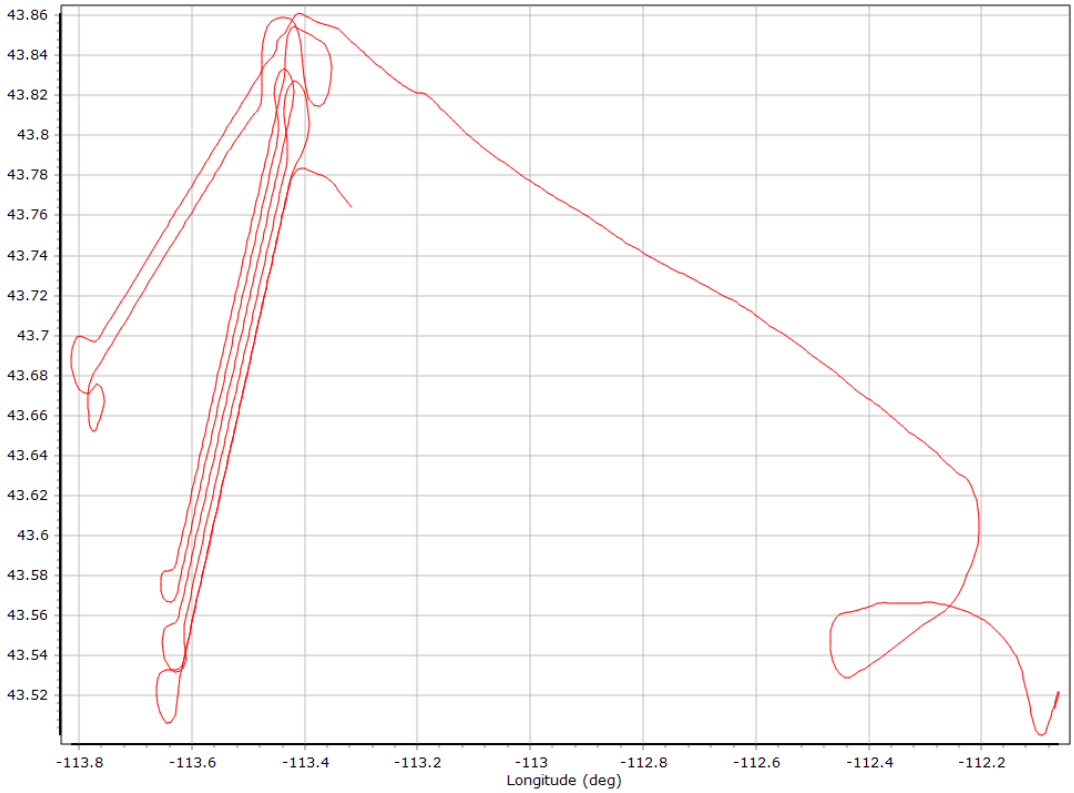

Altitude

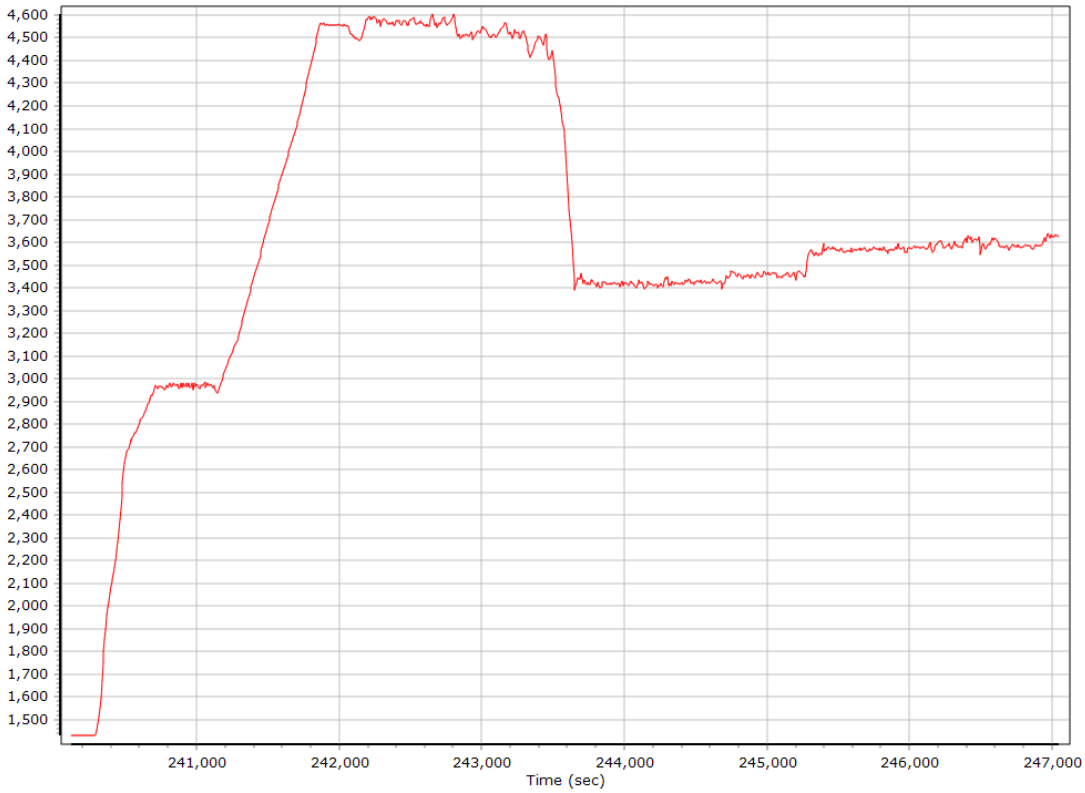

Roll/Pitch

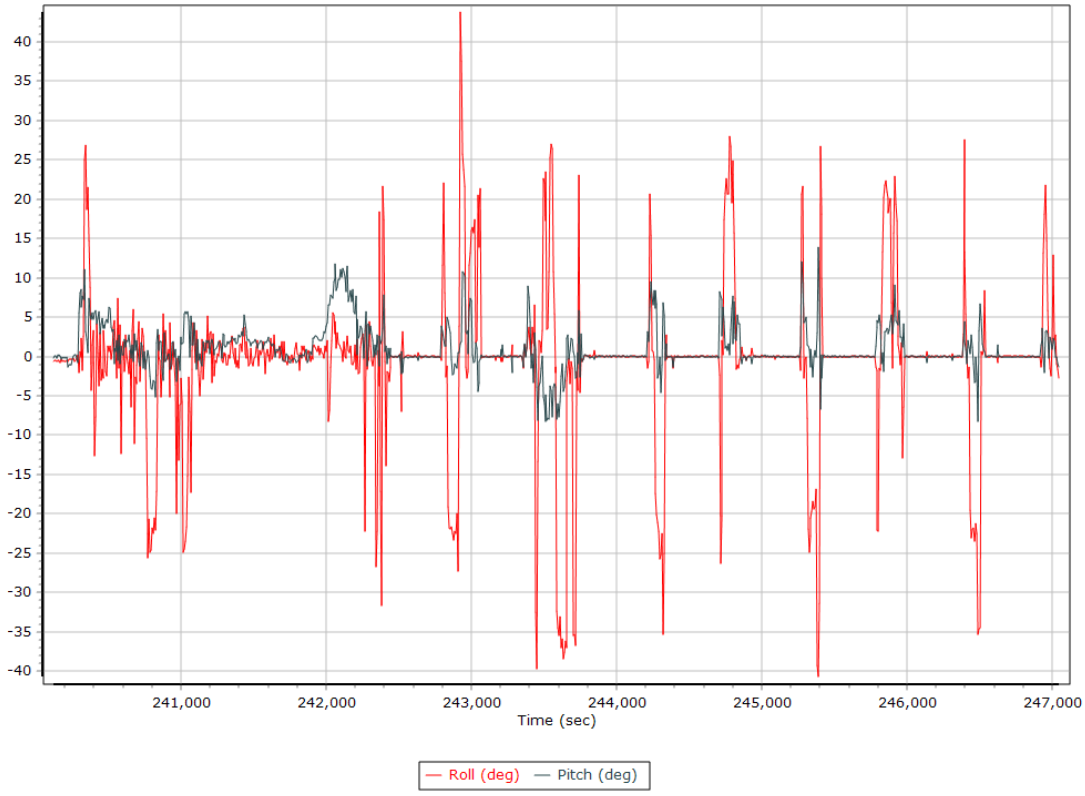

Heading

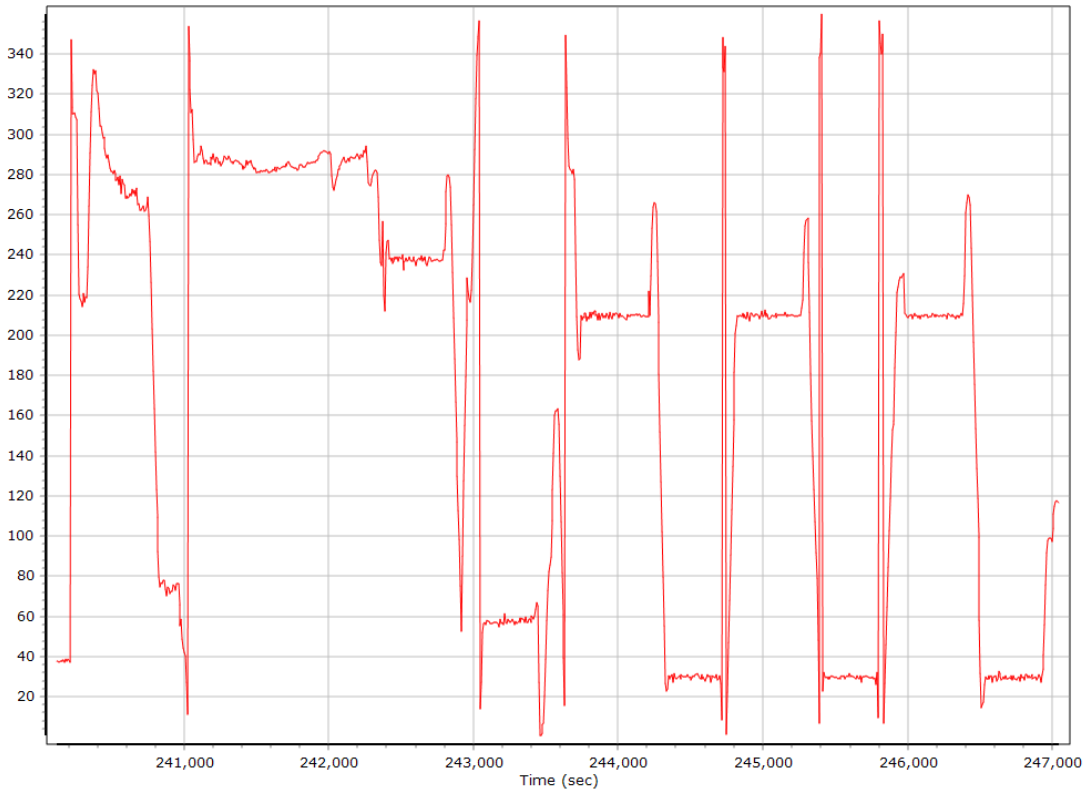

North/East Velocity

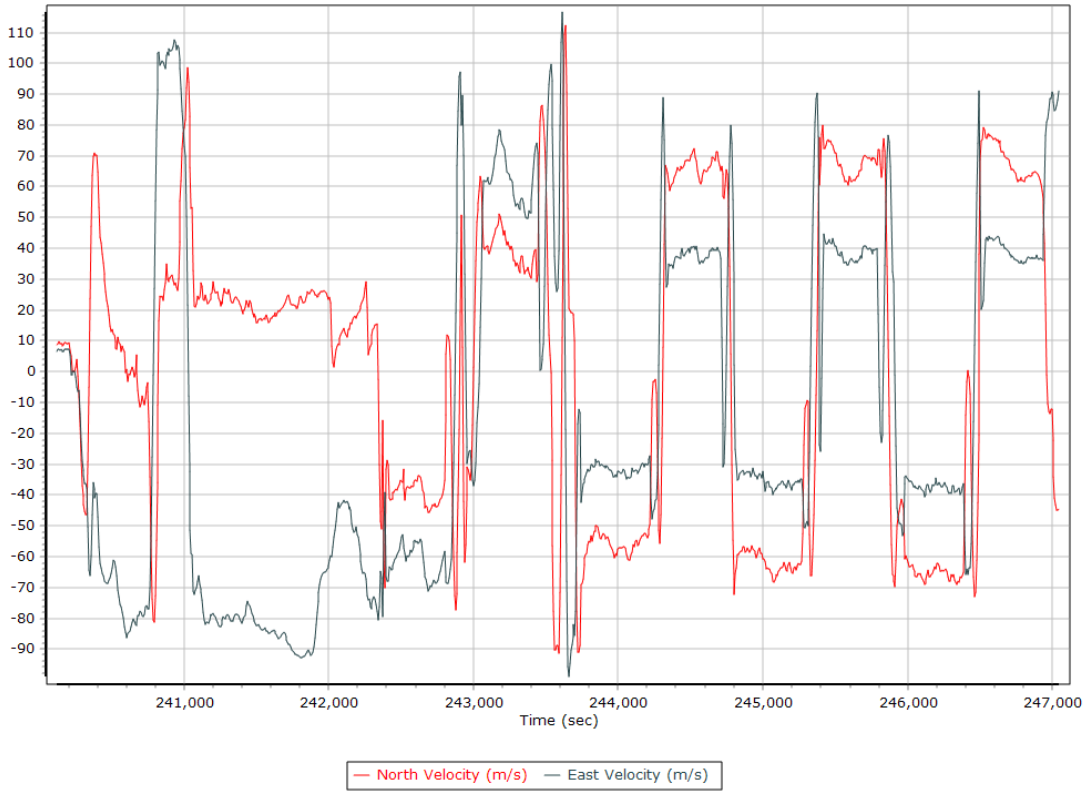

Down Velocity

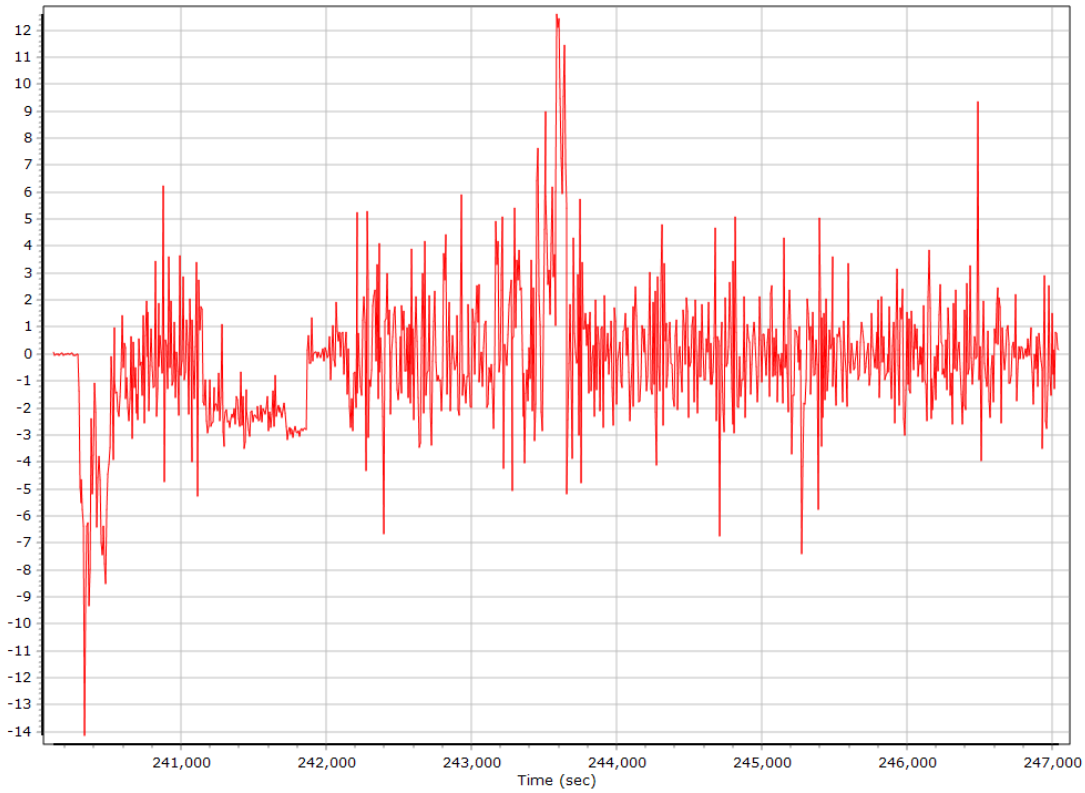

Total Speed

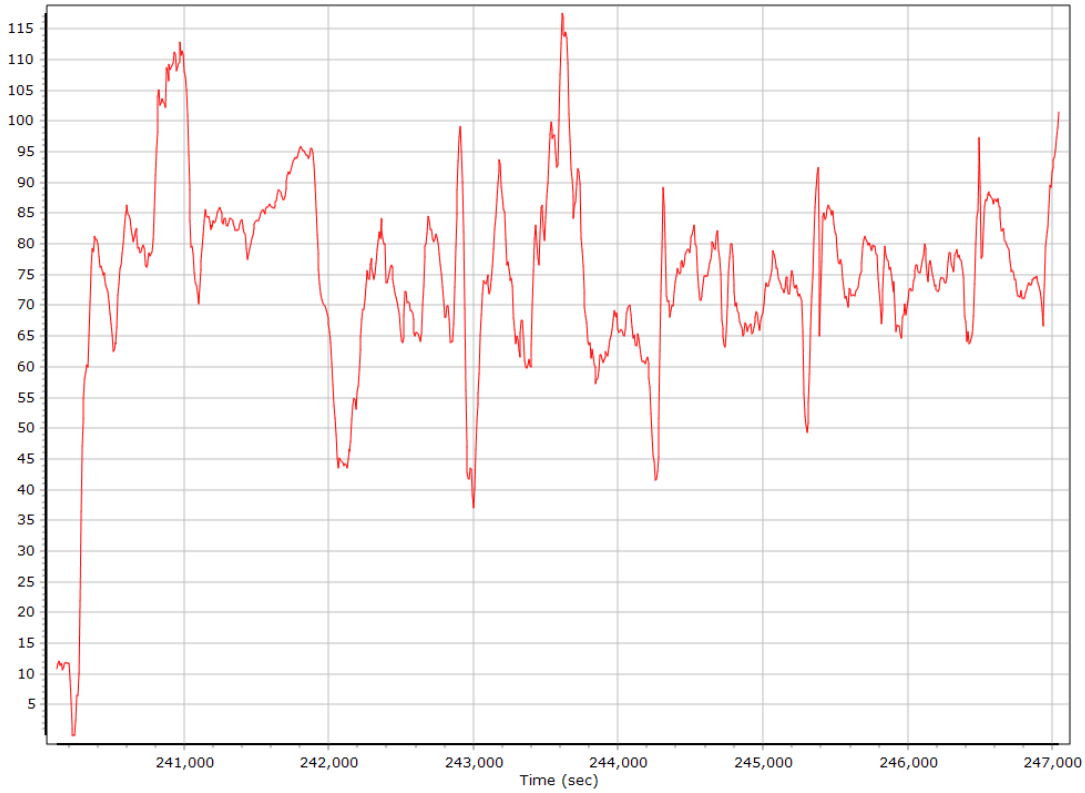

Ground Speed

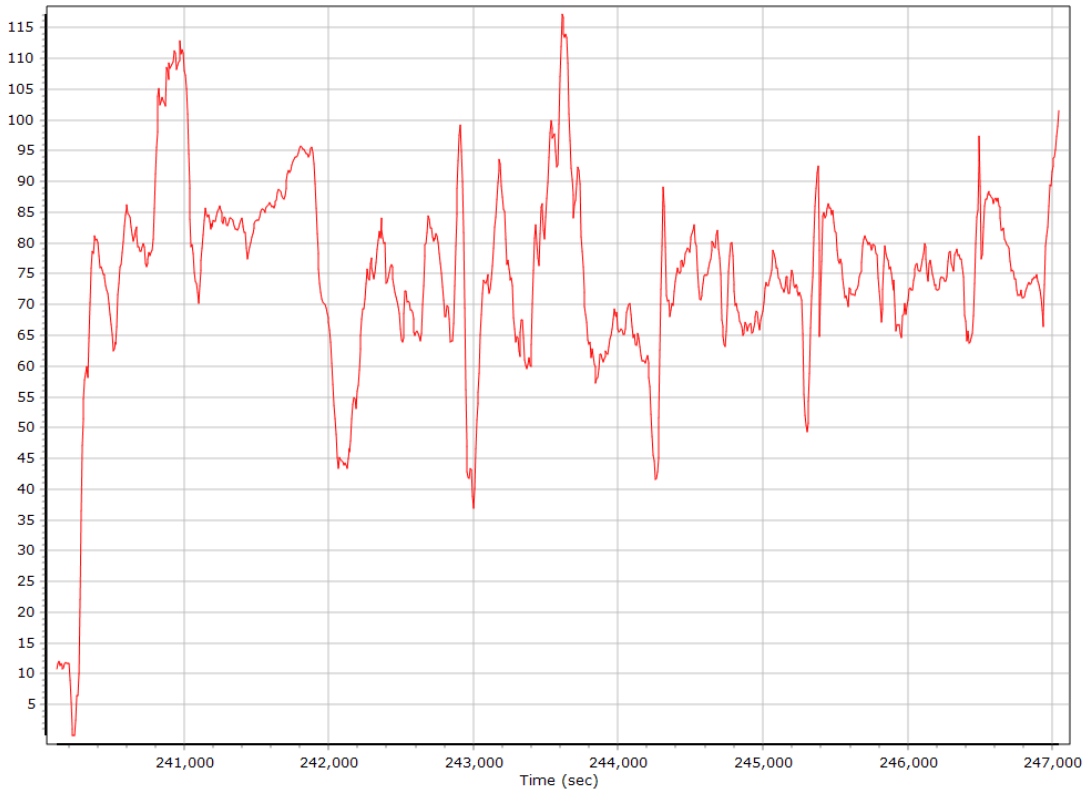

Body Acceleration

Total Body Acceleration

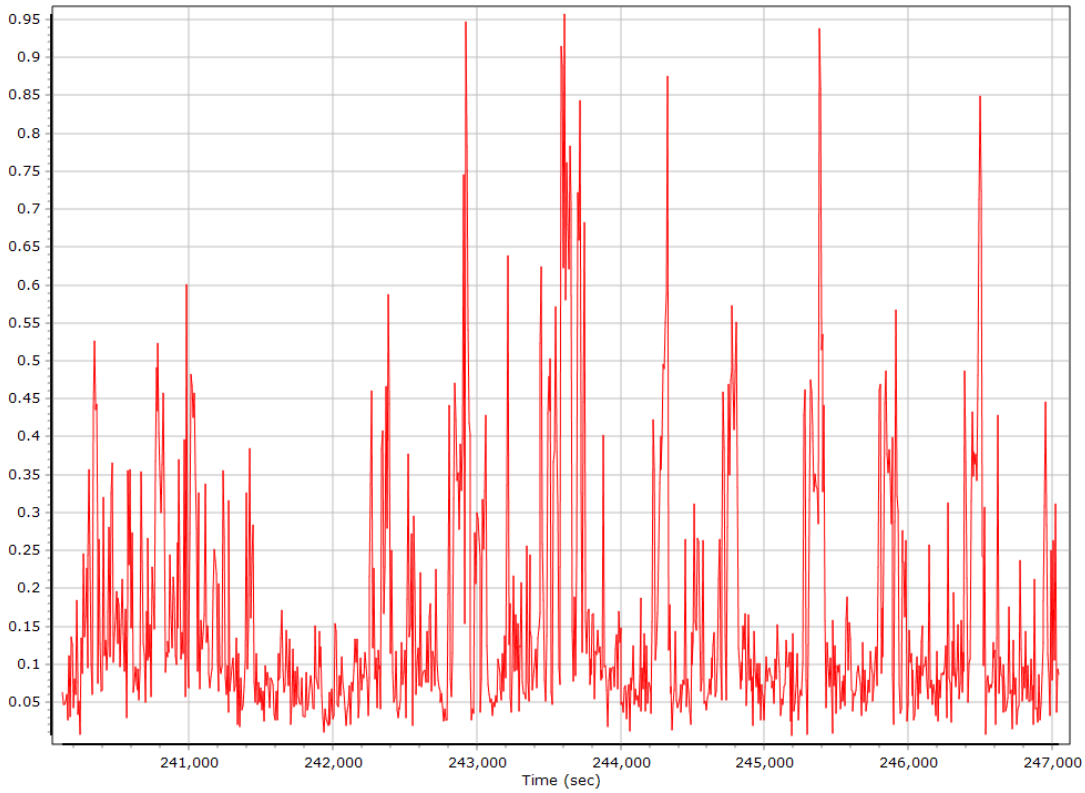

Body Angular Rate

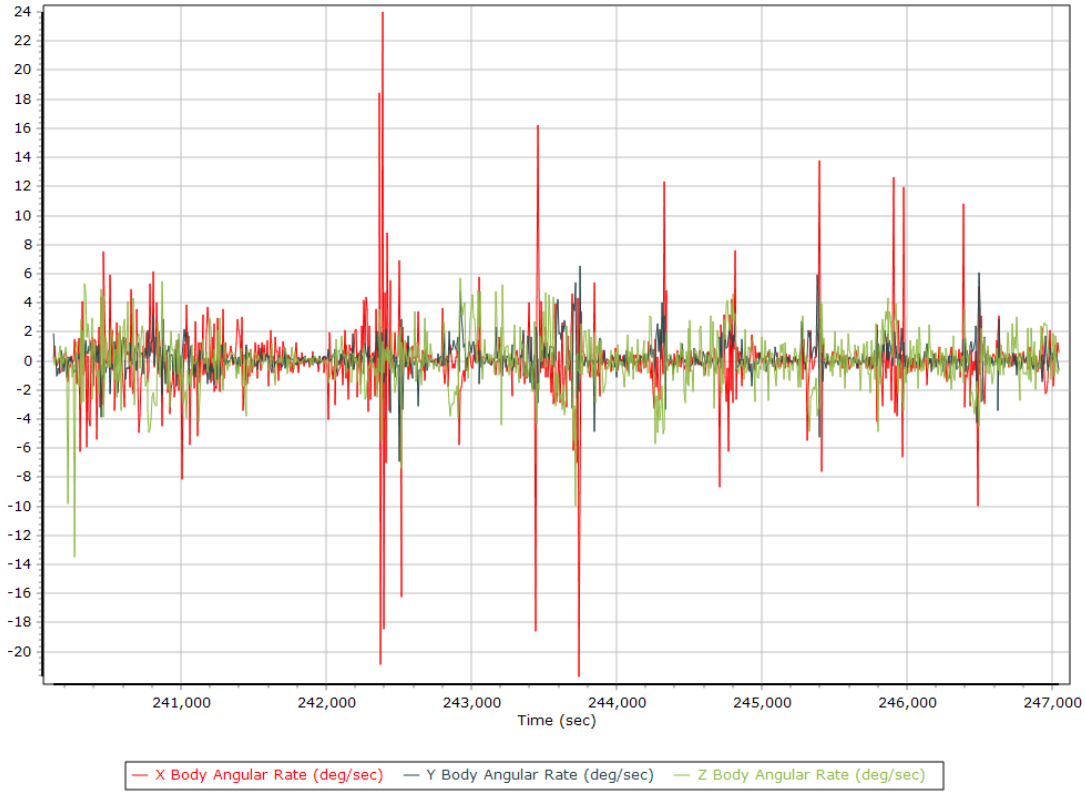

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion Trimble RTX Nav		
Stabilized mount	True		
Processing start time	239549.000 (07/07/2020 18:32:29)		
Processing end time	247049.000 (07/07/2020 20:37:29)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	-0.215	-0.027	-0.964
Gimbal to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm (m)

X Reference-Primary GNSS Lever Arm (m)

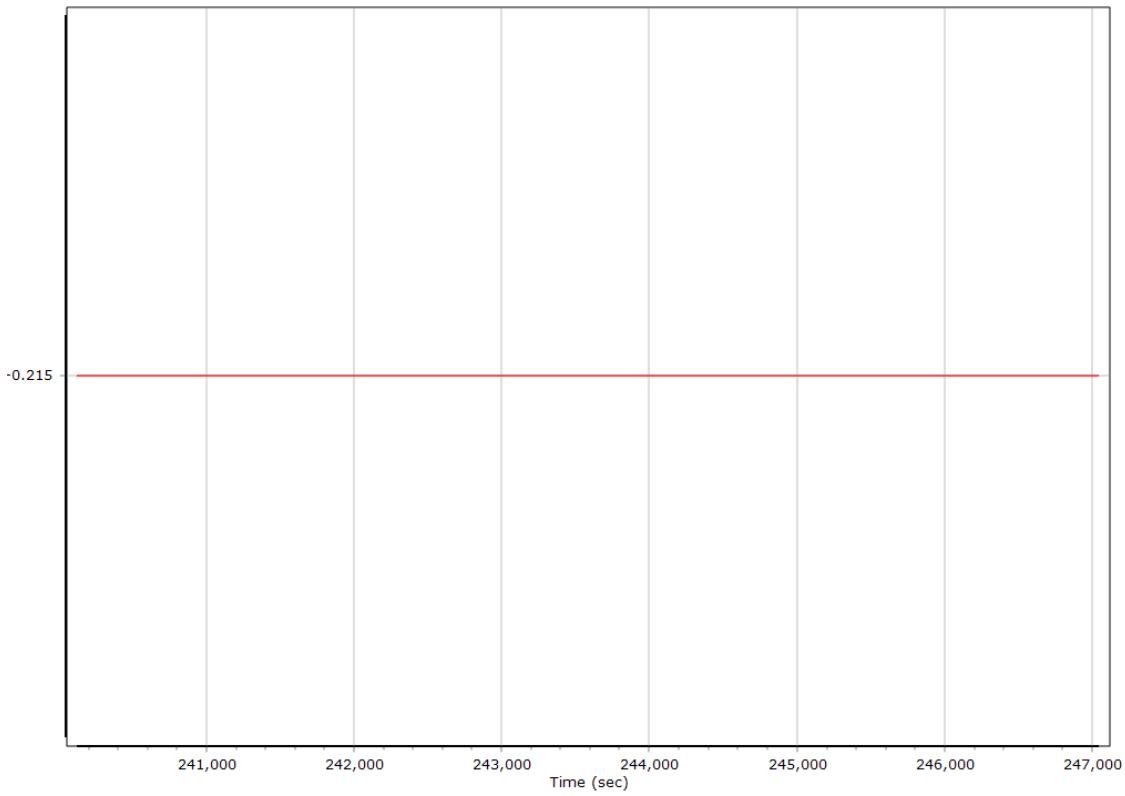

Y Reference-Primary GNSS Lever Arm (m)

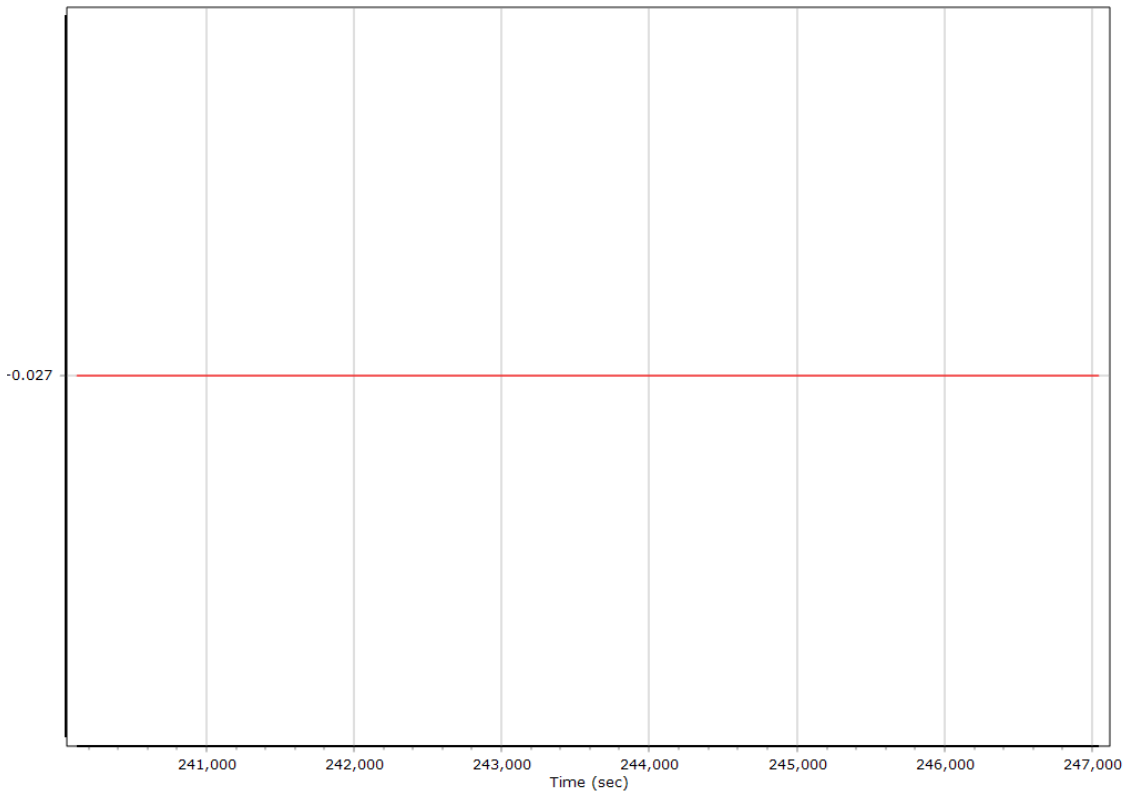

Z Reference-Primary GNSS Lever Arm (m)

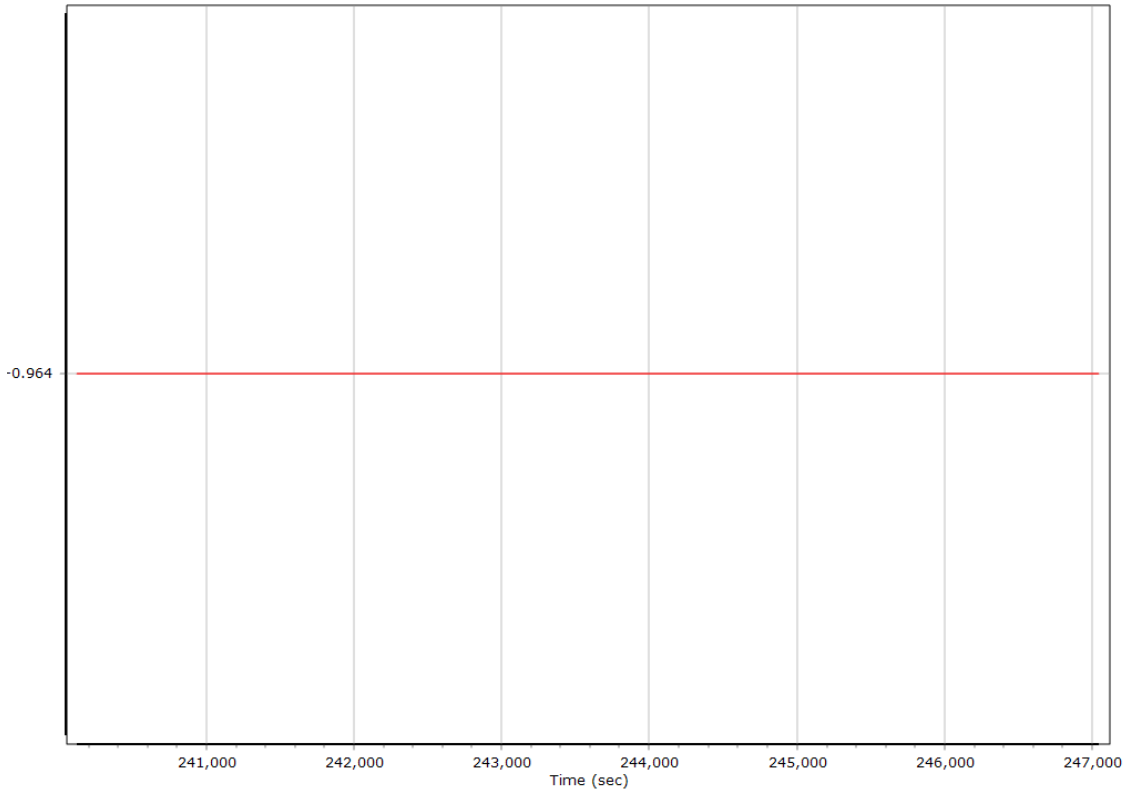

Reference-Primary GNSS Lever Arm Figure of Merit

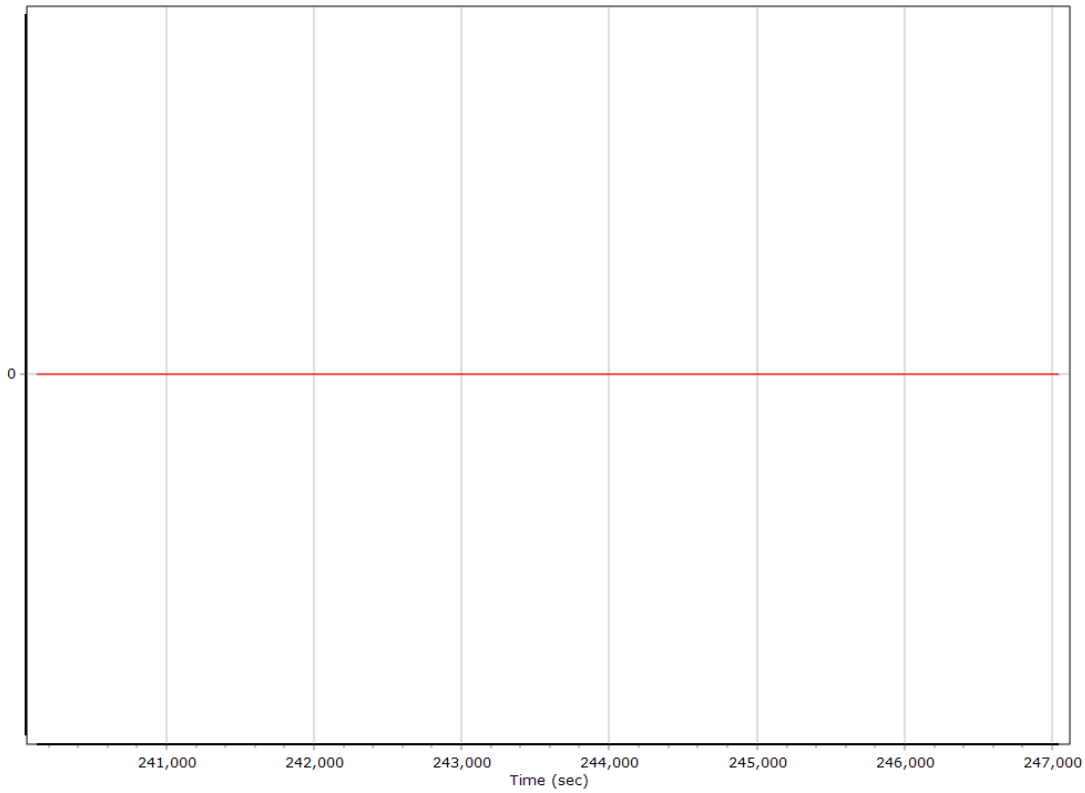

IN-Fusion QC

Forward Processed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

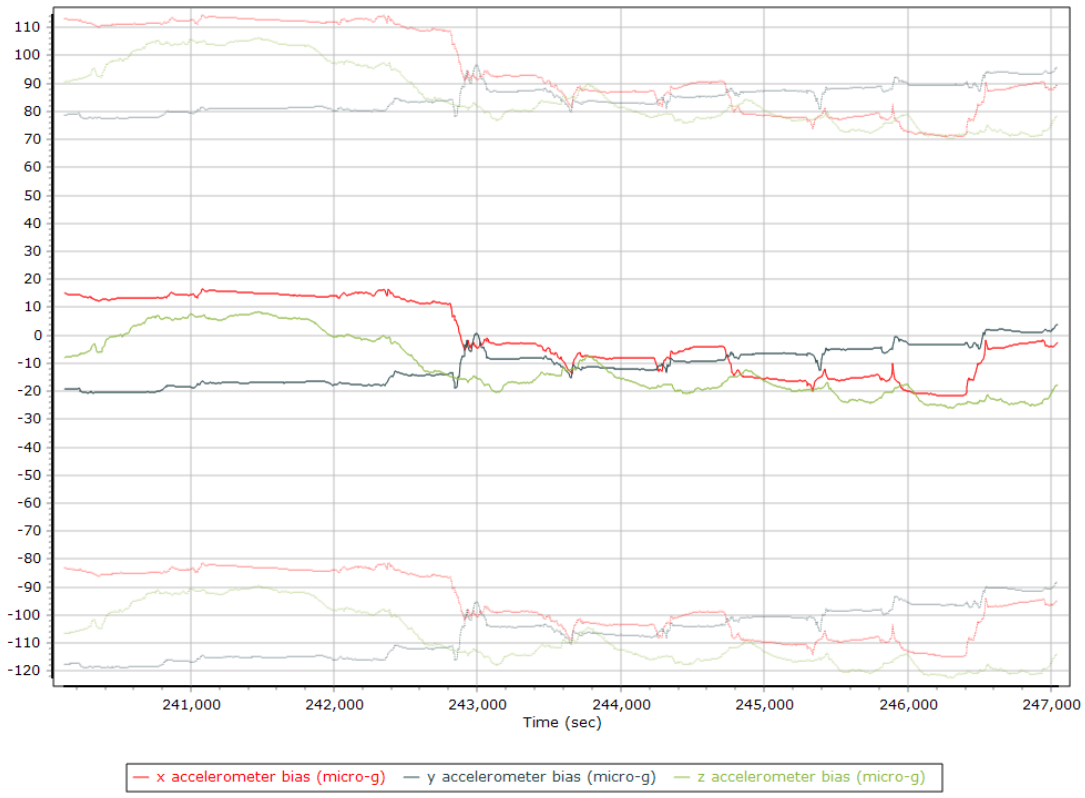

X Accelerometer Bias (micro-g)

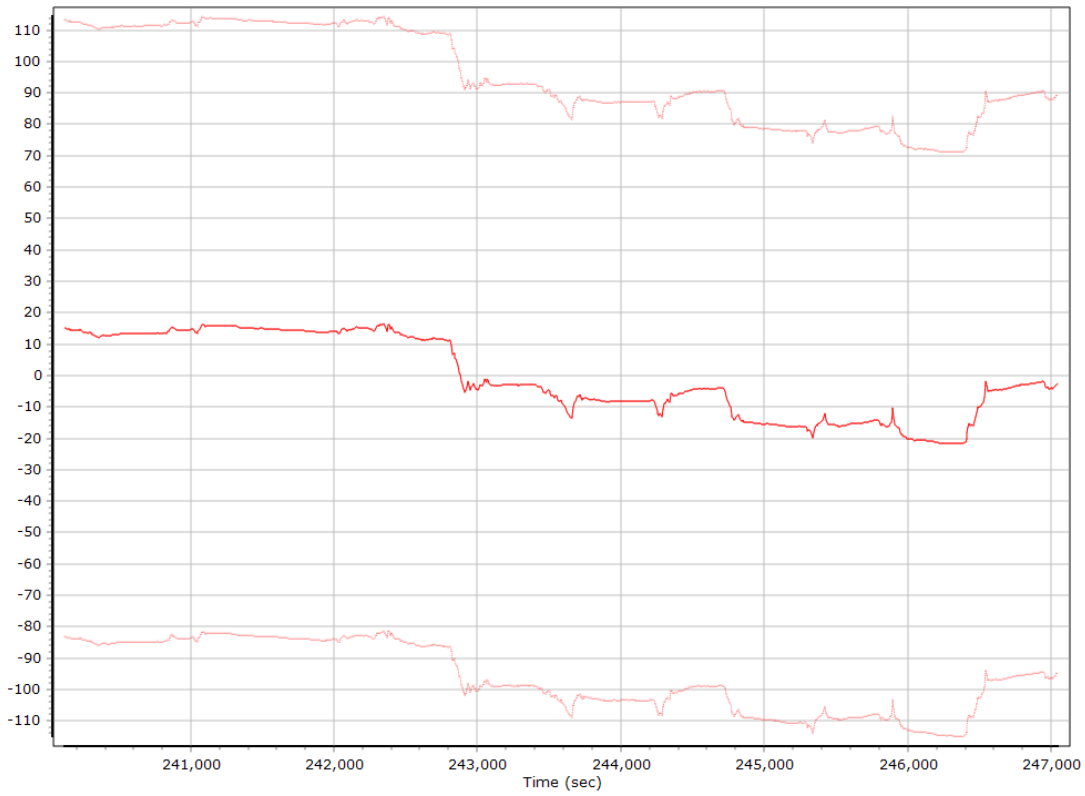

Y Accelerometer Bias (micro-g)

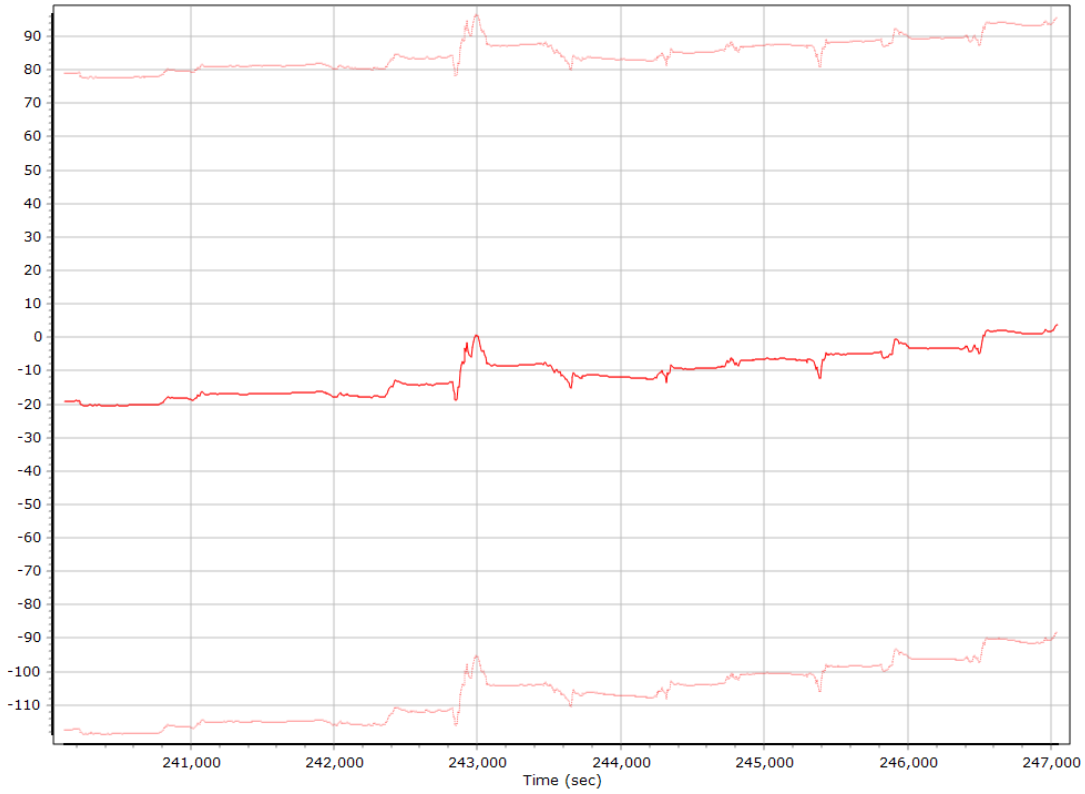

Z Accelerometer Bias (micro-g)

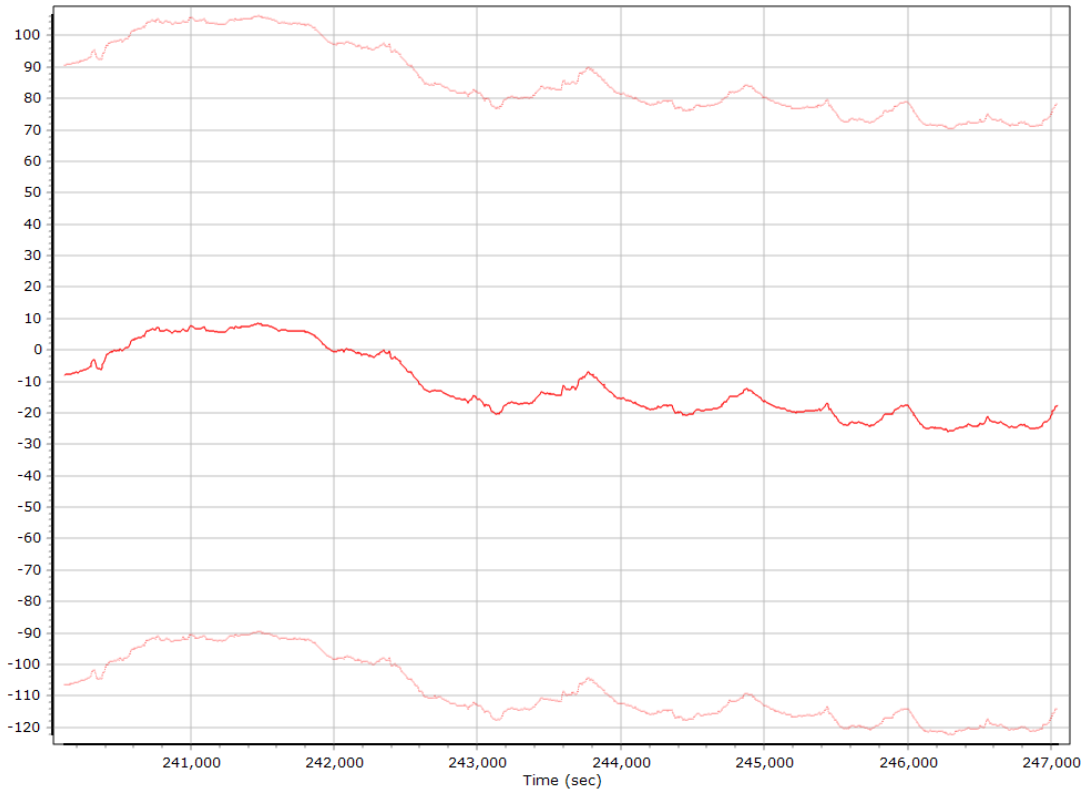

Accelerometer Scale Error (ppm)

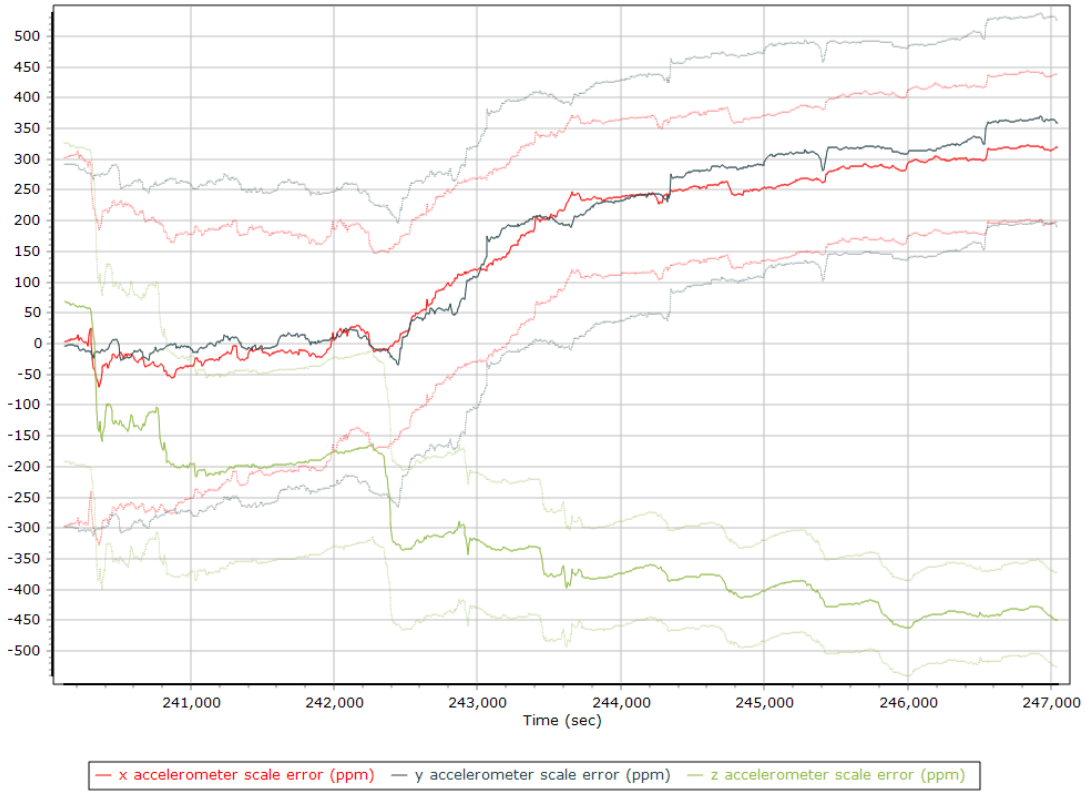

X Accelerometer Scale Error (ppm)

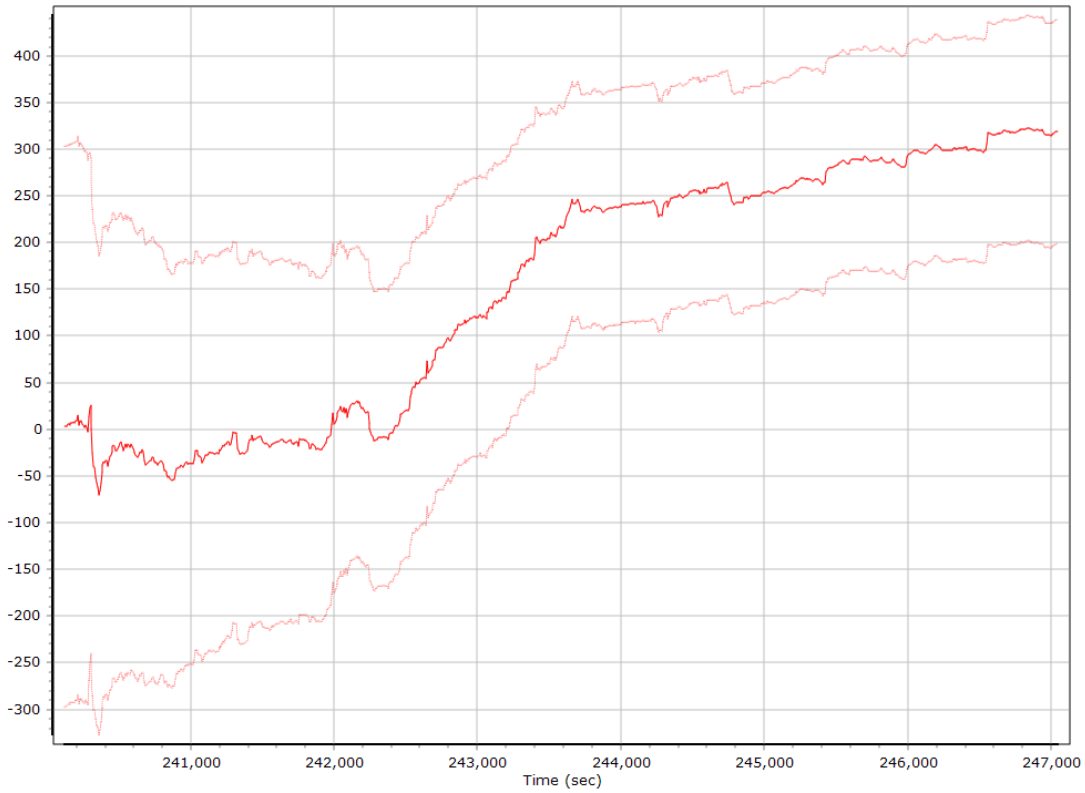

Y Accelerometer Scale Error (ppm)

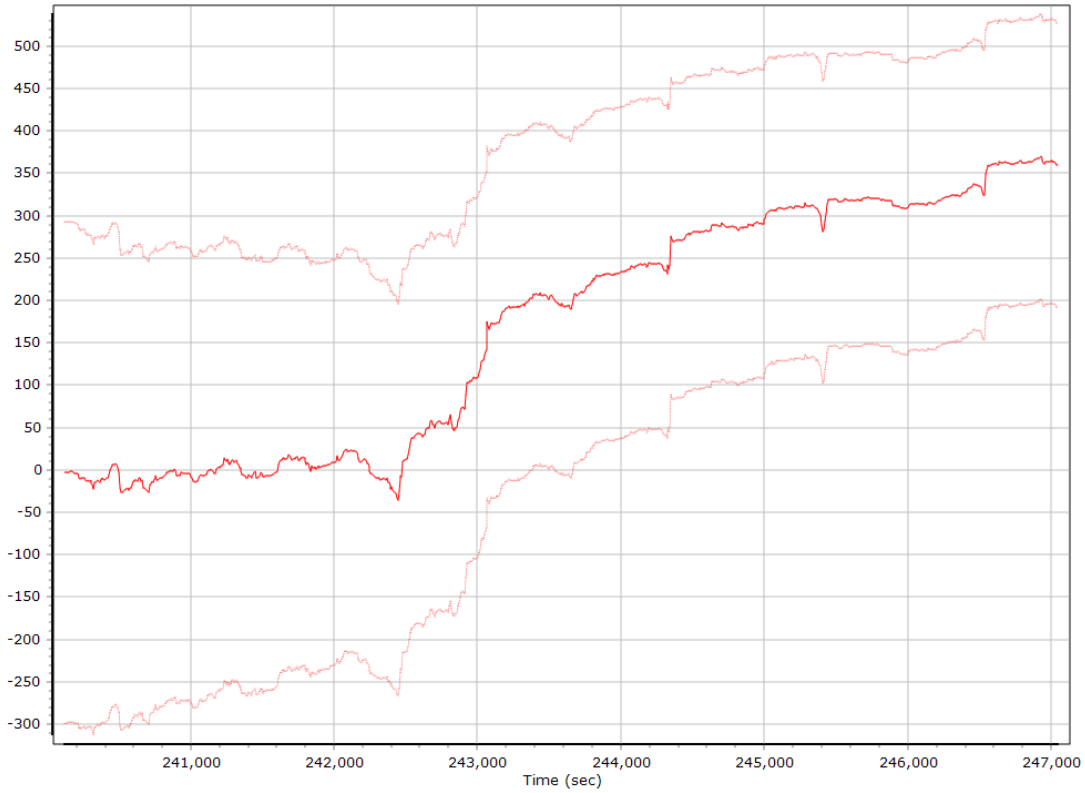

Z Accelerometer Scale Error (ppm)

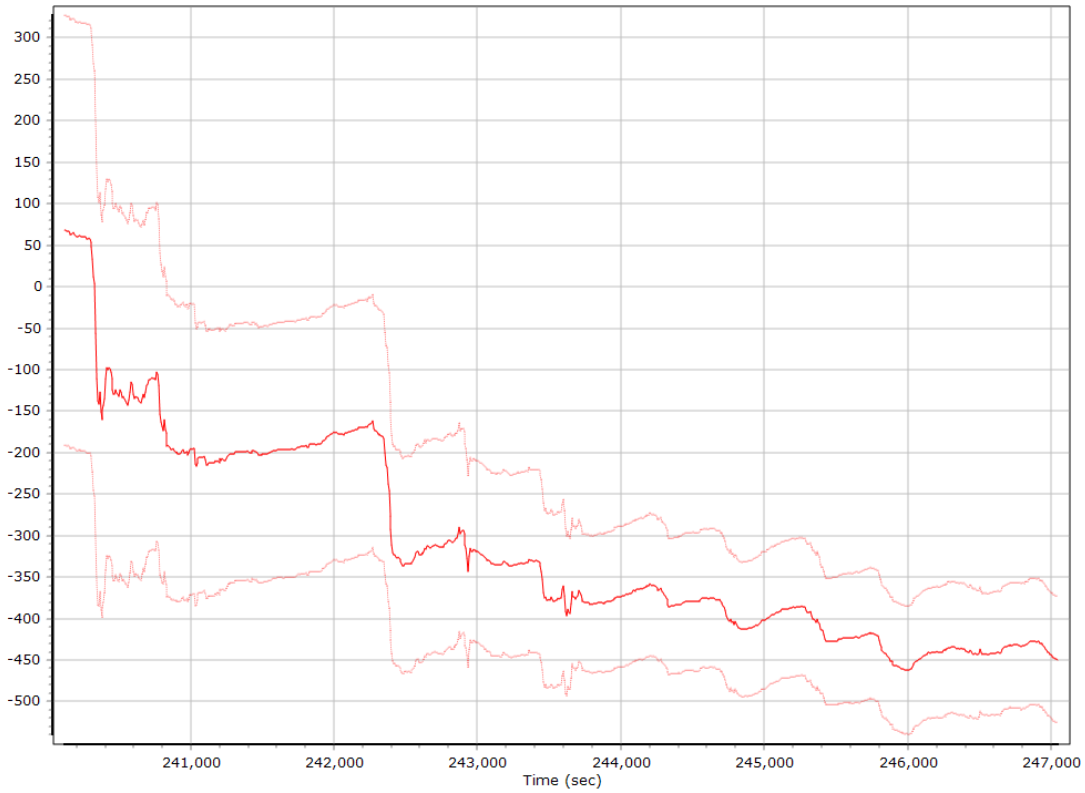

Gyro Bias (deg/h)

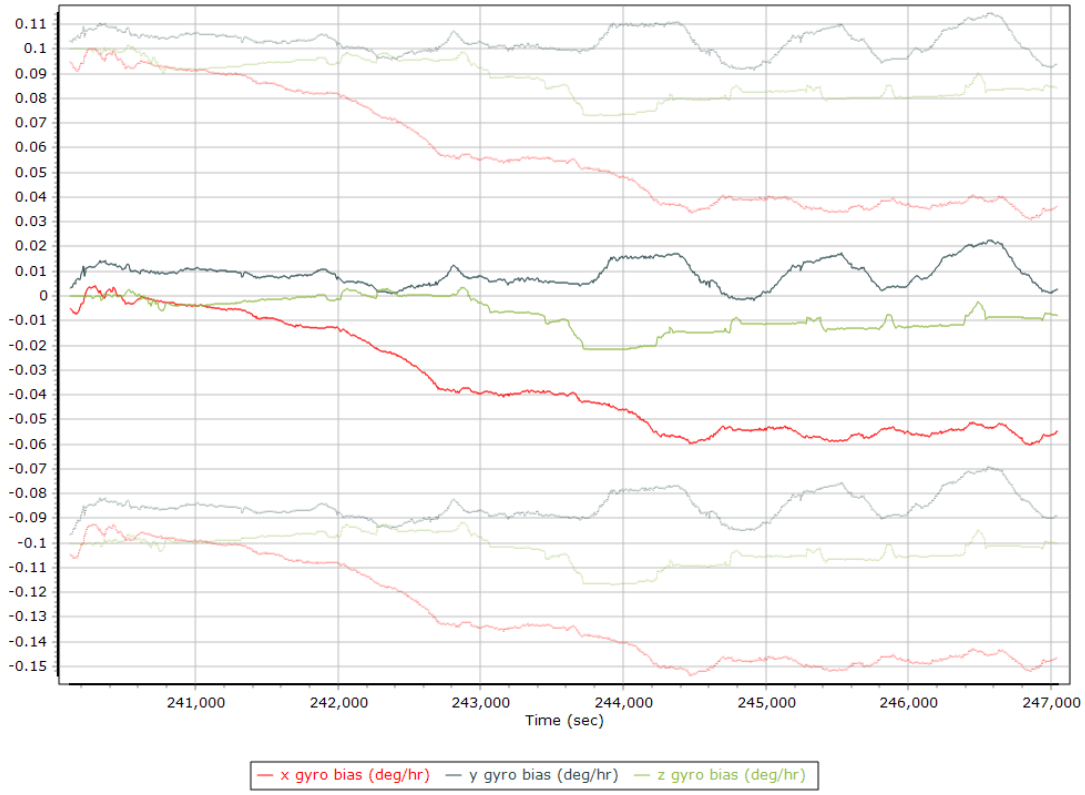

X Gyro Bias (deg/h)

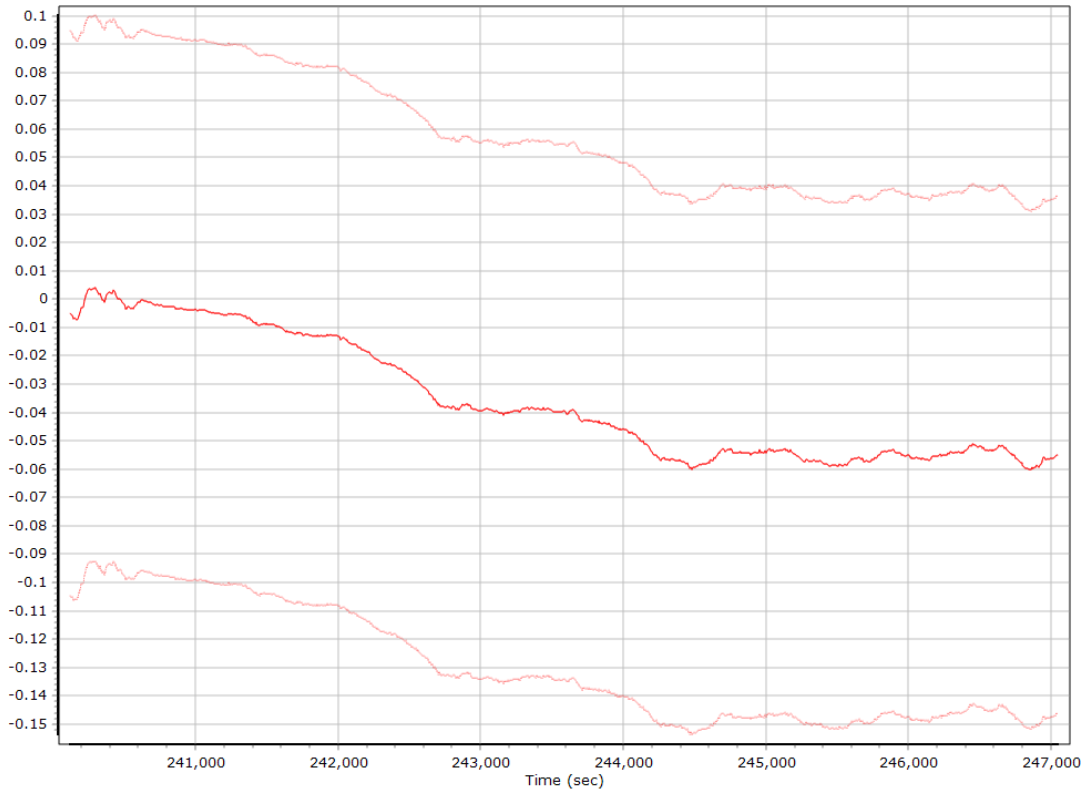

Y Gyro Bias (deg/h)

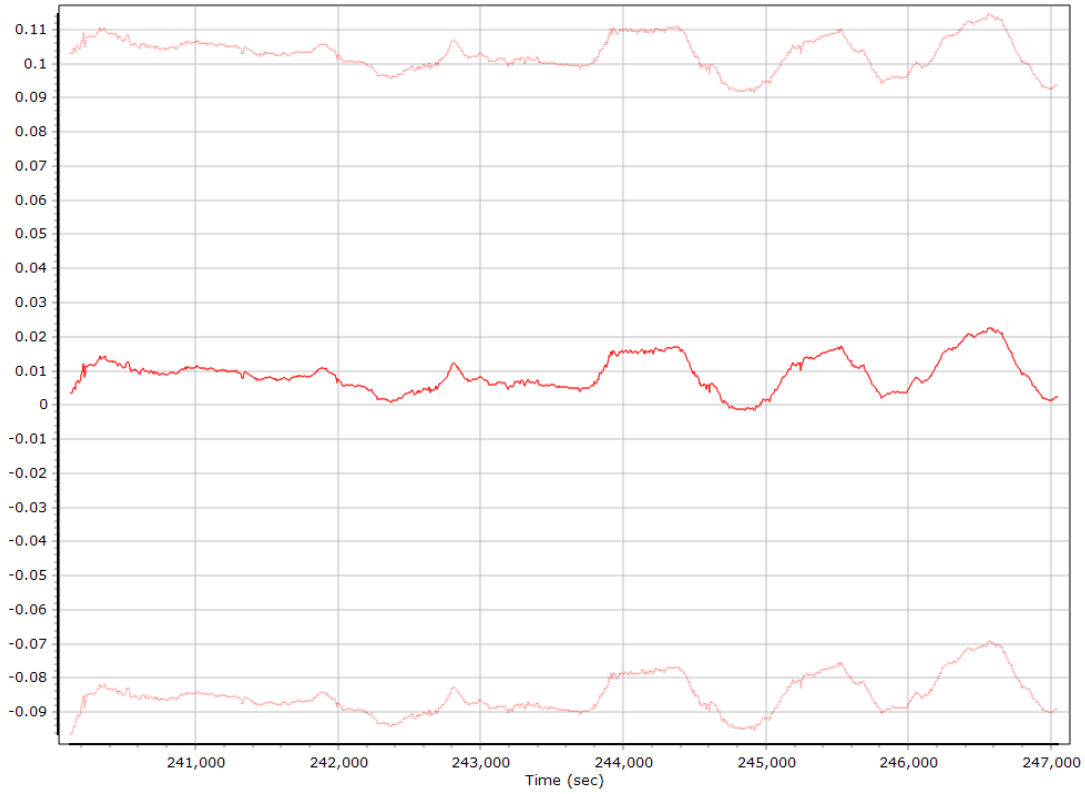

Z Gyro Bias (deg/h)

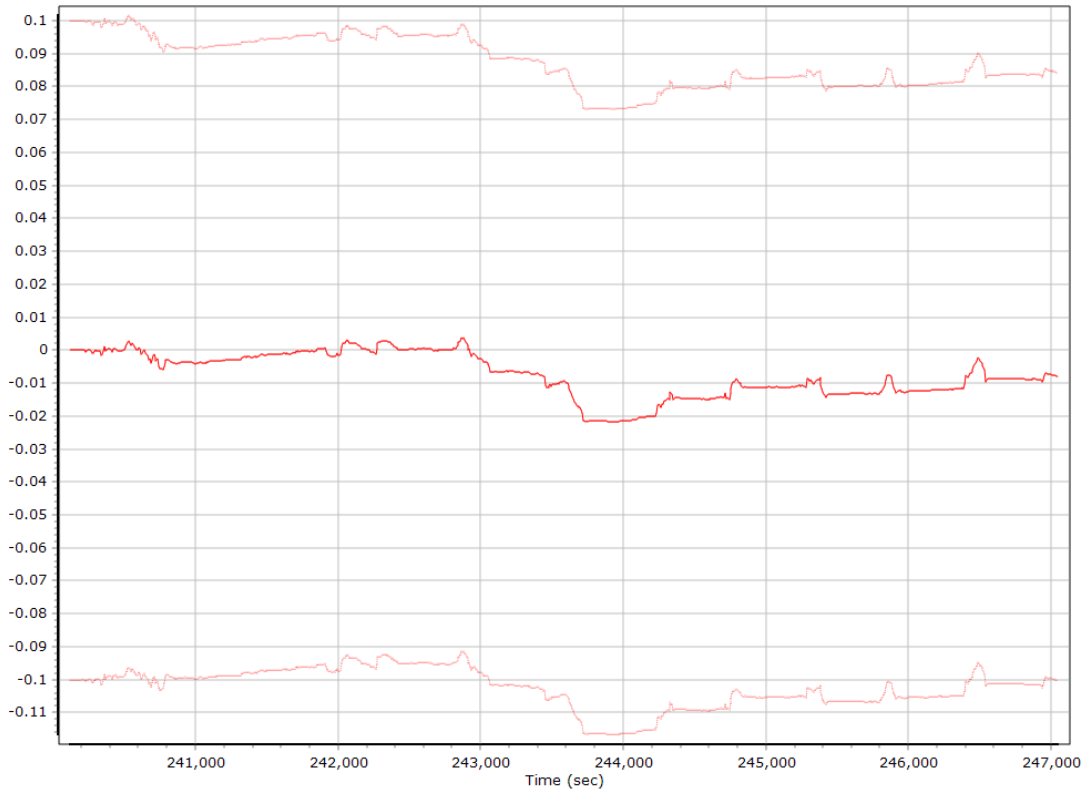

Gyro Scale Error (ppm)

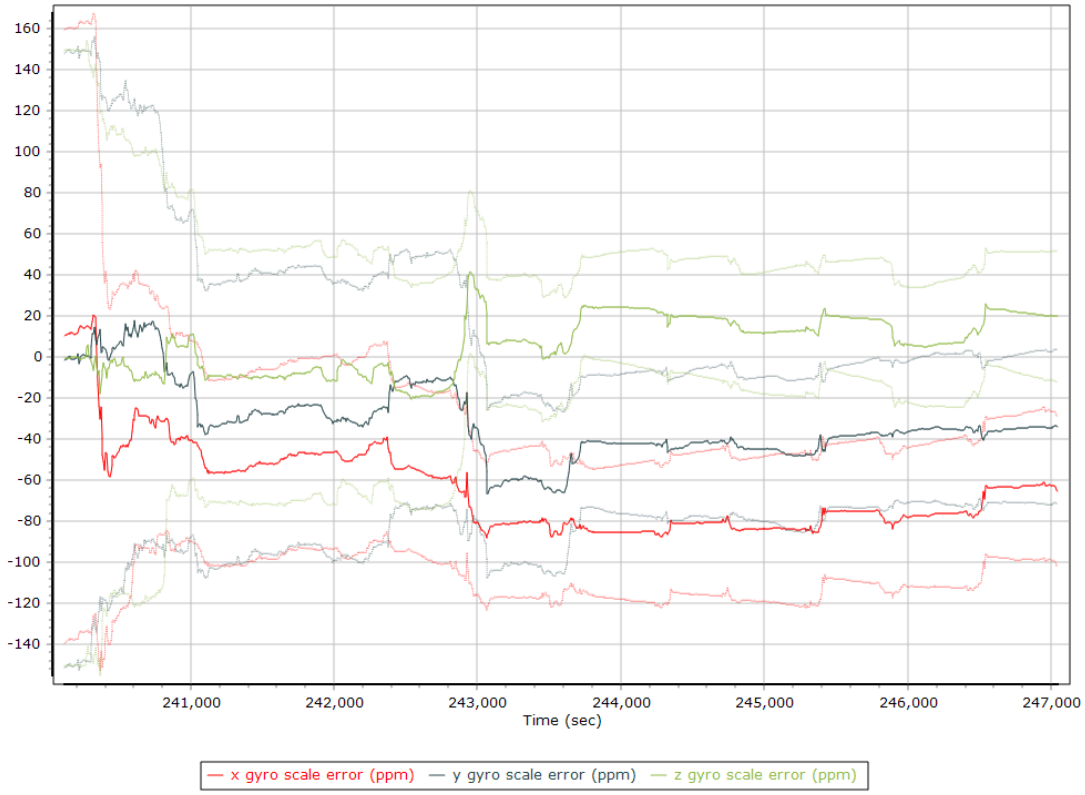

X Gyro Scale Error (ppm)

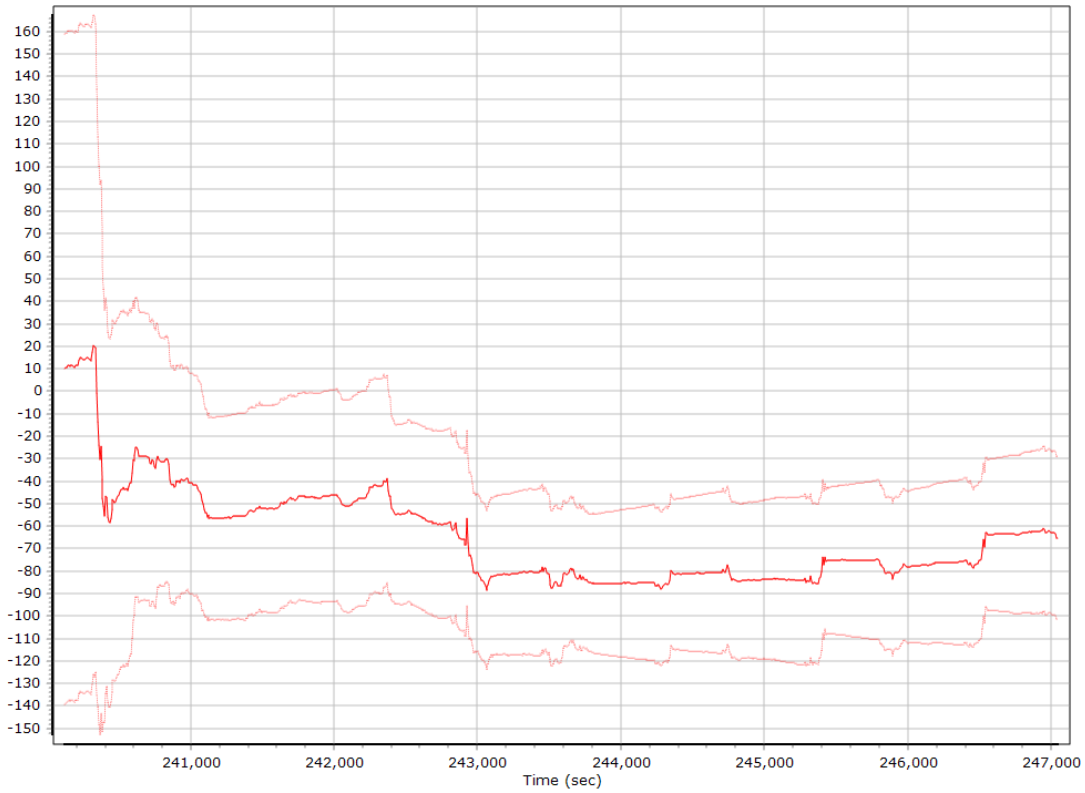

Y Gyro Scale Error (ppm)

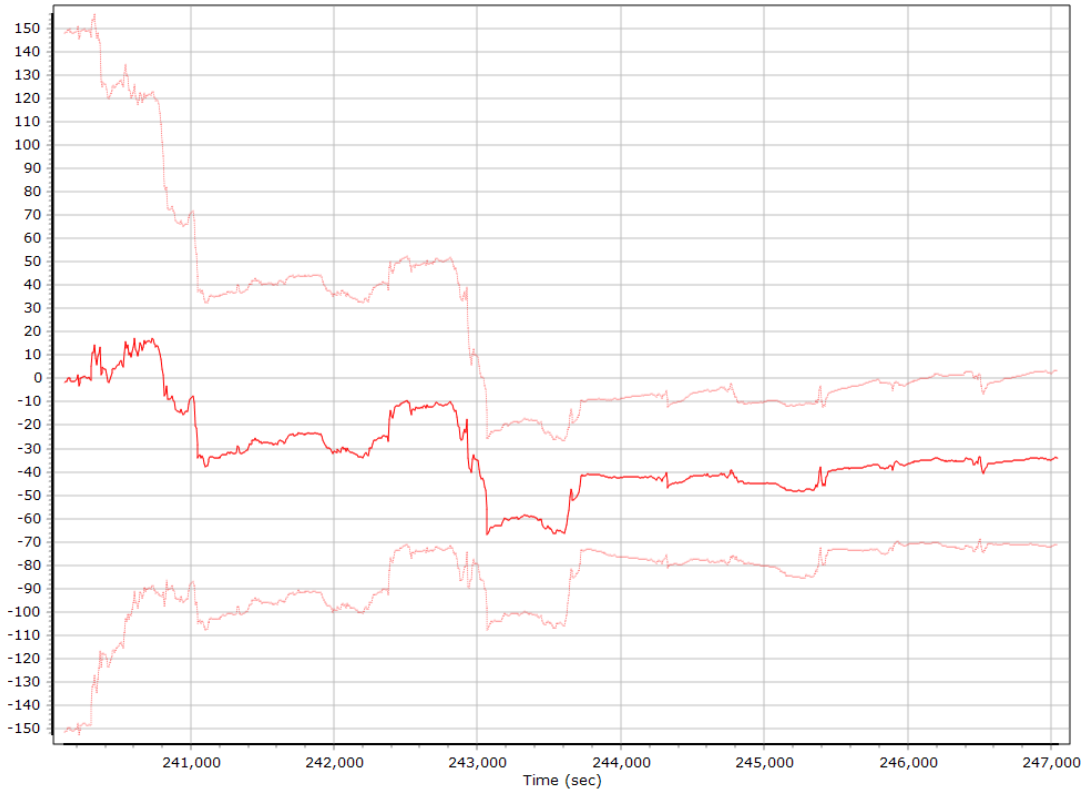

Z Gyro Scale Error (ppm)

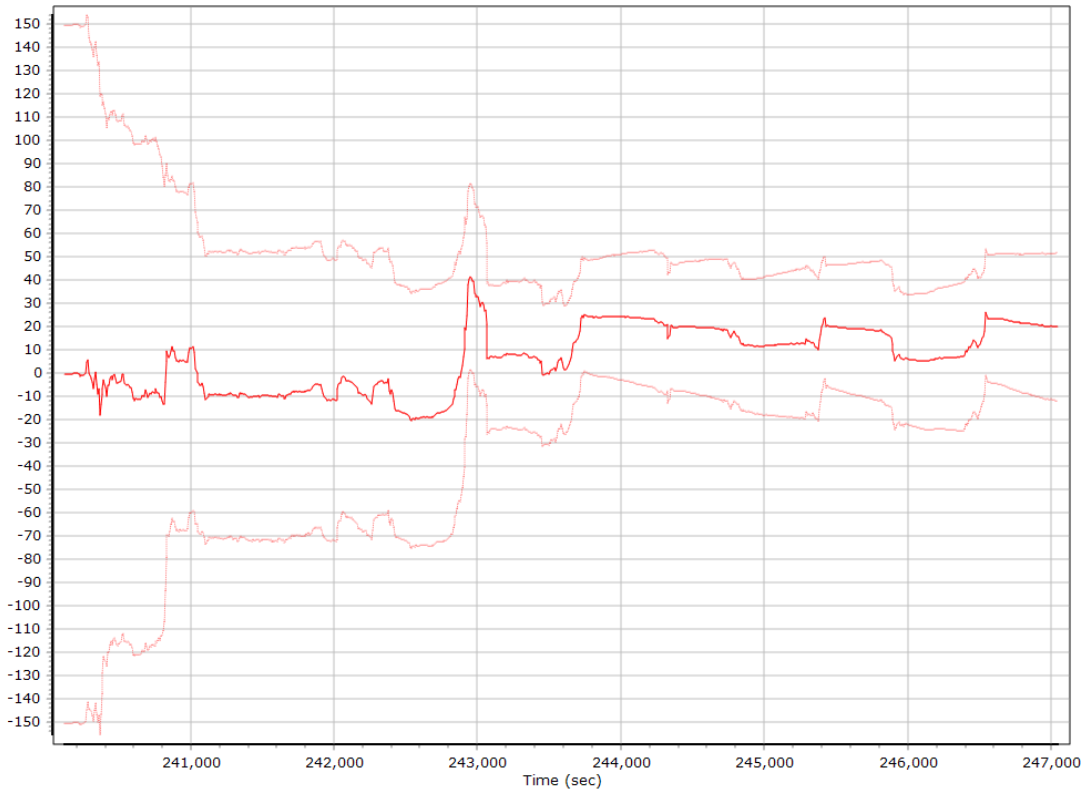

Forward Processed Estimated Constant Errors, Reference Frame

Accelerometer Bias (micro-g)

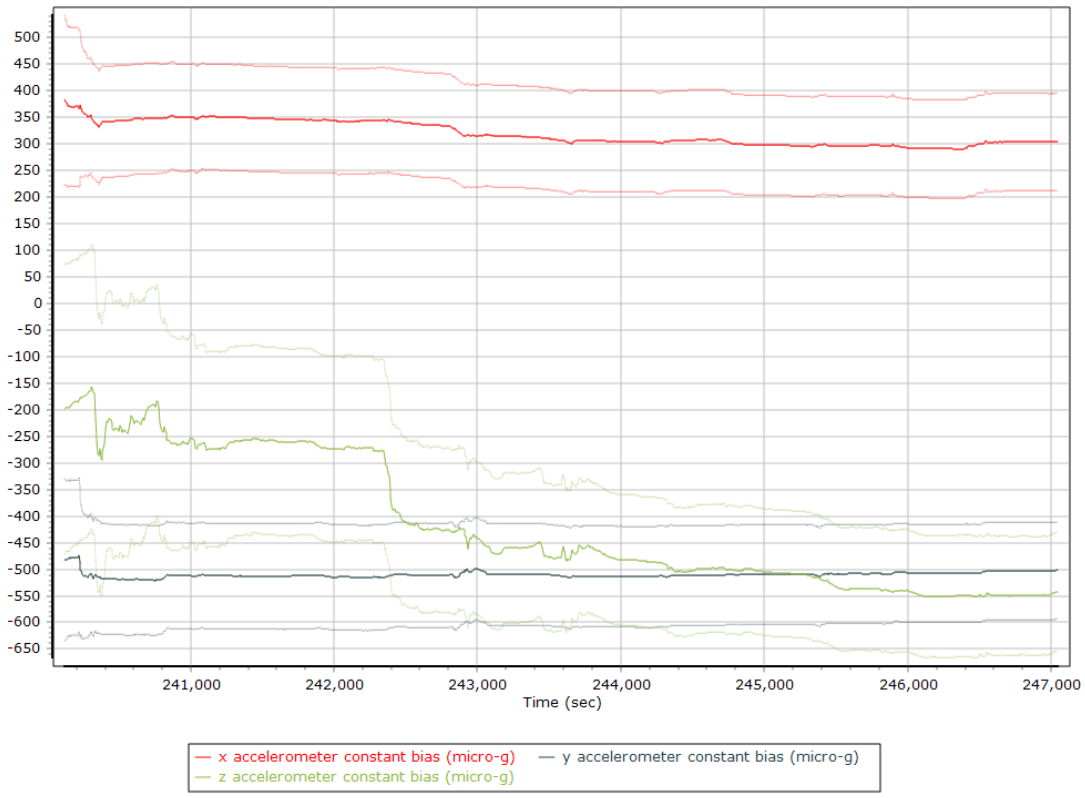

X Accelerometer Bias (micro-g)

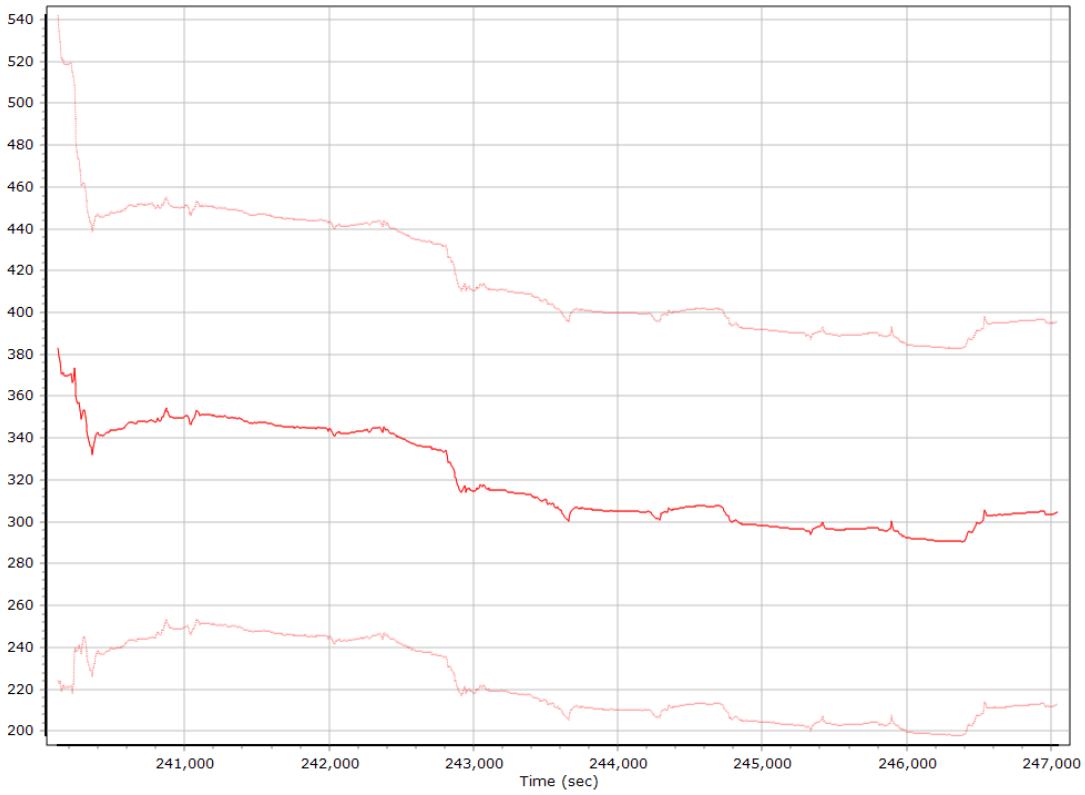

Y Accelerometer Bias (micro-g)

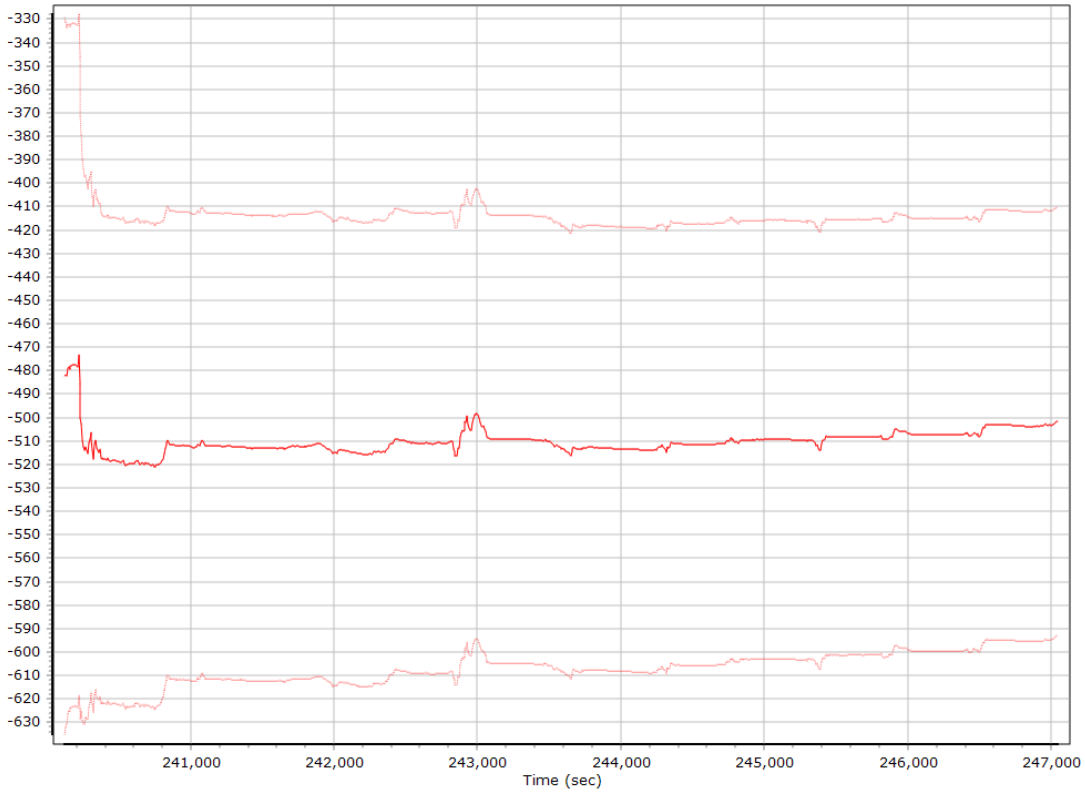

Z Accelerometer Bias (micro-g)

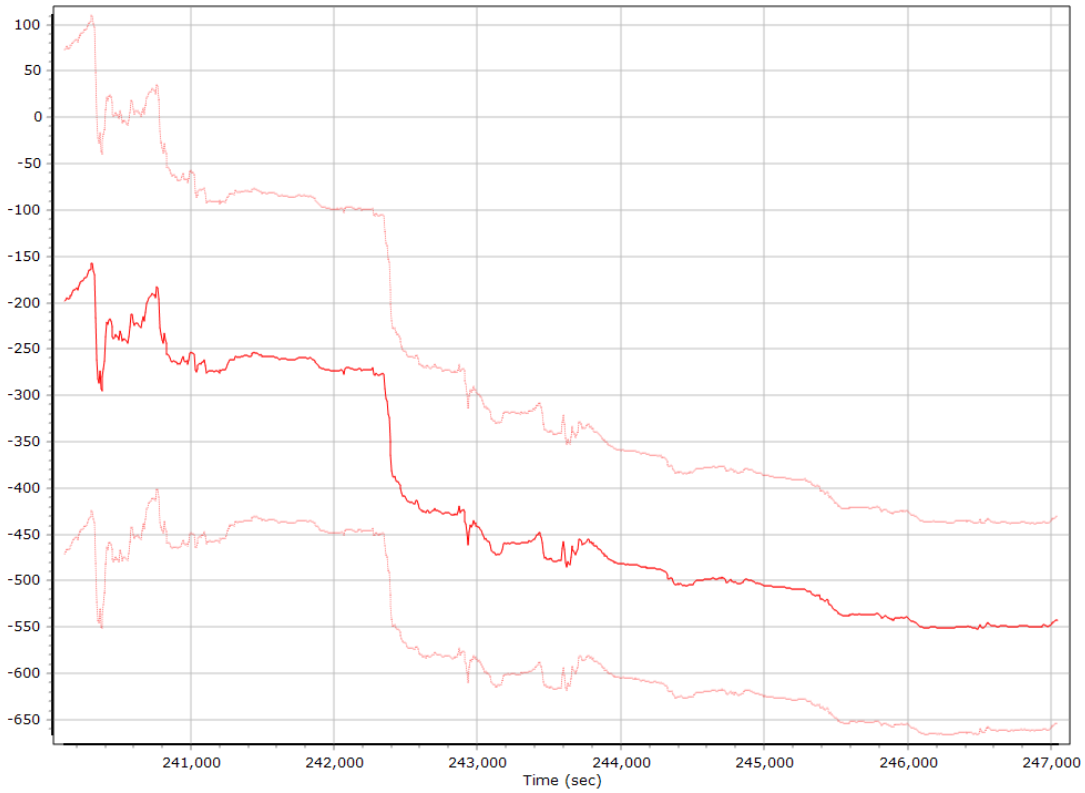

Gyro Bias (deg/h)

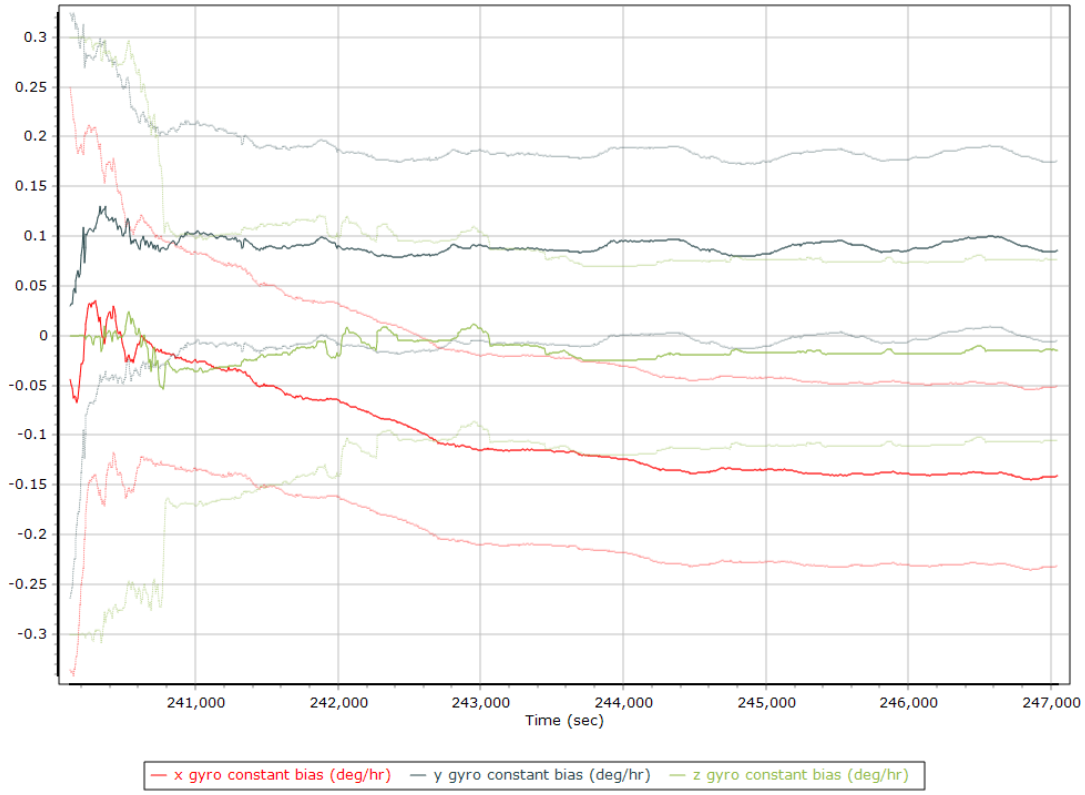

X Gyro Bias (deg/h)

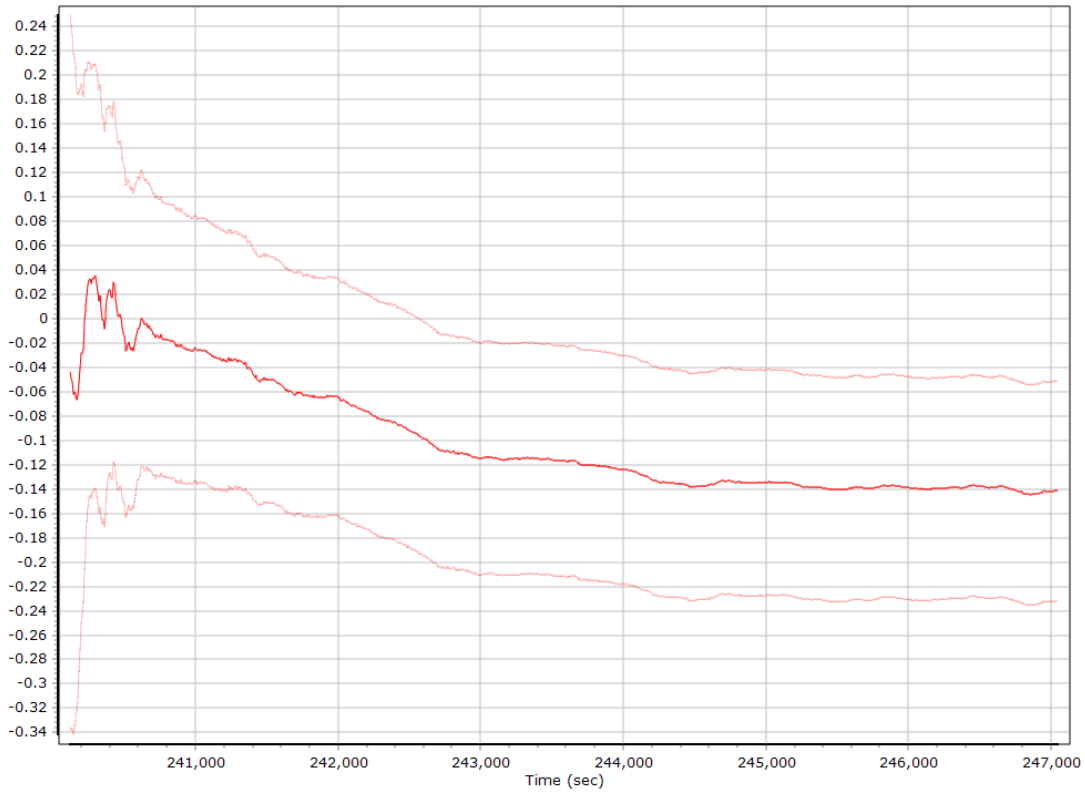

Y Gyro Bias (deg/h)

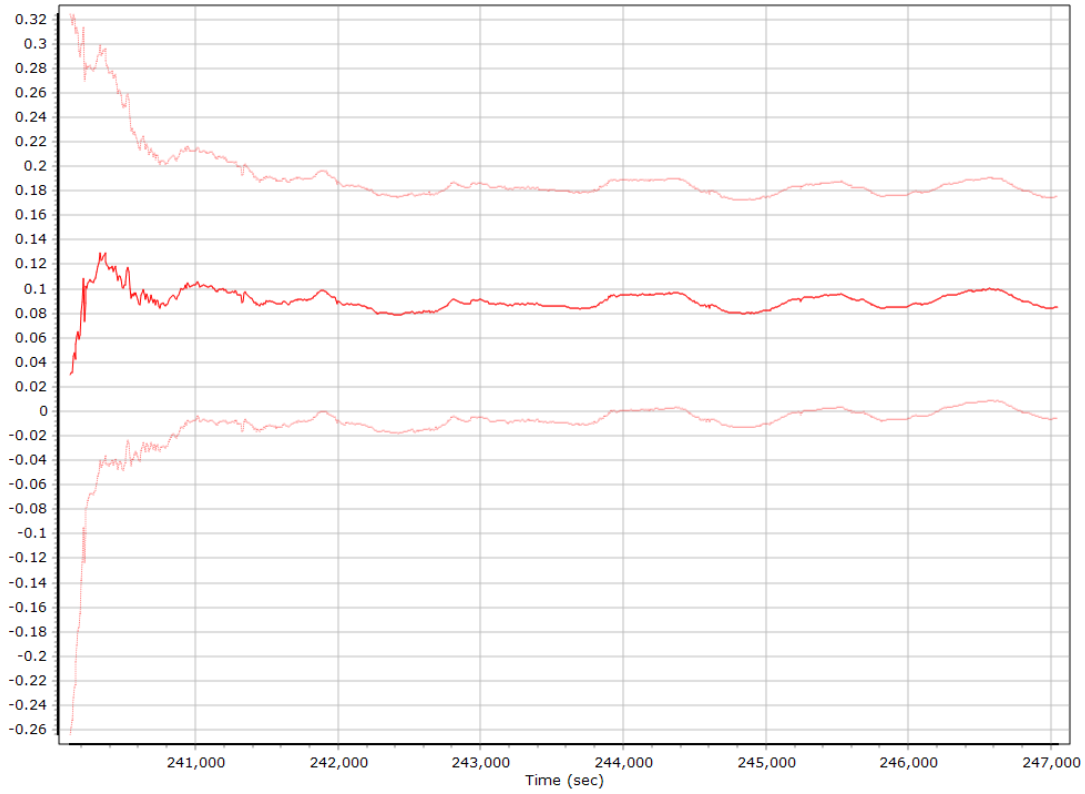

Z Gyro Bias (deg/h)

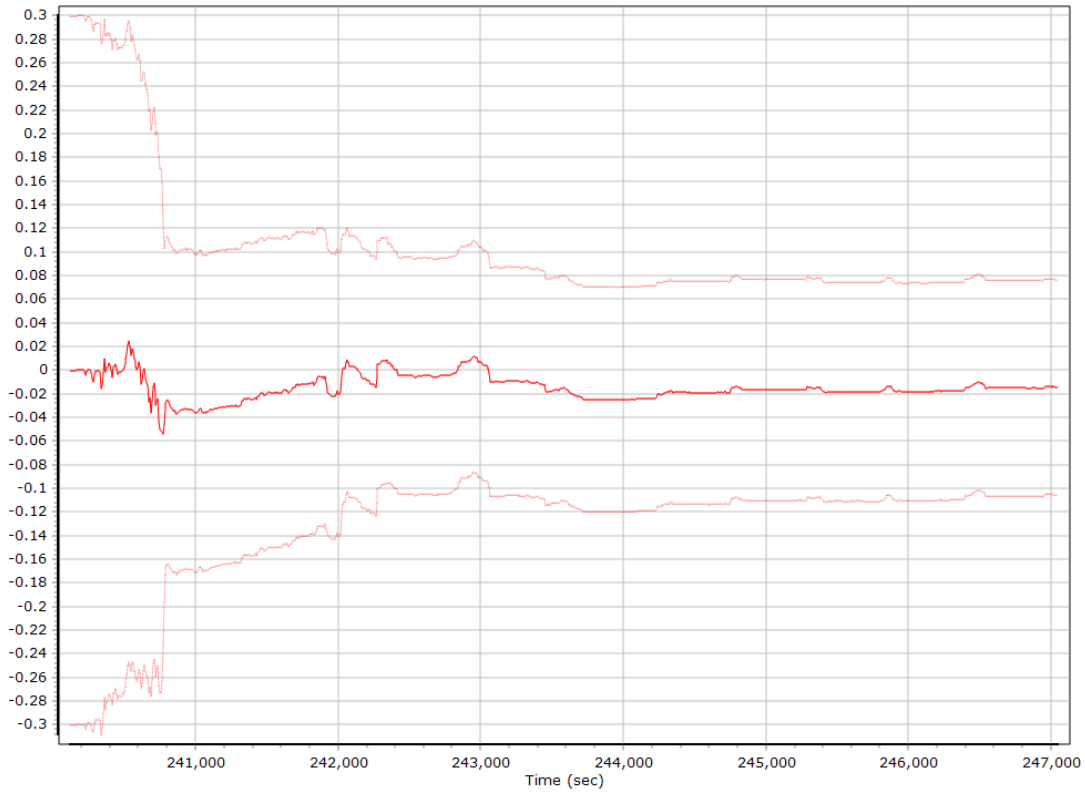

Smoothed Performance Metrics

Position Error RMS (m)

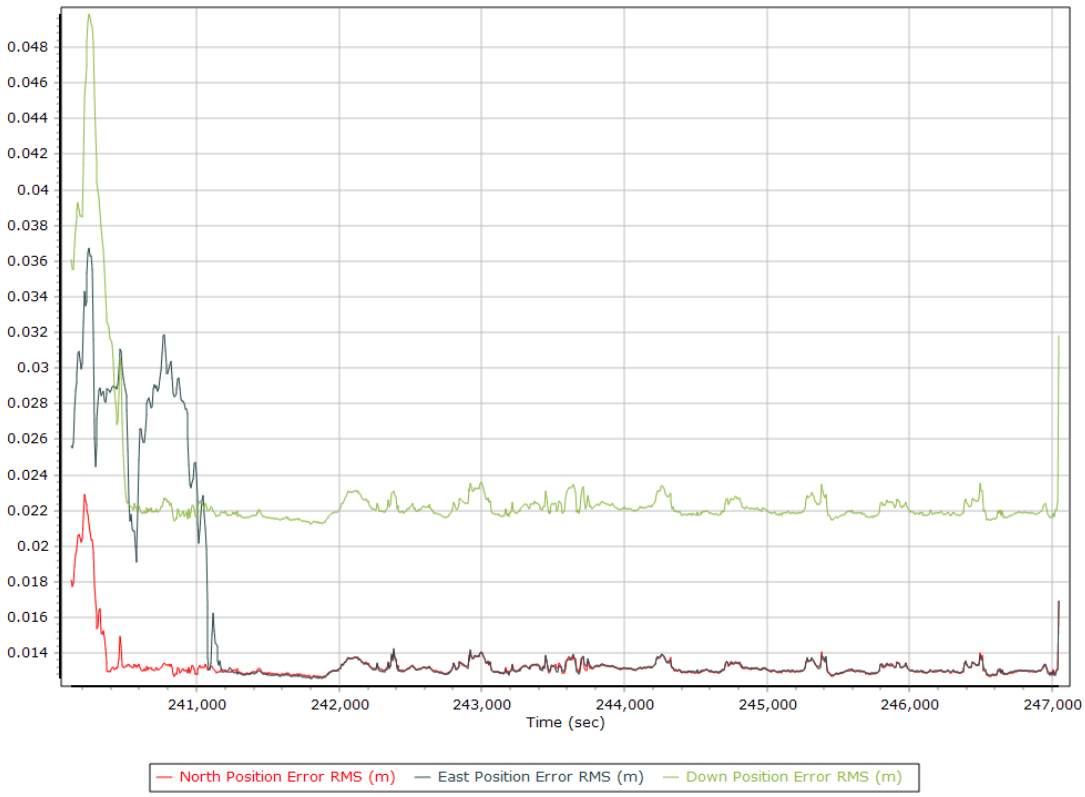

Velocity Error RMS (m/s)

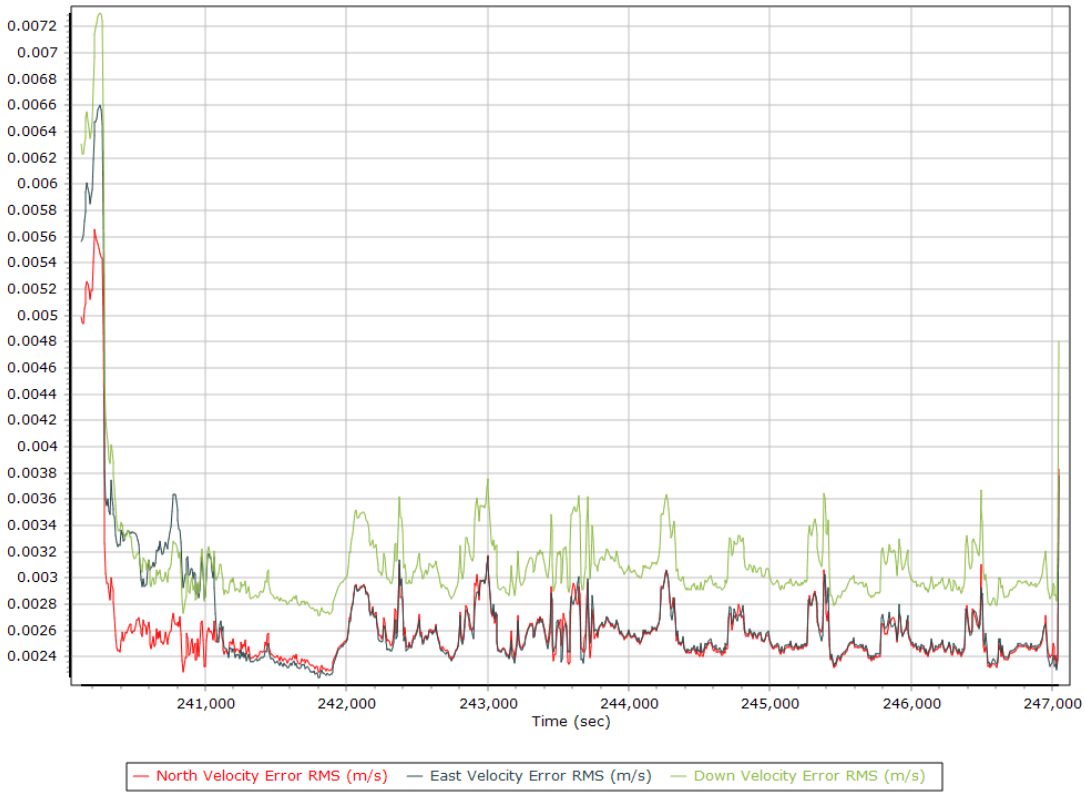

Roll/Pitch Error RMS (arc-min)

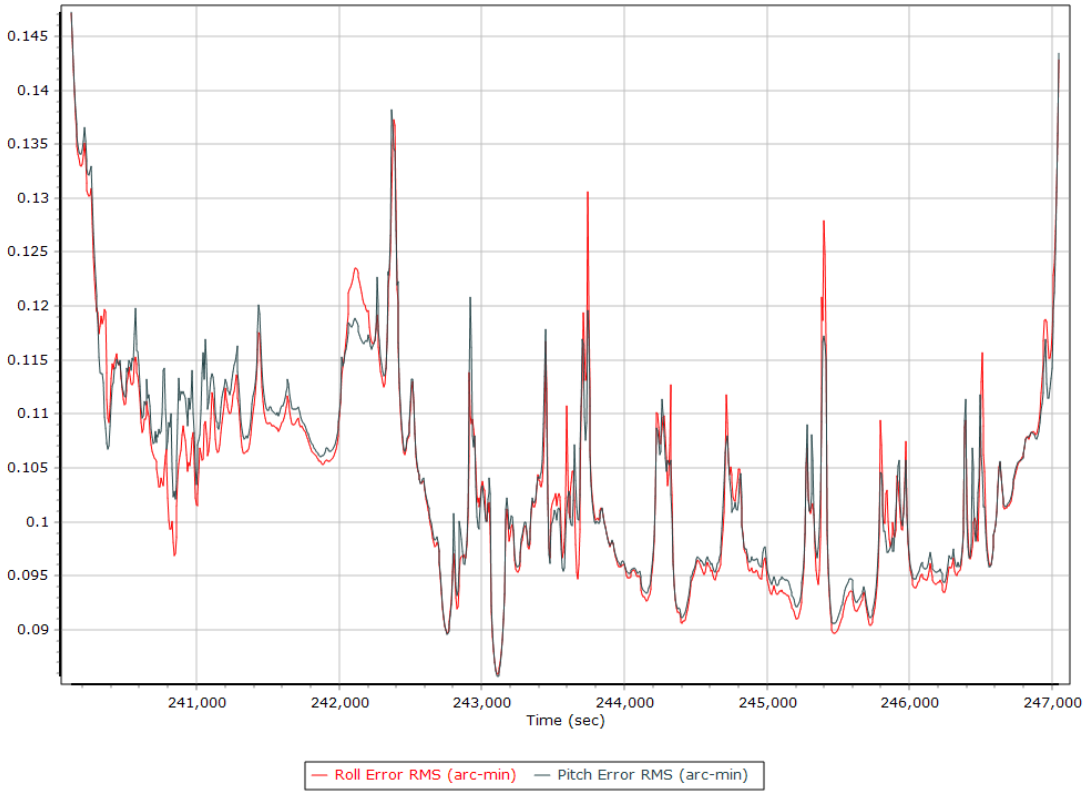

Heading Error RMS (arc-min)

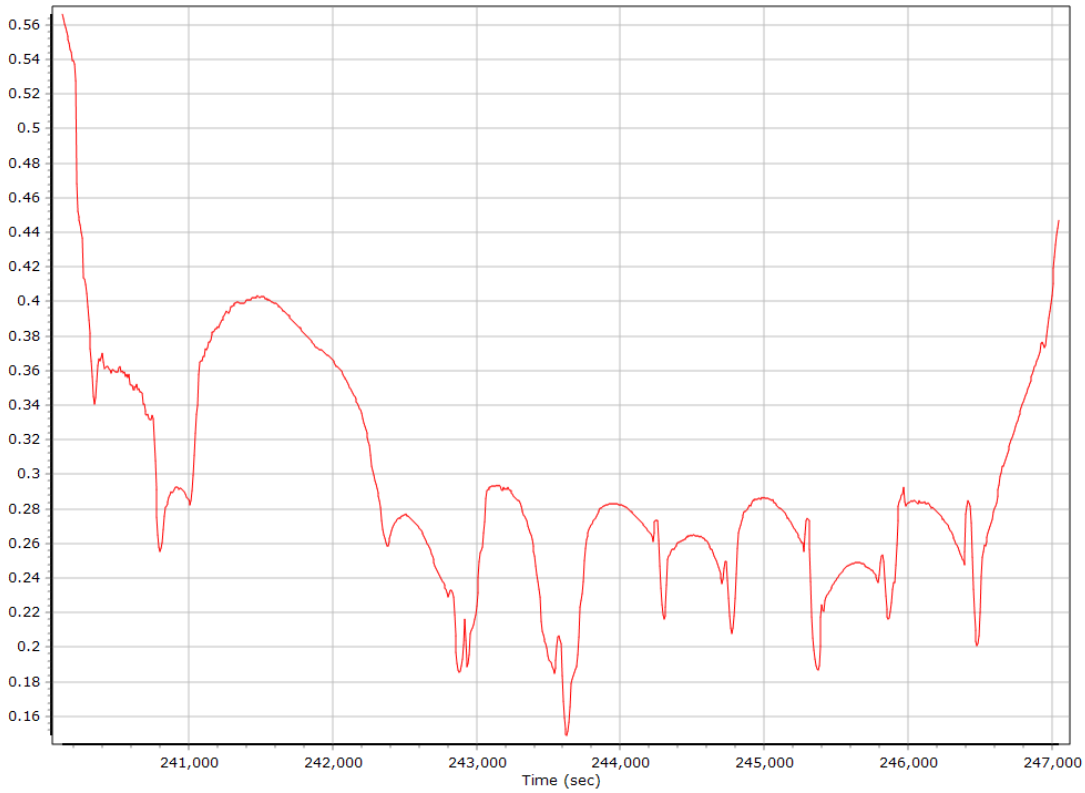

Forward Processed Performance Metrics

Position Error RMS (m)

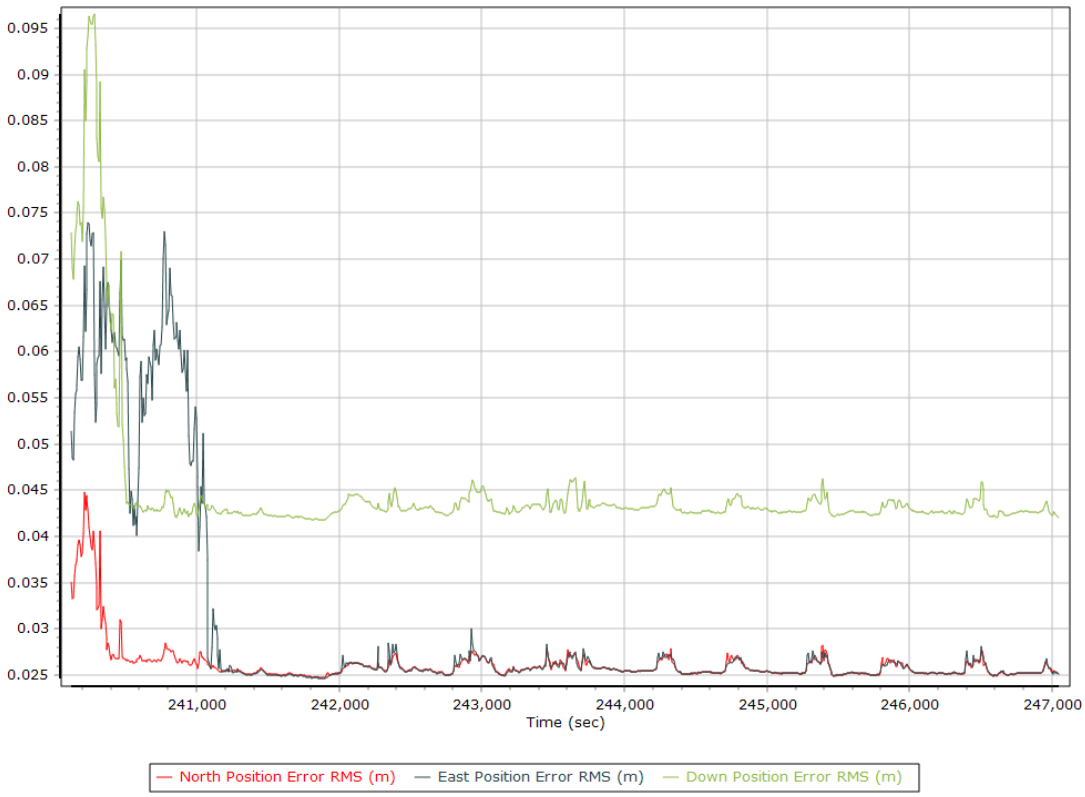

Velocity Error RMS (m/s)

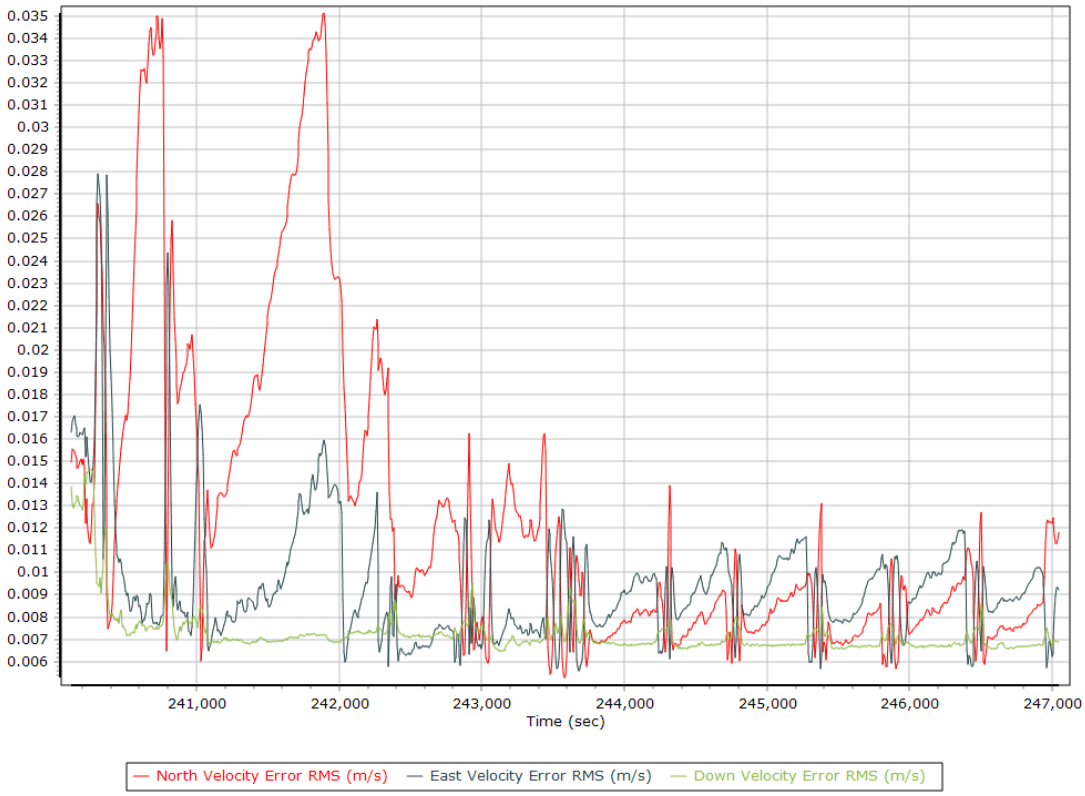

Roll/Pitch Error RMS (arc-min)

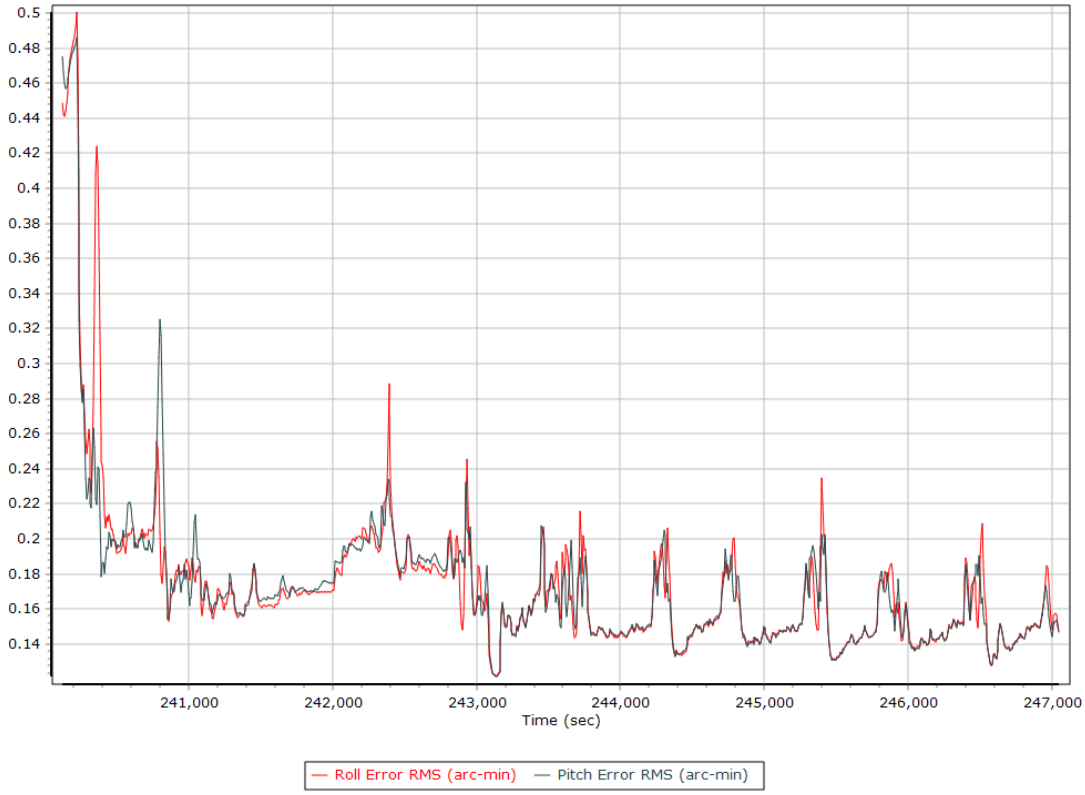

Heading Error RMS (arc-min)

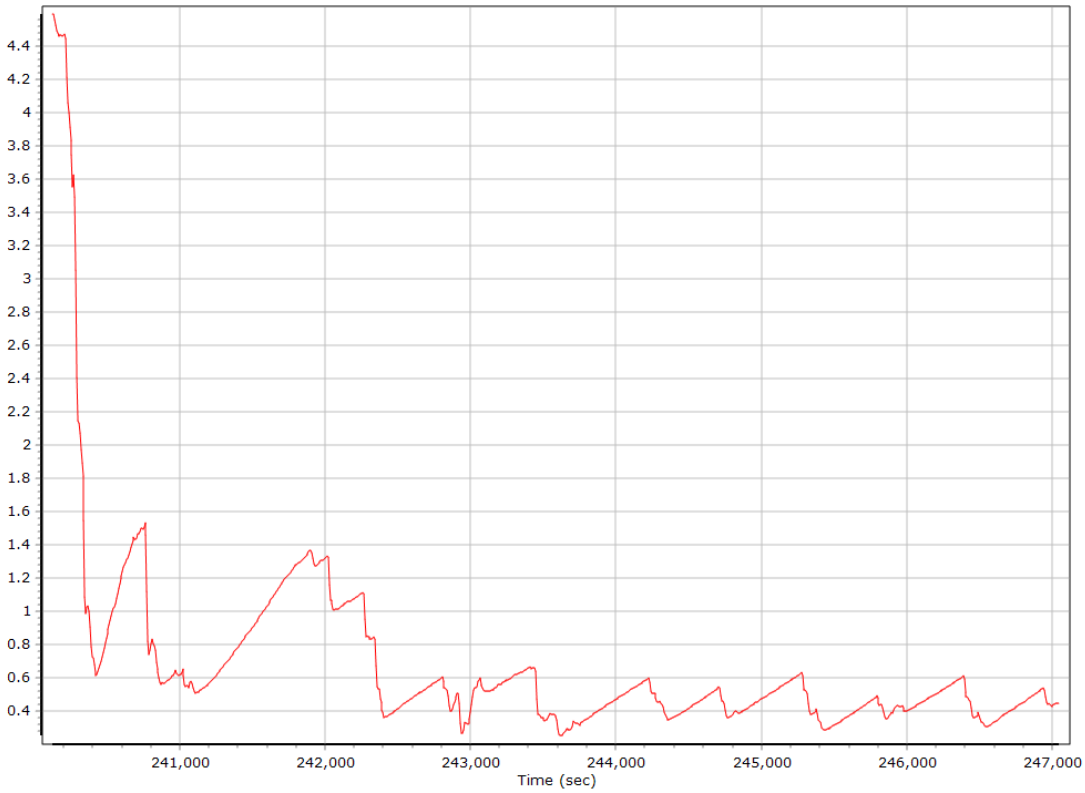

Forward Processed Solution Status

Processing Mode

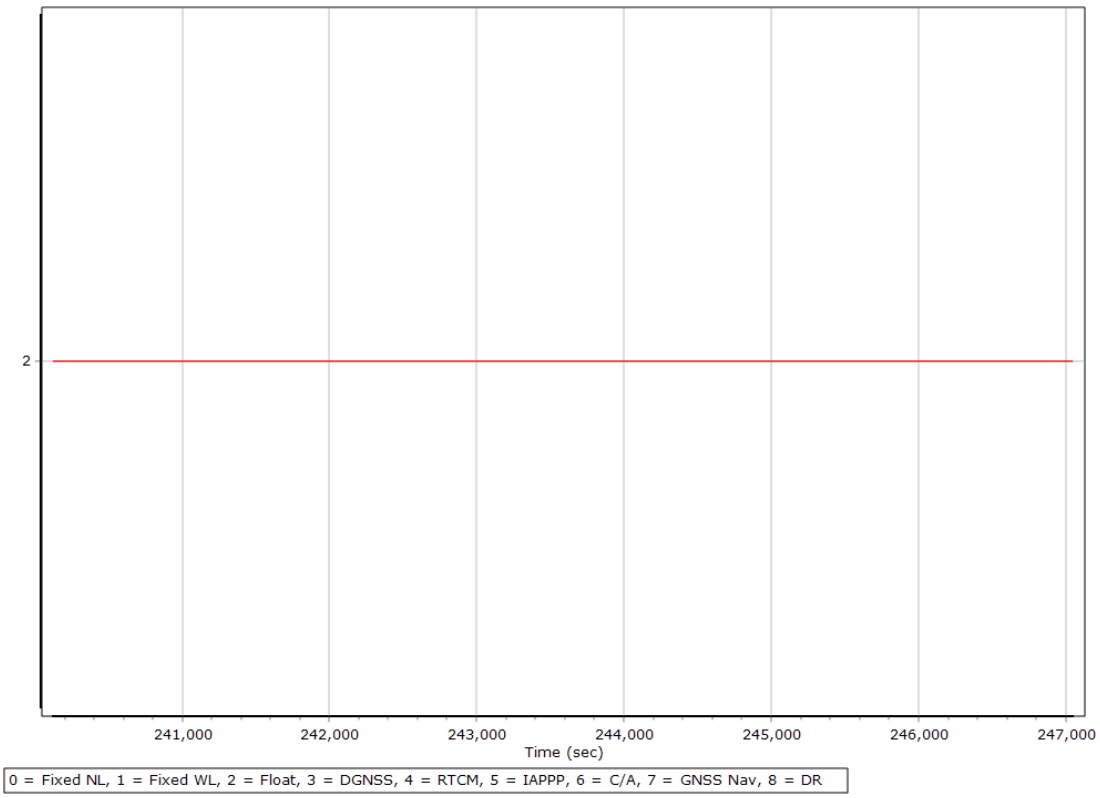

Number of Satellites

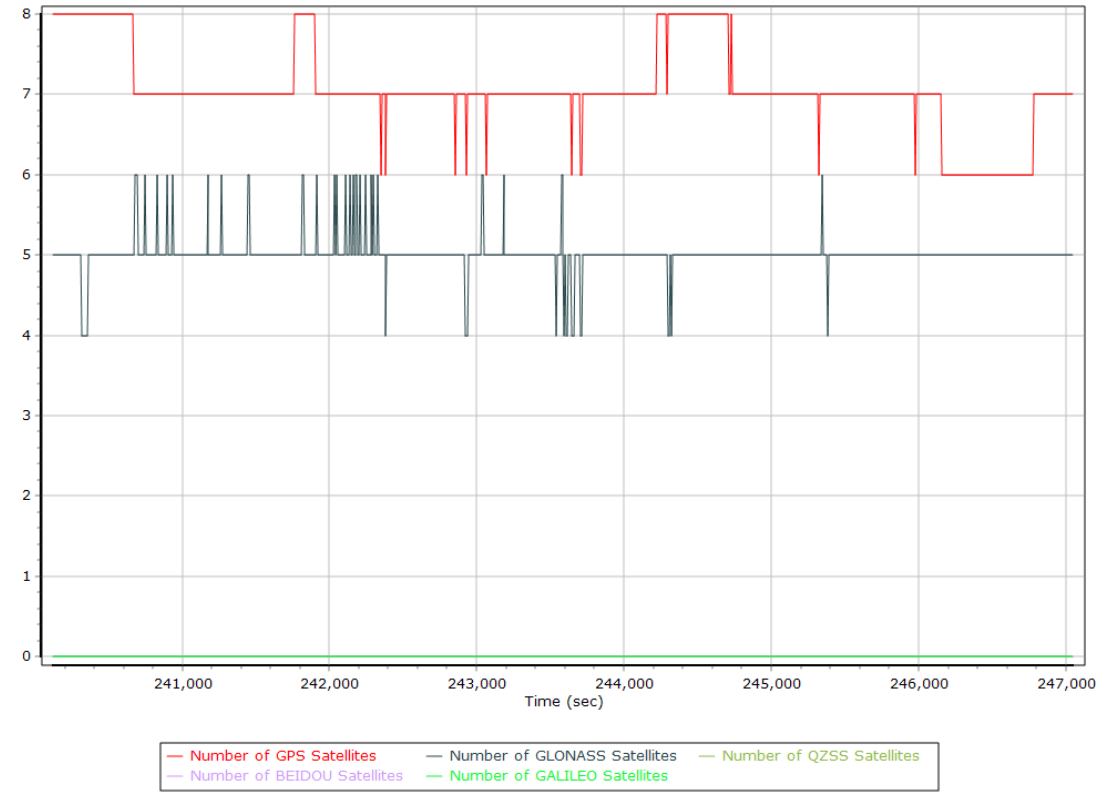
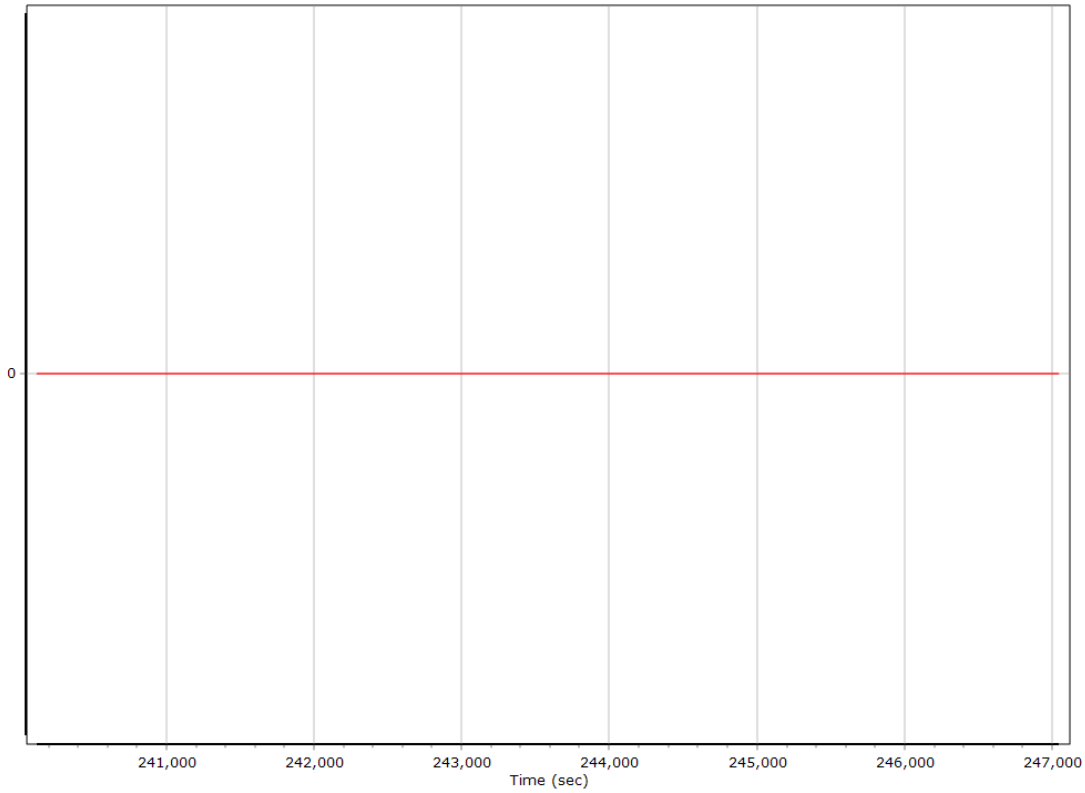
Baseline Length