General Information

Mission Information

Project name	19-058_060920
Processing date	2020-07-02 21:19:55
Mission date	2020-06-09 19:04:10
Mission duration	02:39:48.000
Processing mode	IN-Fusion Trimble RTX Nav

Rover Hardware Information

Product	POS AV 610 VER6 HW2.4-12
Serial number	S/N6310
IMU type	57
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
ALS.513	POS Data
ALS.514	POS Data
ALS.515	POS Data
ALS.516	POS Data
ALS.517	POS Data
ALS.518	POS Data
ALS.519	POS Data
ALS.520	POS Data
ALS.521	POS Data
ALS.522	POS Data
ALS.523	POS Data
ALS.524	POS Data
ALS.525	POS Data
ALS.526	POS Data
ALS.527	POS Data
ALS.528	POS Data
ALS.529	POS Data
ALS.530	POS Data
ALS.531	POS Data
ALS.532	POS Data
ALS.533	POS Data
ALS.534	POS Data

Input Files

File Name	File Type
Ephm1610.20g	GLONASS Broadcast Ephemeris
Ephm1610.20n	GPS Broadcast Ephemeris
igl21091.sp3	GLONASS Precise Ephemeris
igl21092.sp3	GLONASS Precise Ephemeris
igl21093.sp3	GLONASS Precise Ephemeris
igs21091.sp3	GPS Precise Ephemeris
igs21092.sp3	GPS Precise Ephemeris
igs21093.sp3	GPS Precise Ephemeris

Output Files

Filename	File type
sbet_19-058_060920.out	SBET Trajectory File

Rover Data Summary

First raw data file	ALS.513		
Last raw data file	ALS.534		
Start GPS week	2109		
Start time	241461.287 (06/09/2020 19:04:03)		
End time	251037.559 (06/09/2020 21:43:39)		
Start of fine alignment	242110.246 (06/09/2020 19:14:52)		
Available subsystems	Primary GNSS, Gimbal, IMU		
POS Event Input	Event 1 Input		
Correction data	Trimble RTX		
IMU Installation Lever Arms & Mounting Angles			
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	-0.011	0.039	-1.317
Gimbal to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Rover Data QC

Raw IMU Import QC Summary

IMU data input file	imu_19-058_060920.dat
IMU data check log file	imudt_19-058_060920.log
IMU Records Processed	1917372
Termination Status	Warnings
IMU Anomalies	1
IMU Failure Messages	
241461.052 : WARNING : Gap of 241449.0957 seconds in CHECKDT input data	

Primary Observables & Satellite Data

L1 Satellite Lock/Elevation

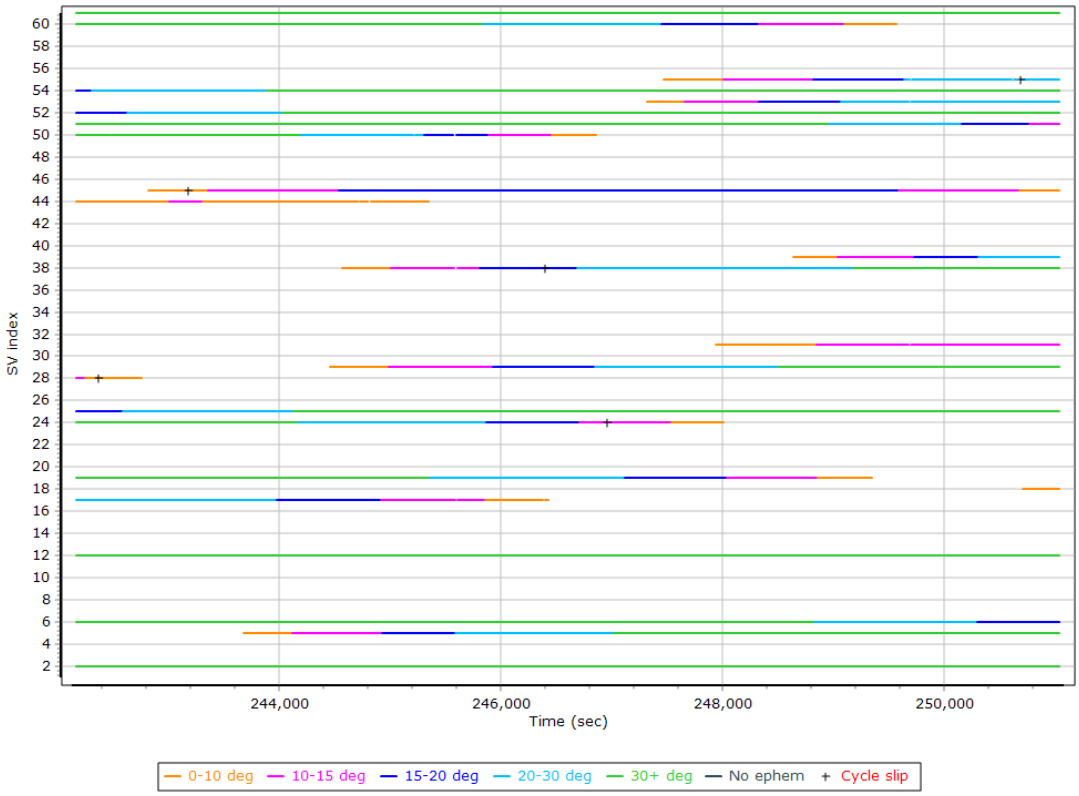

L2 Satellite Lock/Elevation

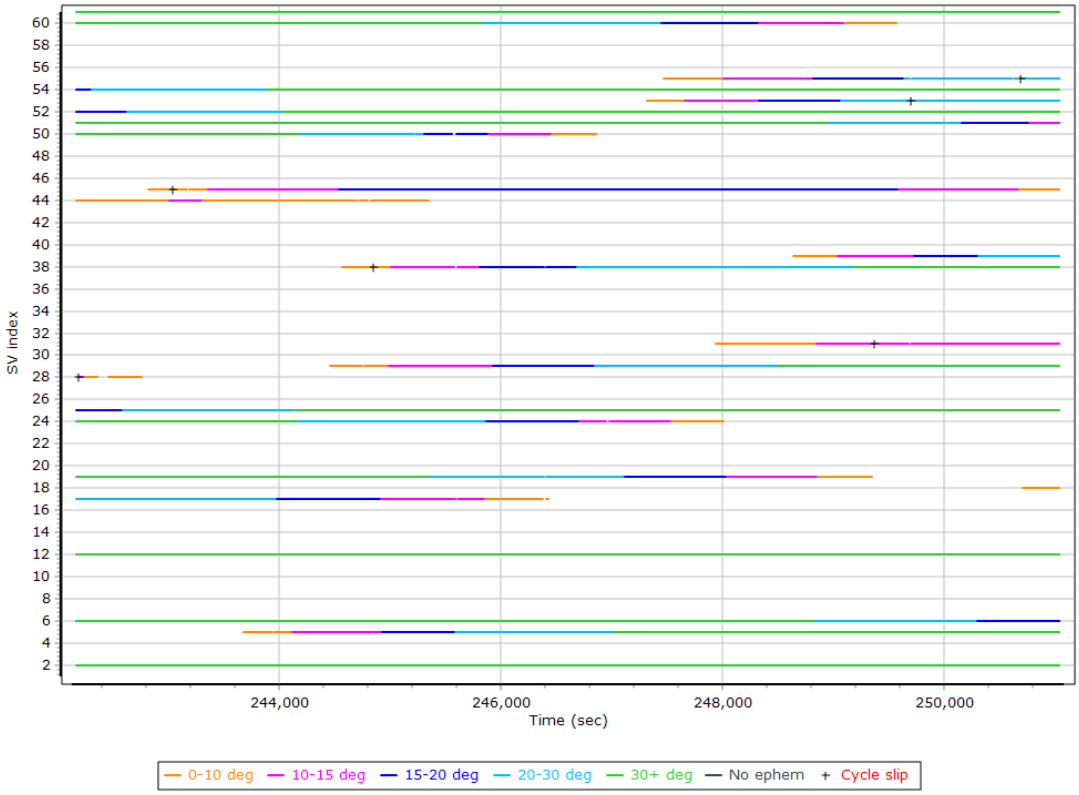

GPS L1 SNR

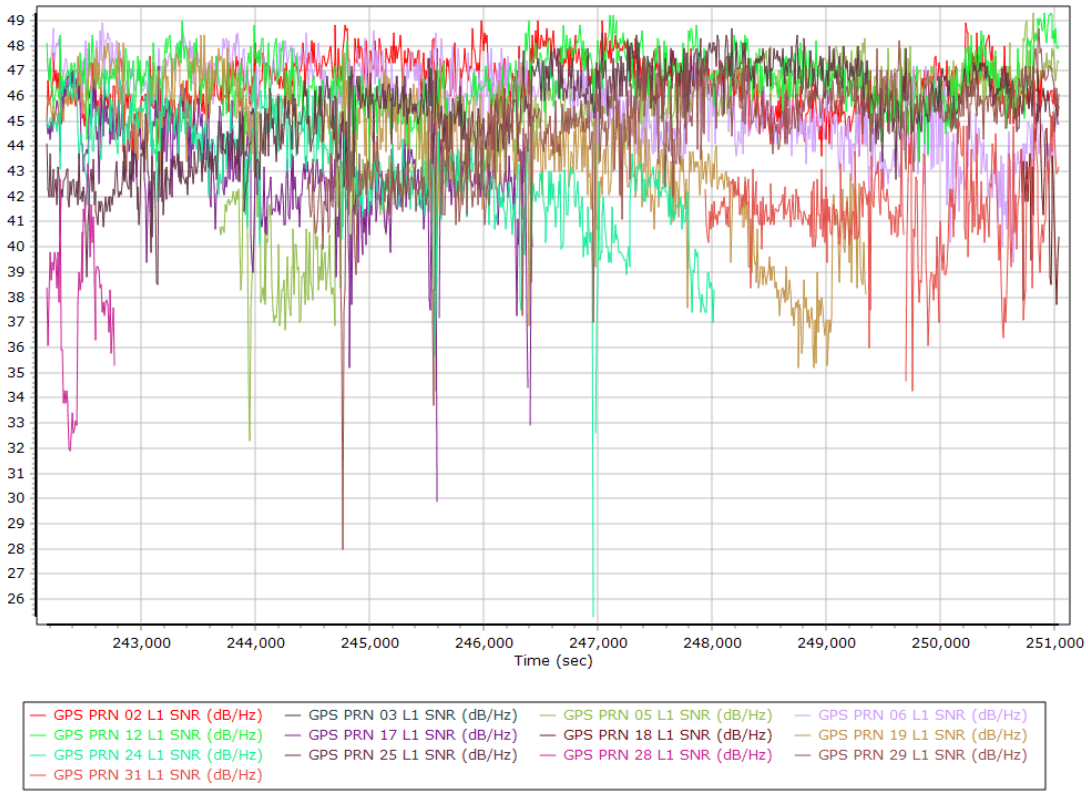

GPS L2 SNR

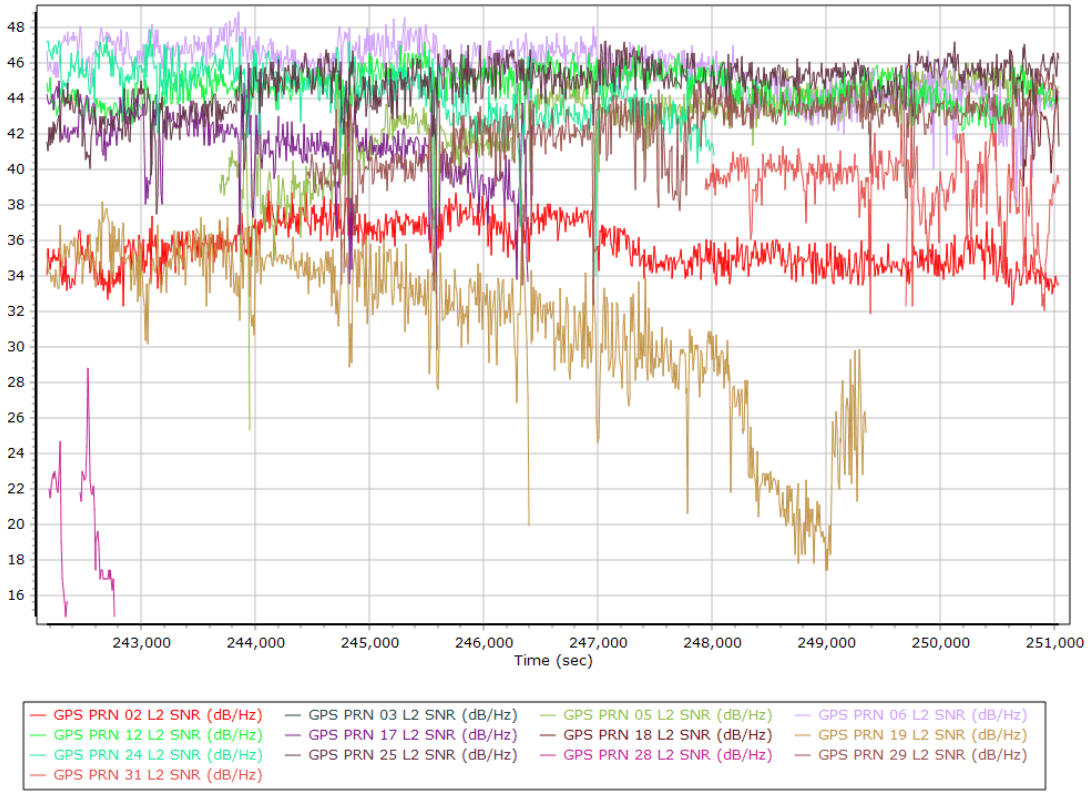

GLONASS L1 SNR

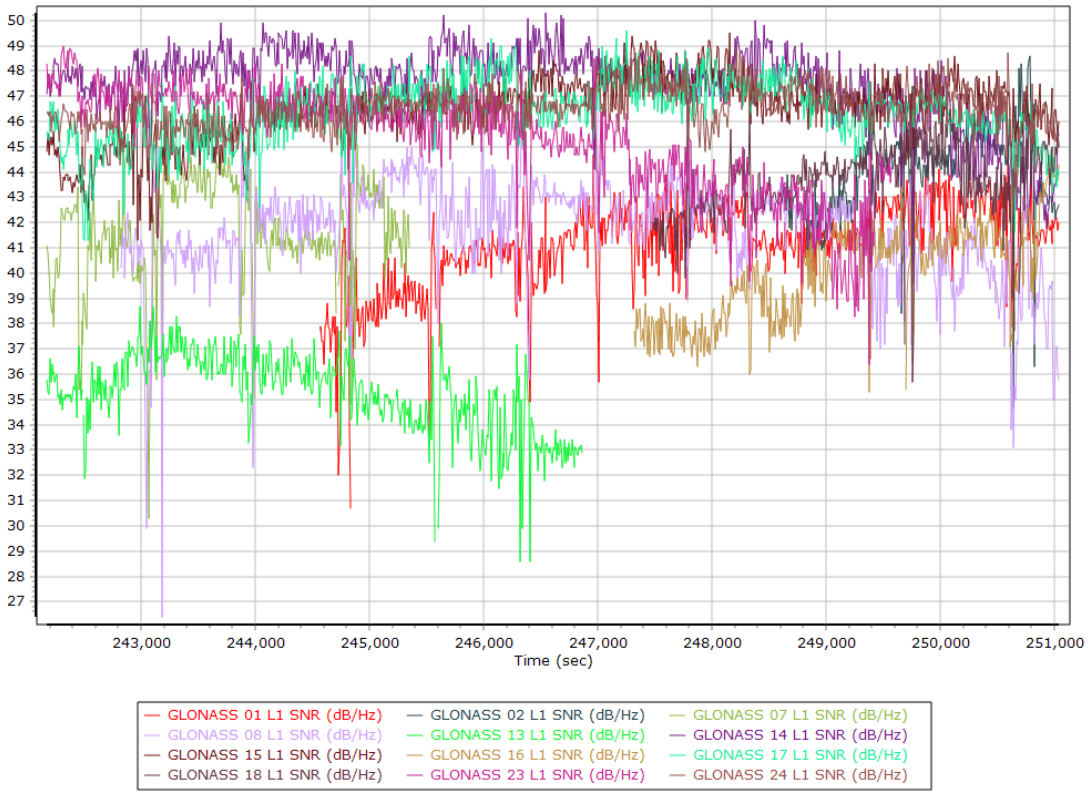

GLONASS L2 SNR

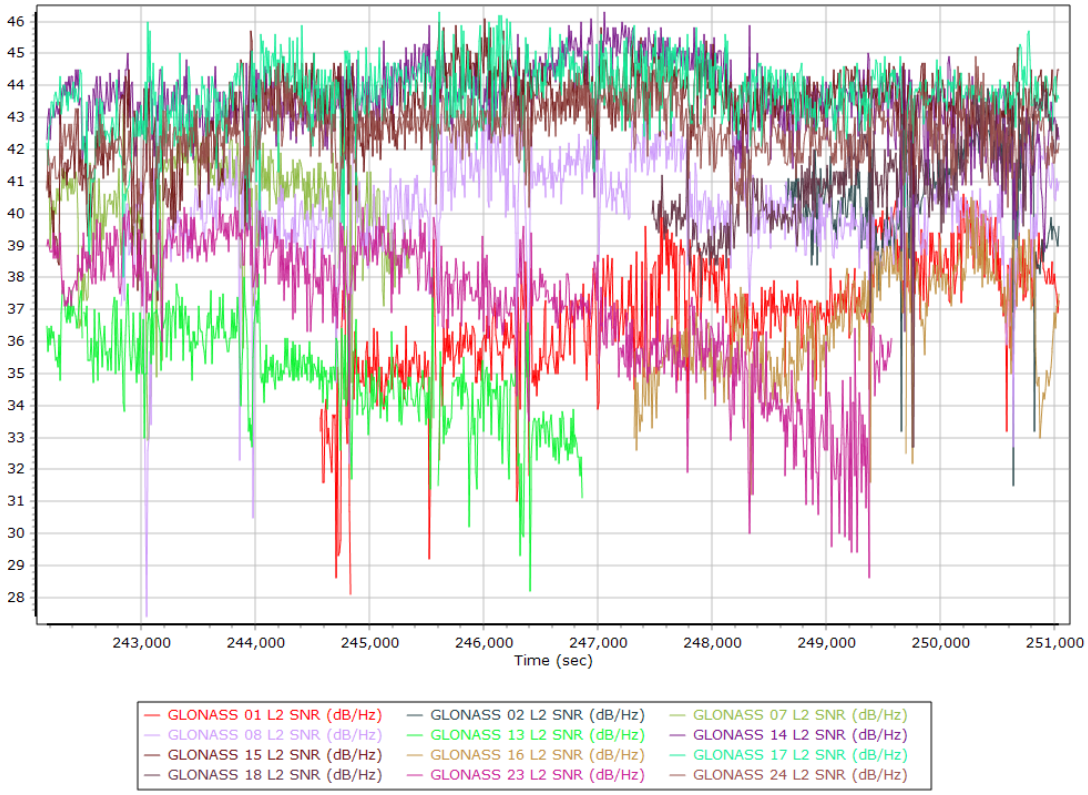

BEIDOU SNR

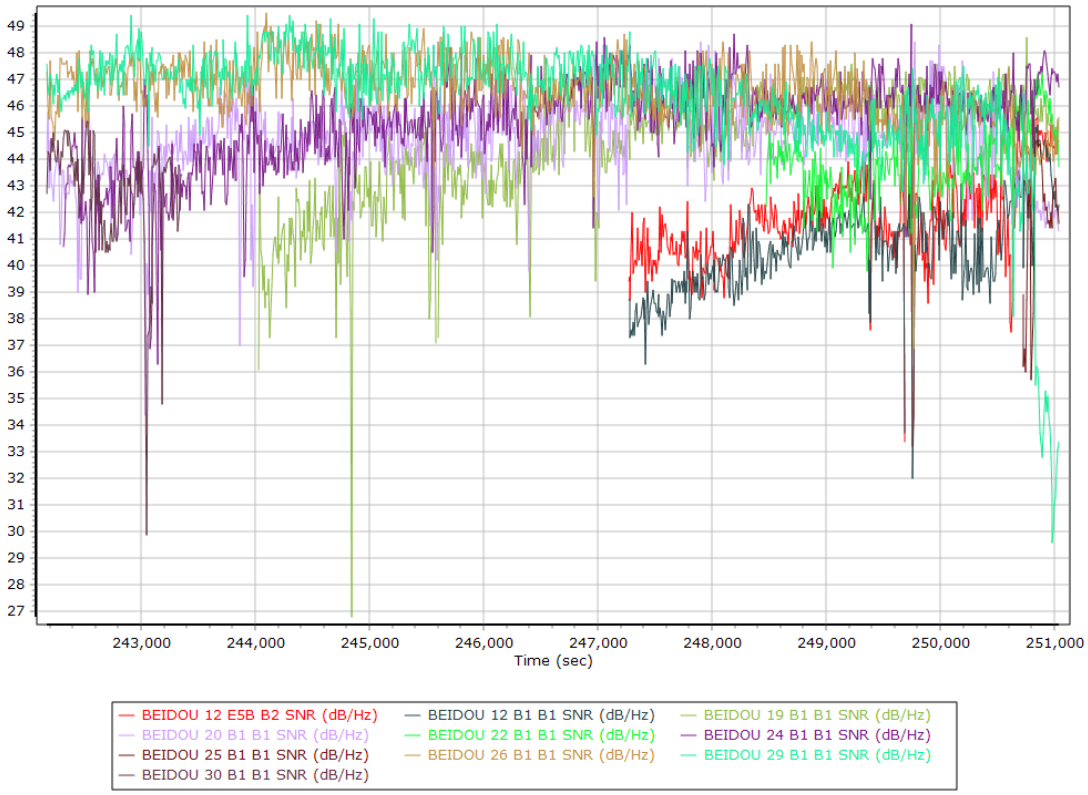

GALILEO SNR

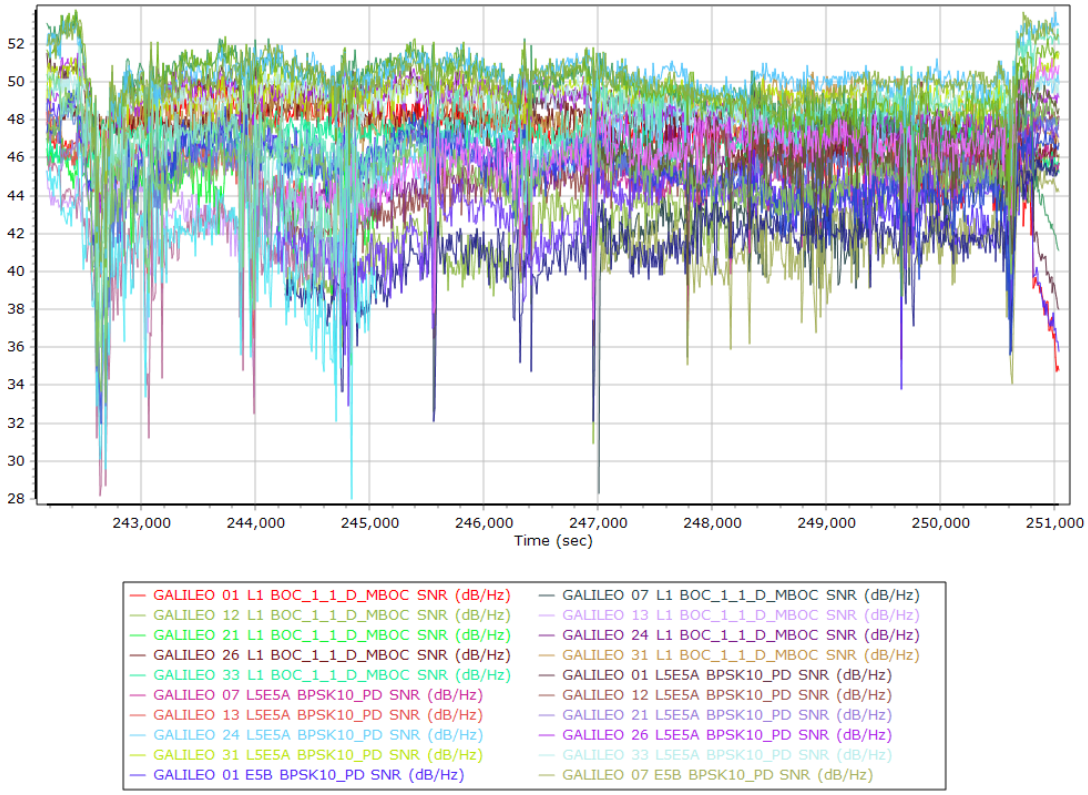
52
50
48
46
44
42
40
38
36
34
32
30
28
243,000
244,000
245,000
246,000
247,000
248,000
249,000
250,000
251,000
Time (sec)
GALILEO 01 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 07 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 12 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 13 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 21 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 24 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 26 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 31 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 33 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 01 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 07 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 12 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 13 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 21 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 24 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 26 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 31 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 33 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 01 E5B BPSK10_PD SNR (dB/Hz)
GALILEO 07 E5B BPSK10_PD SNR (dB/Hz)

Smoothed Trajectory Information

Top View

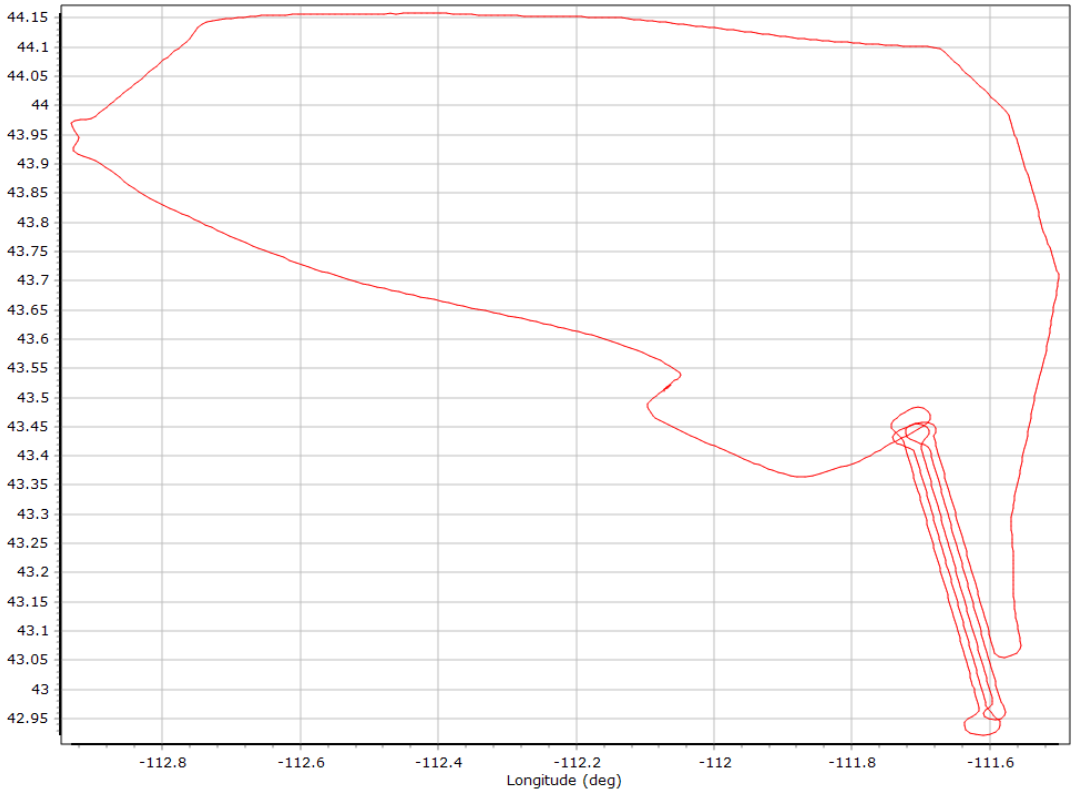

Altitude

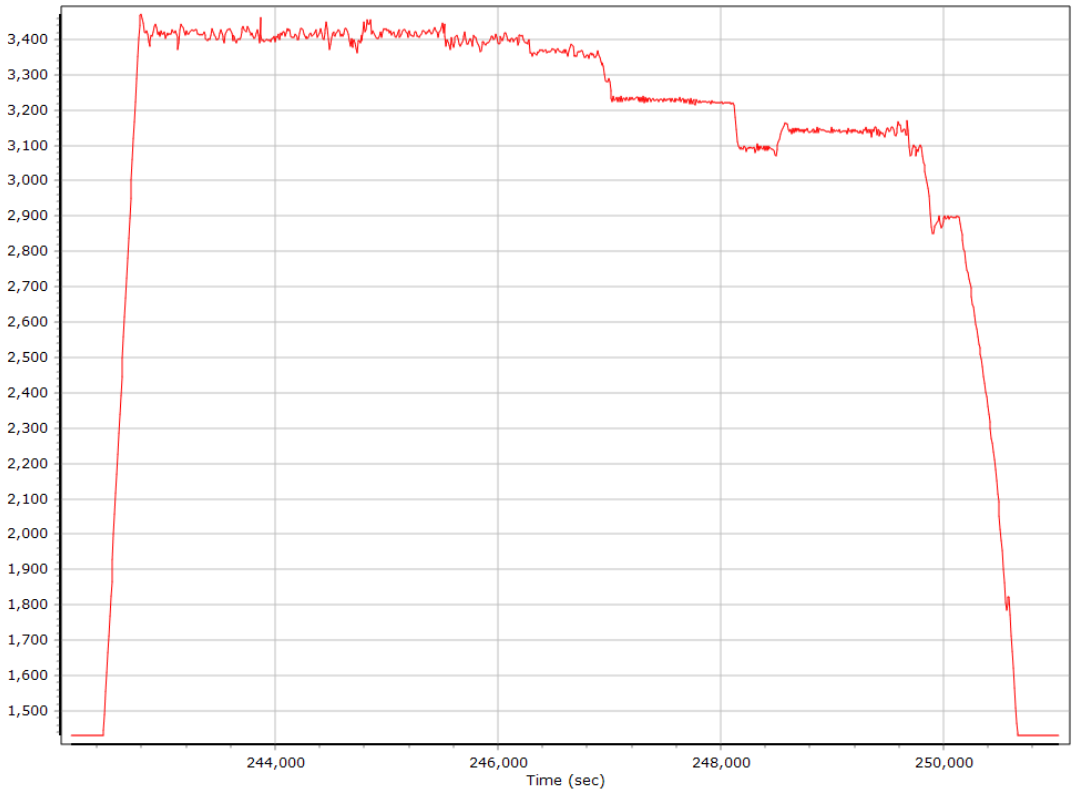

Roll/Pitch

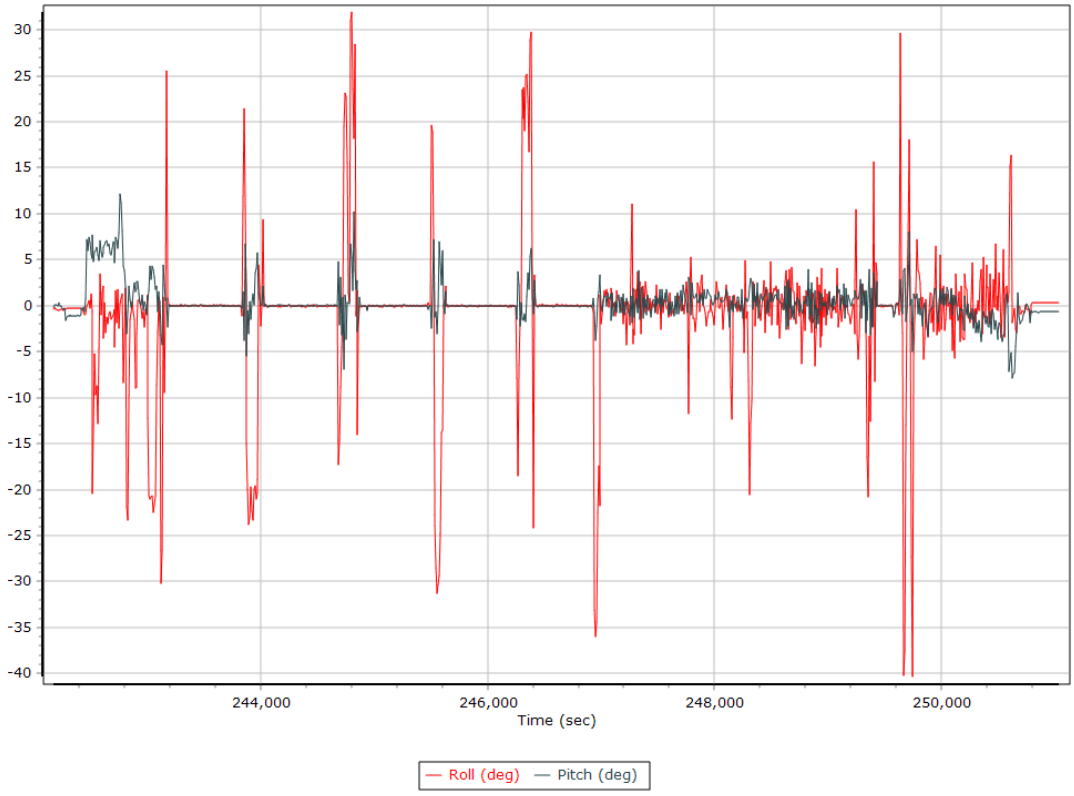

Heading

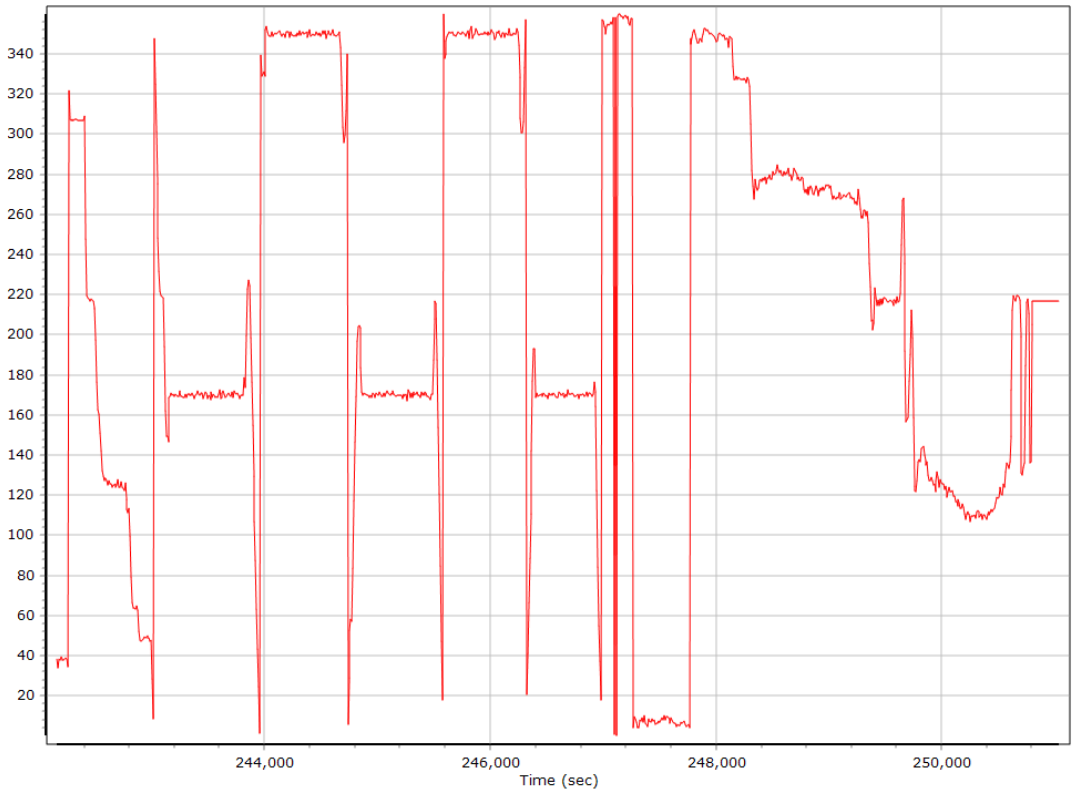

North/East Velocity

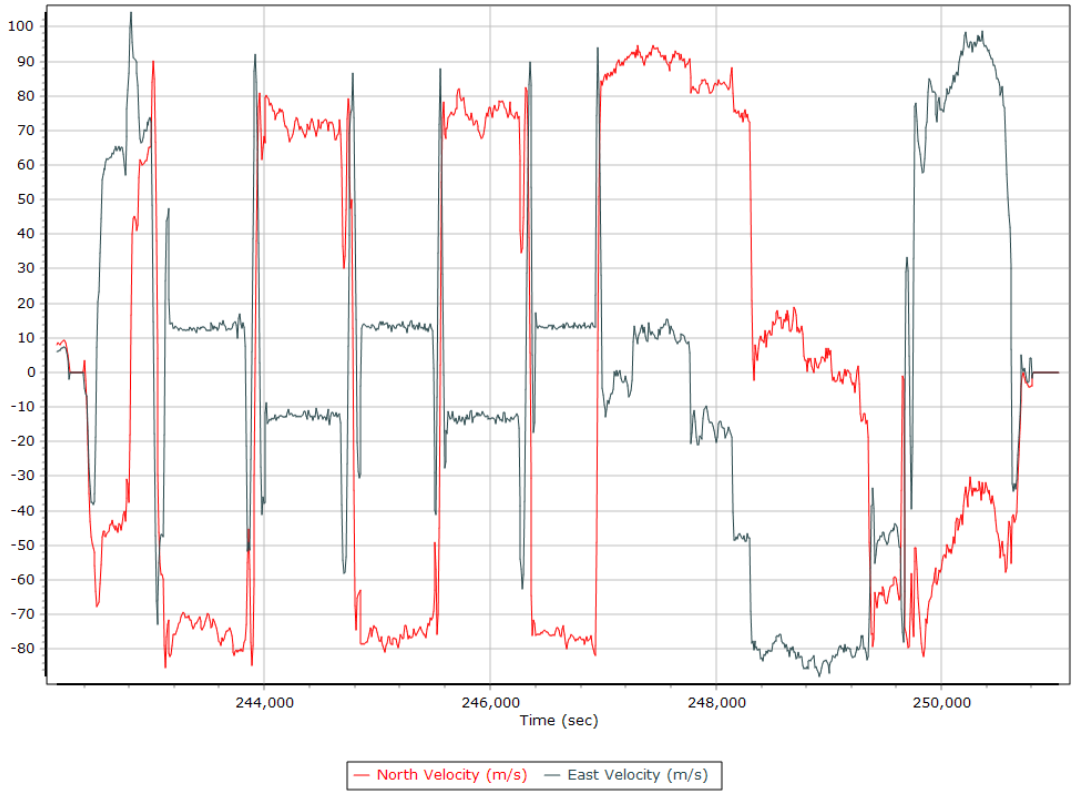

Down Velocity

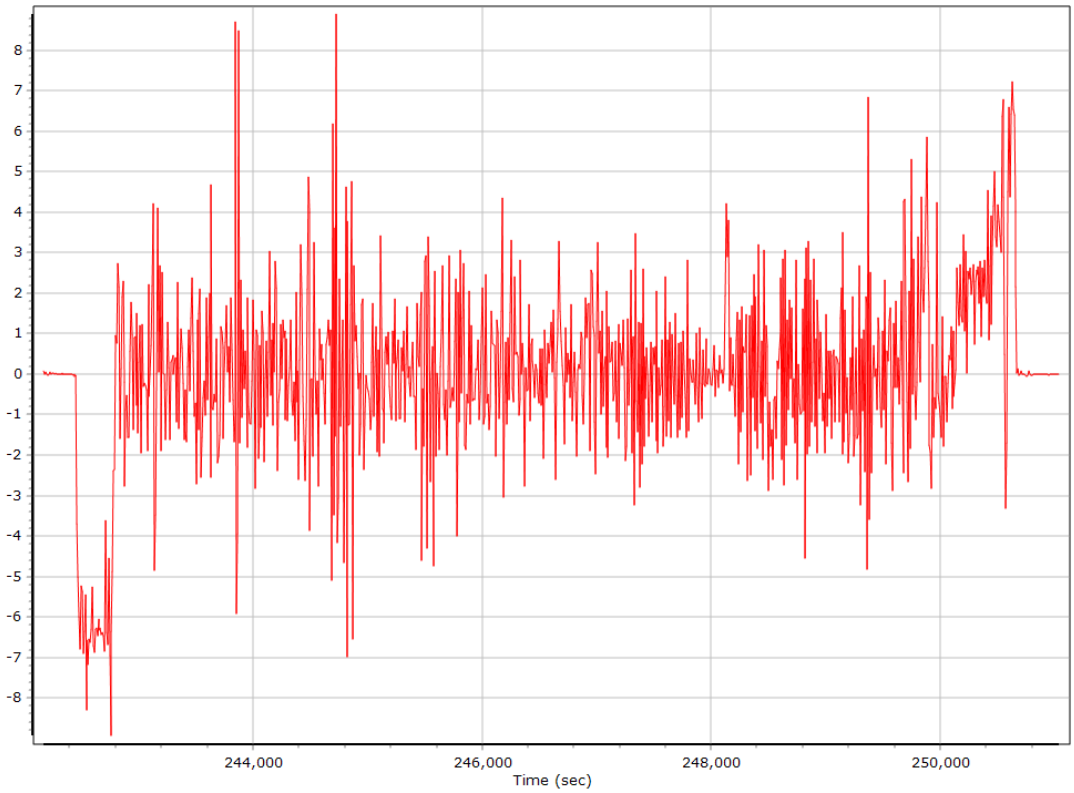

Total Speed

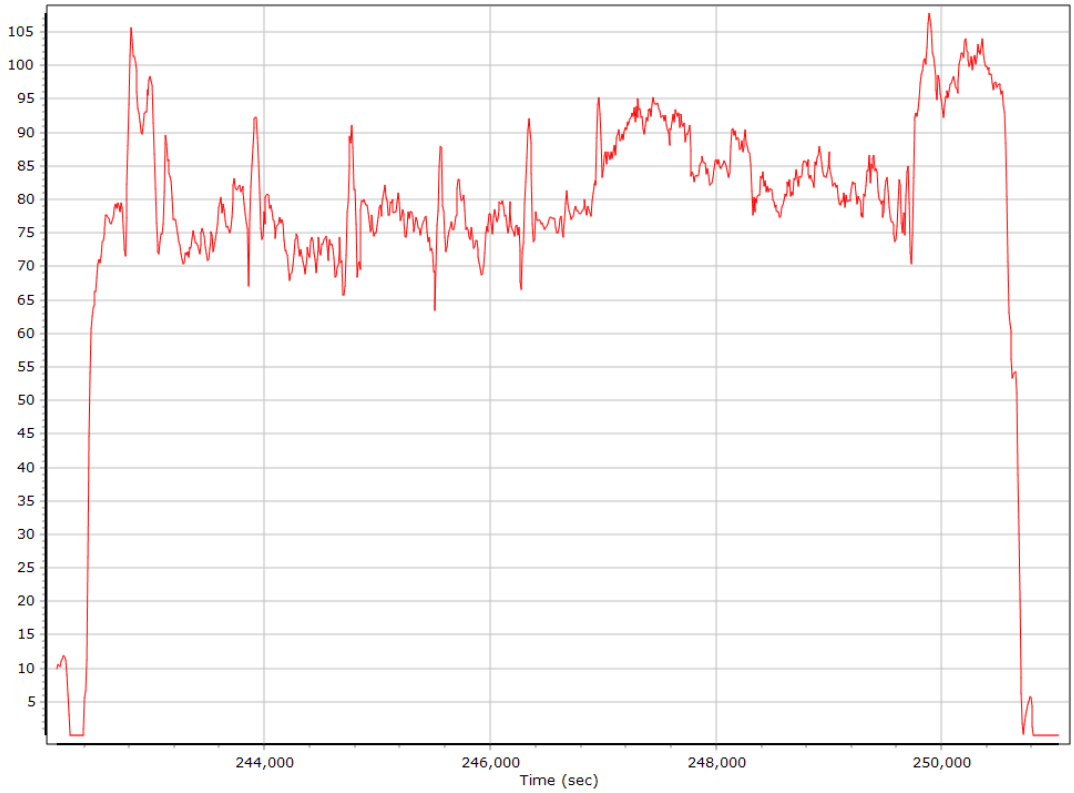

Ground Speed

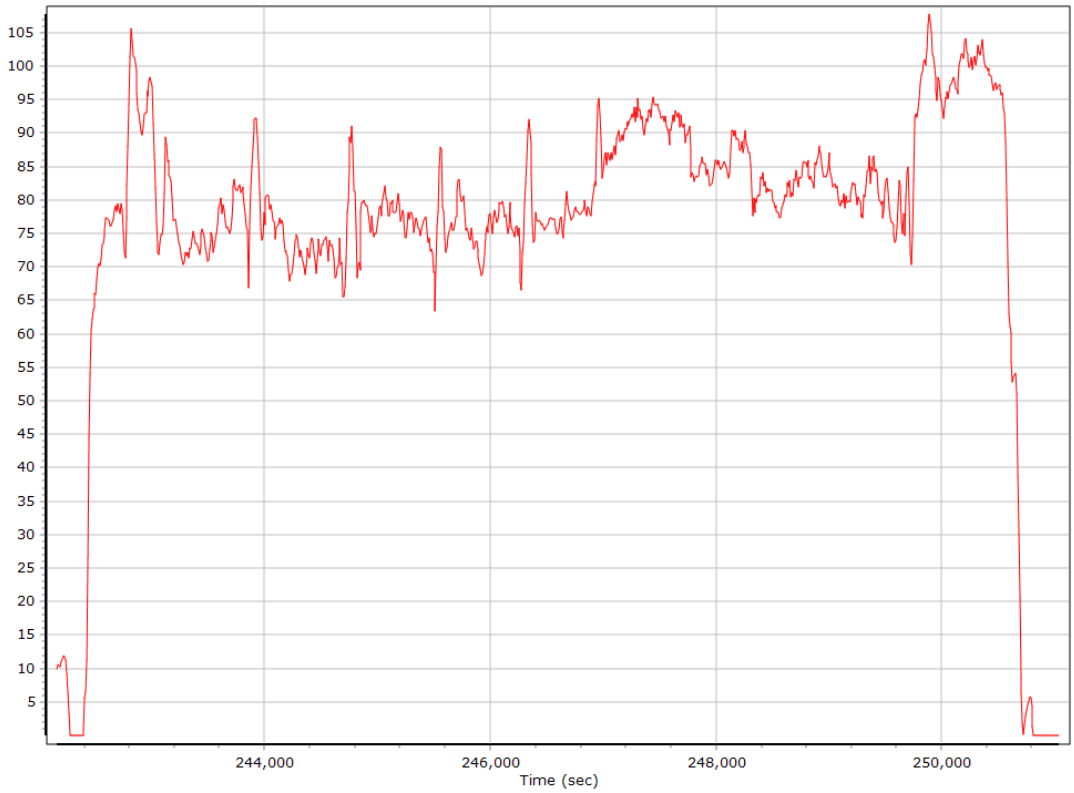

Body Acceleration

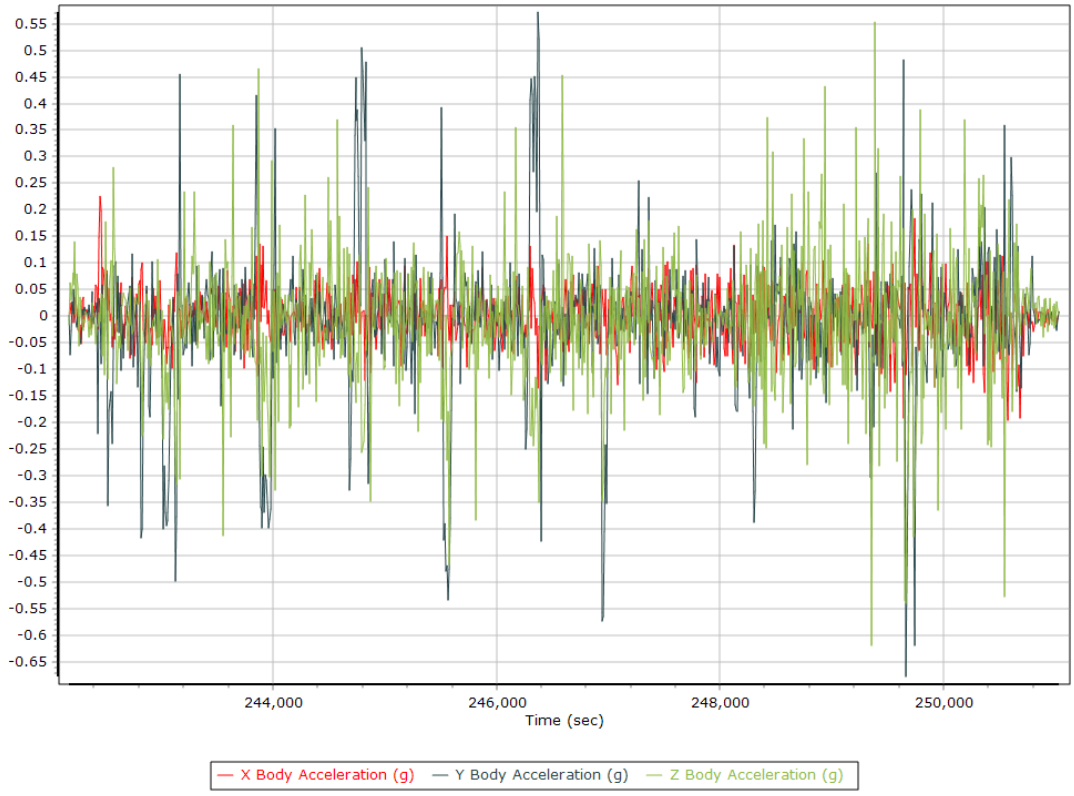

Total Body Acceleration

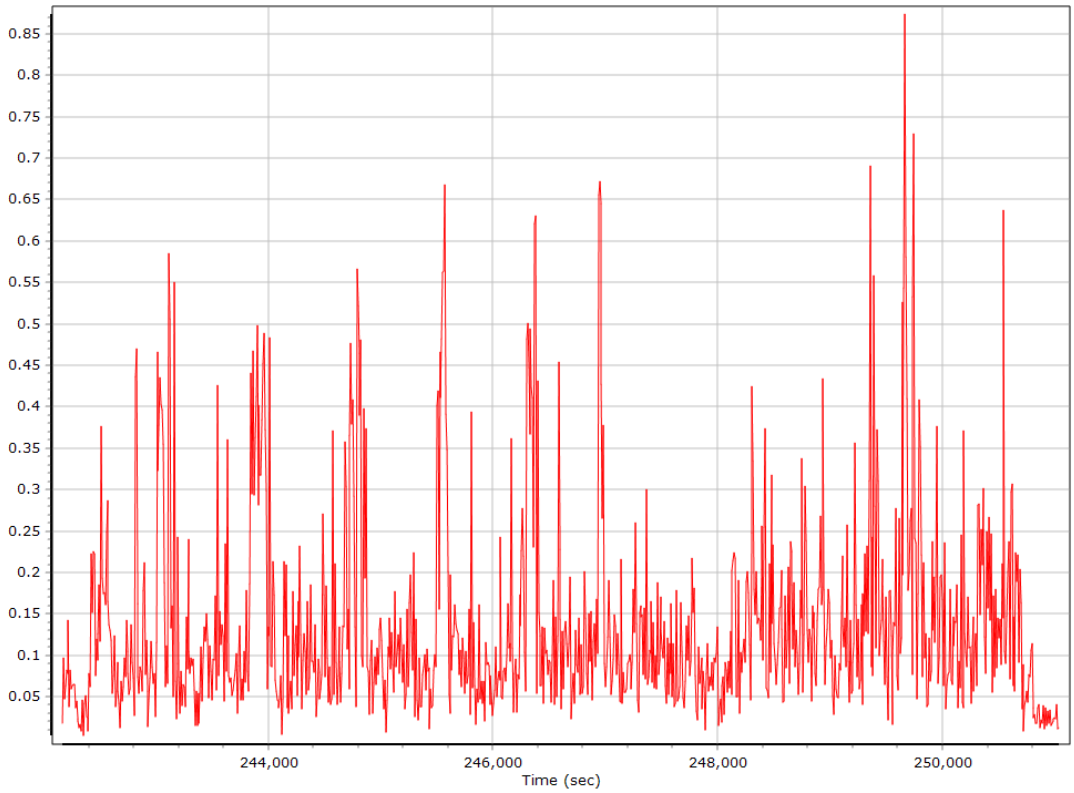

Body Angular Rate

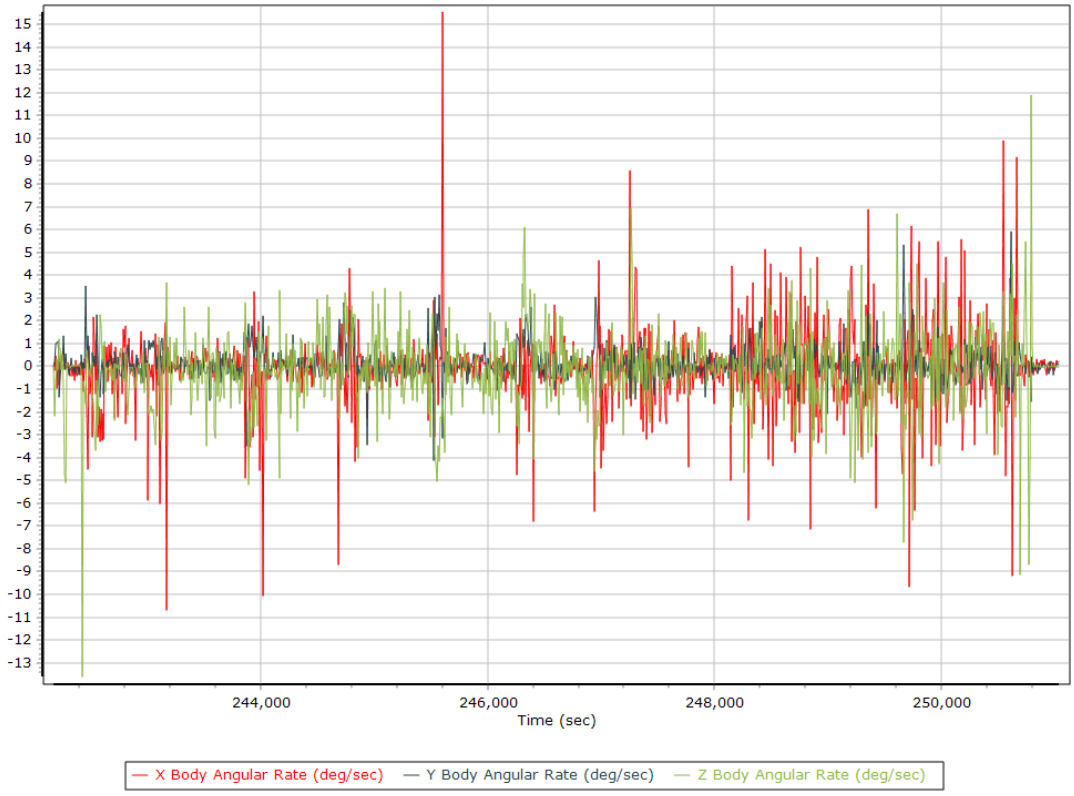

Forward Processed Trajectory Information

Top View

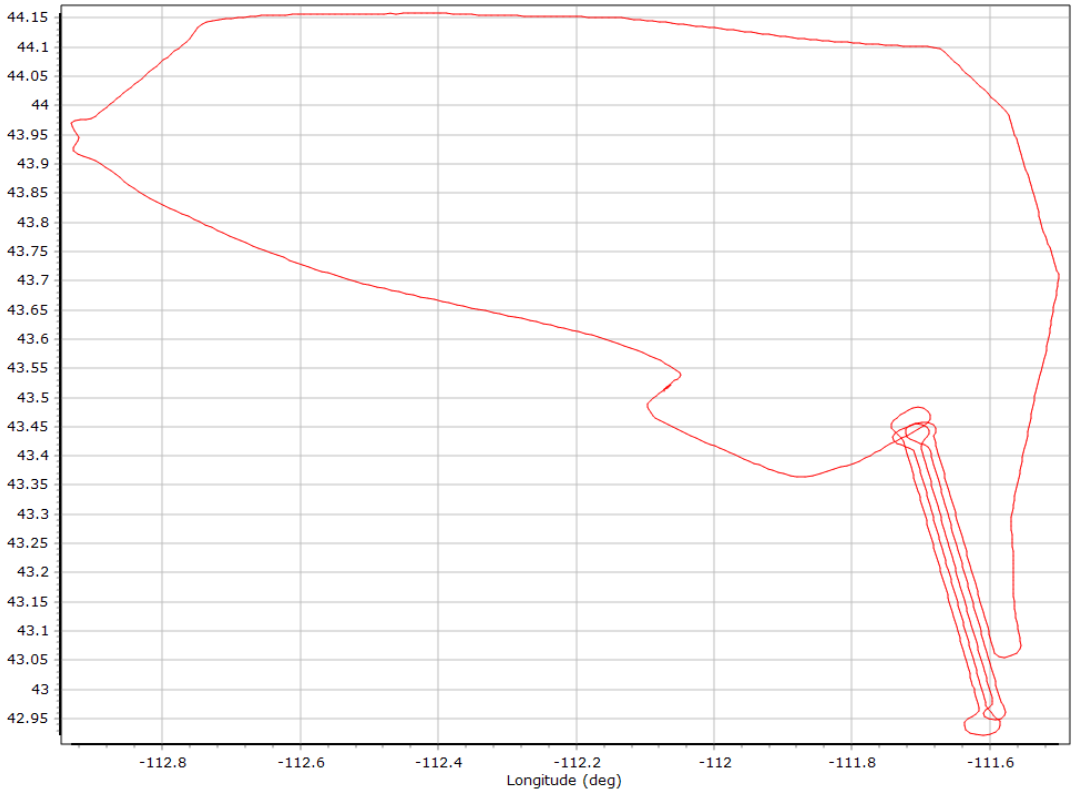

Altitude

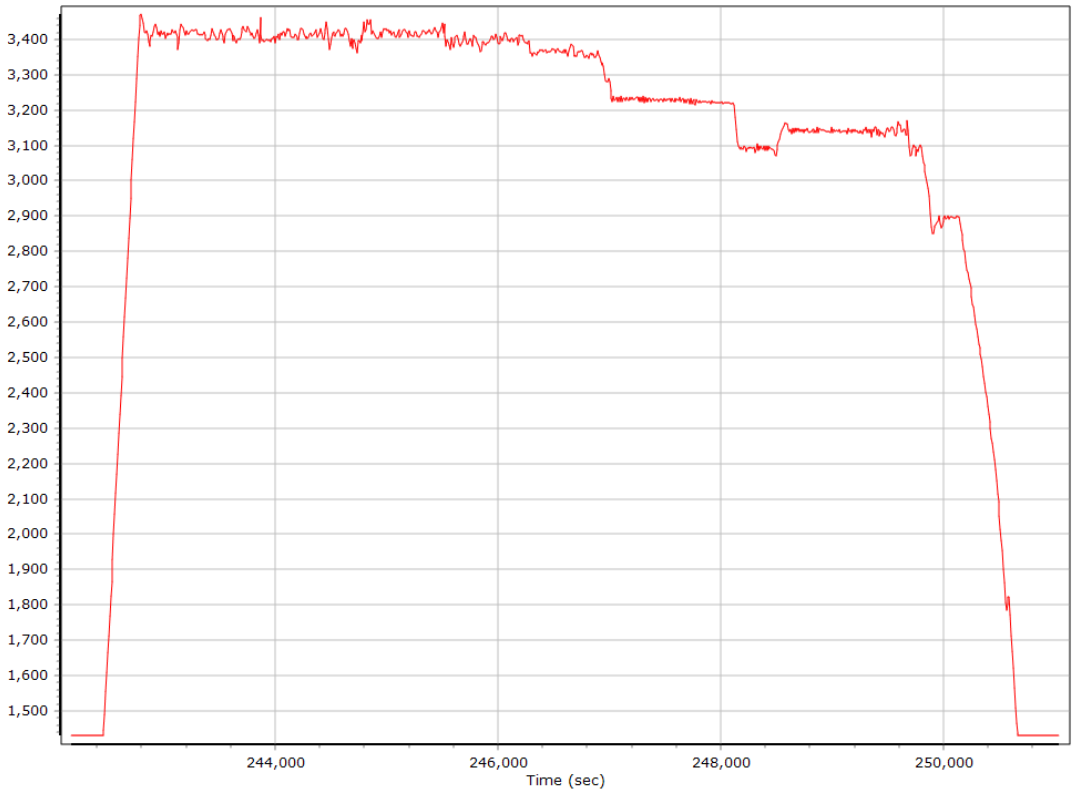

Roll/Pitch

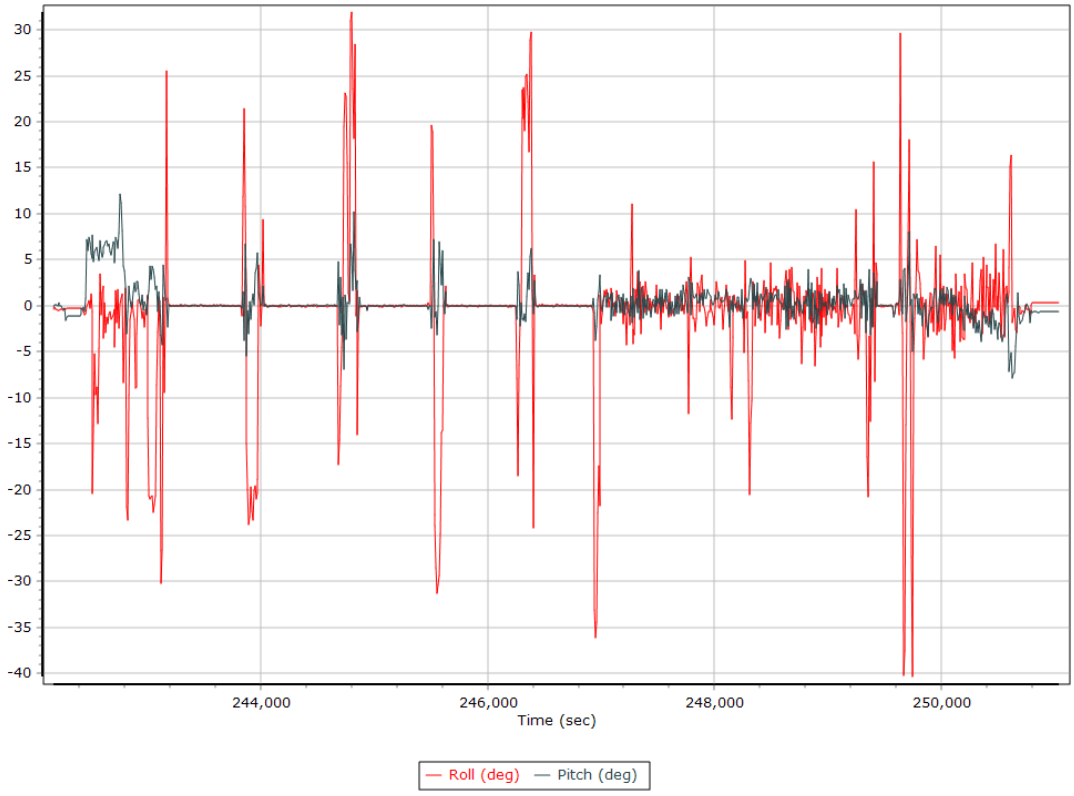

Heading

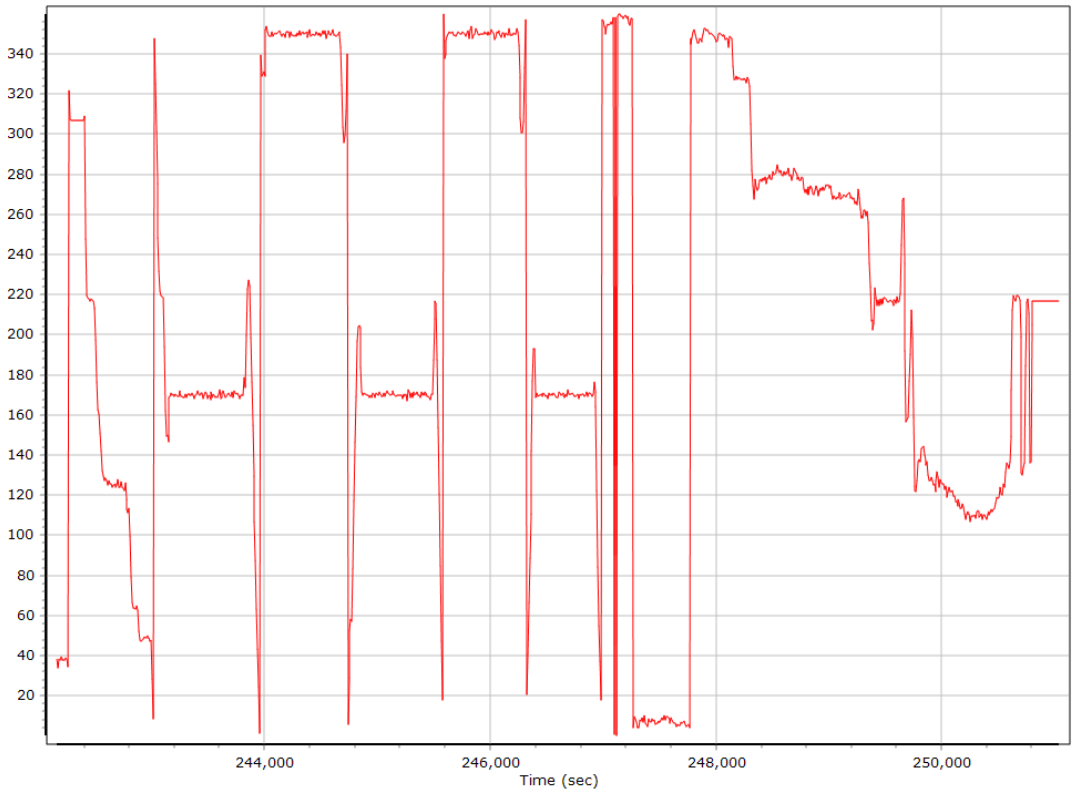

North/East Velocity

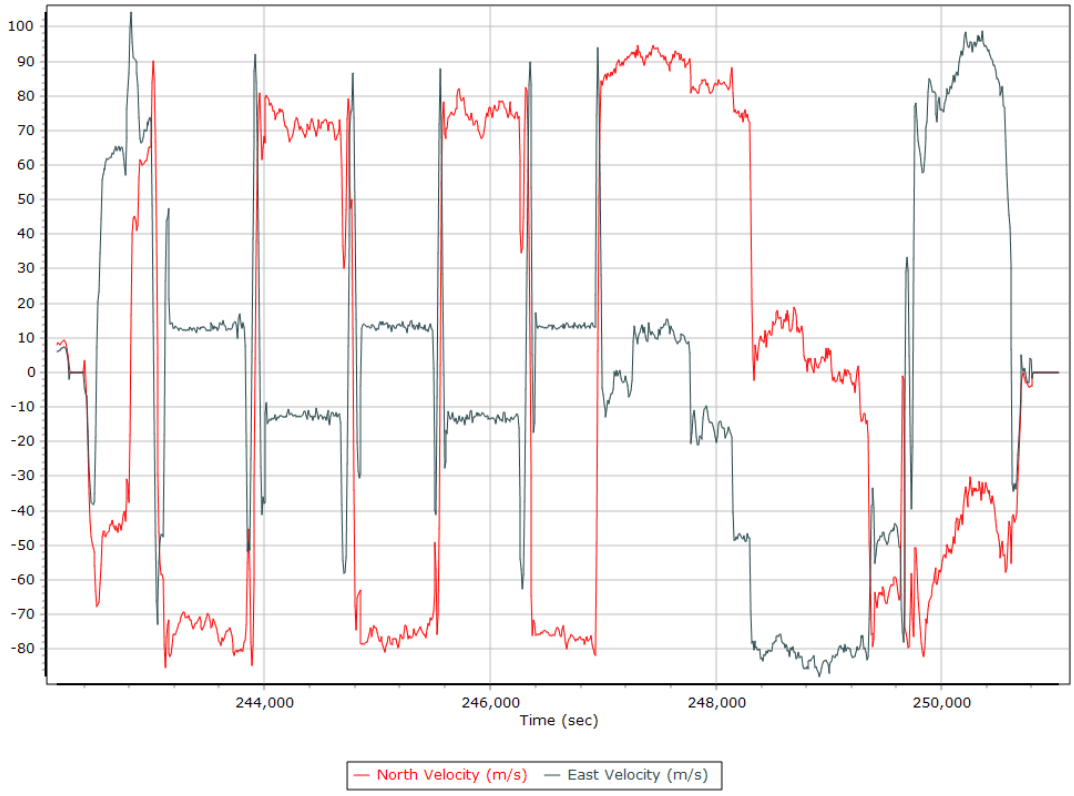

Down Velocity

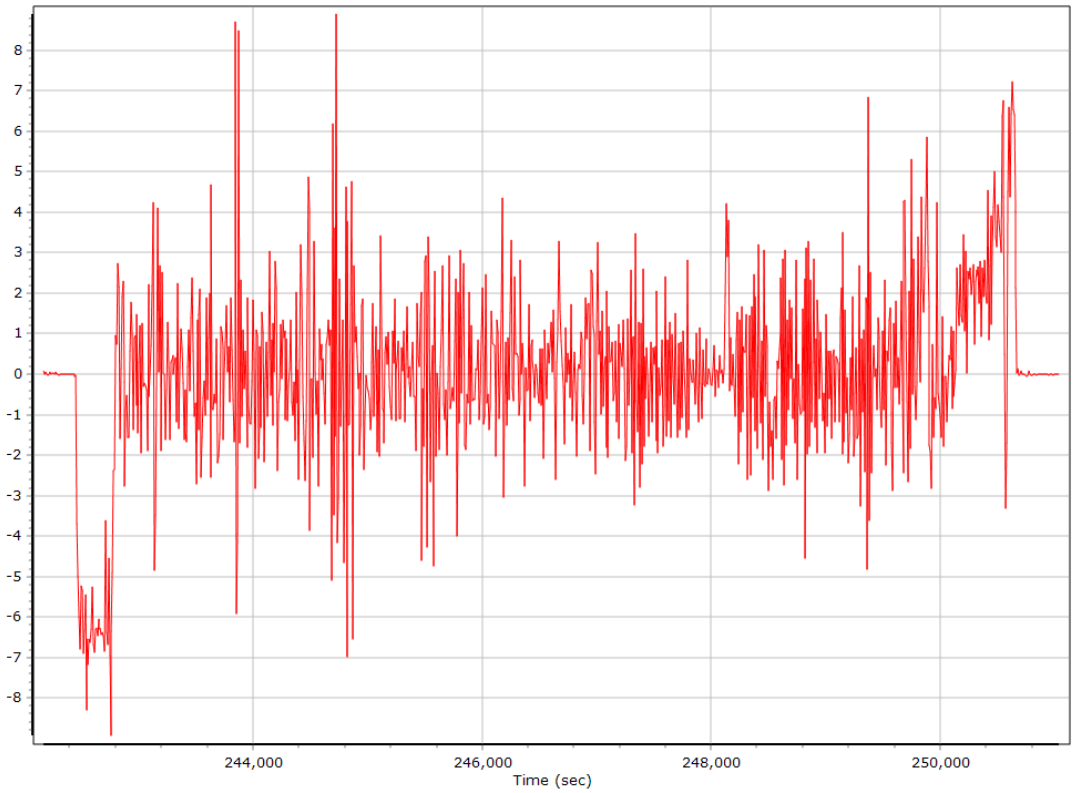

Total Speed

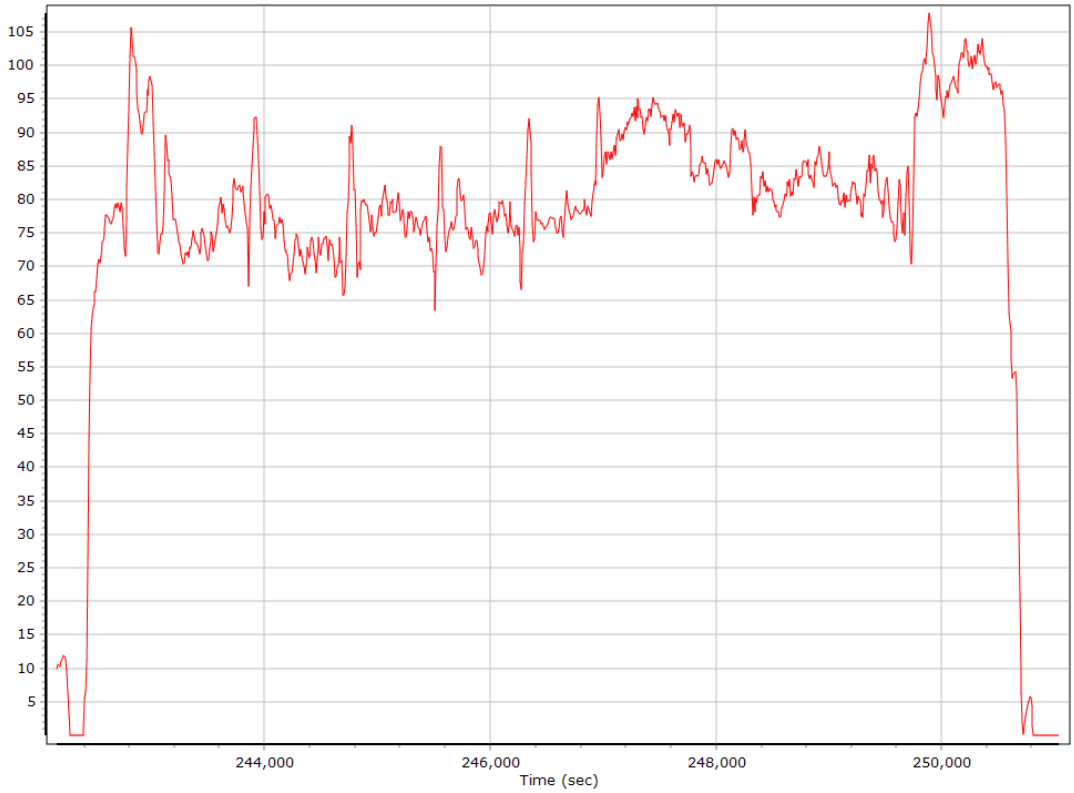

Ground Speed

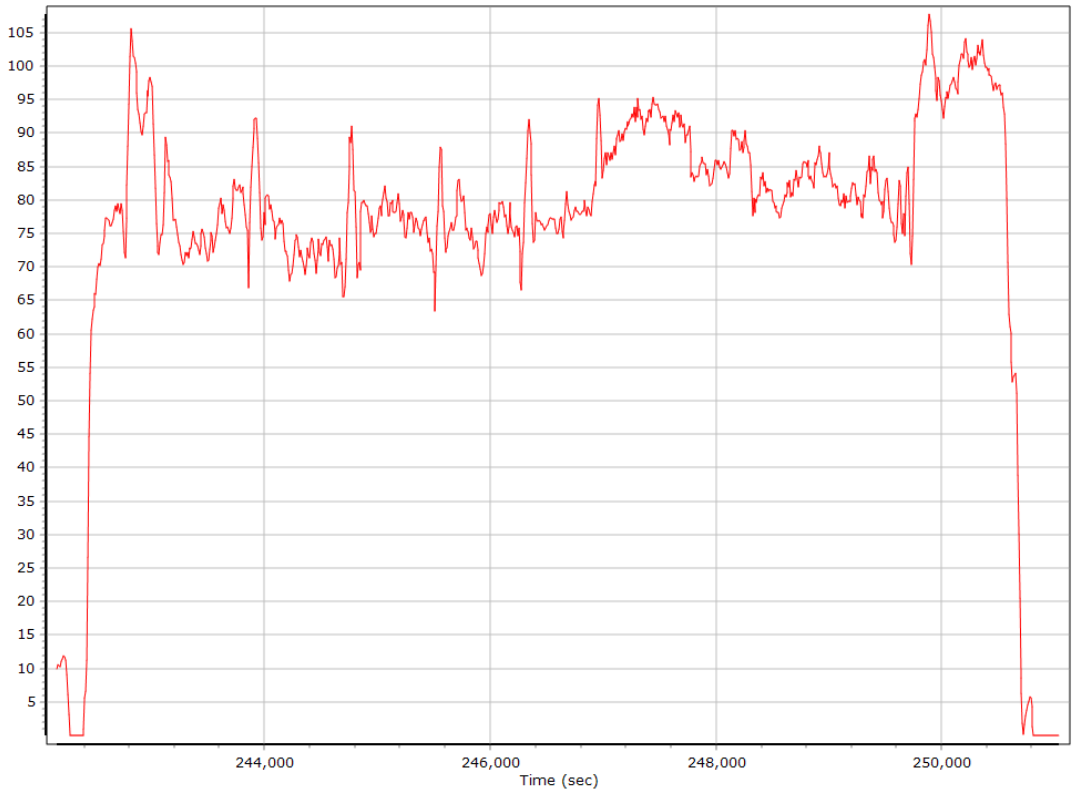

Body Acceleration

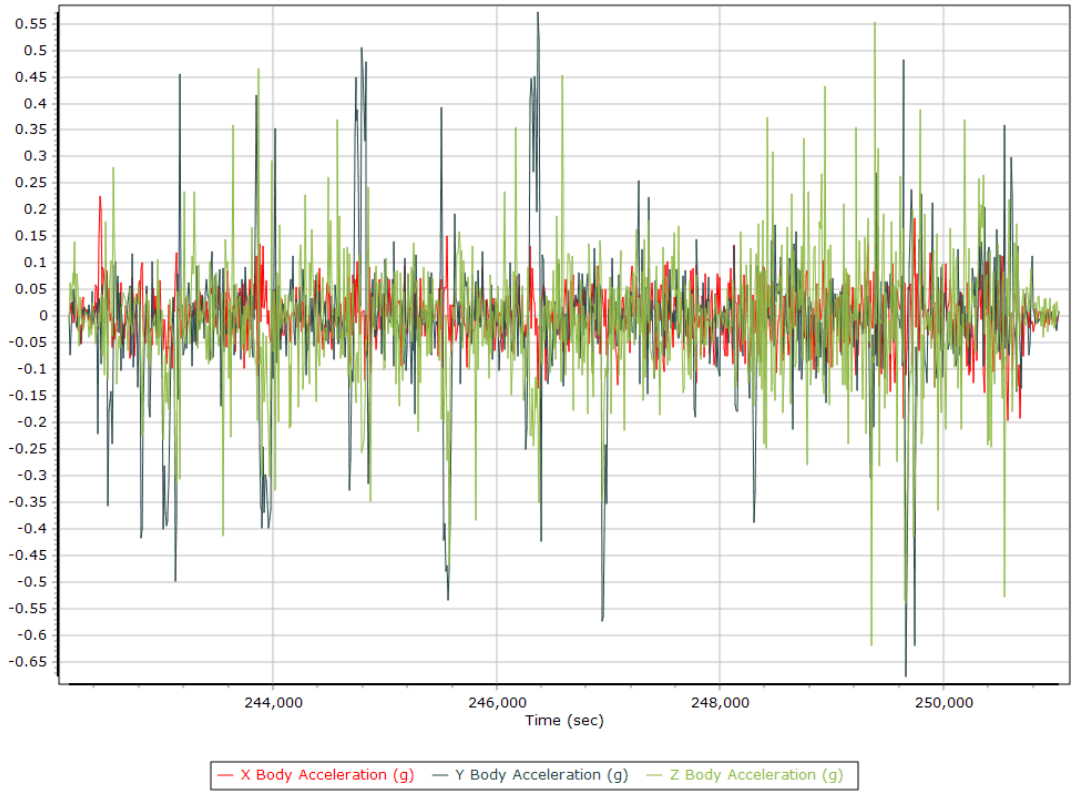

Total Body Acceleration

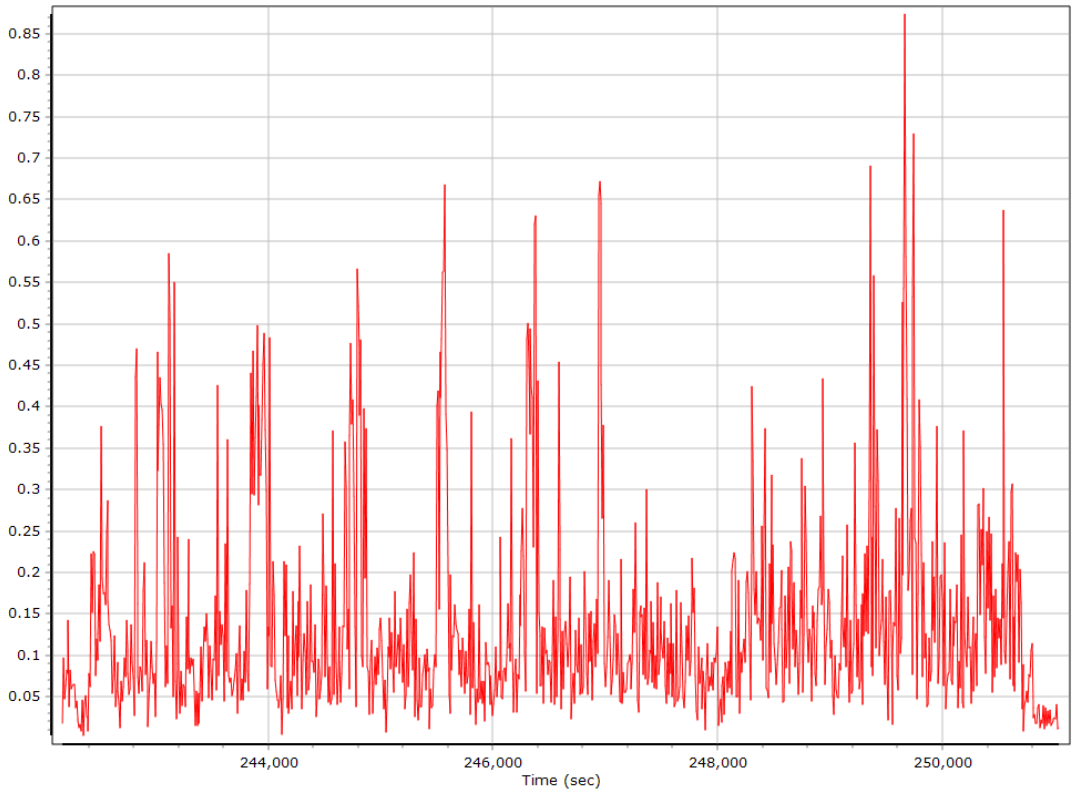

Body Angular Rate

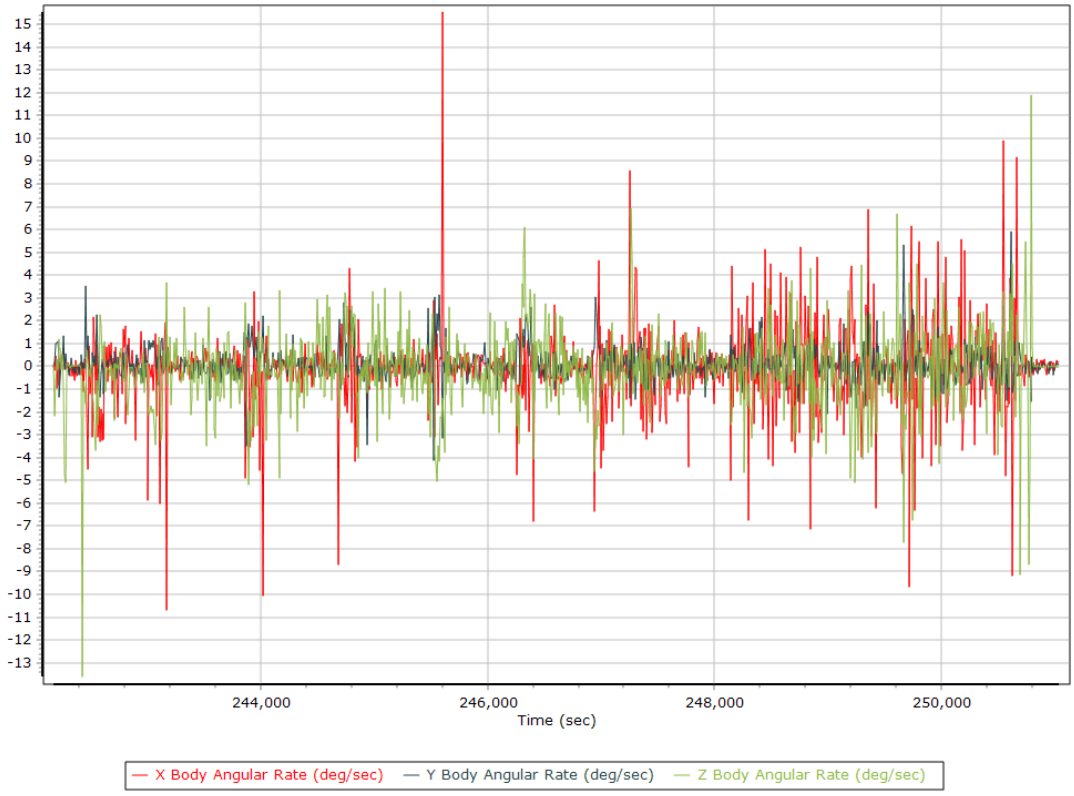

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion Trimble RTX Nav		
Stabilized mount	True		
Processing start time	241450.000 (06/09/2020 19:03:52)		
Processing end time	251038.000 (06/09/2020 21:43:40)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	-0.215	-0.027	-0.964
Gimbal to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm (m)

X Reference-Primary GNSS Lever Arm (m)

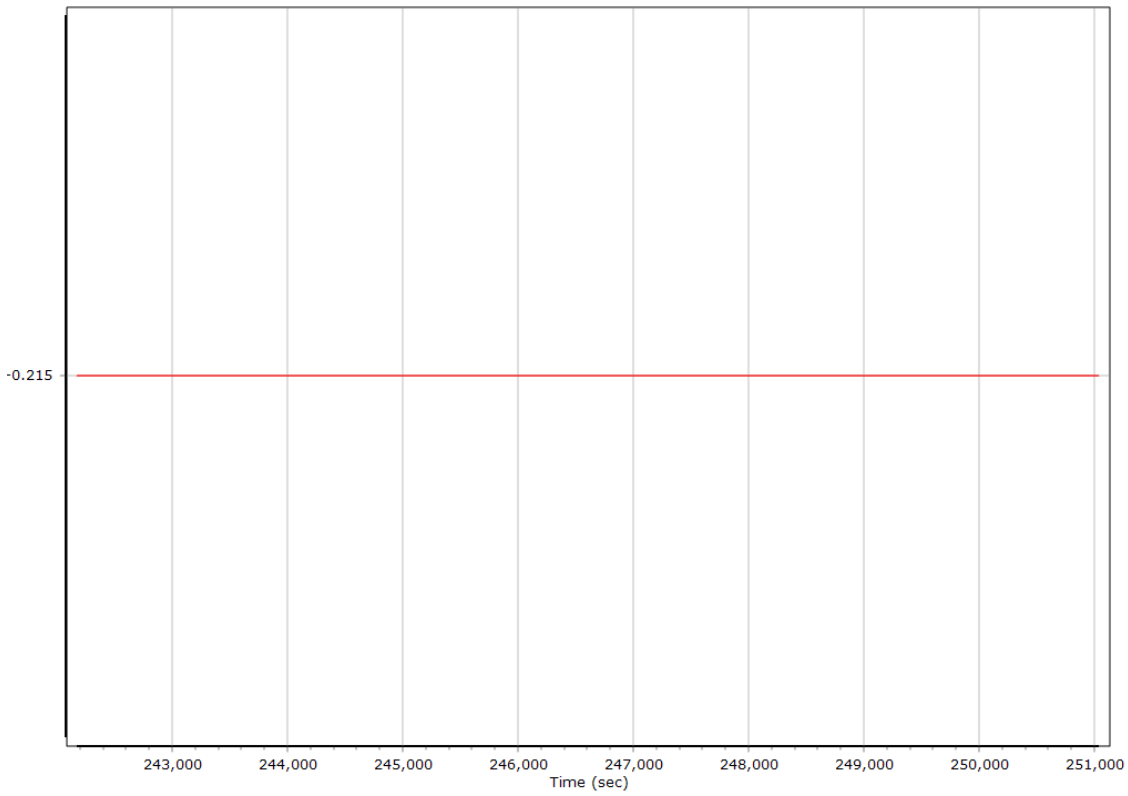

Y Reference-Primary GNSS Lever Arm (m)

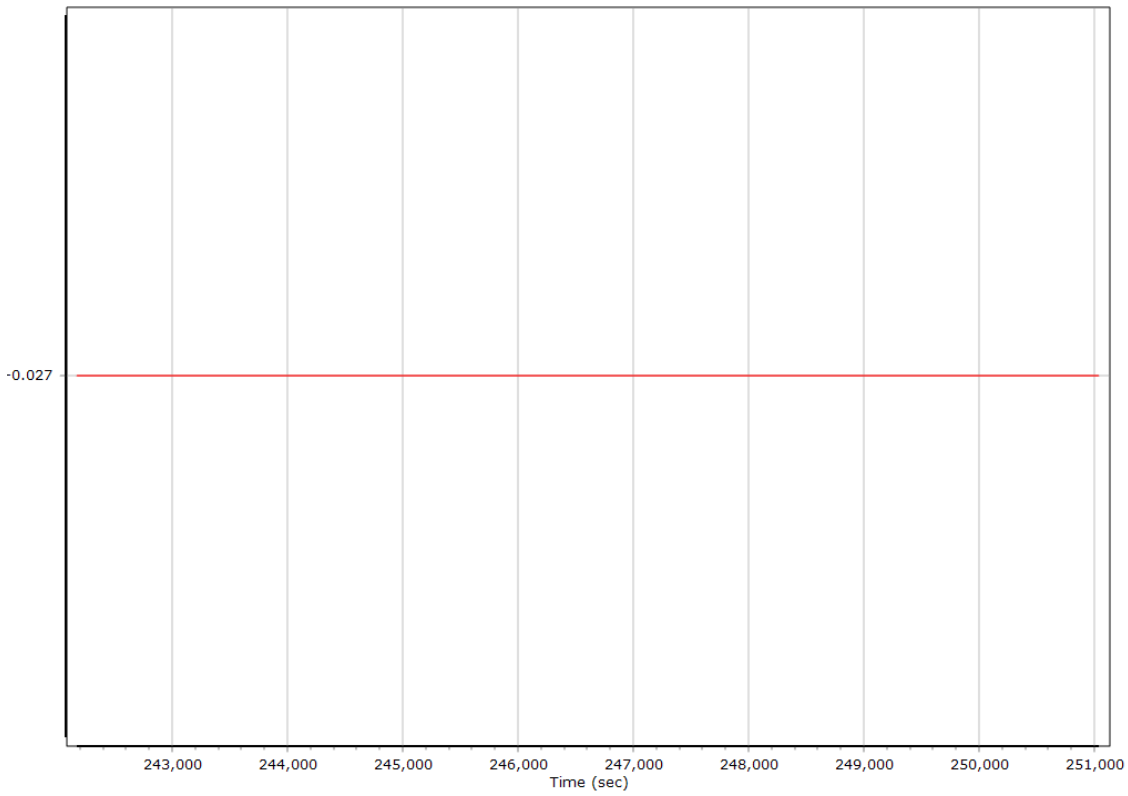

Z Reference-Primary GNSS Lever Arm (m)

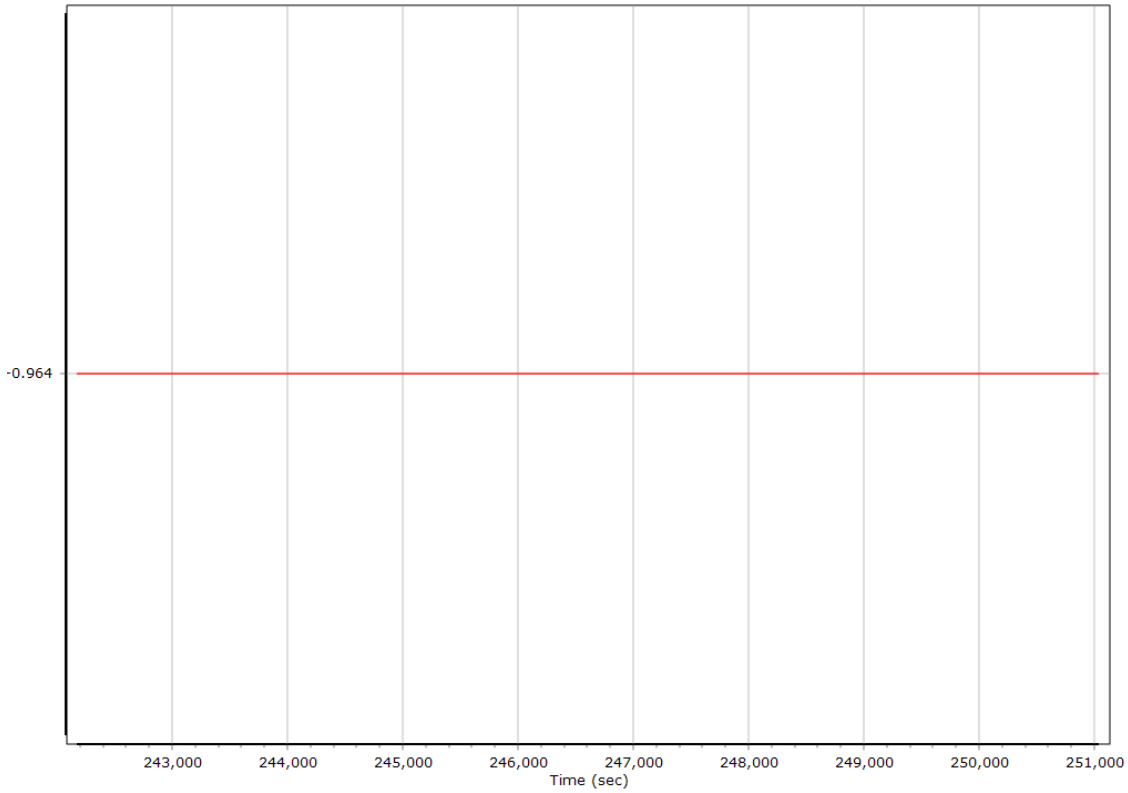

Reference-Primary GNSS Lever Arm Figure of Merit

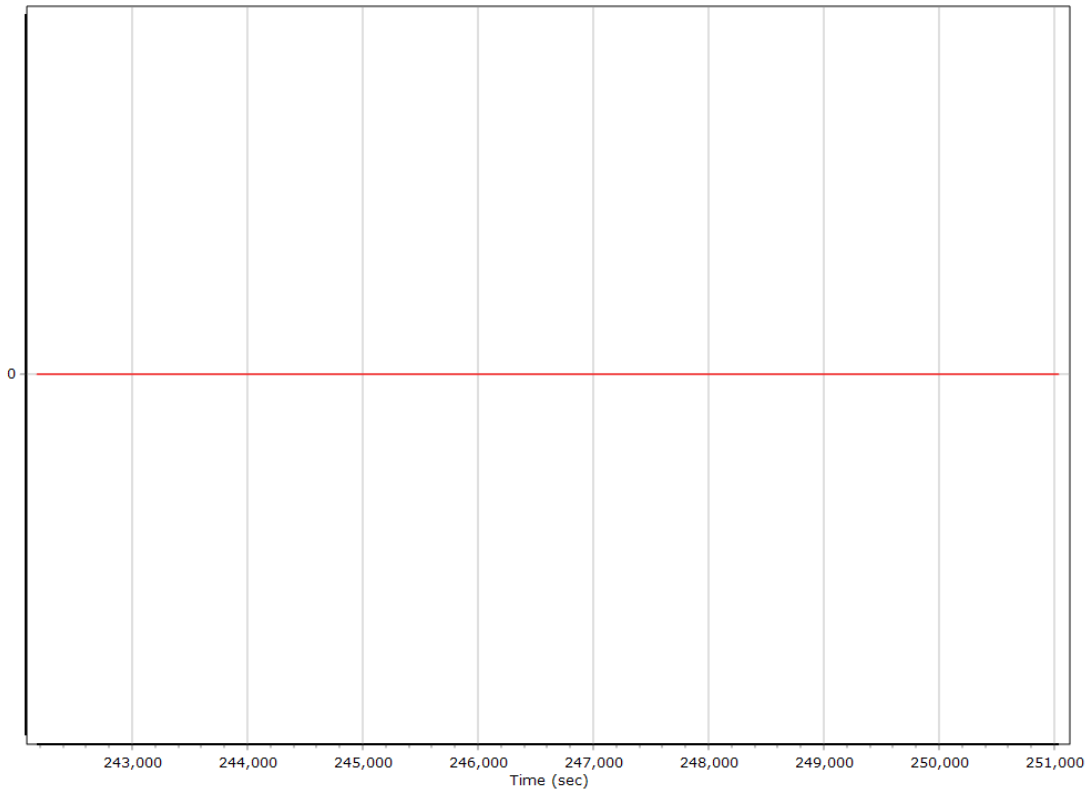

IN-Fusion QC

Forward Processed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

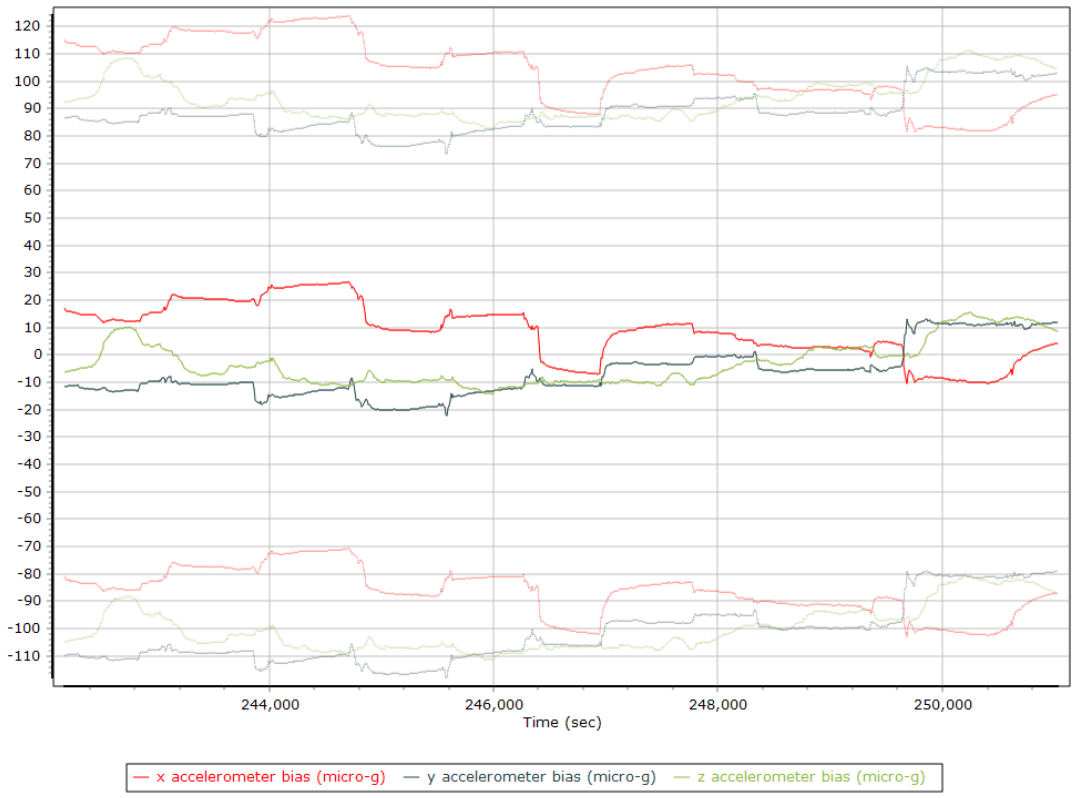

X Accelerometer Bias (micro-g)

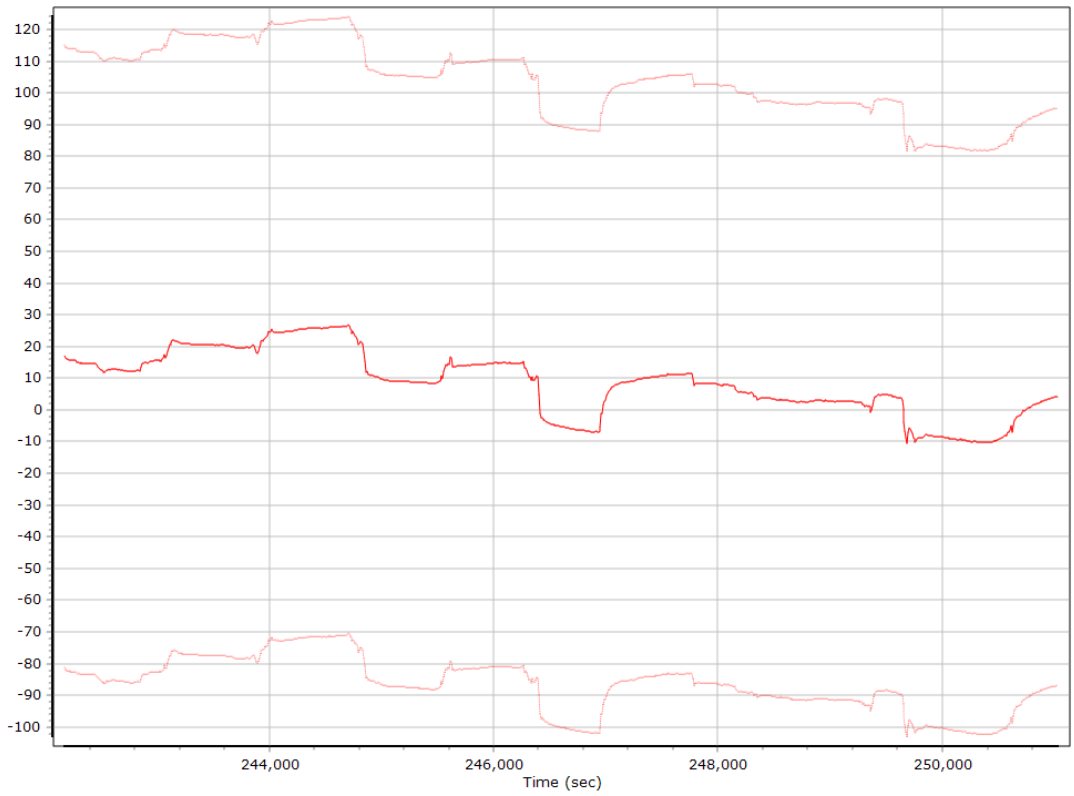

Y Accelerometer Bias (micro-g)

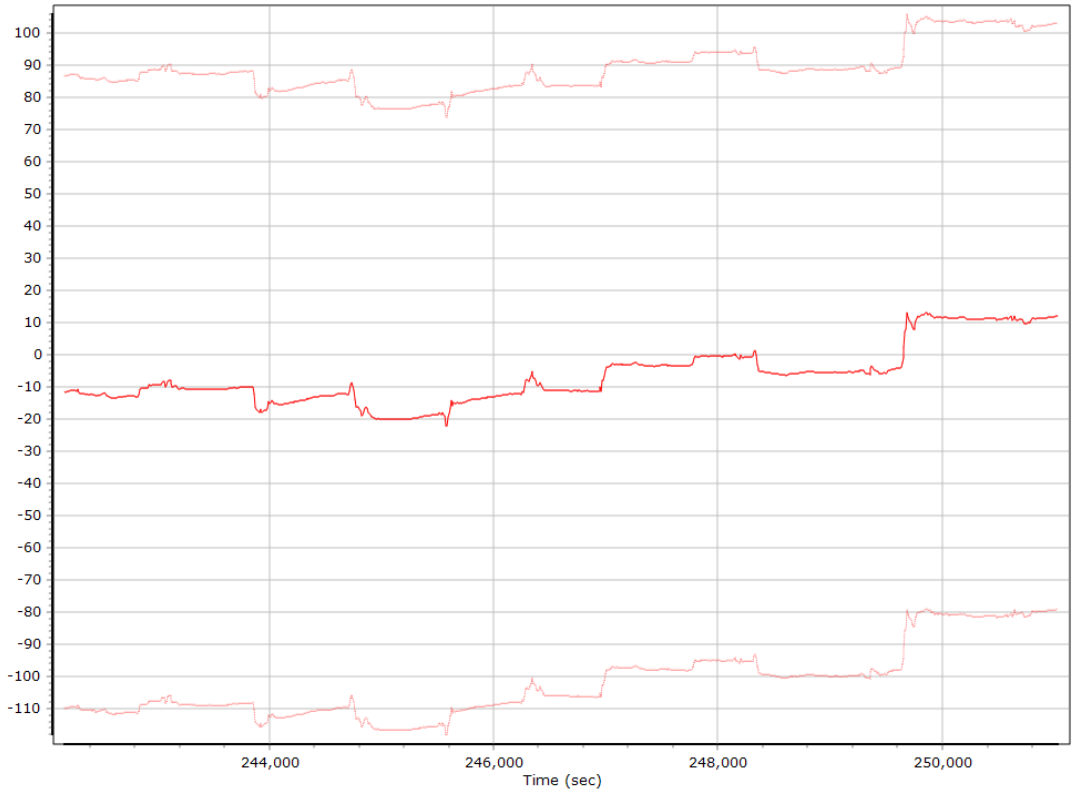

Z Accelerometer Bias (micro-g)

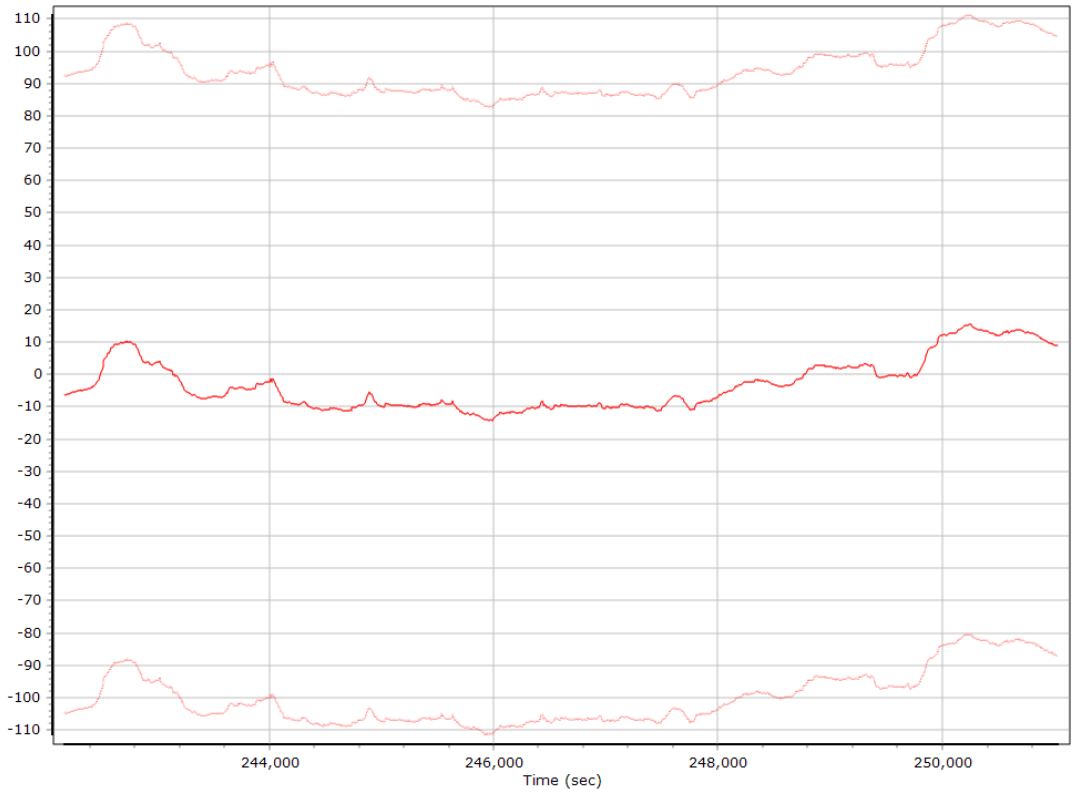

Accelerometer Scale Error (ppm)

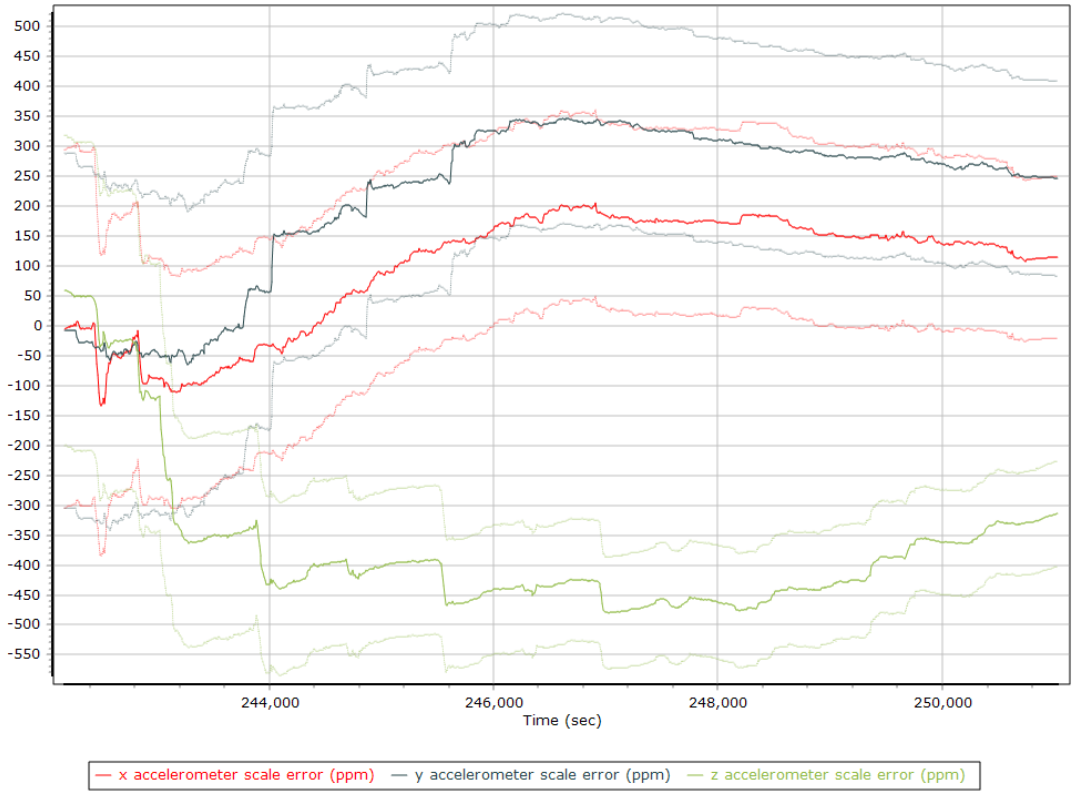

X Accelerometer Scale Error (ppm)

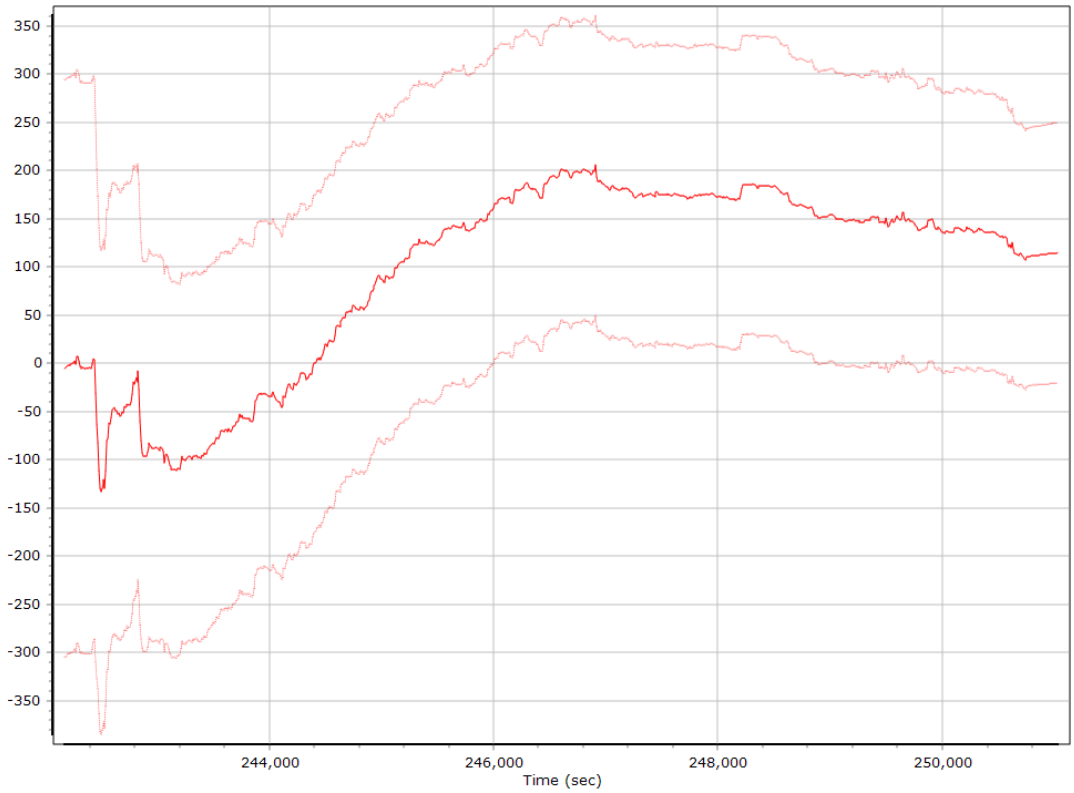

Y Accelerometer Scale Error (ppm)

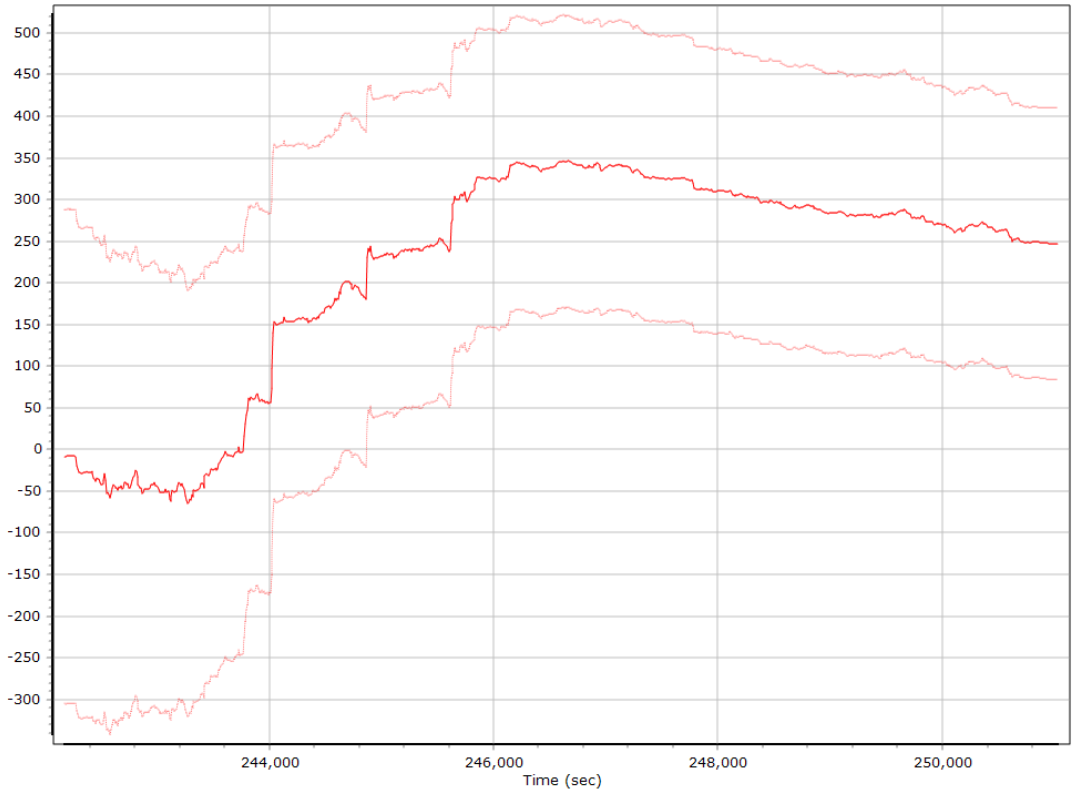

Z Accelerometer Scale Error (ppm)

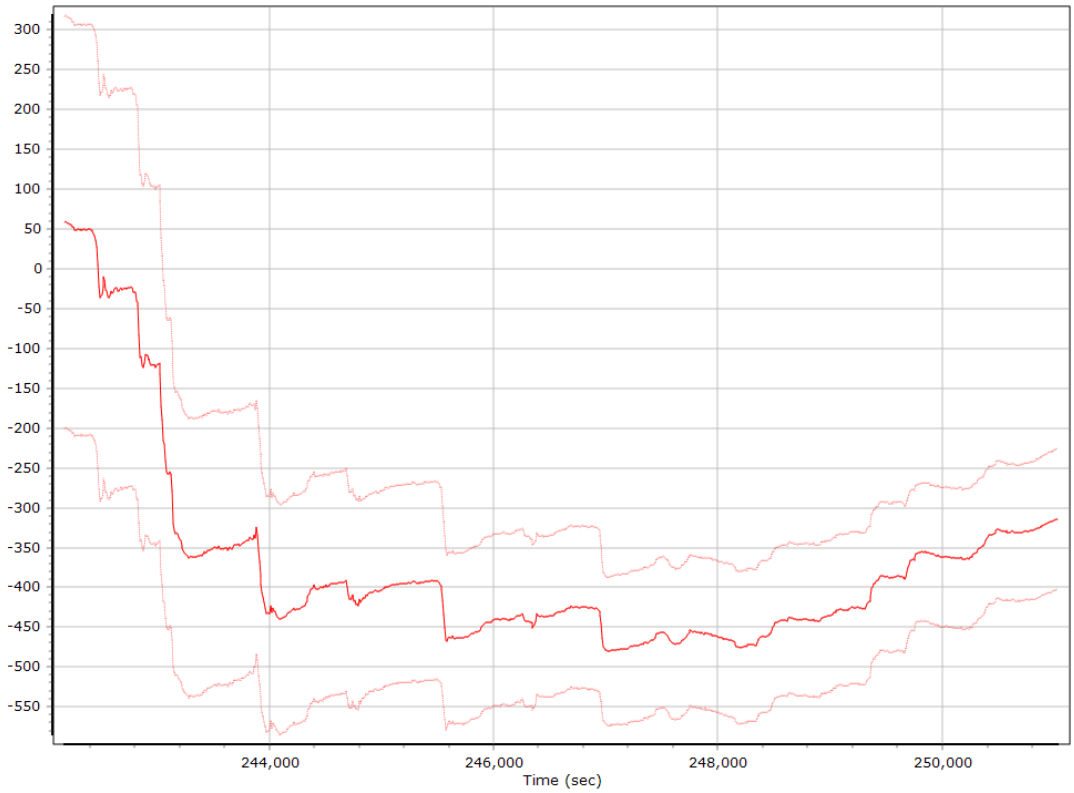

Gyro Bias (deg/h)

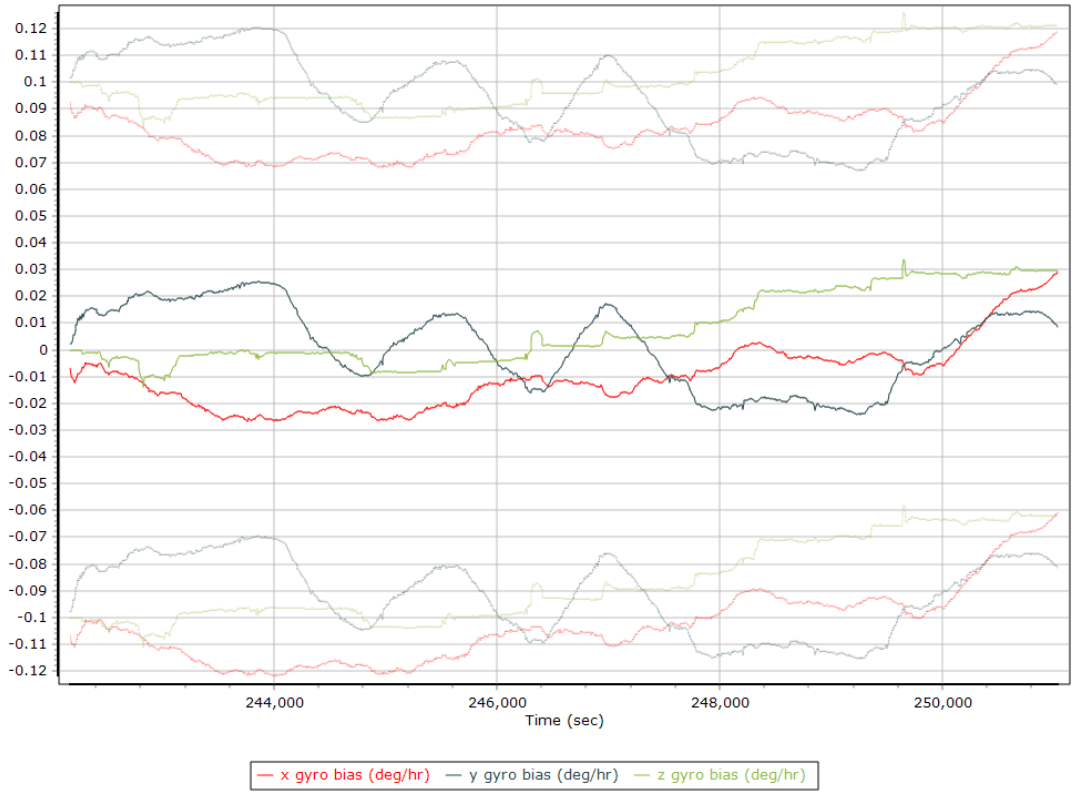

X Gyro Bias (deg/h)

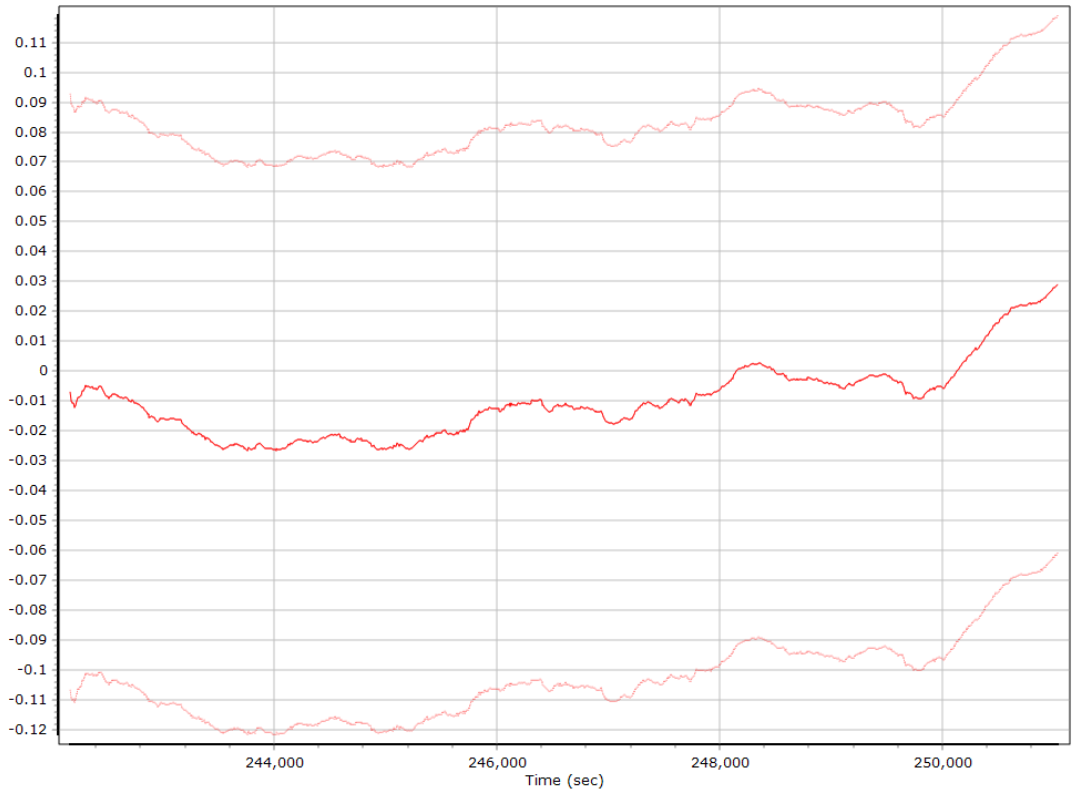

Y Gyro Bias (deg/h)

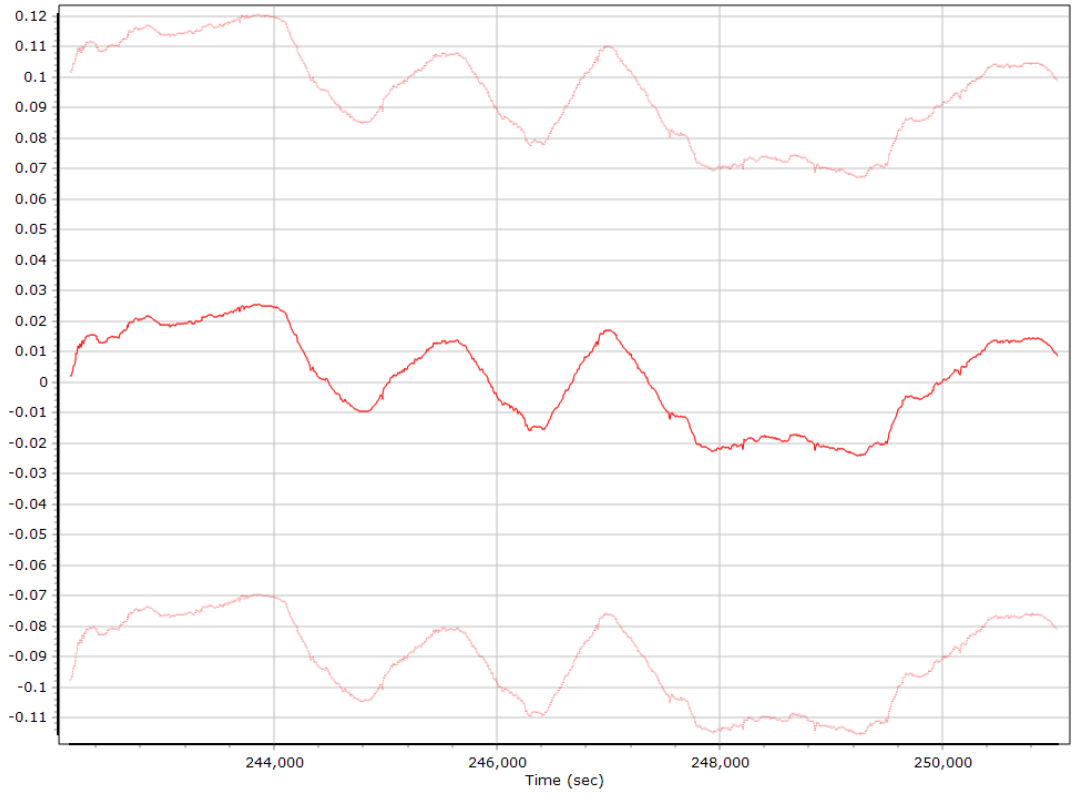

Z Gyro Bias (deg/h)

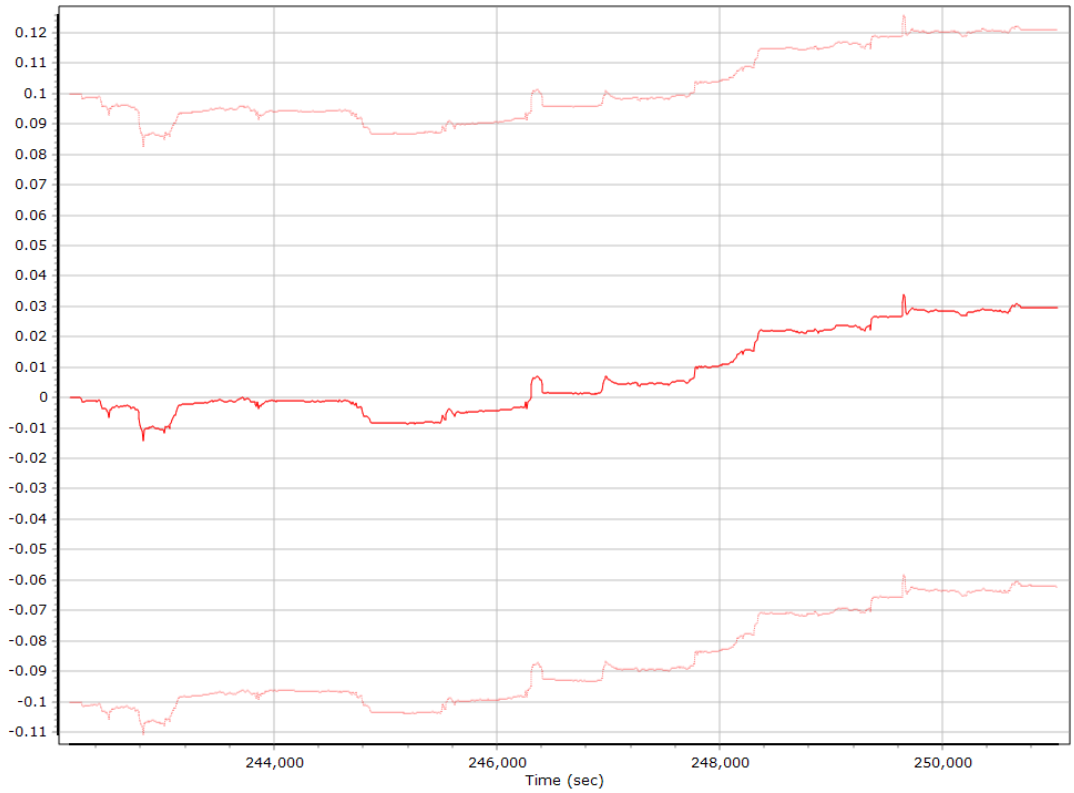

Gyro Scale Error (ppm)

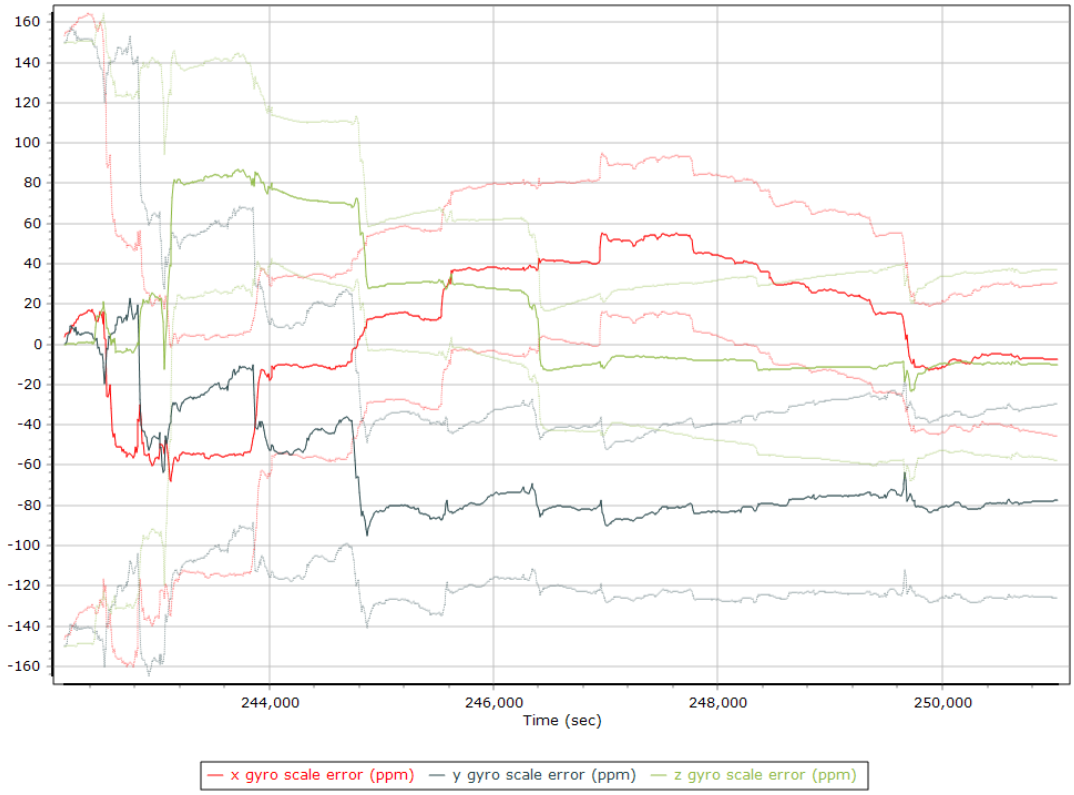

X Gyro Scale Error (ppm)

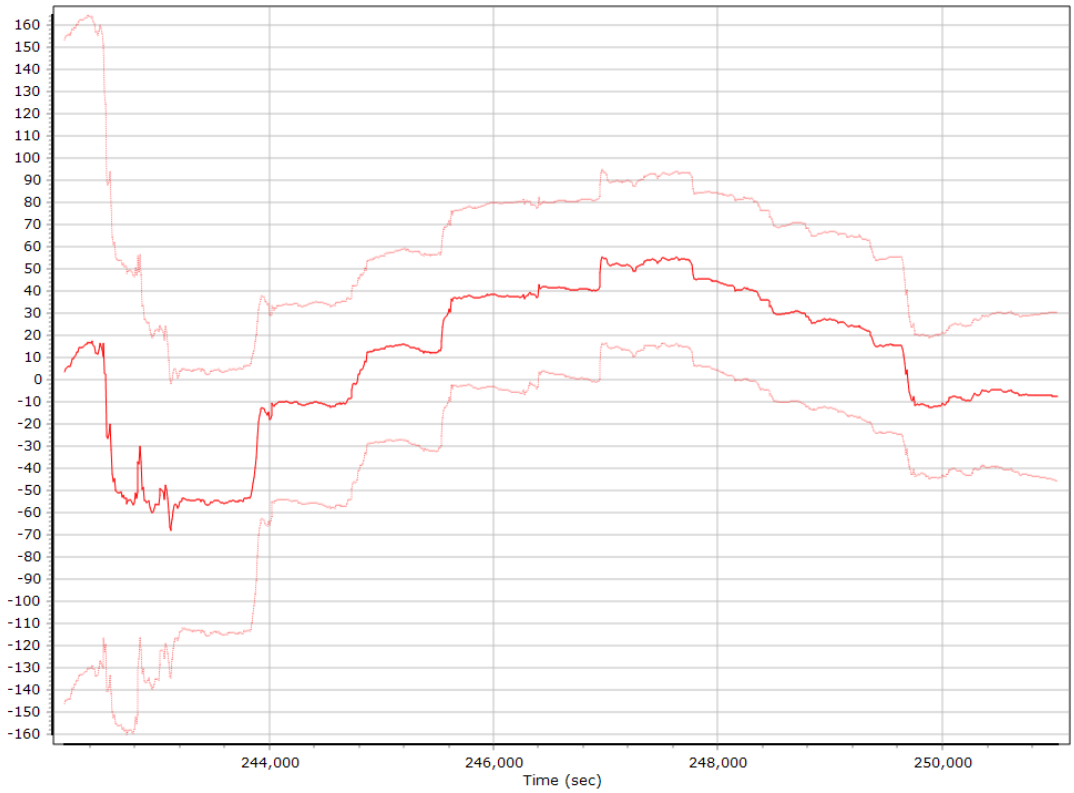

Y Gyro Scale Error (ppm)

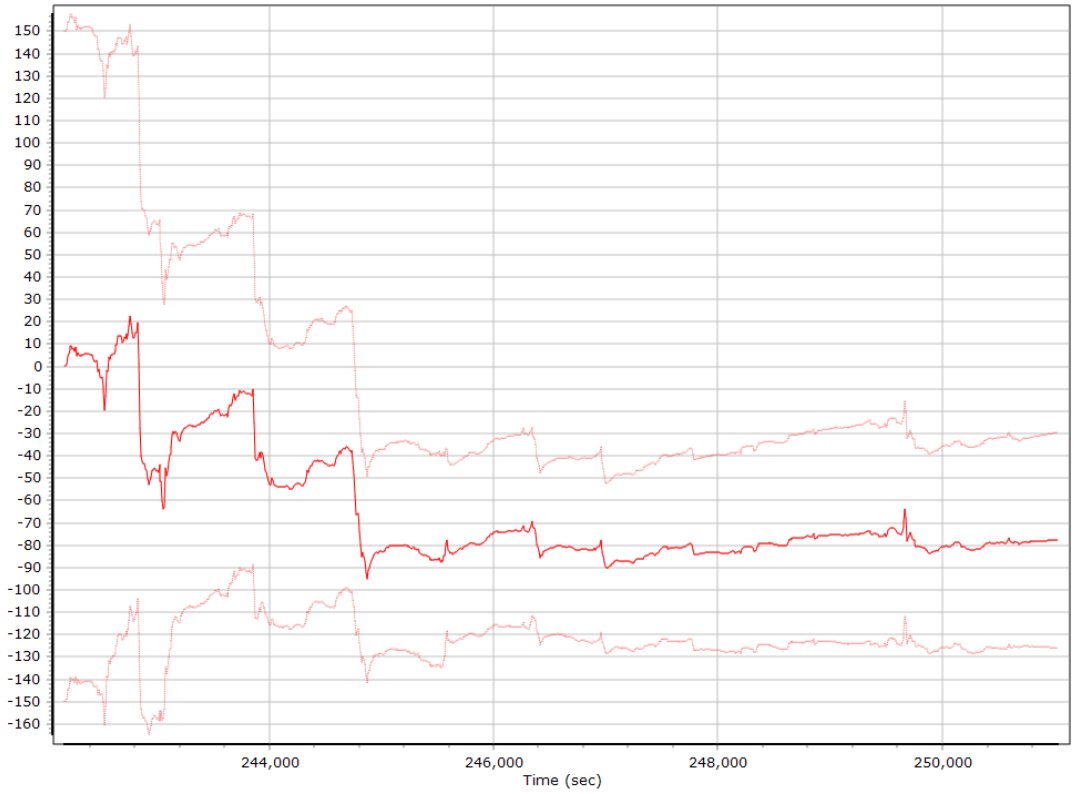

Z Gyro Scale Error (ppm)

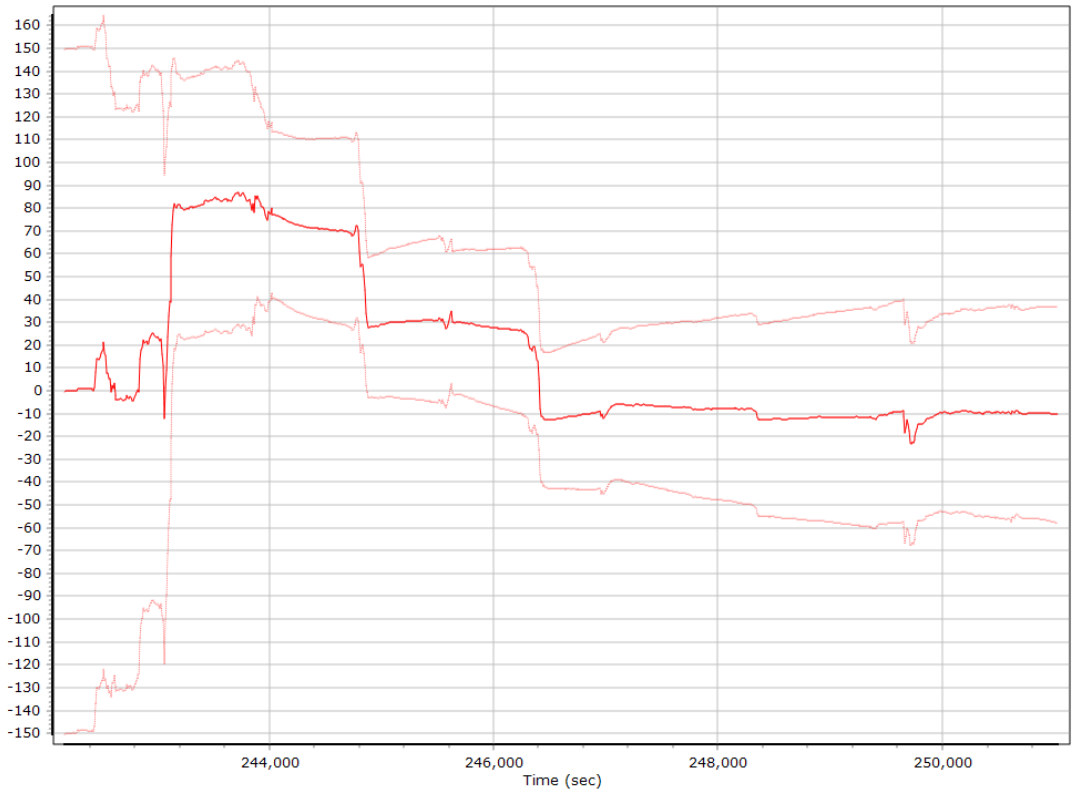

Forward Processed Estimated Constant Errors, Reference Frame

Accelerometer Bias (micro-g)

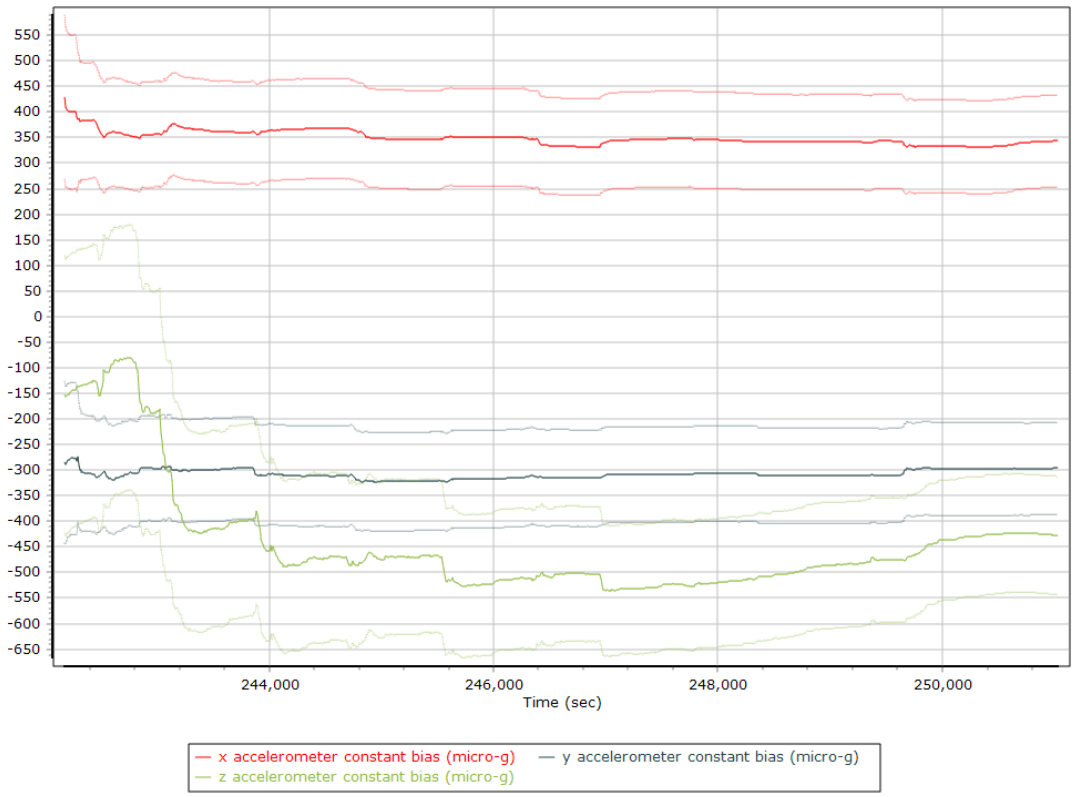

X Accelerometer Bias (micro-g)

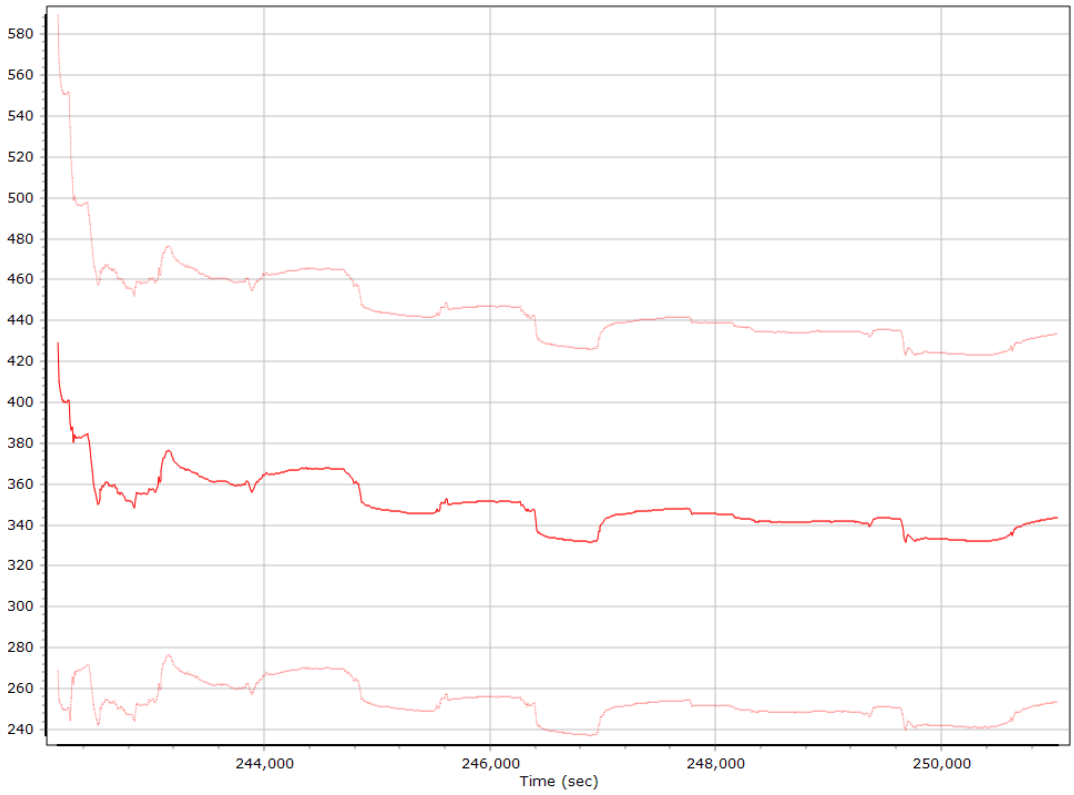

Y Accelerometer Bias (micro-g)

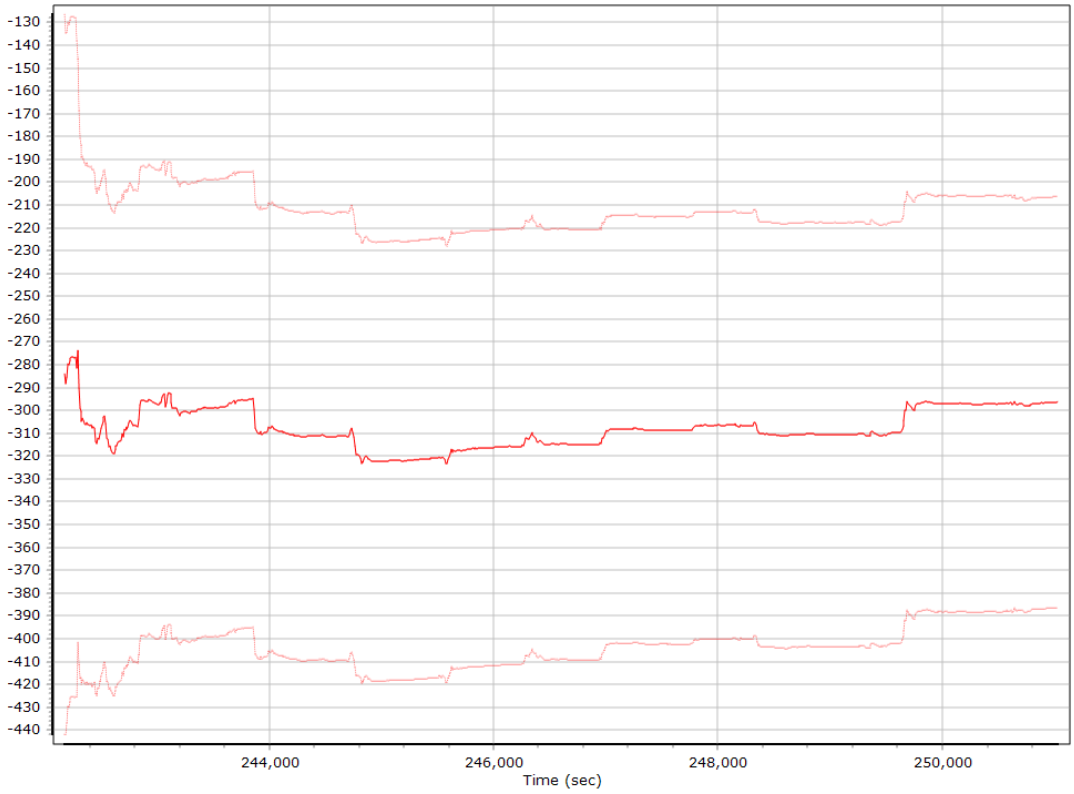

Z Accelerometer Bias (micro-g)

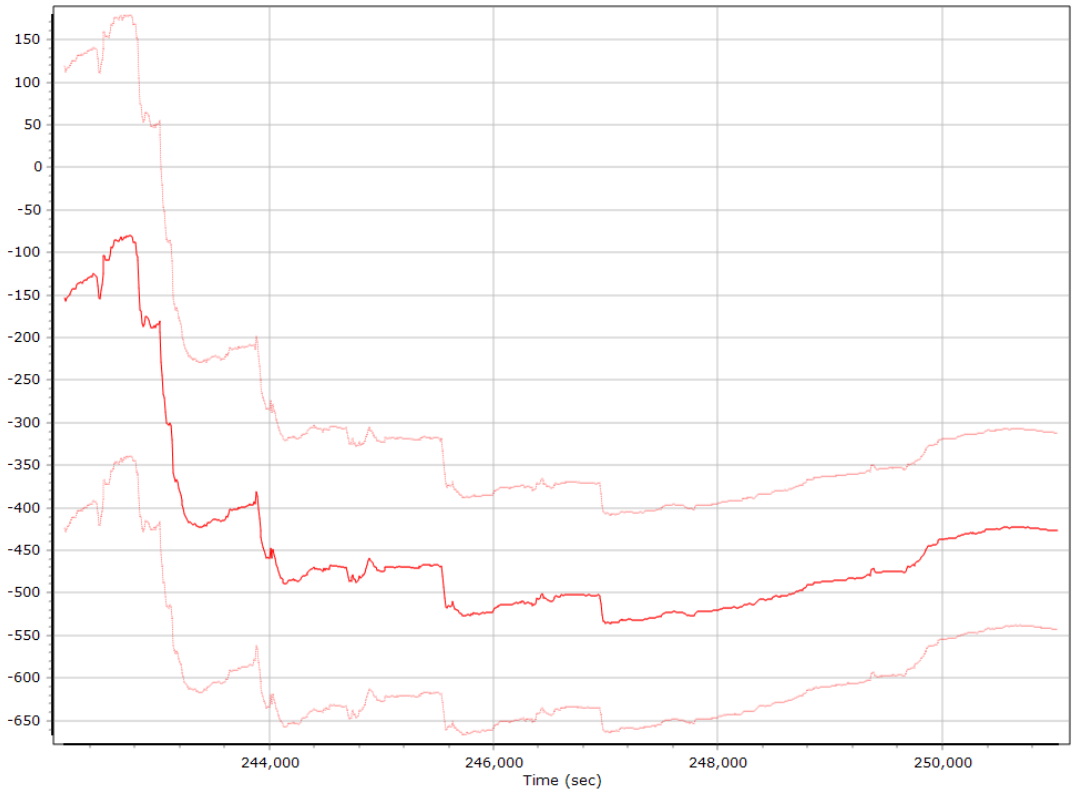

Gyro Bias (deg/h)

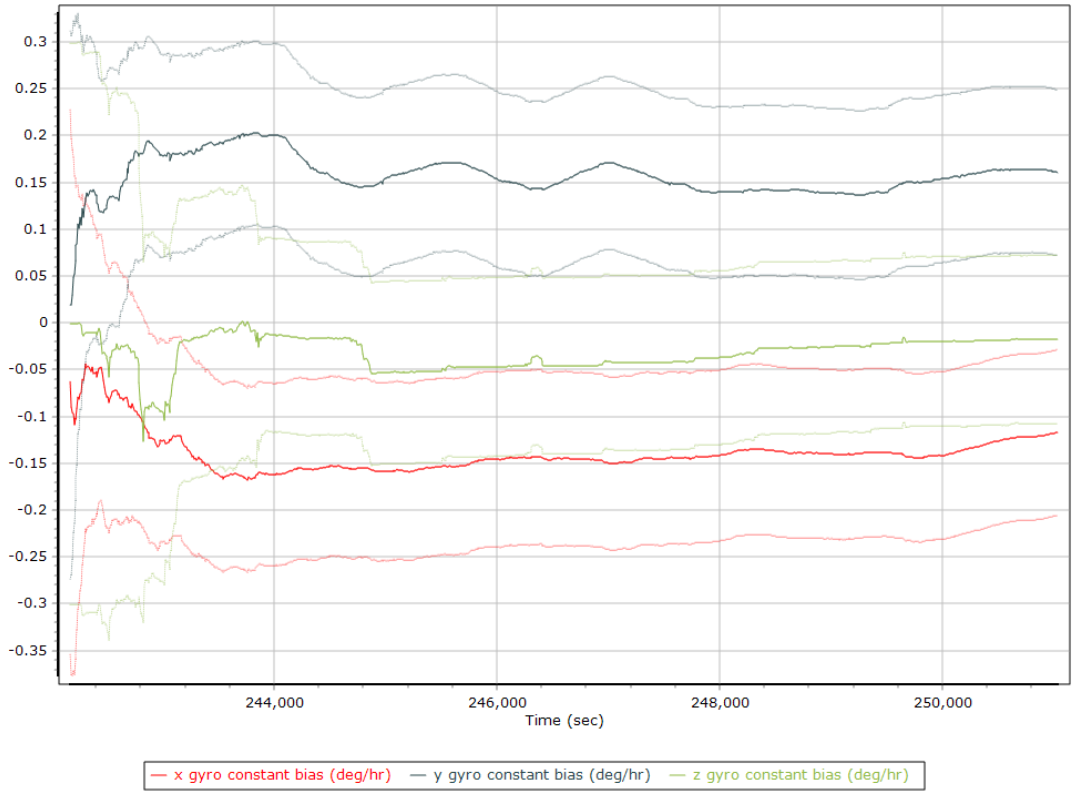

X Gyro Bias (deg/h)

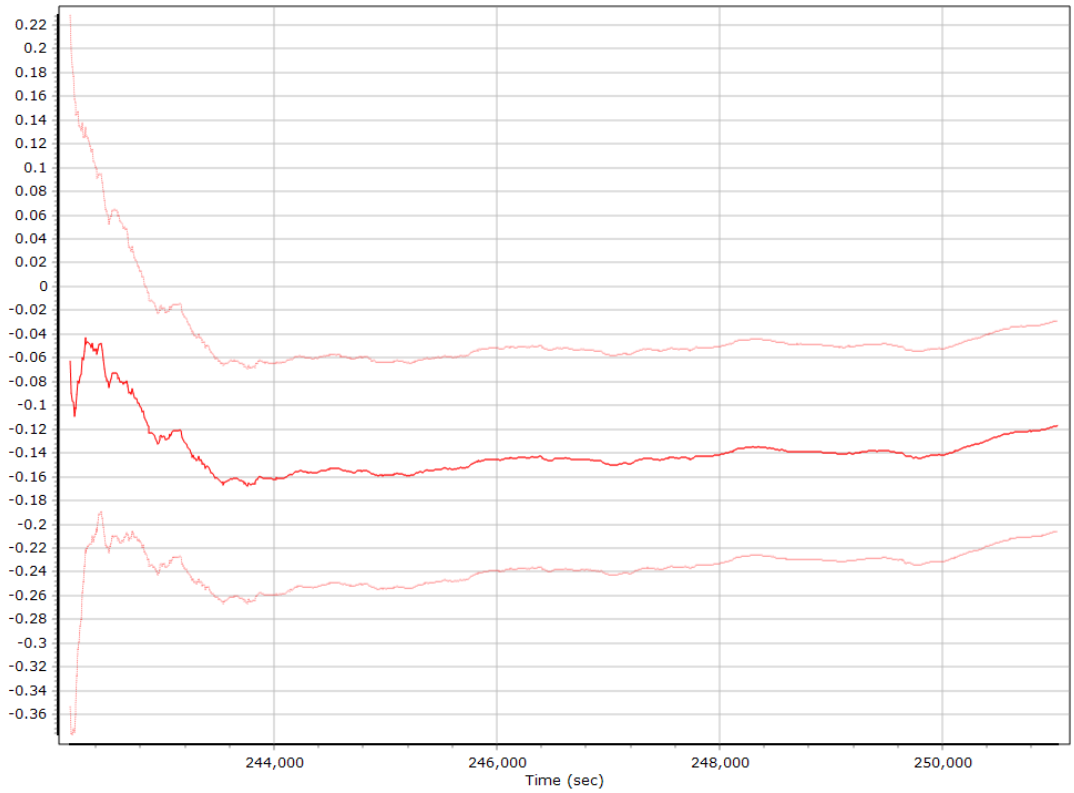

Y Gyro Bias (deg/h)

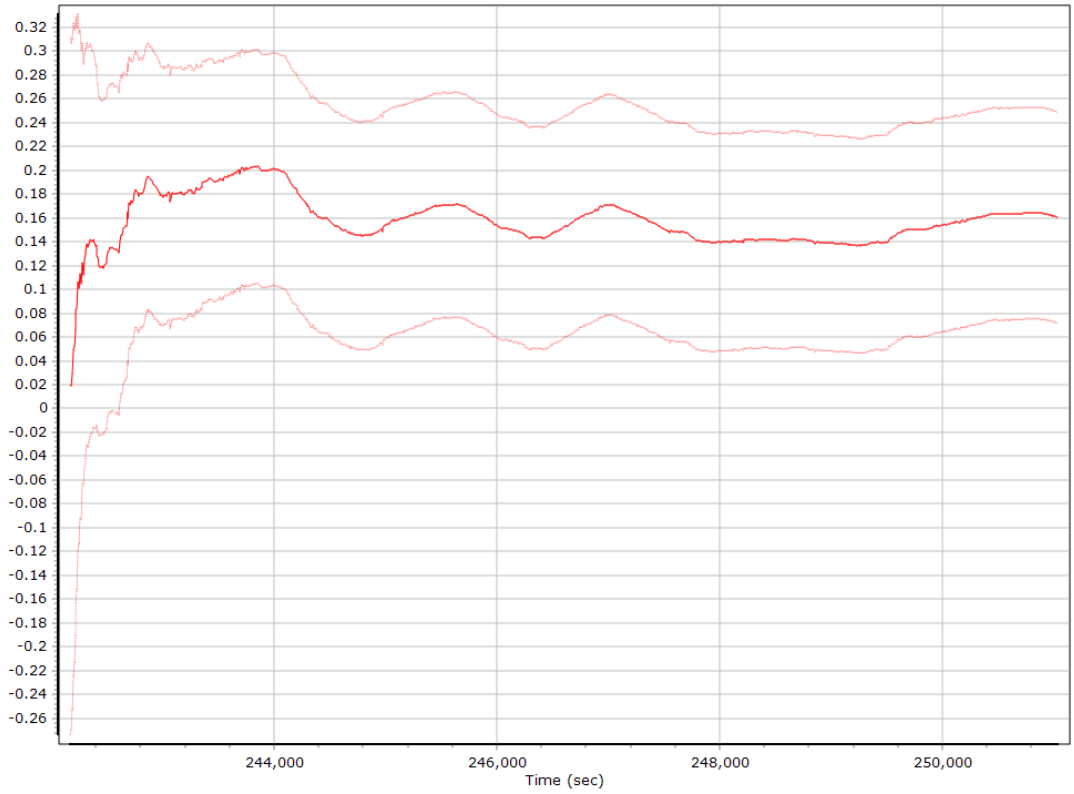

Z Gyro Bias (deg/h)

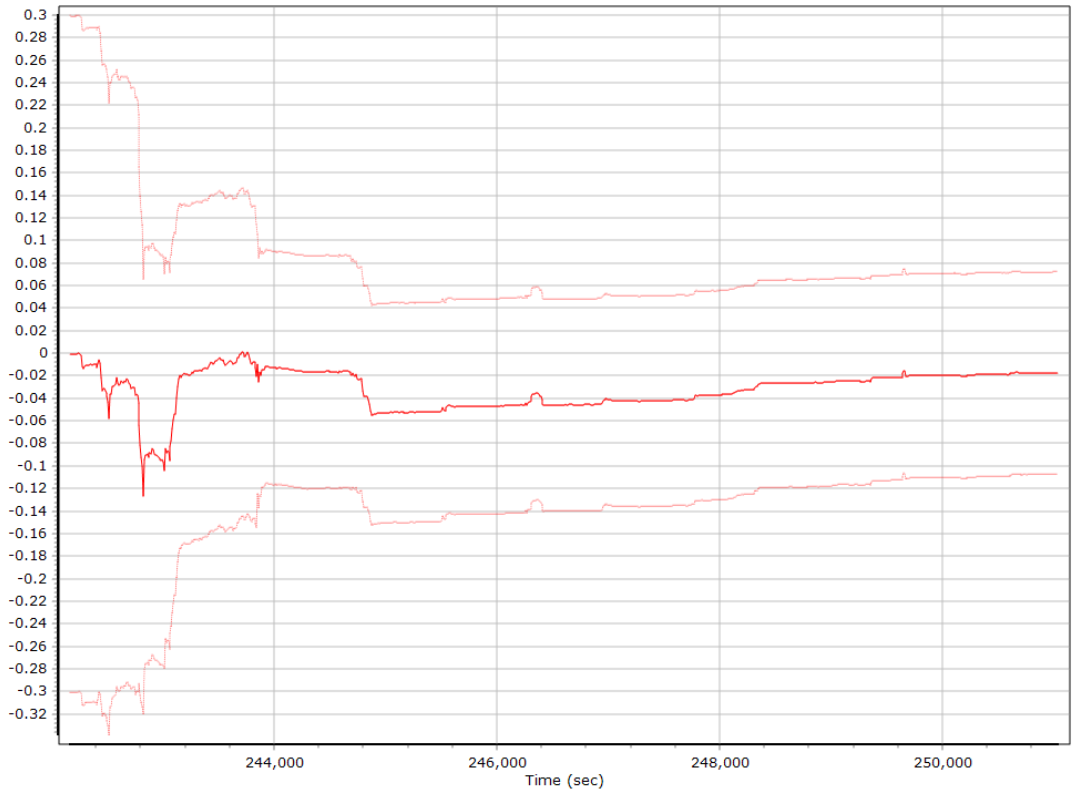

Smoothed Performance Metrics

Position Error RMS (m)

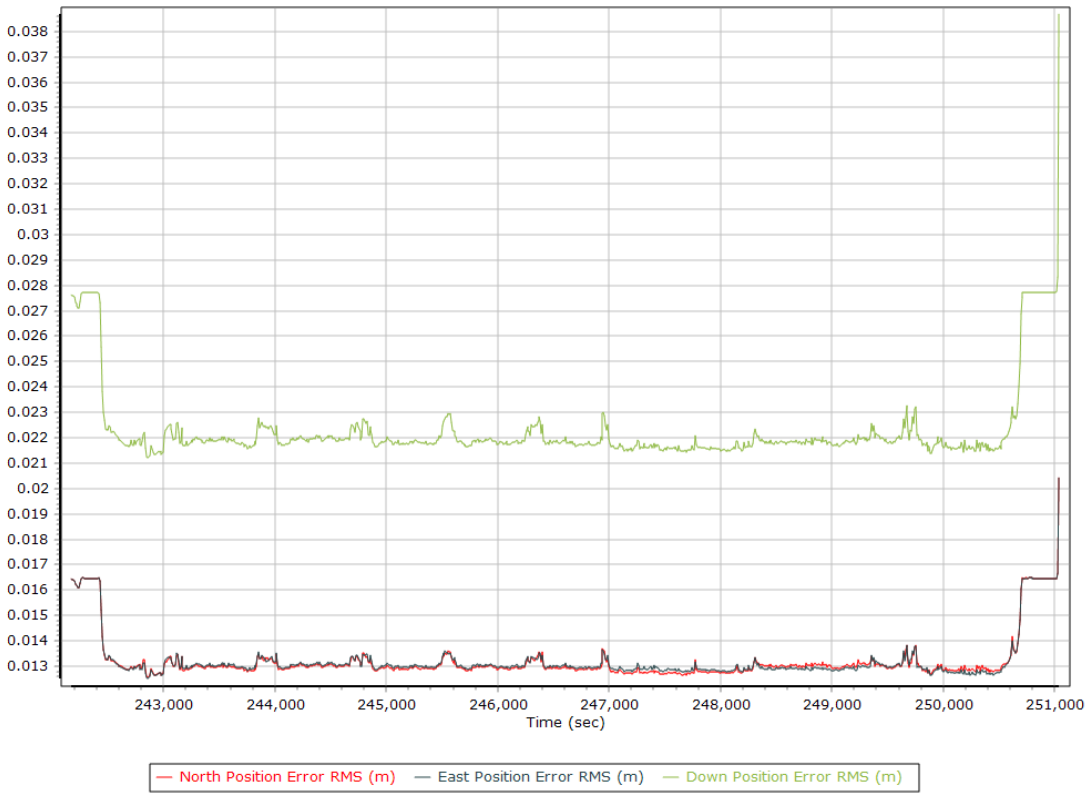

Velocity Error RMS (m/s)

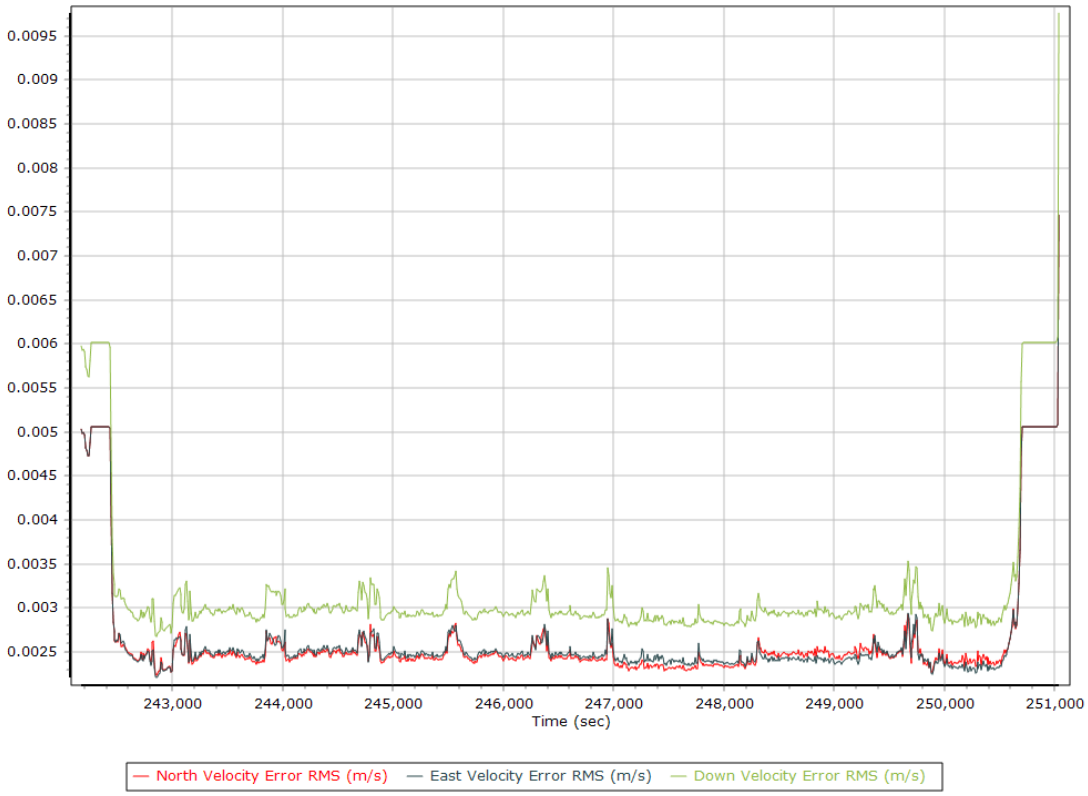

Roll/Pitch Error RMS (arc-min)

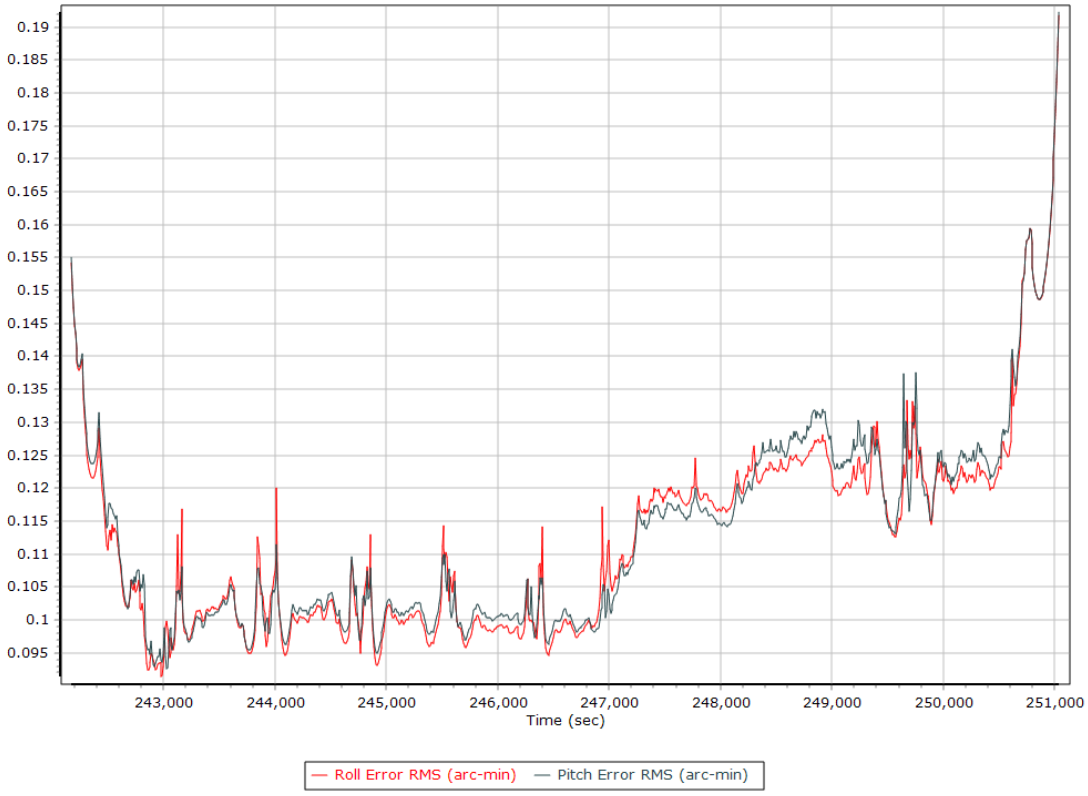

Heading Error RMS (arc-min)

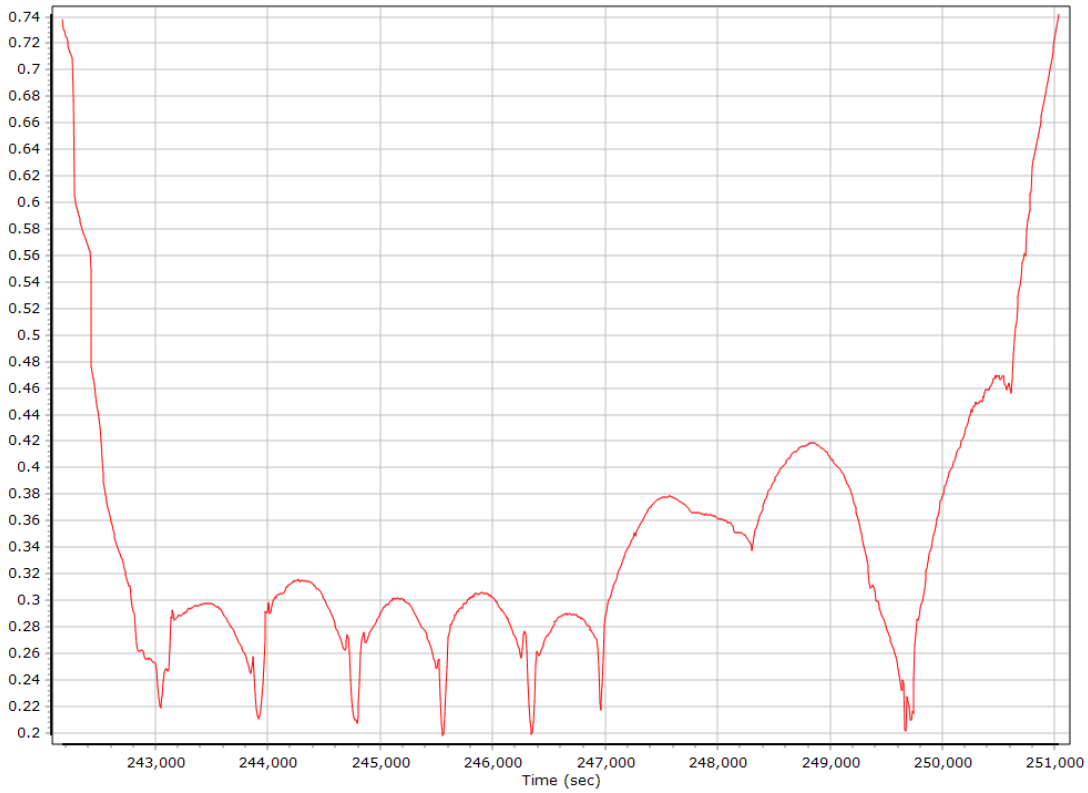

Forward Processed Performance Metrics

Position Error RMS (m)

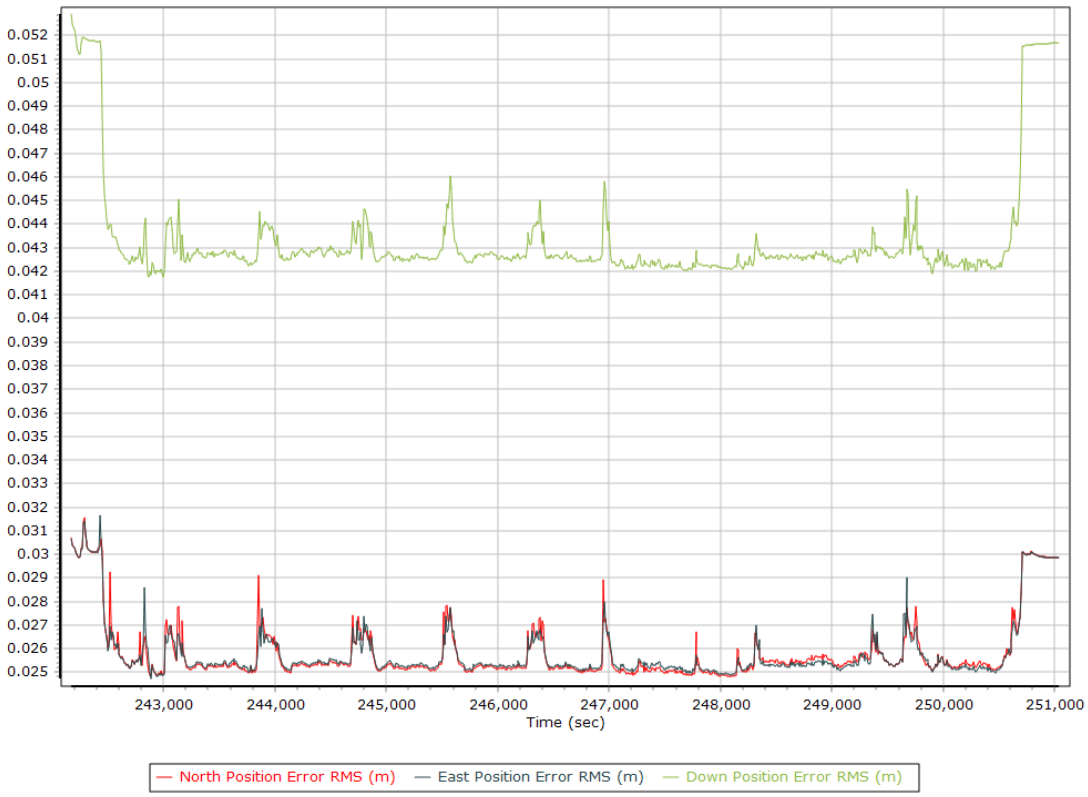

Velocity Error RMS (m/s)

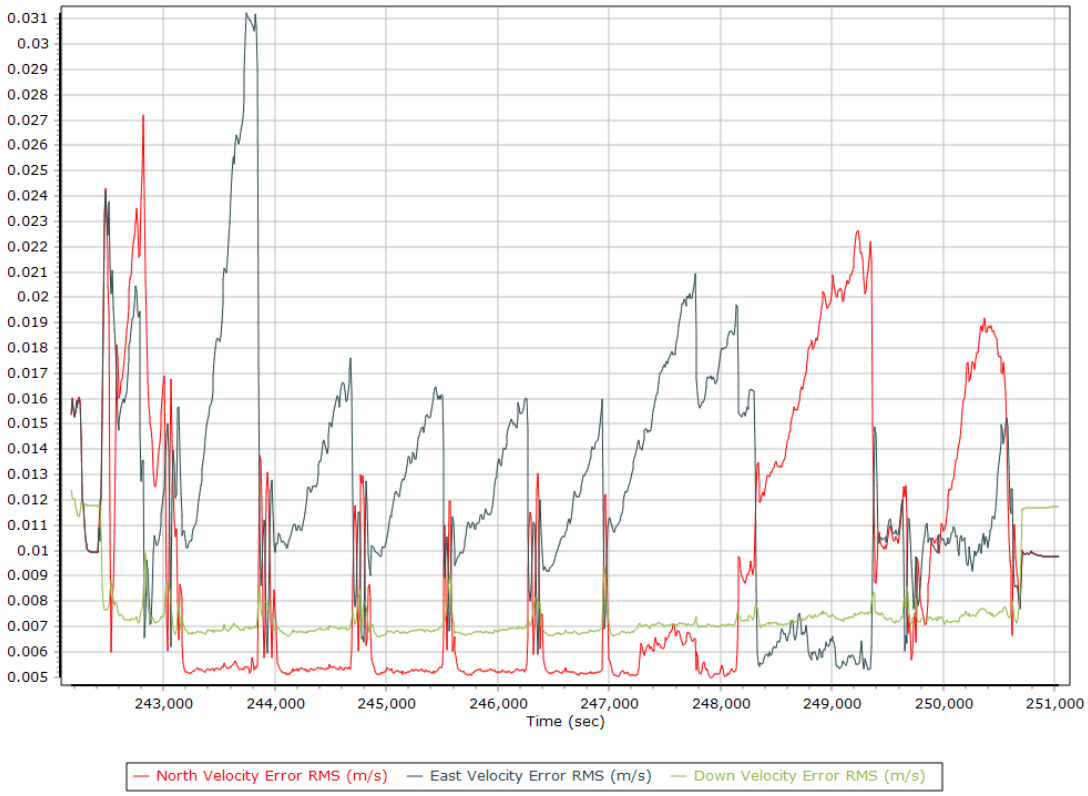

Roll/Pitch Error RMS (arc-min)

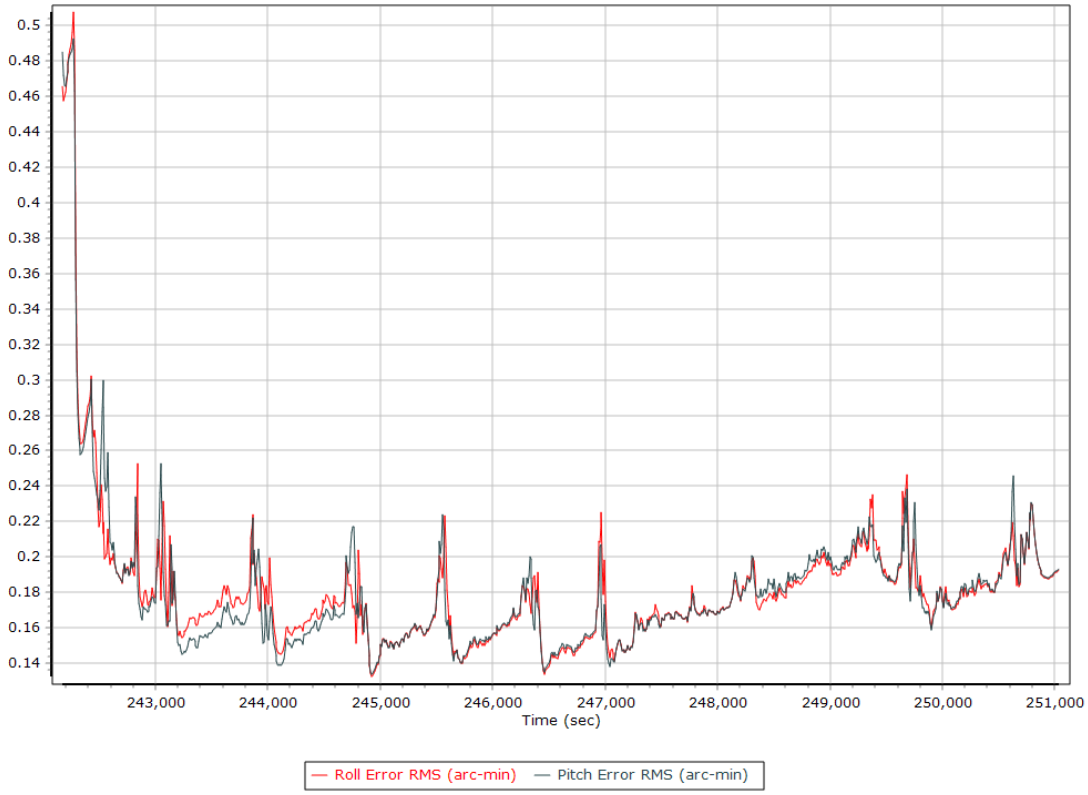

Heading Error RMS (arc-min)

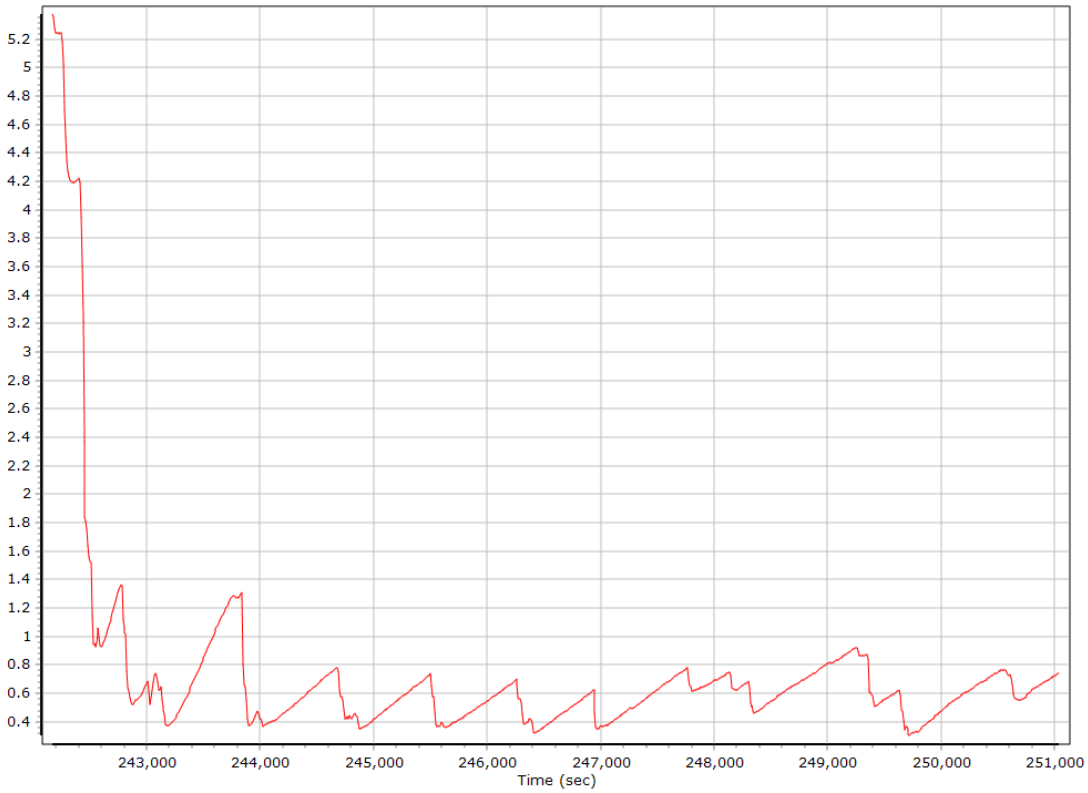

Forward Processed Solution Status

Processing Mode

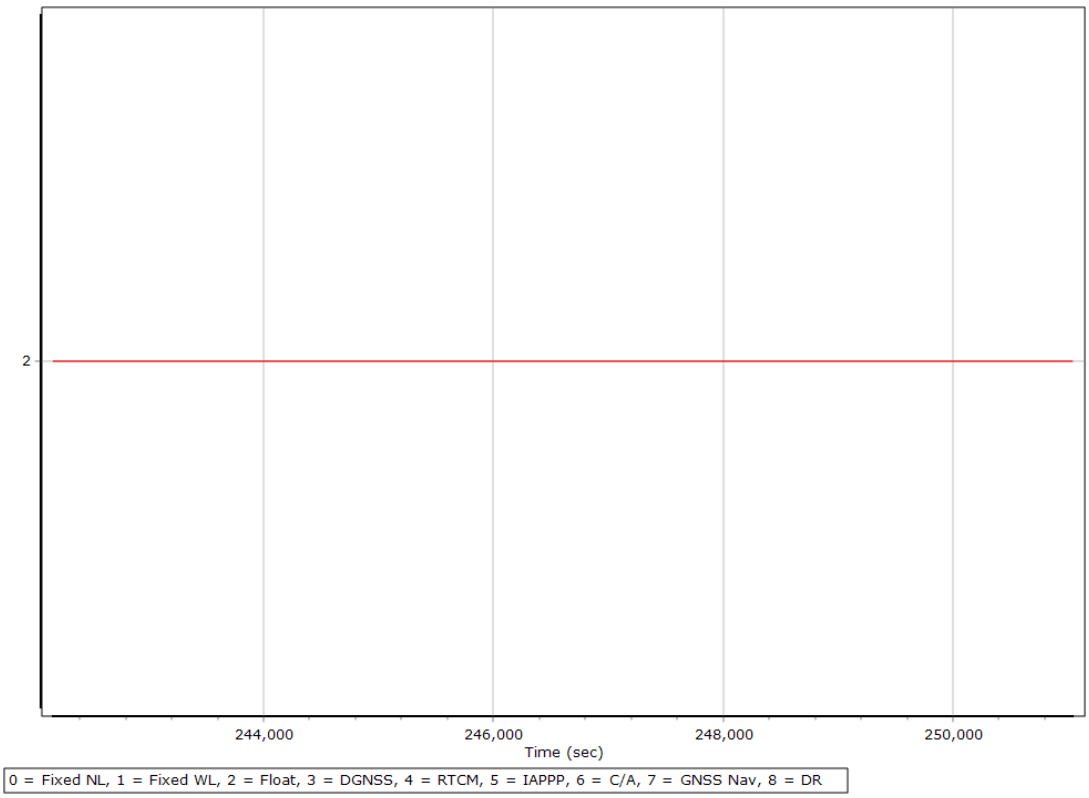

Number of Satellites

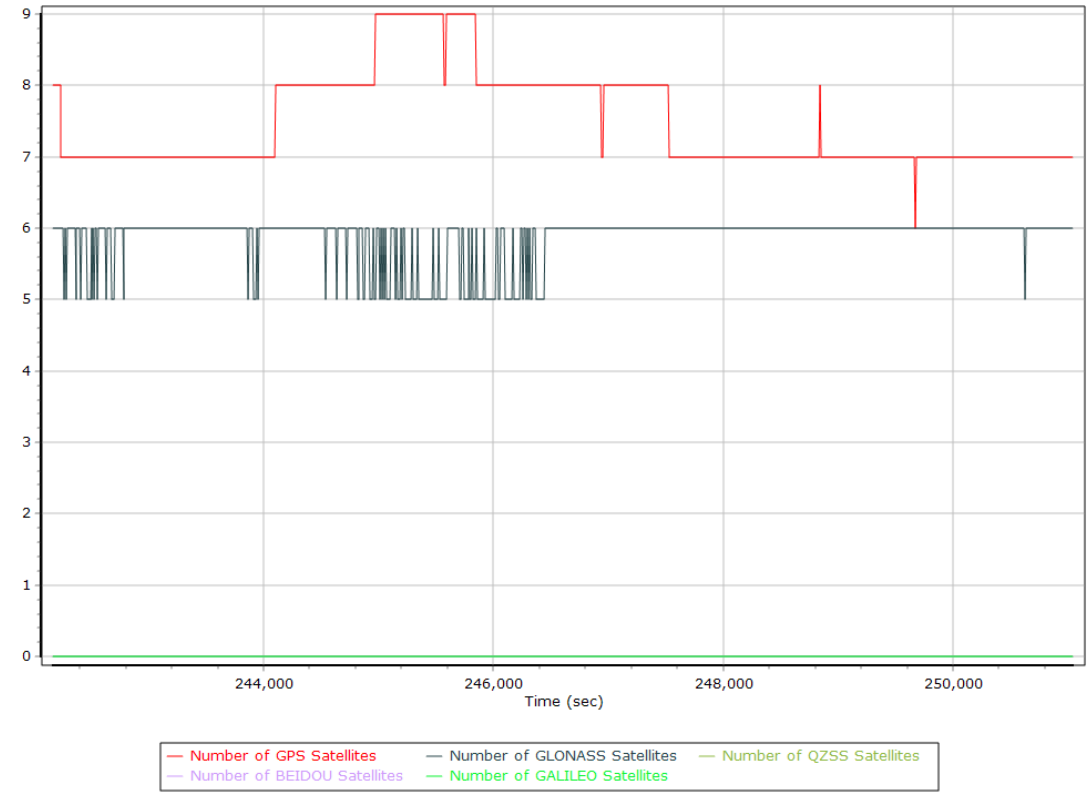
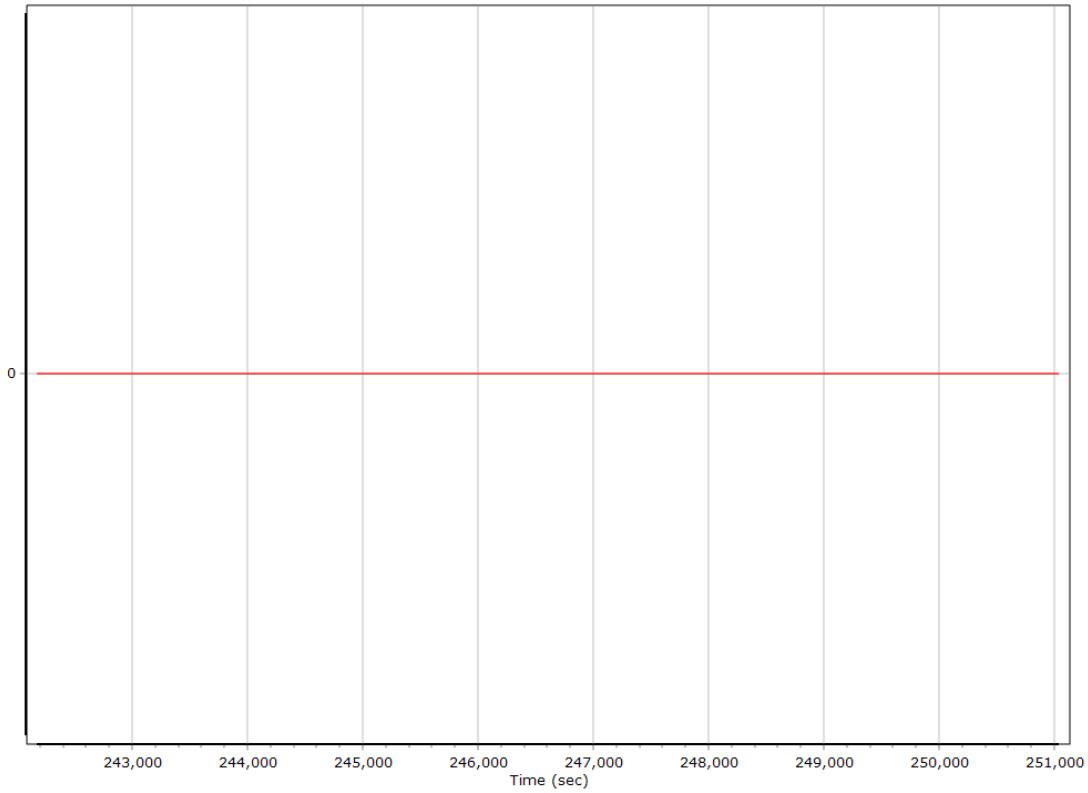
Baseline Length