General Information

Mission Information

Project name	070820
Processing date	2020-08-11 16:08:23
Mission date	2020-07-08 15:34:09
Mission duration	05:45:04.000
Processing mode	IN-Fusion Trimble RTX Nav

Rover Hardware Information

Product	POS AV 610 VER6 HW2.4-12
Serial number	S/N6310
IMU type	57
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
ALS.906	POS Data
ALS.907	
ALS.908	
ALS.909	
ALS.910	
ALS.911	
ALS.912	
ALS.913	
ALS.914	
ALS.915	
ALS.916	
ALS.917	
ALS.918	
ALS.919	
ALS.920	
ALS.921	
ALS.922	
ALS.923	
ALS.924	
ALS.925	
ALS.926	
ALS.927	
ALS.928	
ALS.929	
ALS.930	
ALS.931	
ALS.932	
ALS.933	
ALS.934	
ALS.935	
ALS.936	
ALS.937	
ALS.938	
ALS.939	
ALS.940	
ALS.941	
ALS.942	
ALS.943	
ALS.944	
ALS.945	
ALS.946	
ALS.947	
ALS.948	
ALS.949	
ALS.950	
ALS.951	

Input Files

File Name	File Type
Ephm1900.20g	GLONASS Broadcast Ephemeris
Ephm1900.20n	GPS Broadcast Ephemeris
igl21132.sp3	GLONASS Precise Ephemeris
igl21133.sp3	GLONASS Precise Ephemeris
igl21134.sp3	GLONASS Precise Ephemeris
igs21132.sp3	GPS Precise Ephemeris
igs21133.sp3	GPS Precise Ephemeris
igs21134.sp3	GPS Precise Ephemeris

Output Files

Filename	File type
sbet_070820.out	SBET Trajectory File

Rover Data Summary

First raw data file	ALS.906		
Last raw data file	ALS.951		
Start GPS week	2113		
Start time	21.199 (07/05/2020 00:00:21)		
End time	335935.050 (07/08/2020 21:18:55)		
Start of fine alignment	315858.347 (07/08/2020 15:44:18)		
Available subsystems	Primary GNSS, Gimbal, IMU		
POS Event Input	Event 1 Input		
Correction data	Trimble RTX		
IMU Installation Lever Arms & Mounting Angles			
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	-0.011	0.039	-1.317
Gimbal to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Rover Data QC

Raw IMU Import QC Summary

IMU data input file	imu_Mission 1.dat
IMU data check log file	imudt_070820.log
IMU Records Processed	4140048
Termination Status	Warnings
IMU Anomalies	1
IMU Failure Messages	
315252.163 : WARNING : Gap of 315230.2047 seconds in CHECKDT input data	

Primary Observables & Satellite Data

L1 Satellite Lock/Elevation

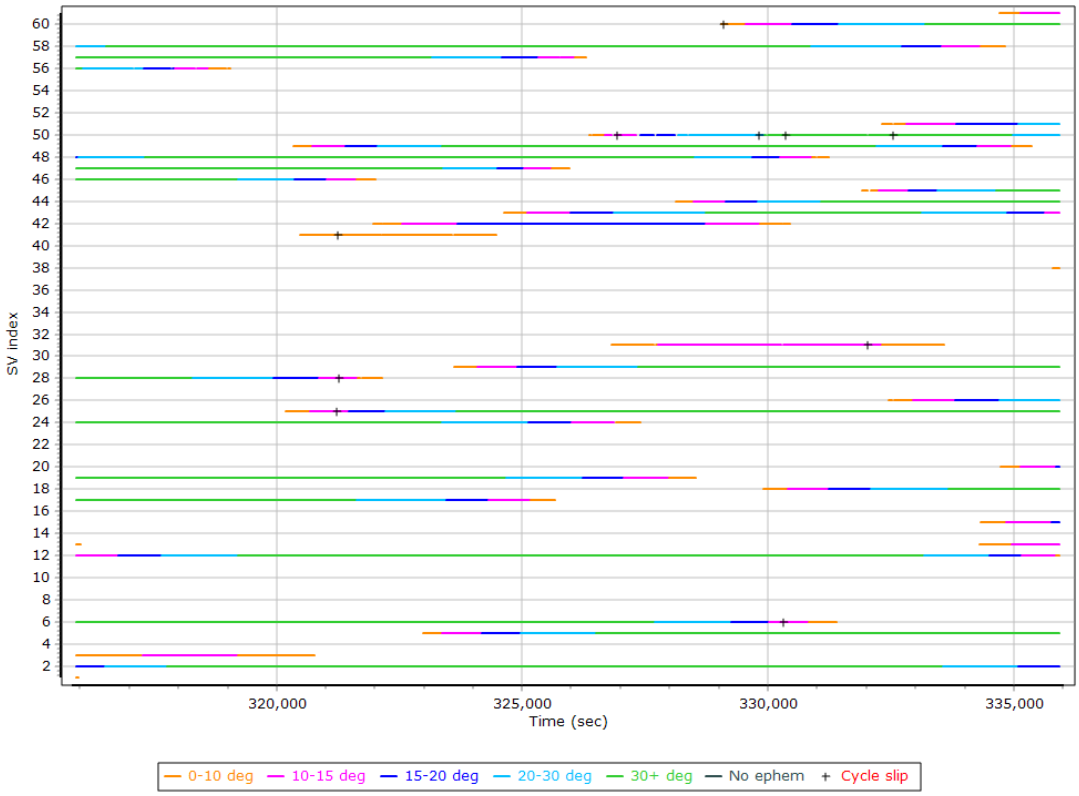

L2 Satellite Lock/Elevation

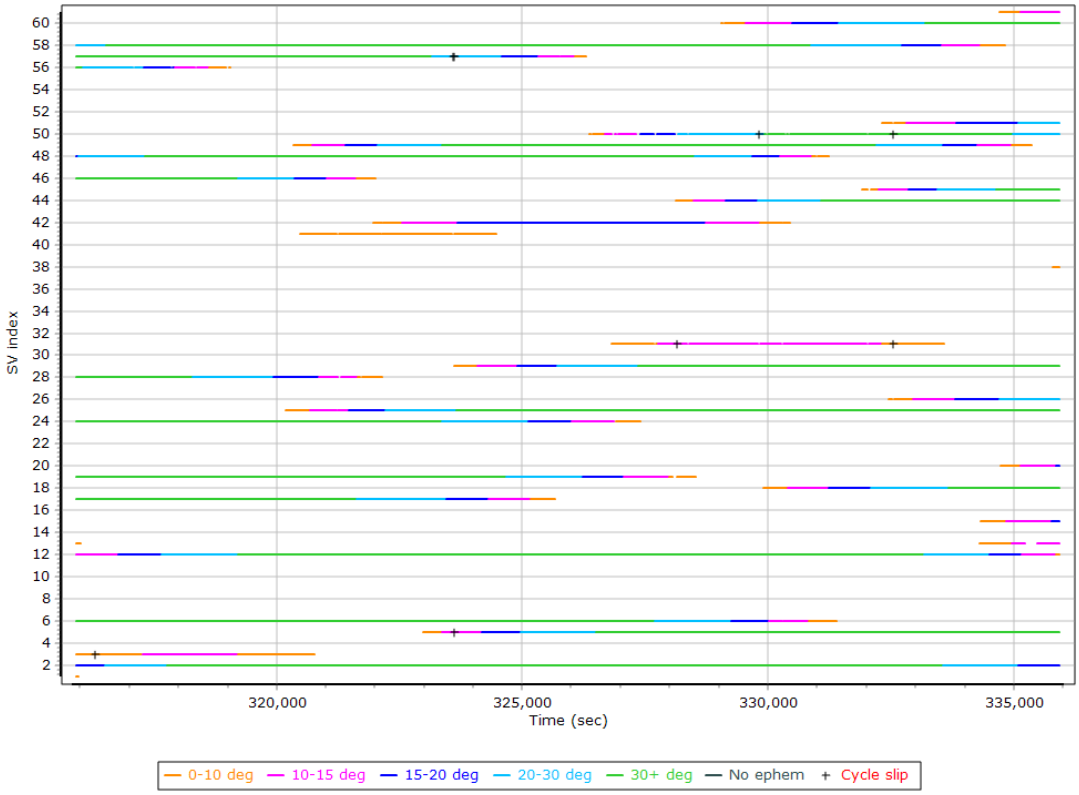

GPS L1 SNR

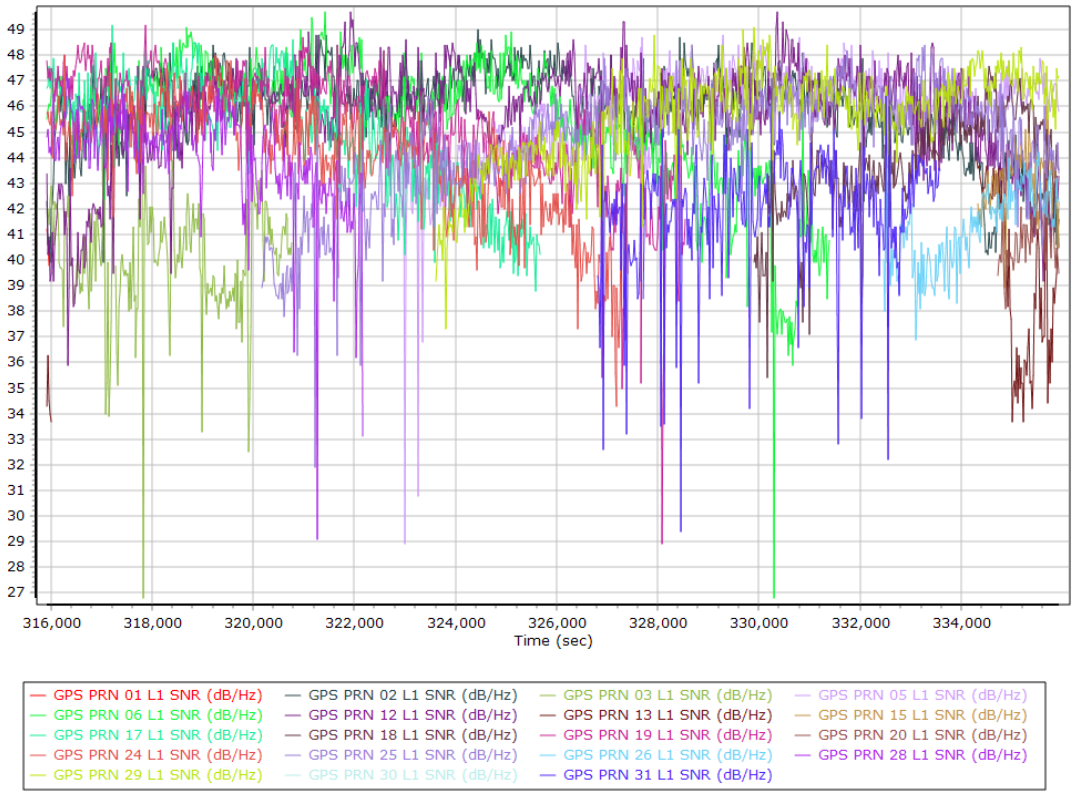

GPS L2 SNR

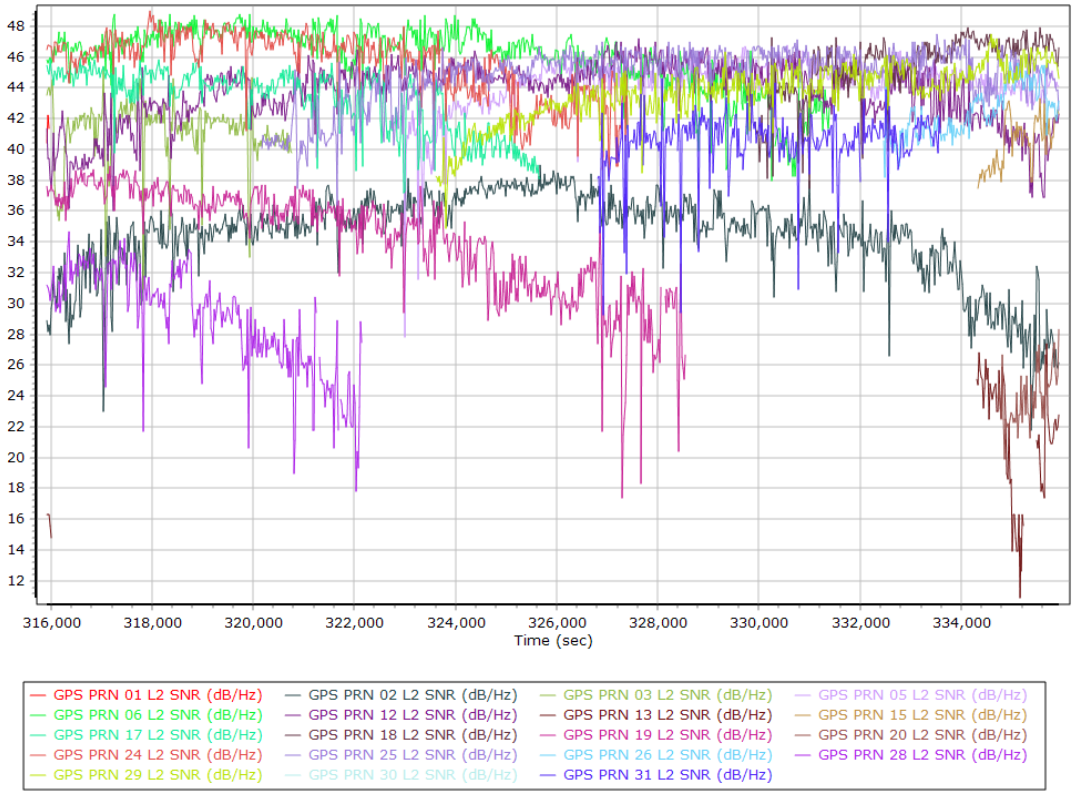

GLONASS L1 SNR

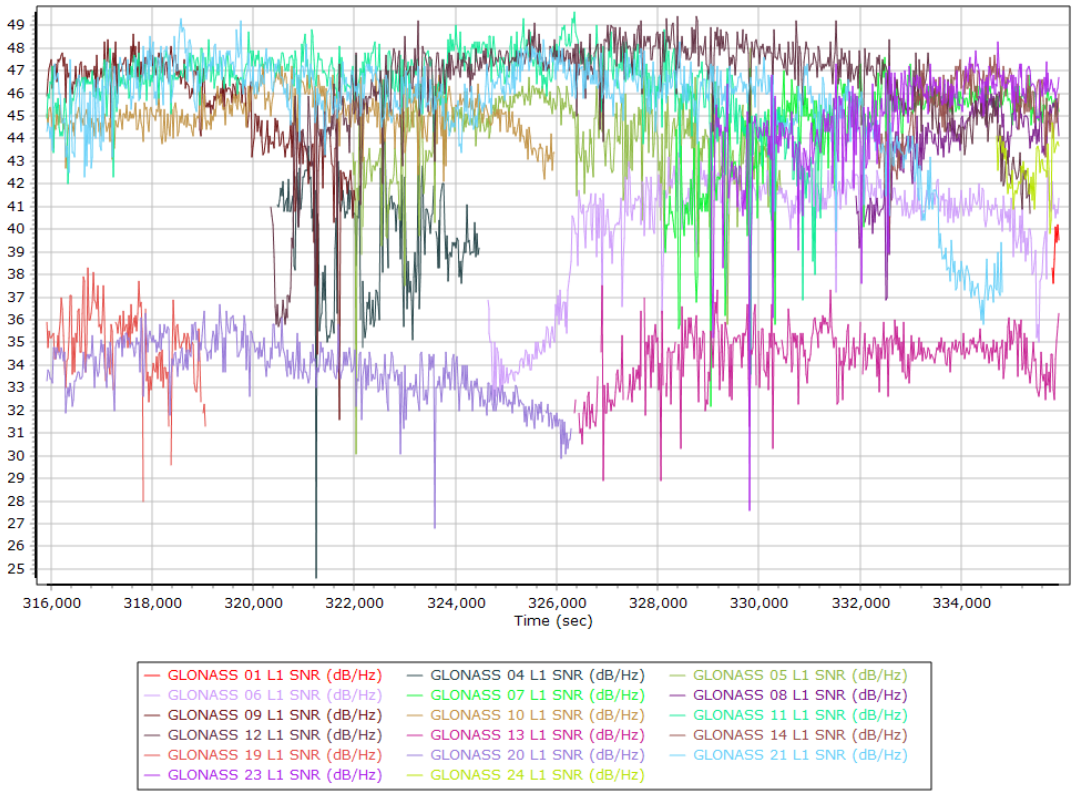

GLONASS L2 SNR

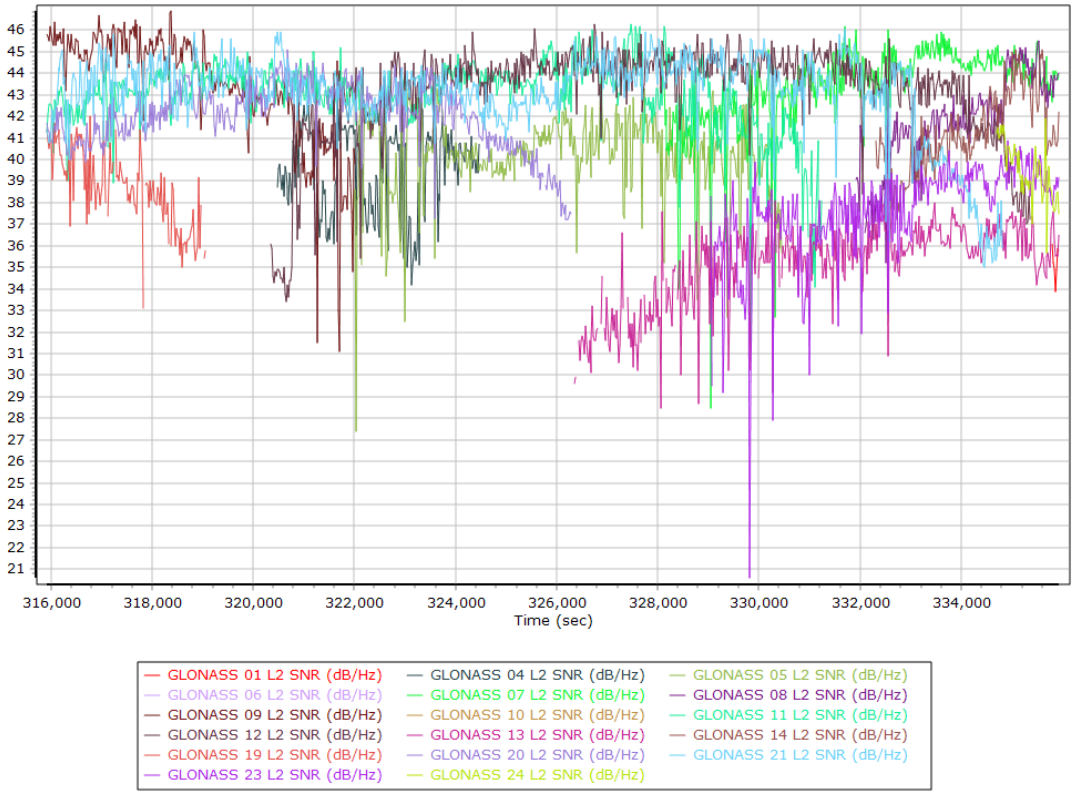

BEIDOU SNR

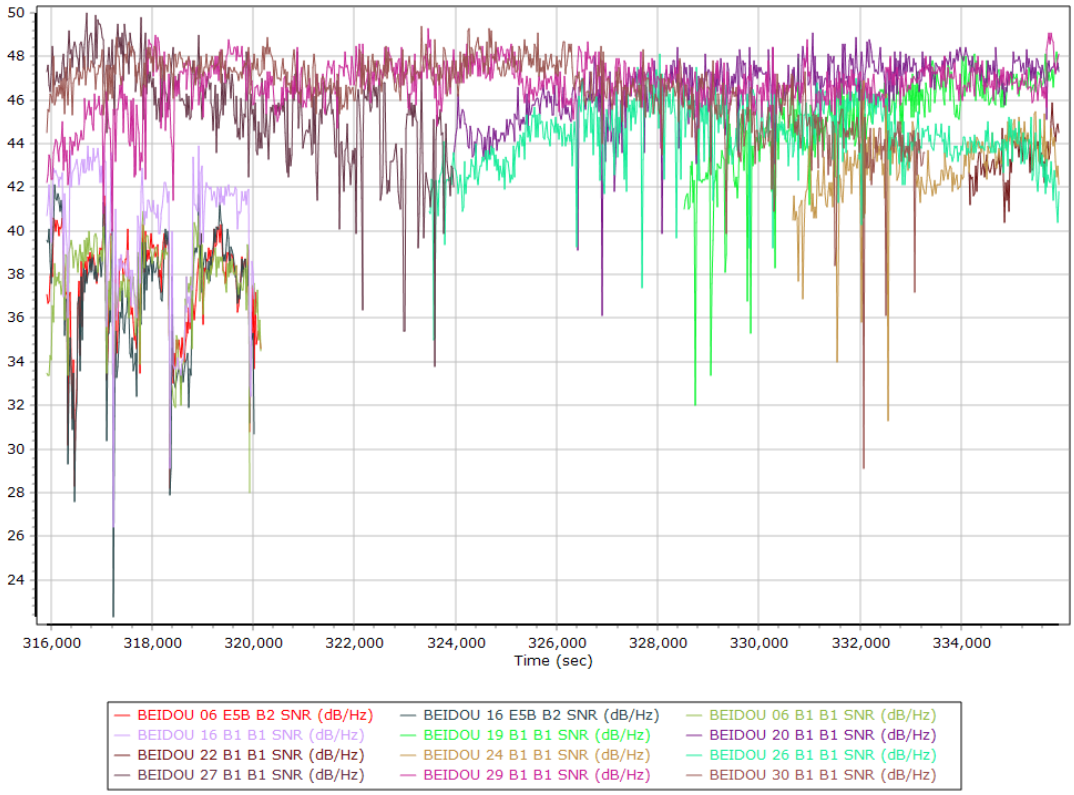

GALILEO SNR

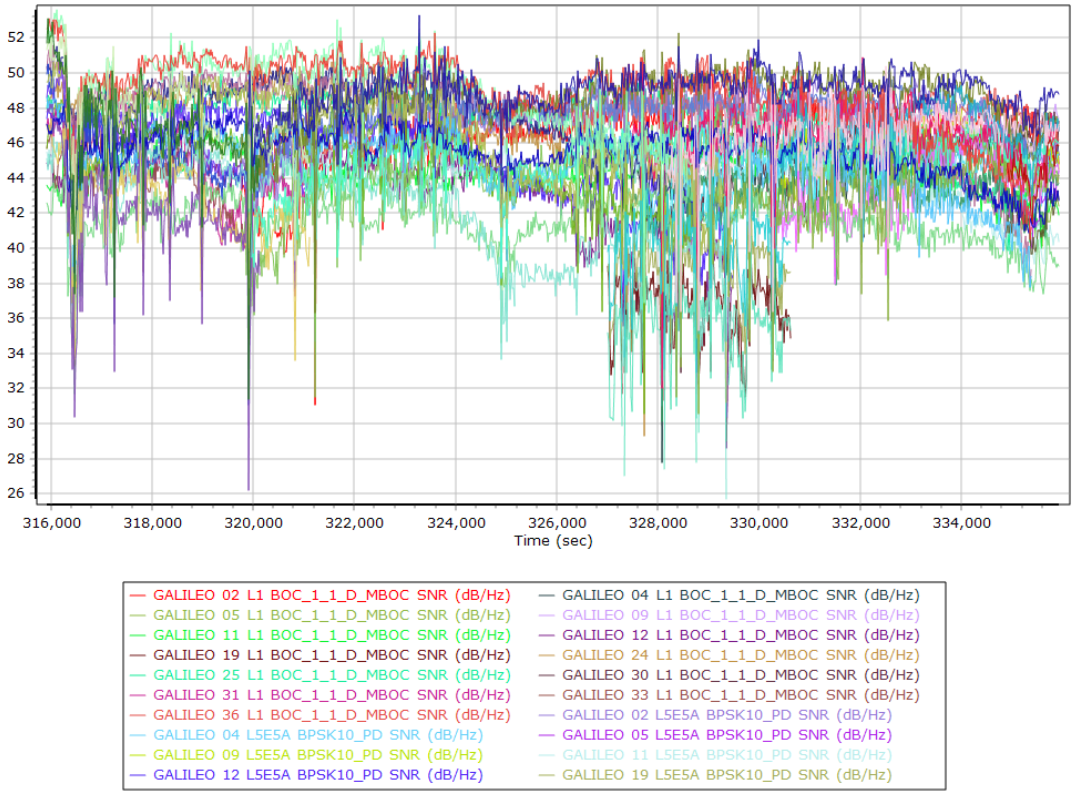
52
50
48
46
44
42
40
38
36
34
32
30
28
26
316,000
318,000
320,000
322,000
324,000
326,000
328,000
330,000
332,000
334,000
Time (sec)
GALILEO 02 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 04 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 05 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 09 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 11 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 12 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 19 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 24 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 25 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 30 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 31 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 33 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 36 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 02 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 04 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 05 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 09 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 11 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 12 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 19 L5E5A BPSK10_PD SNR (dB/Hz)

Smoothed Trajectory Information

Top View

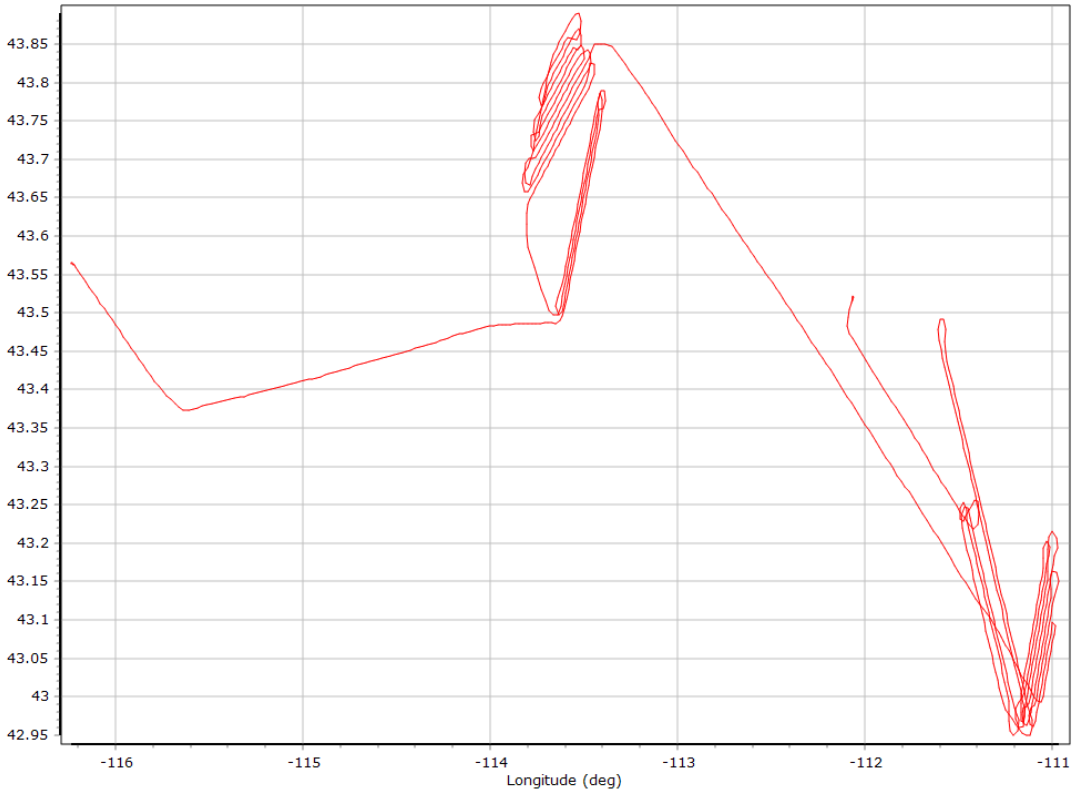

Altitude

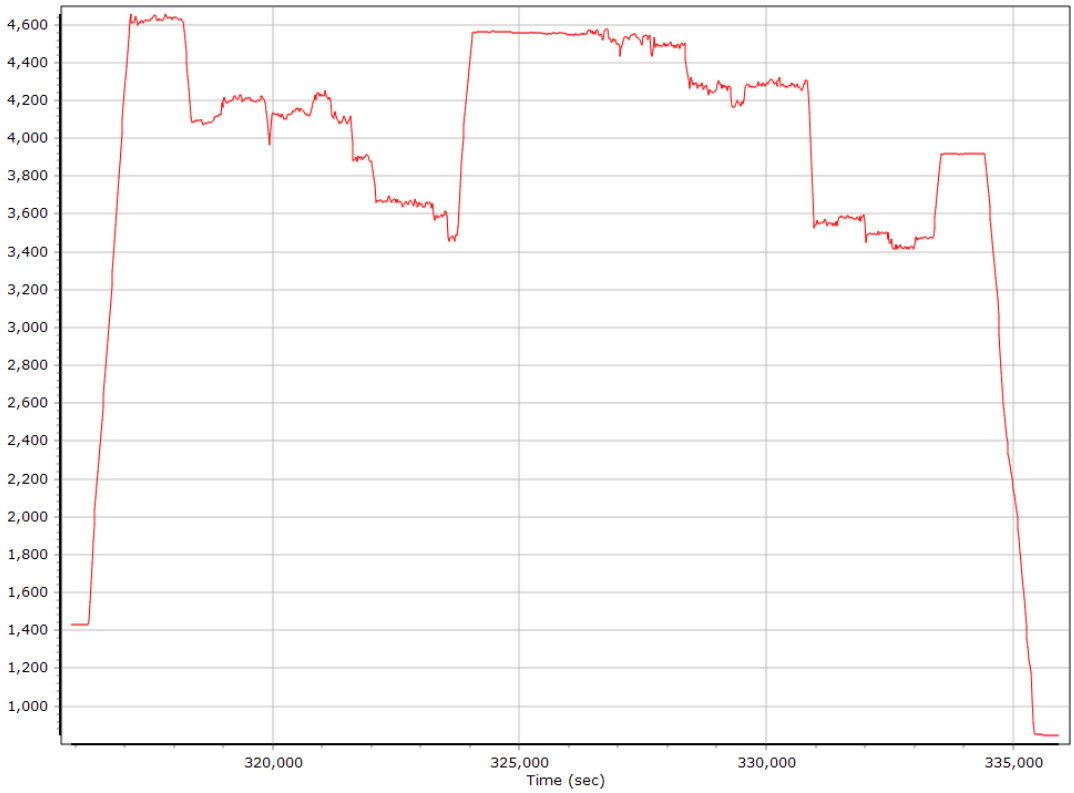

Roll/Pitch

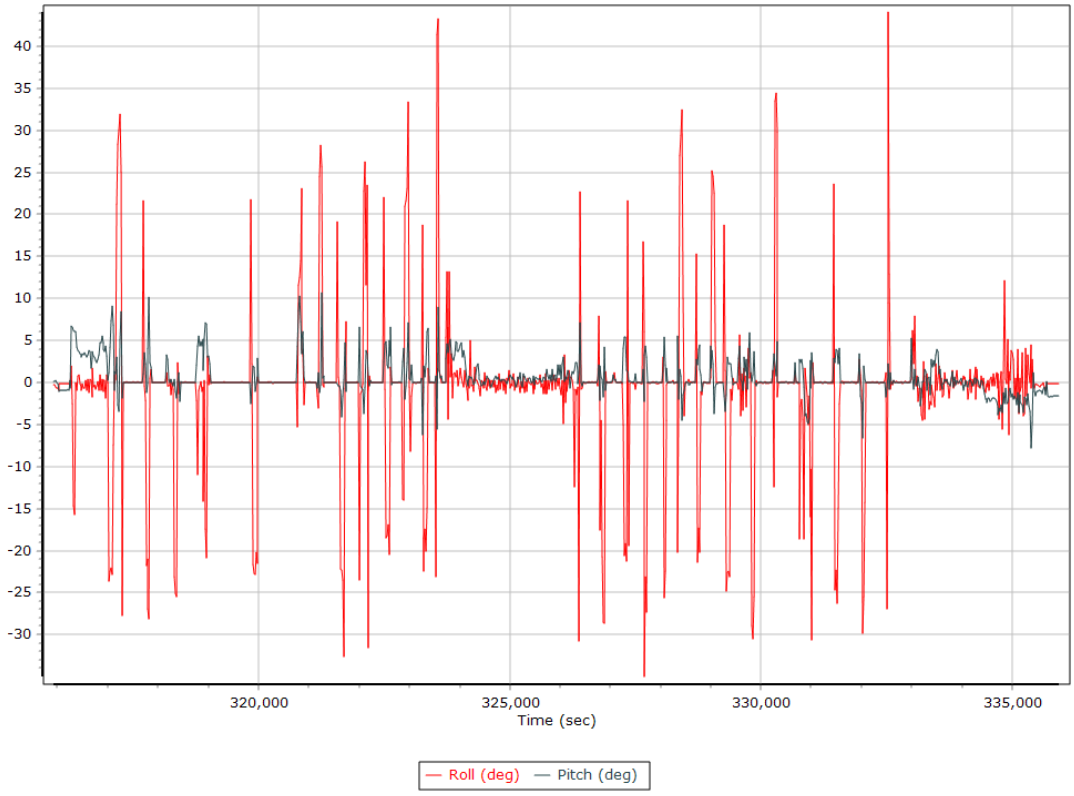

Heading

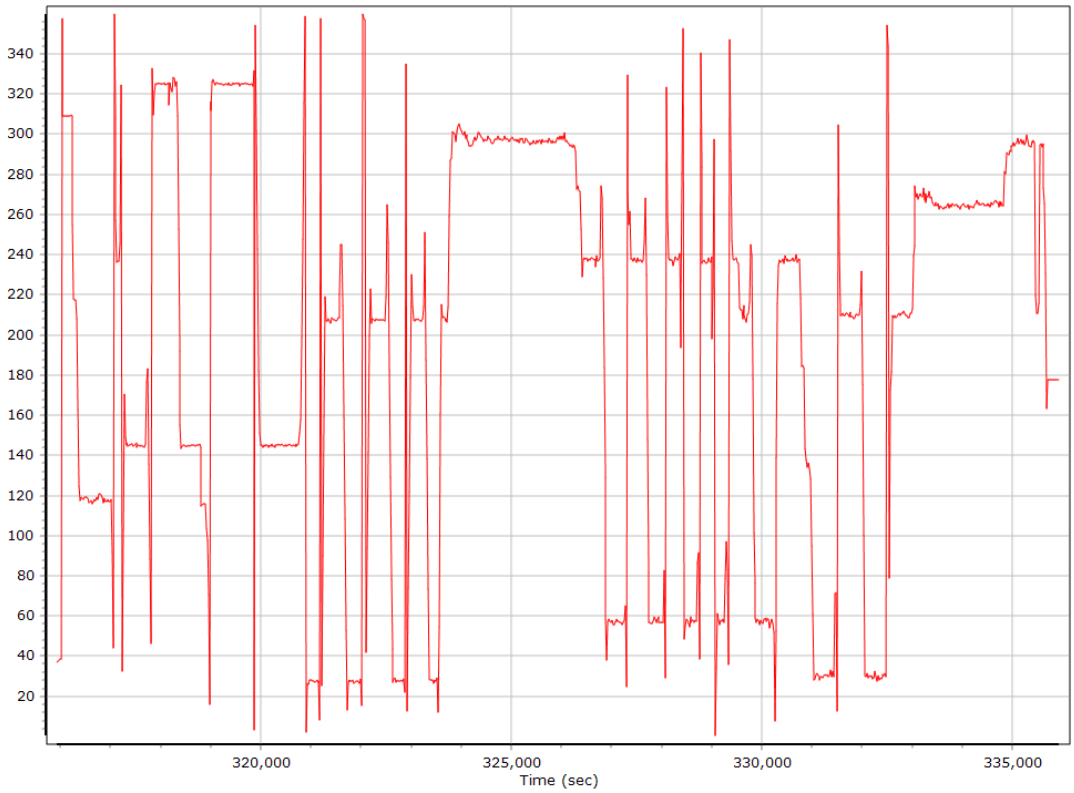

North/East Velocity

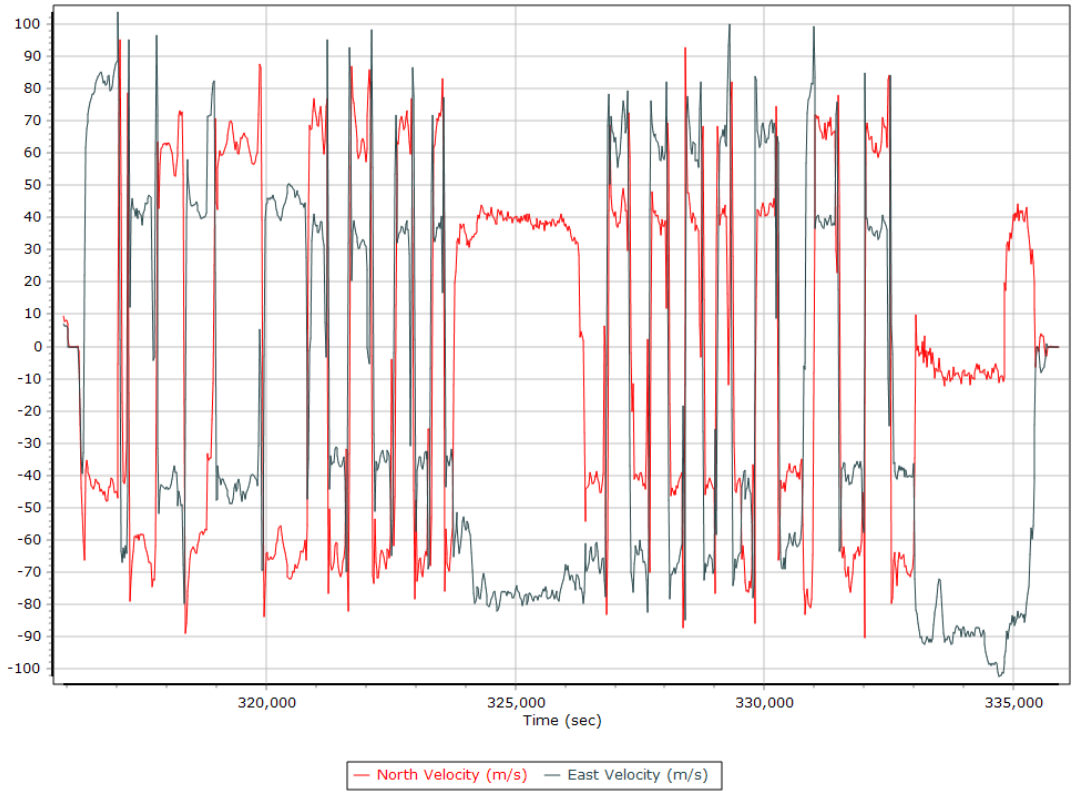

Down Velocity

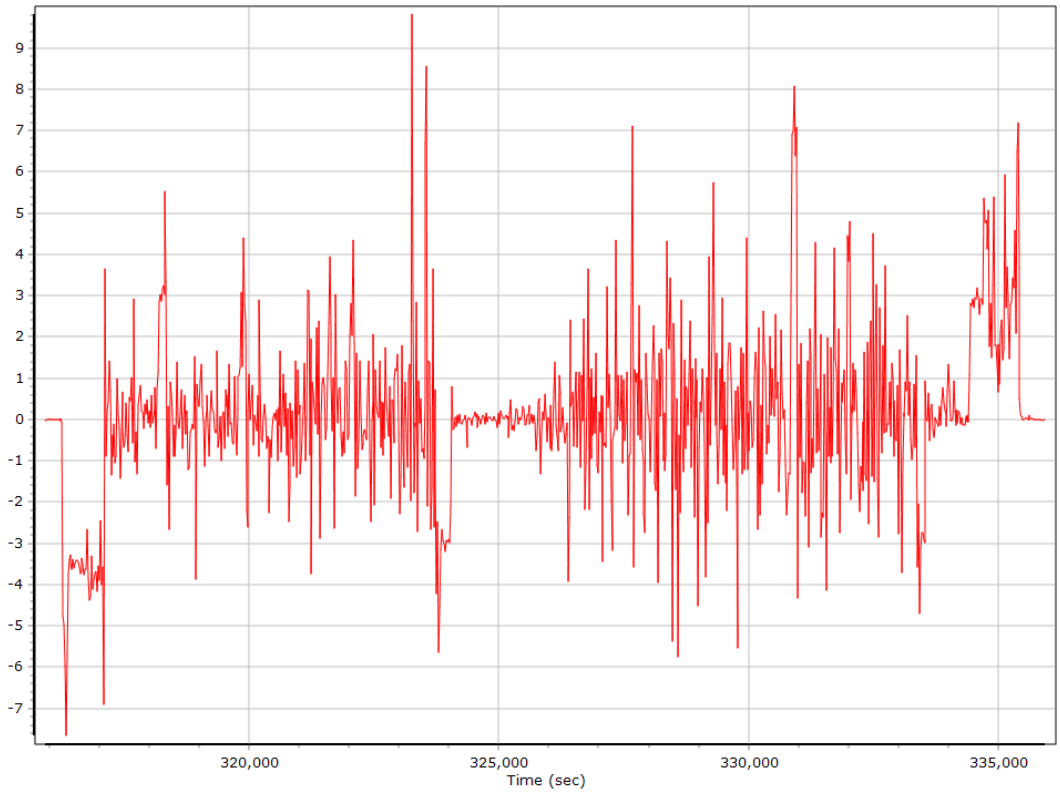

Total Speed

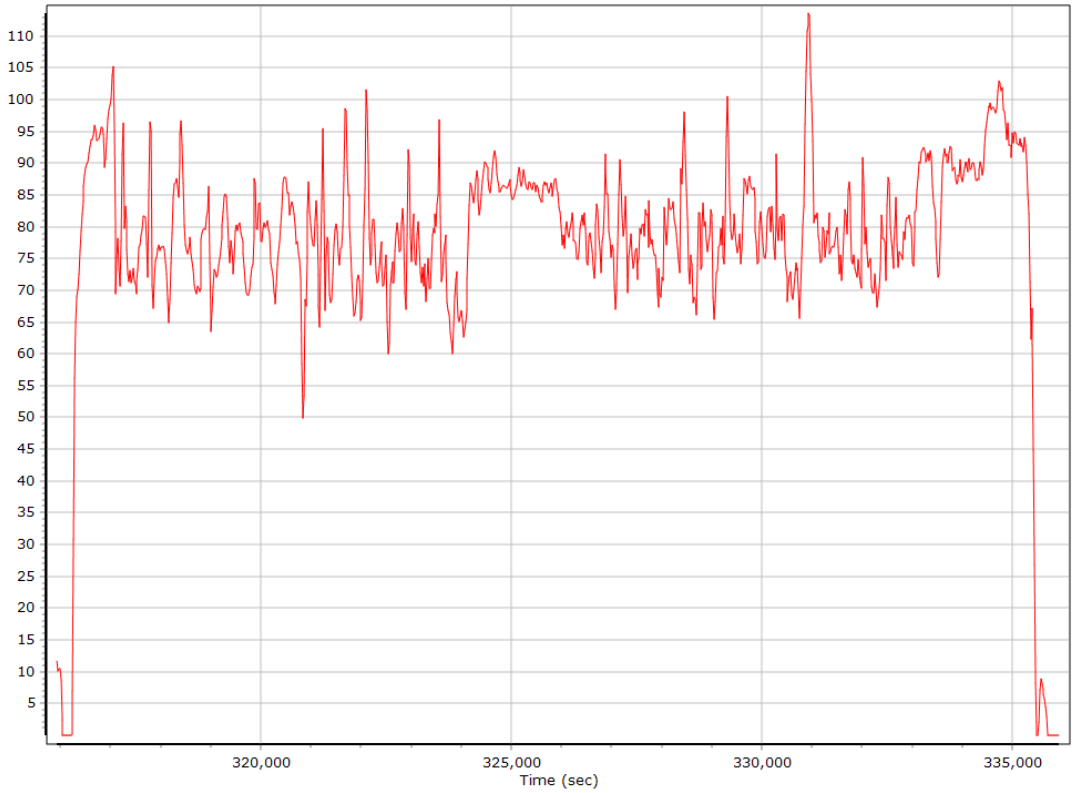

Ground Speed

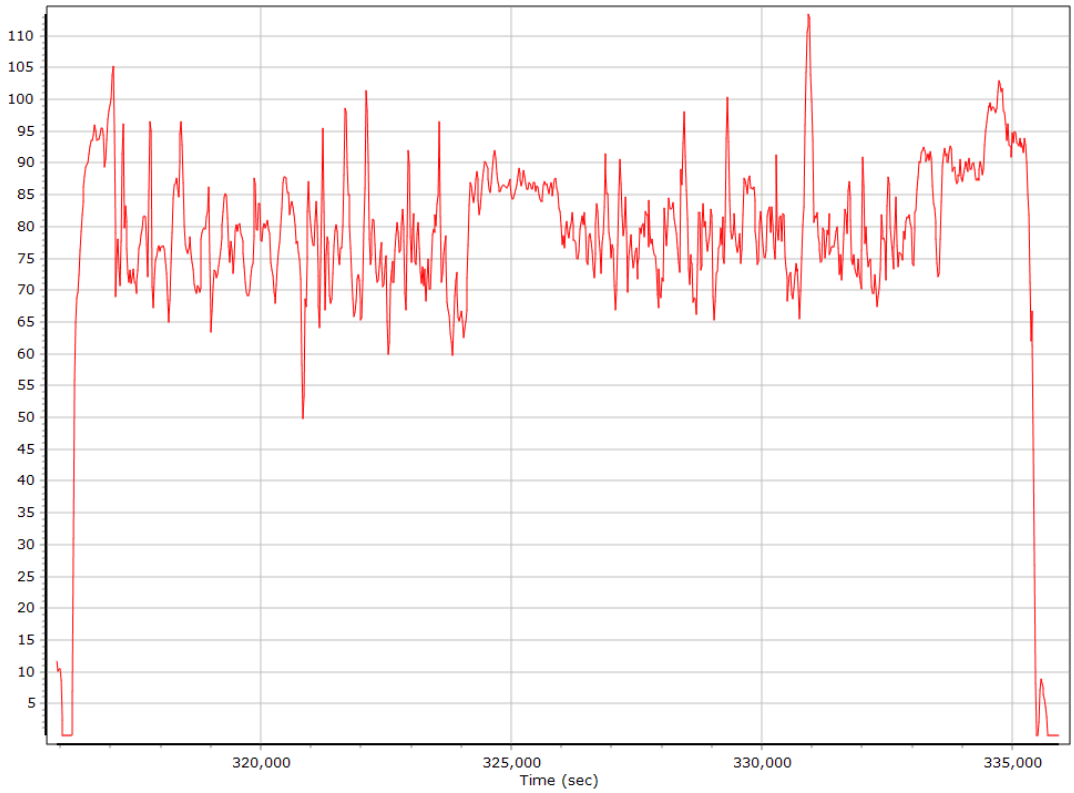

Body Acceleration

Total Body Acceleration

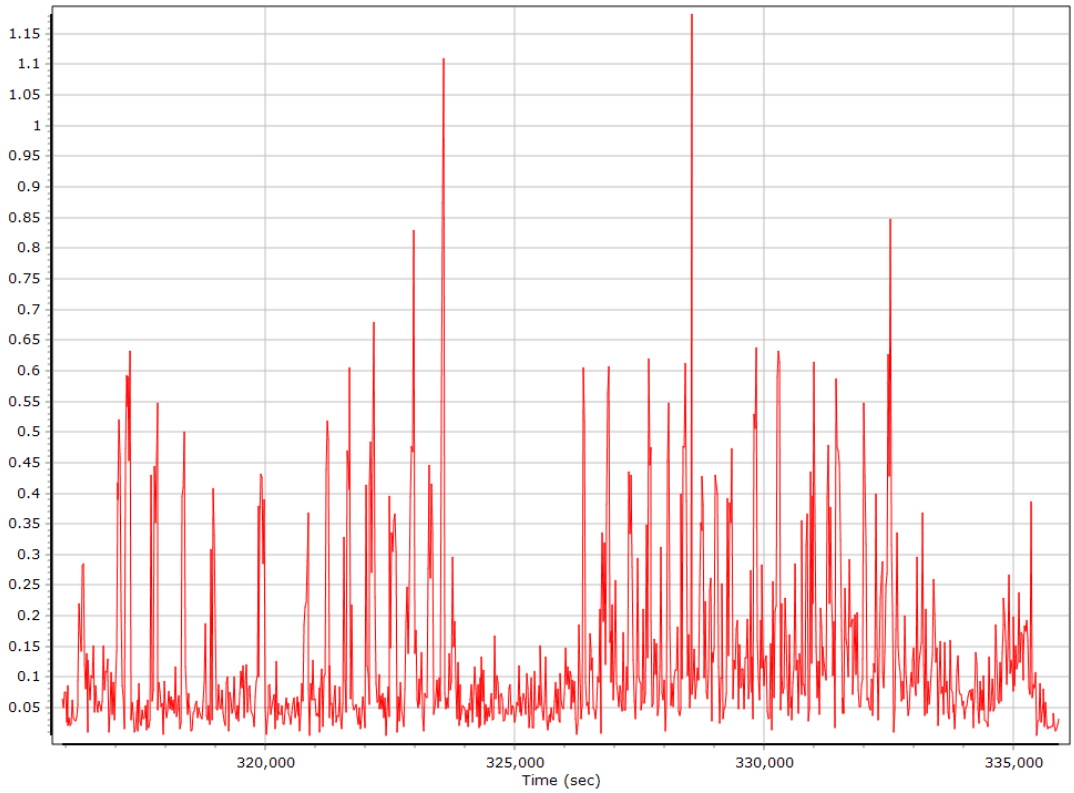

Body Angular Rate

Forward Processed Trajectory Information

Top View

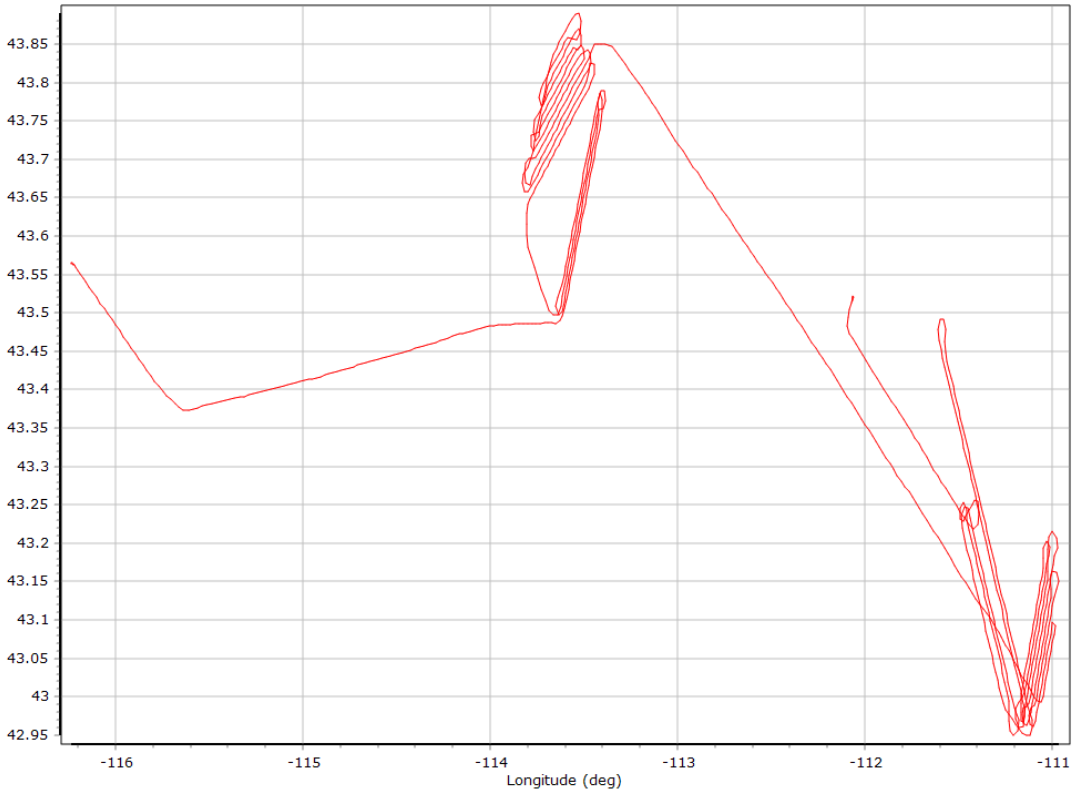

Altitude

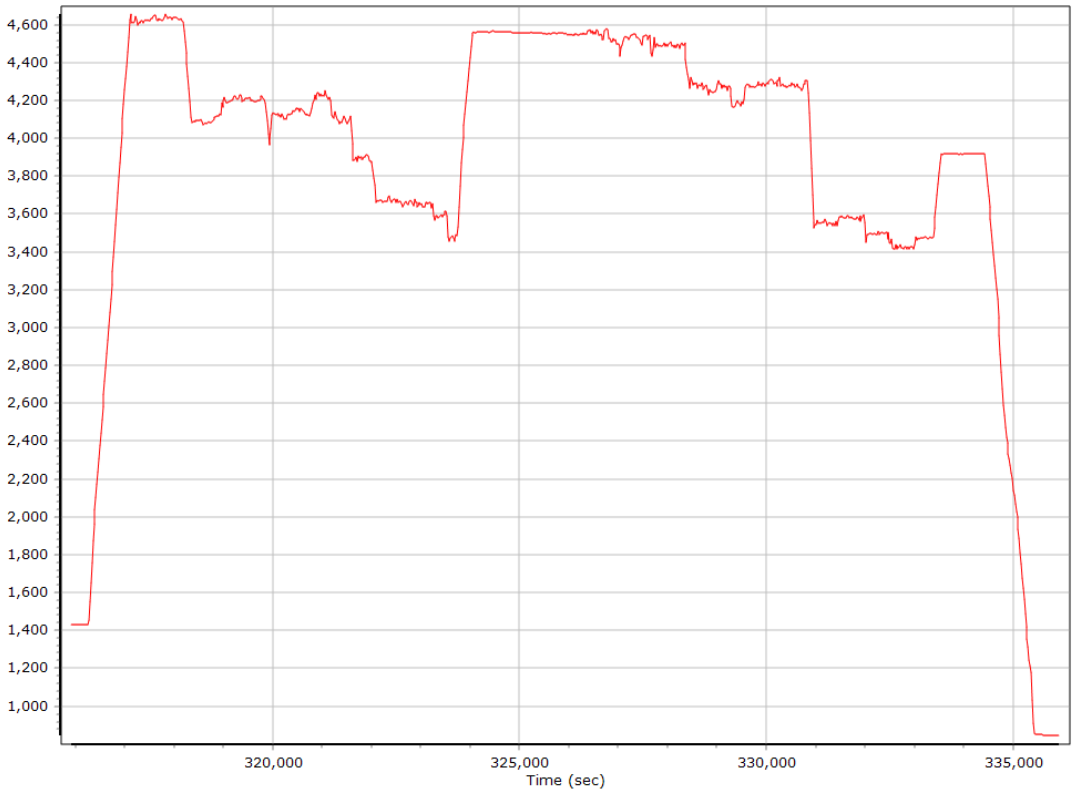

Roll/Pitch

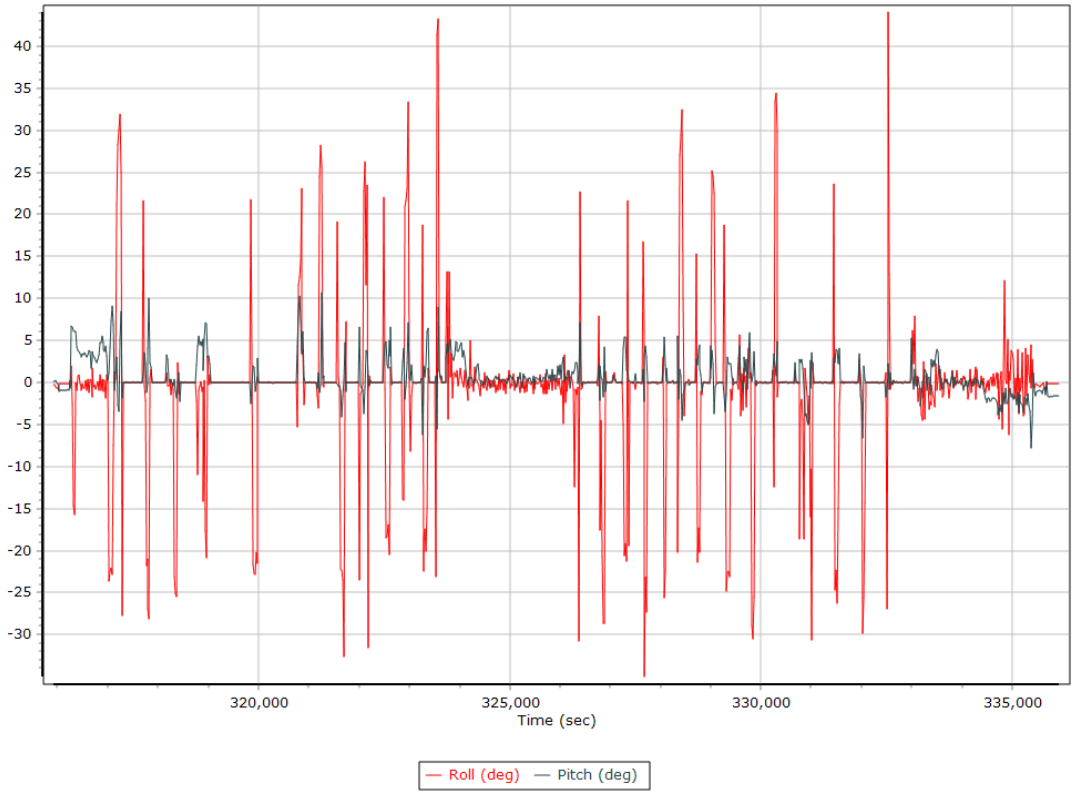

Heading

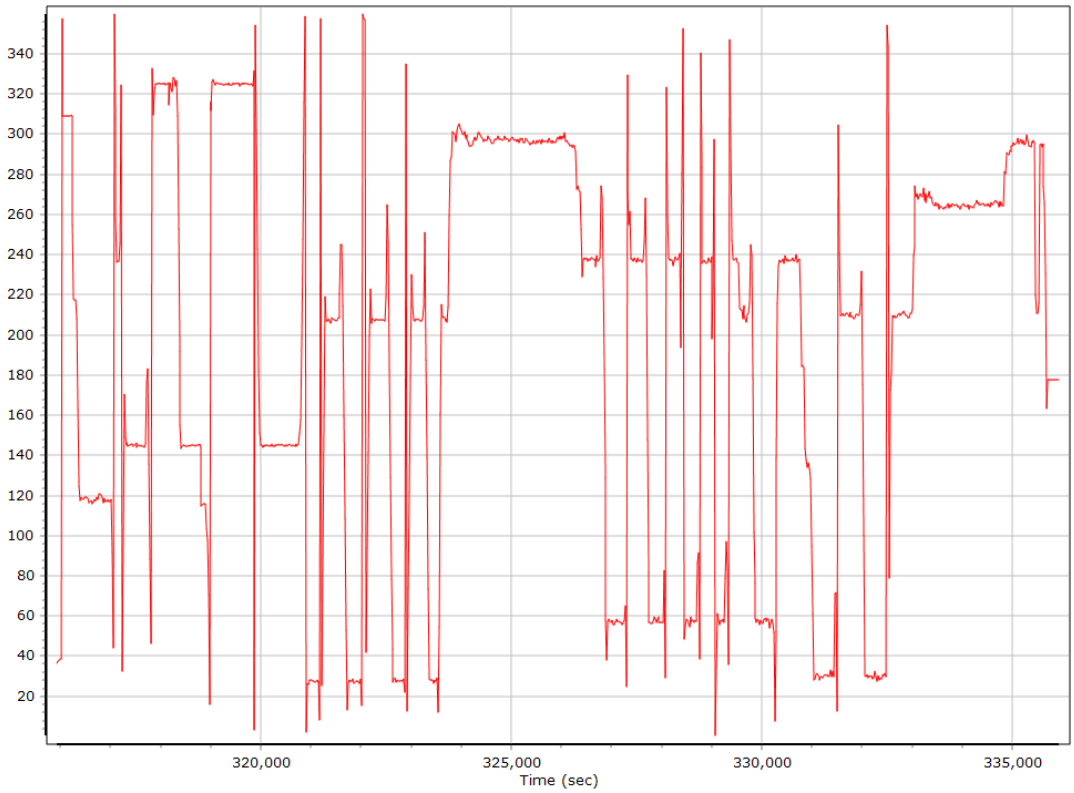

North/East Velocity

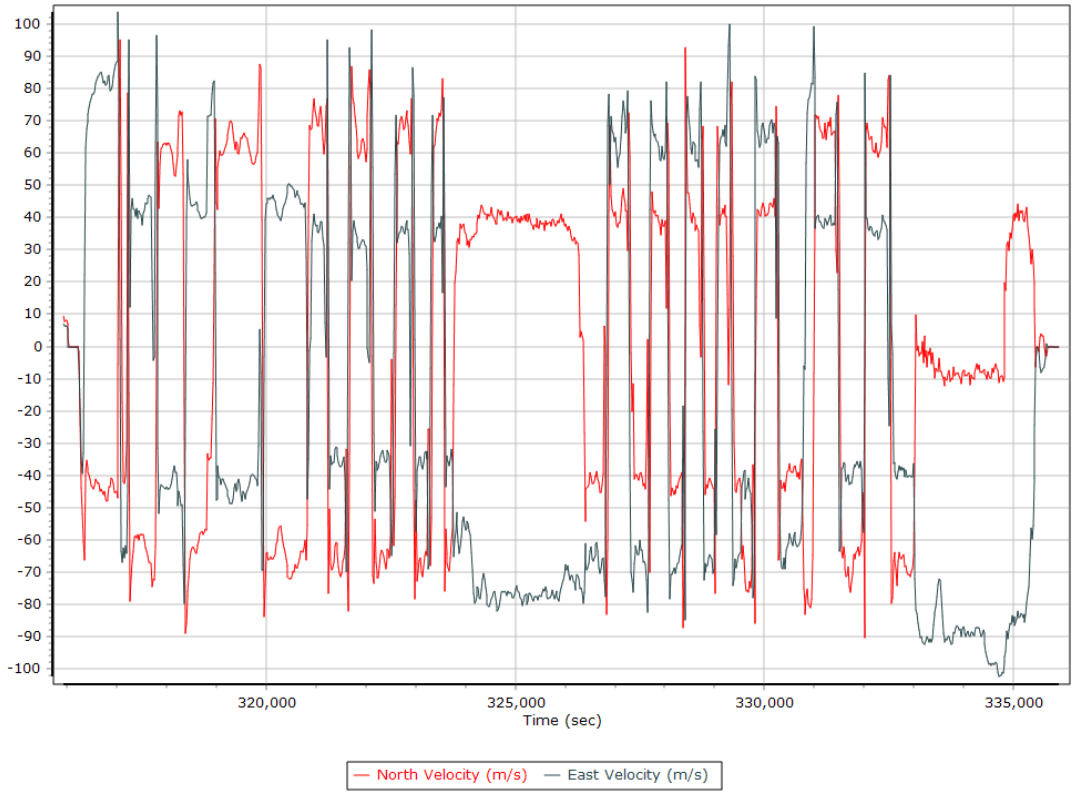

Down Velocity

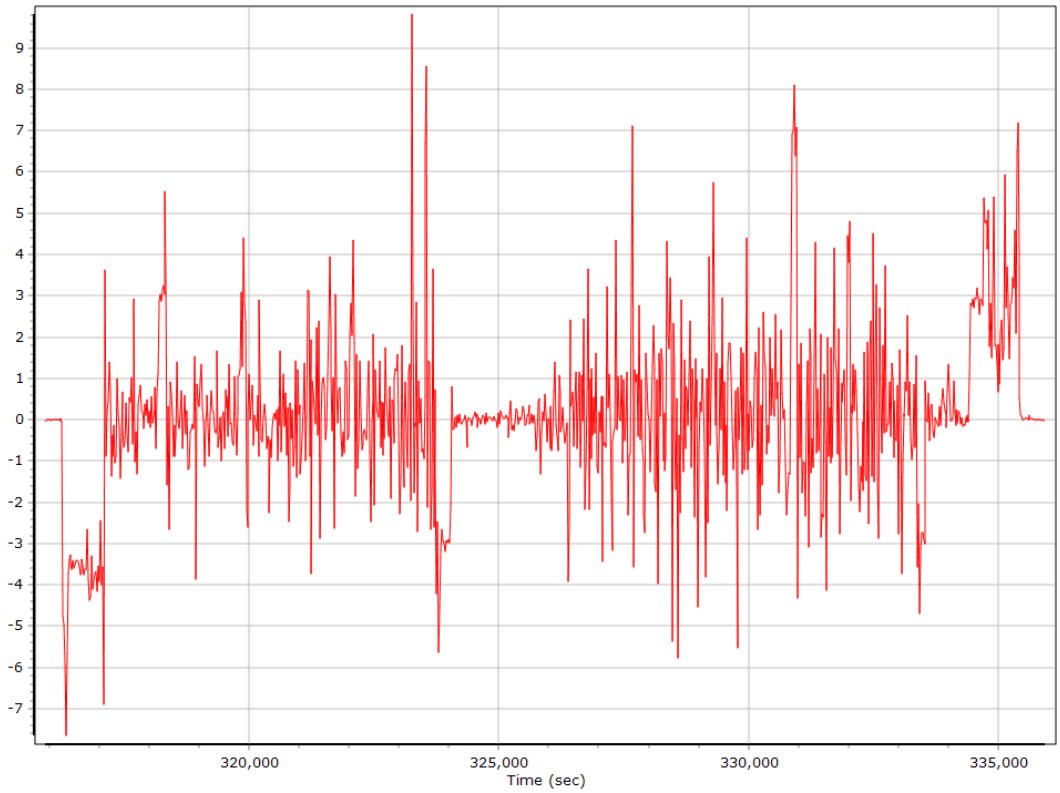

Total Speed

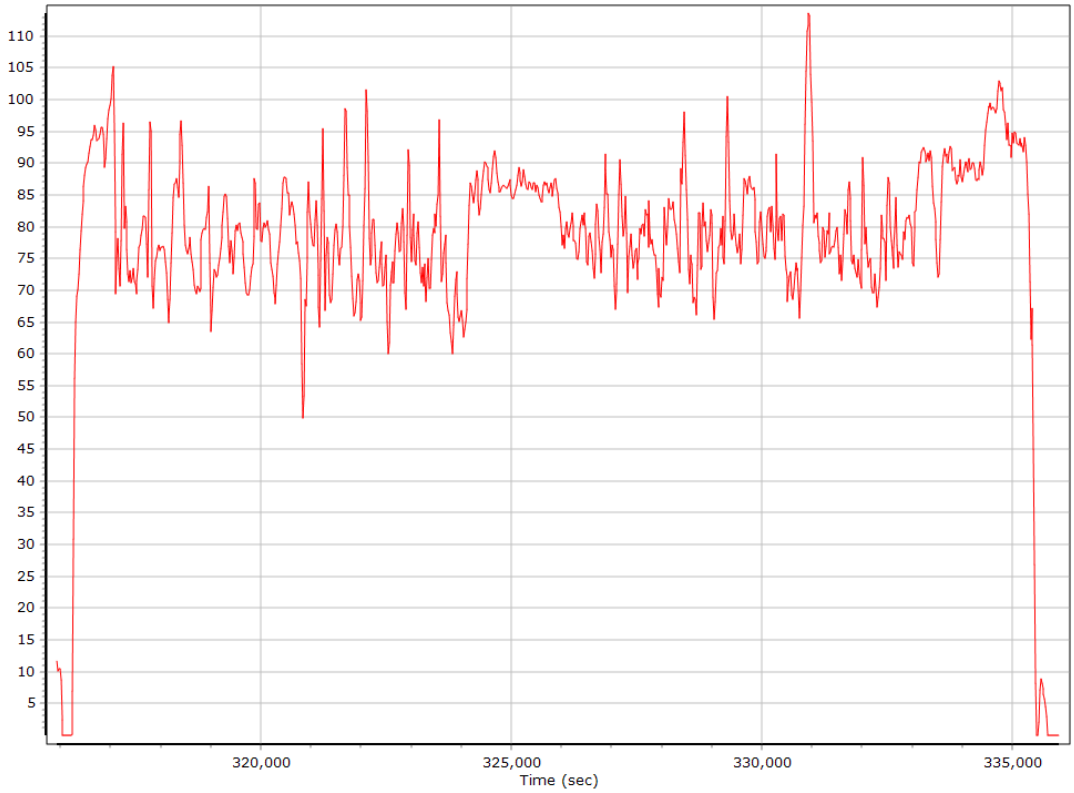

Ground Speed

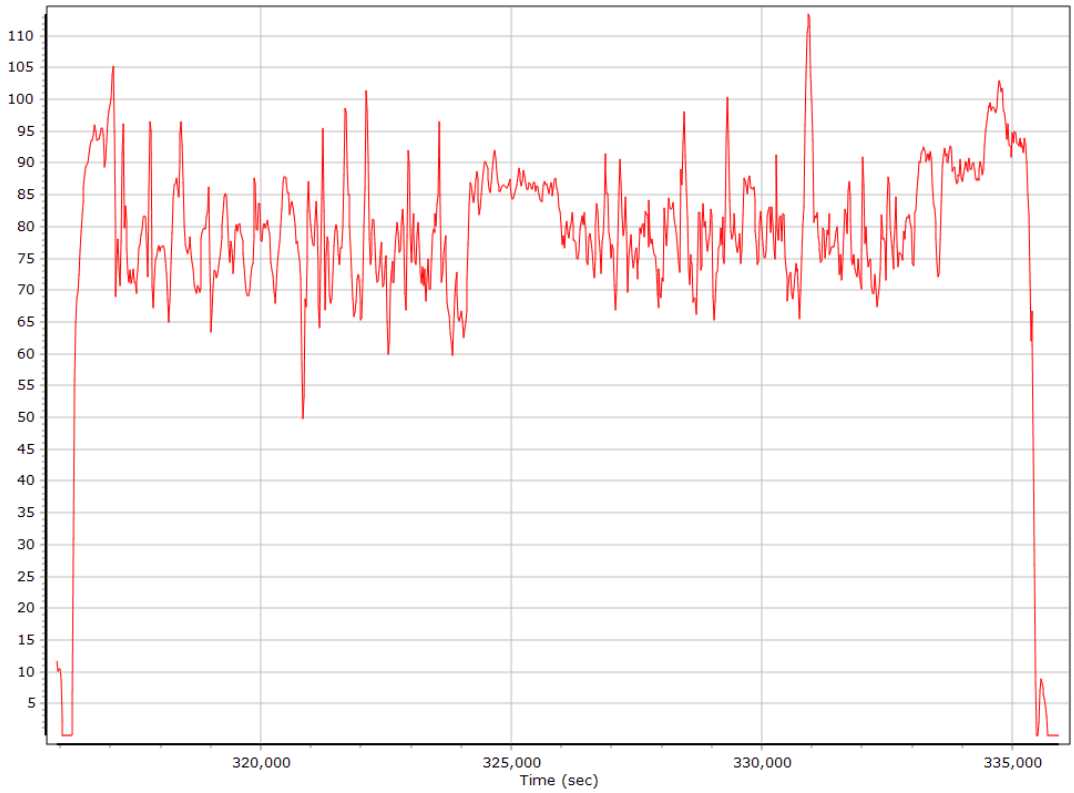

Body Acceleration

Total Body Acceleration

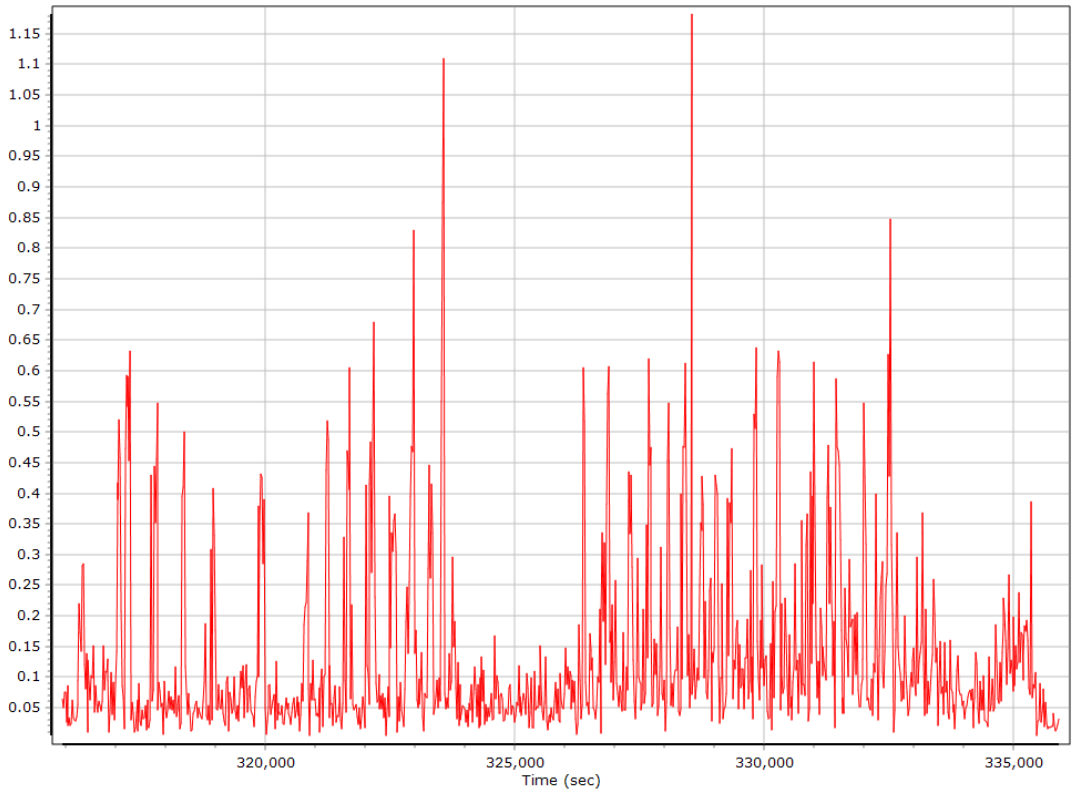

Body Angular Rate

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion Trimble RTX Nav		
Stabilized mount	True		
Processing start time	315231.000 (07/08/2020 15:33:51)		
Processing end time	335935.000 (07/08/2020 21:18:55)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	-0.215	-0.027	-0.964
Gimbal to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm (m)

X Reference-Primary GNSS Lever Arm (m)

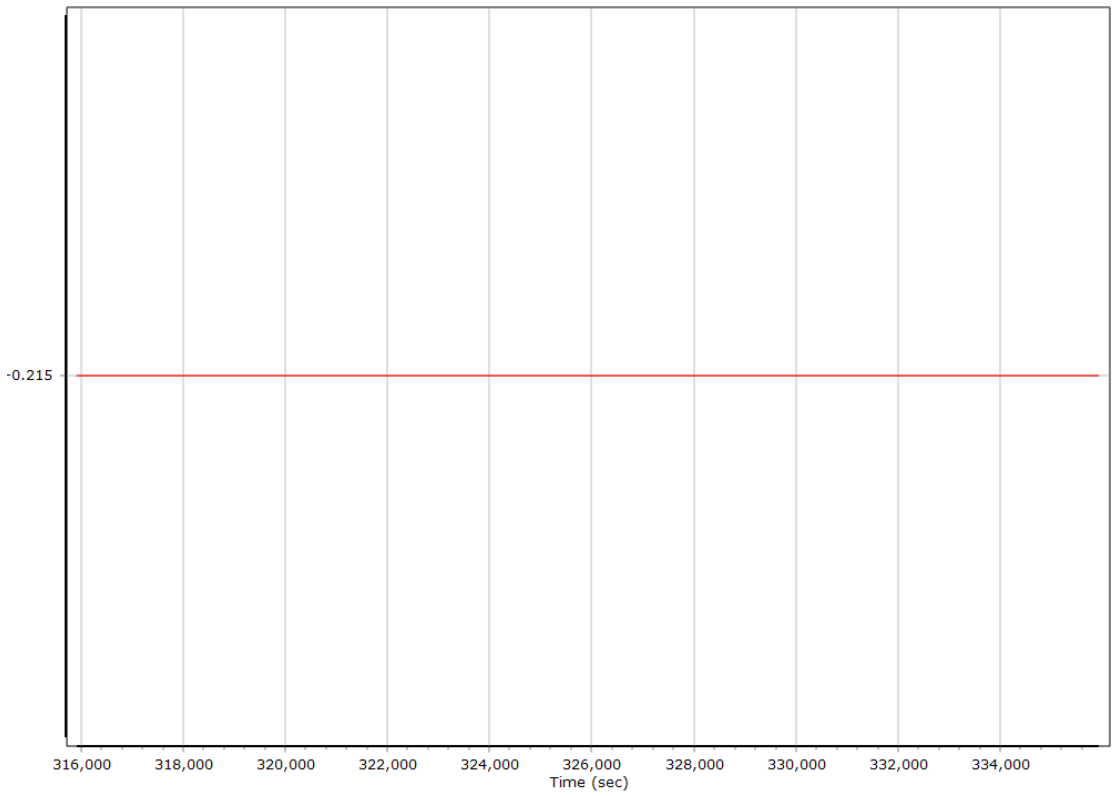

Y Reference-Primary GNSS Lever Arm (m)

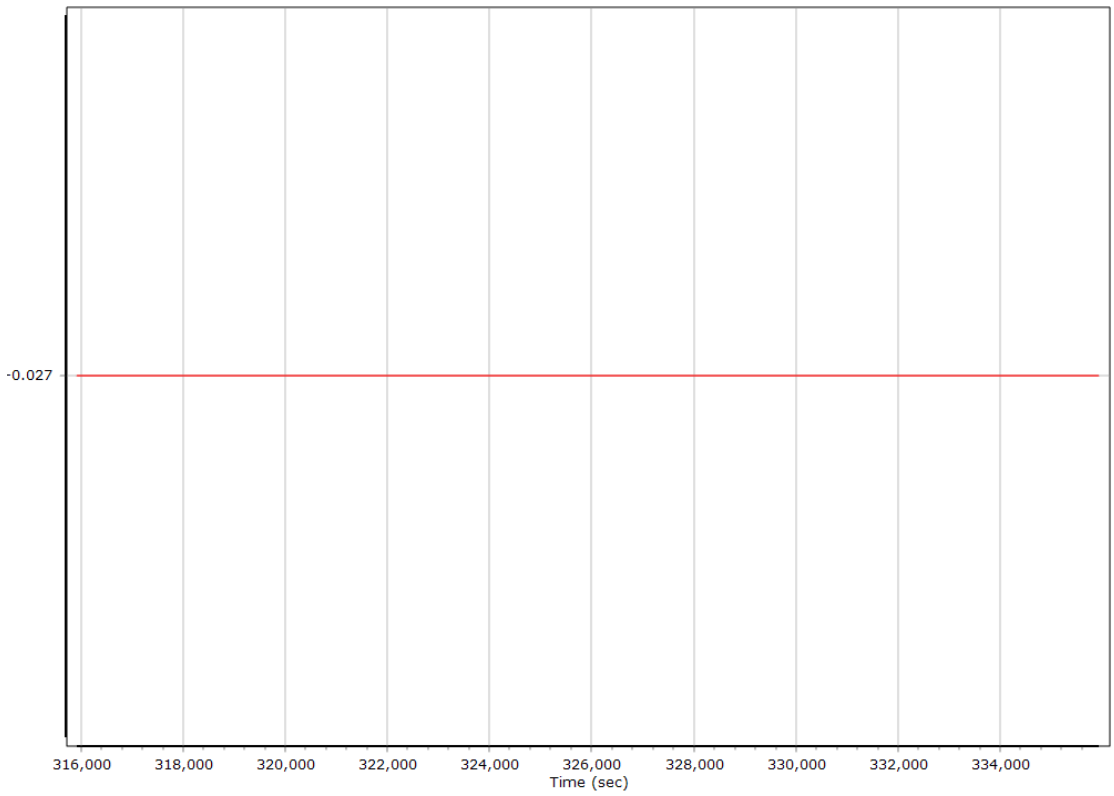

Z Reference-Primary GNSS Lever Arm (m)

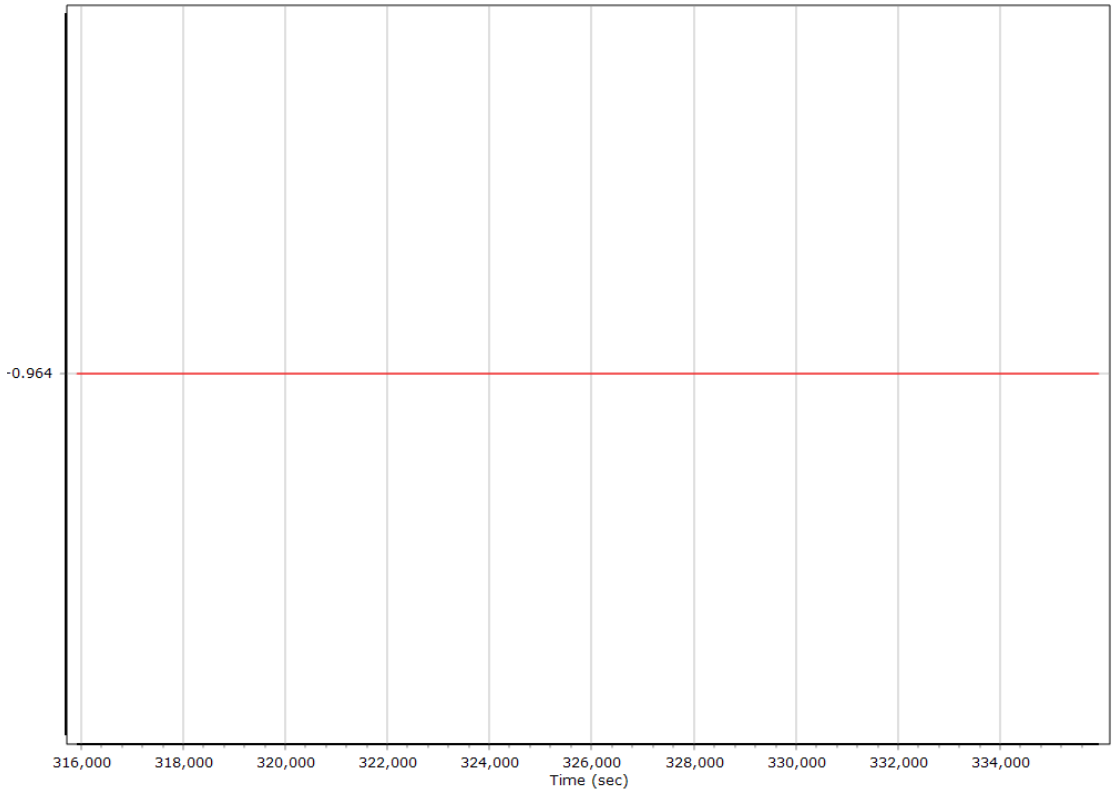

Reference-Primary GNSS Lever Arm Figure of Merit

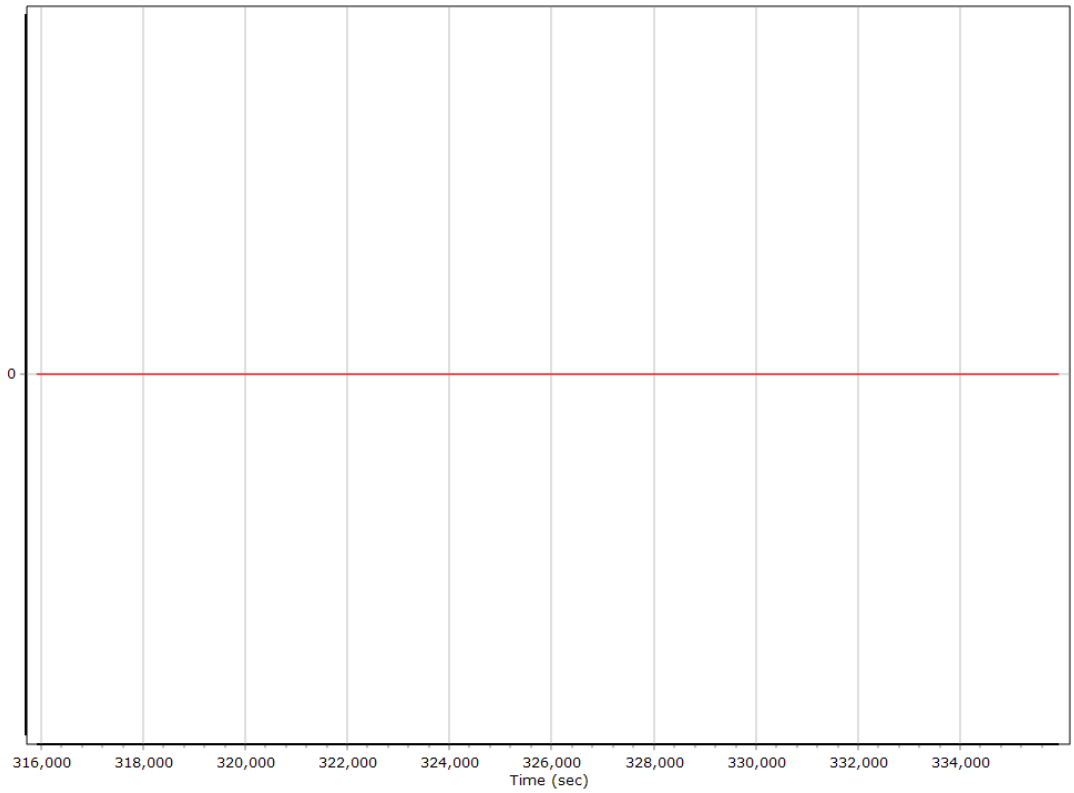

IN-Fusion QC

Forward Processed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

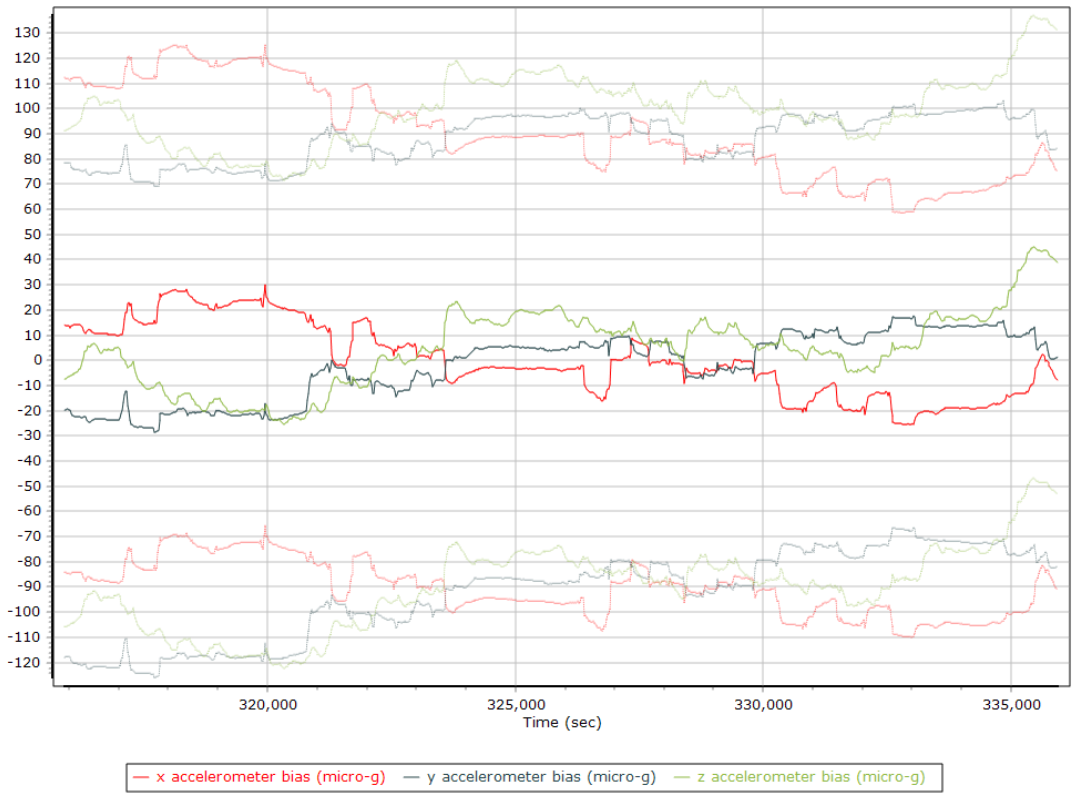

X Accelerometer Bias (micro-g)

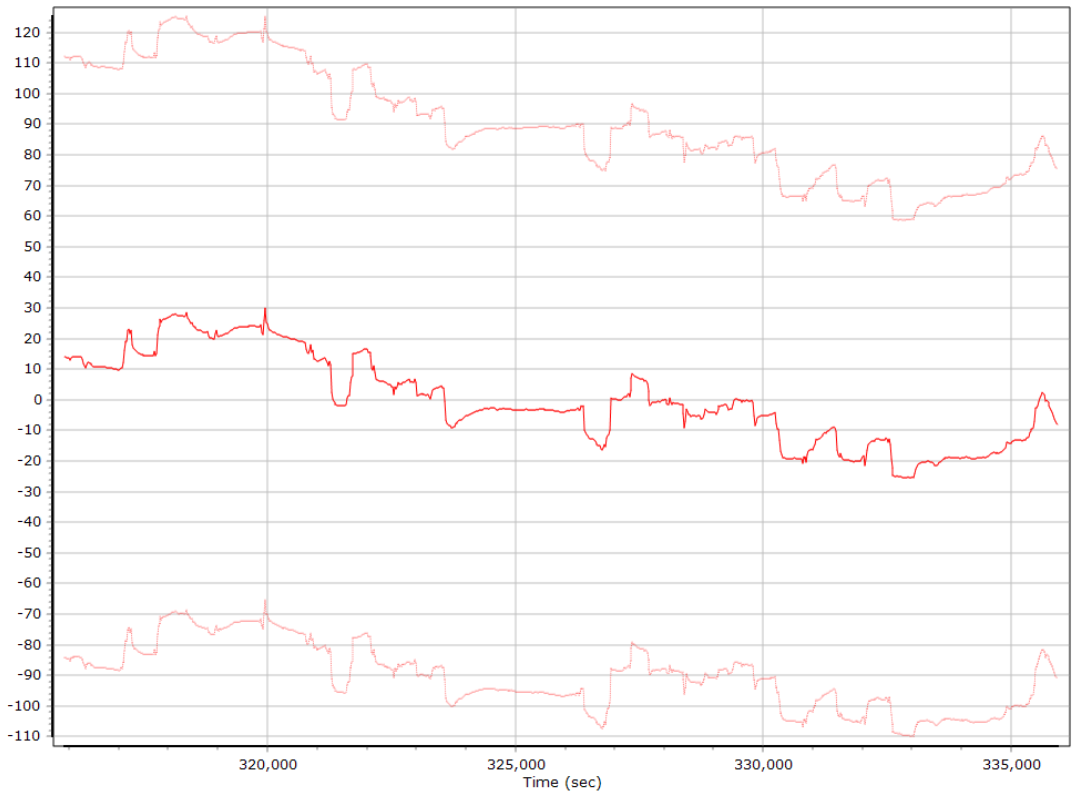

Y Accelerometer Bias (micro-g)

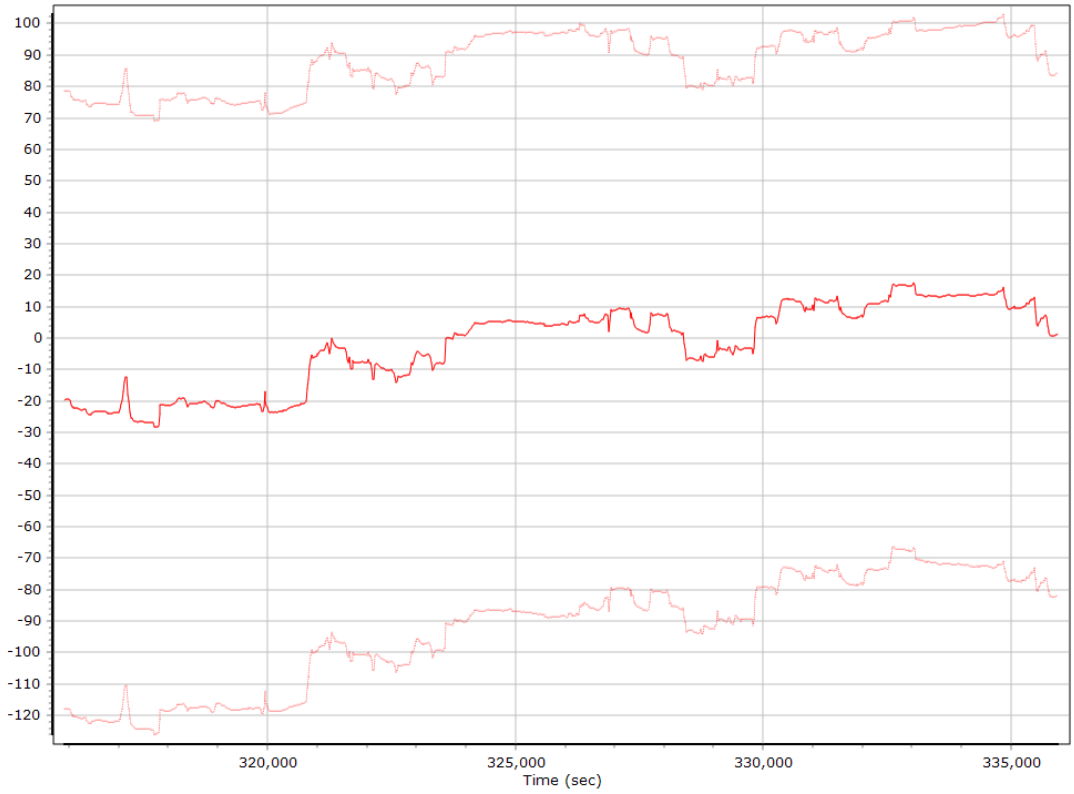

Z Accelerometer Bias (micro-g)

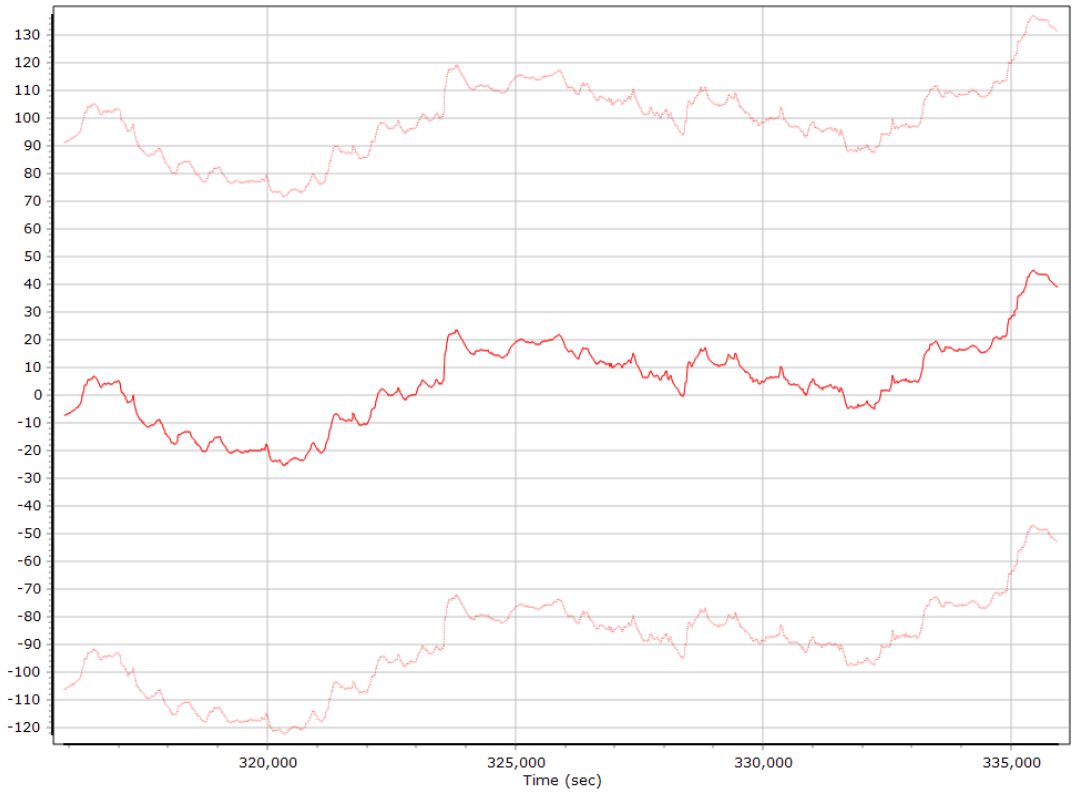

Accelerometer Scale Error (ppm)

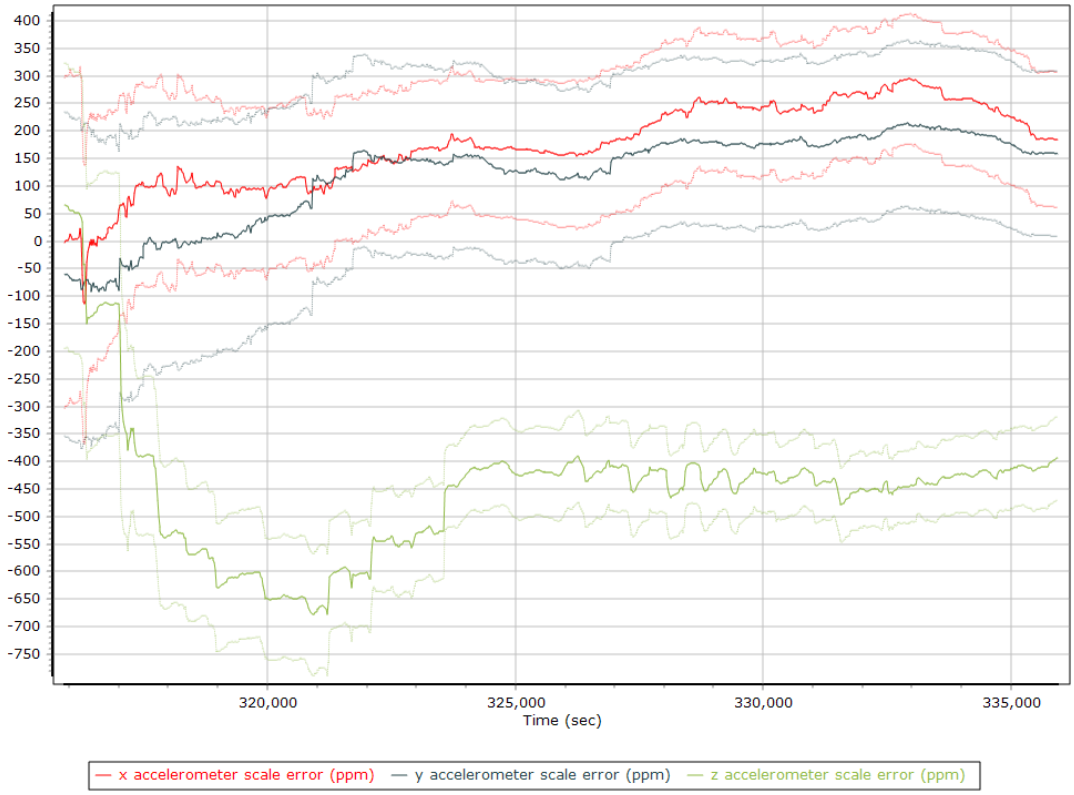

X Accelerometer Scale Error (ppm)

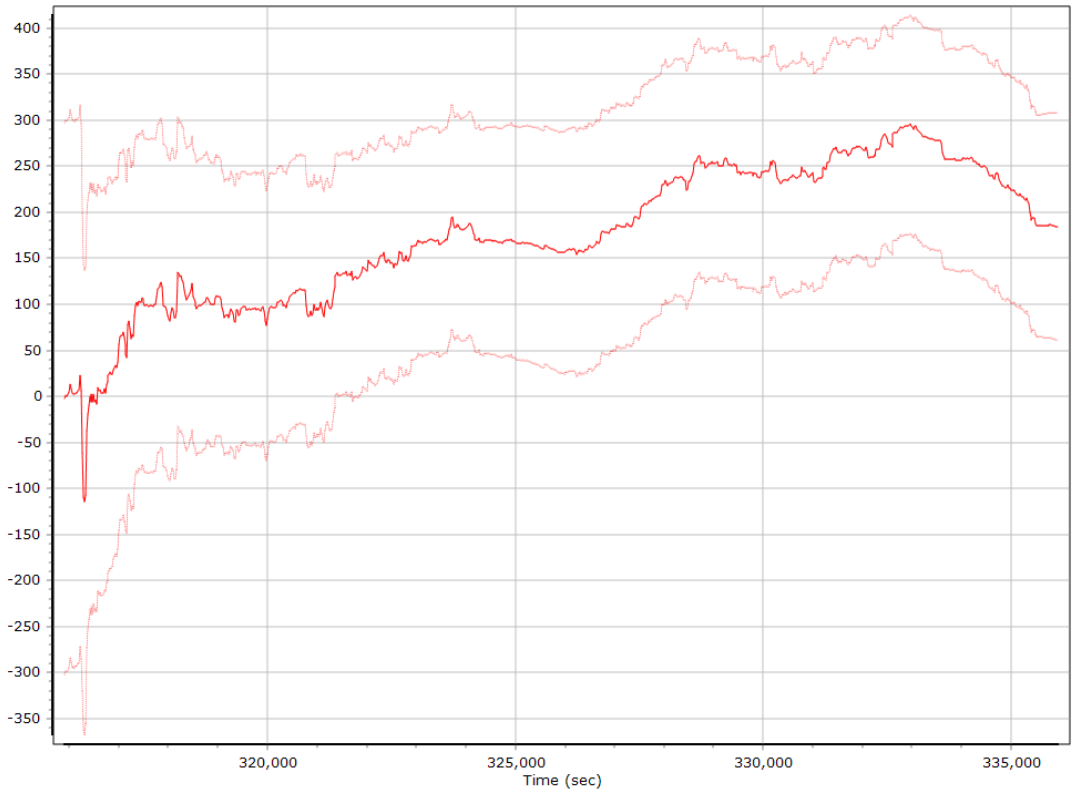

Y Accelerometer Scale Error (ppm)

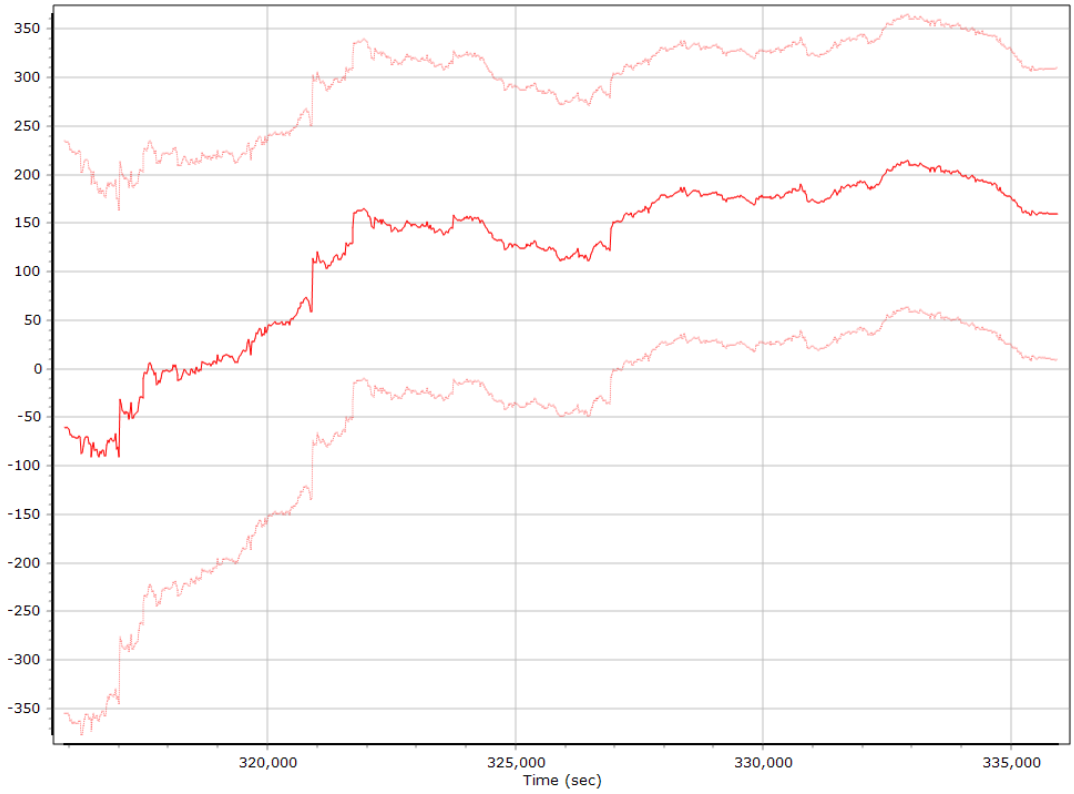

Z Accelerometer Scale Error (ppm)

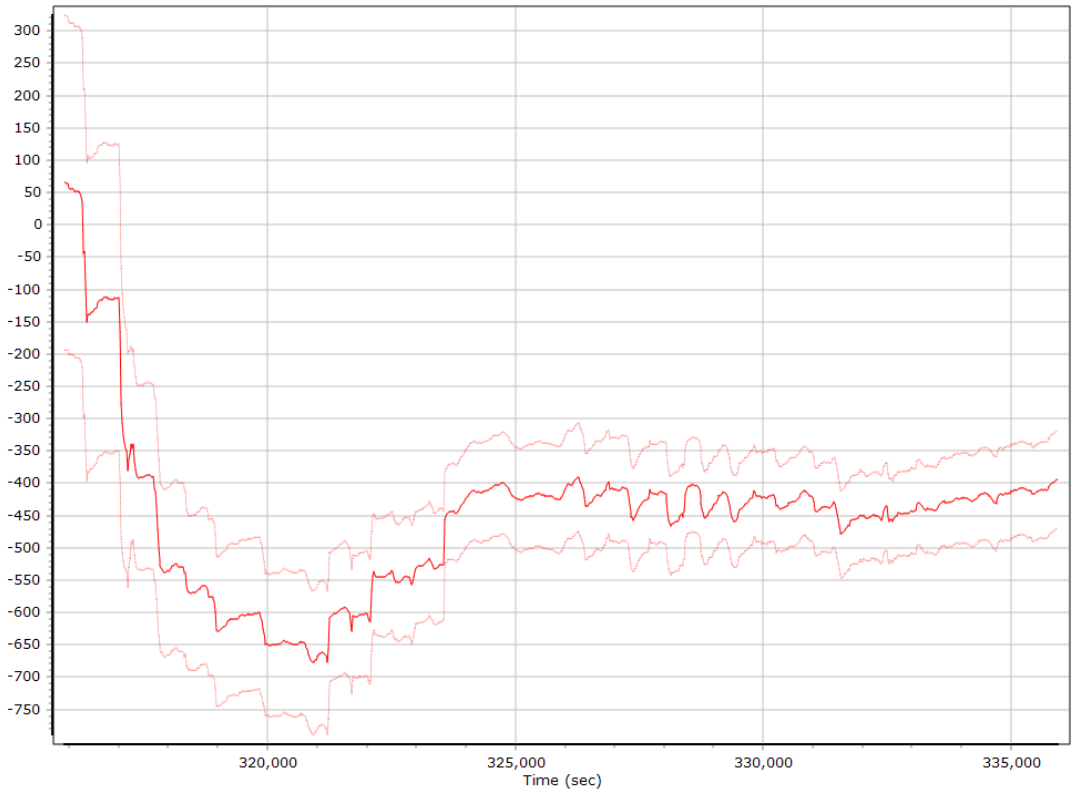

Gyro Bias (deg/h)

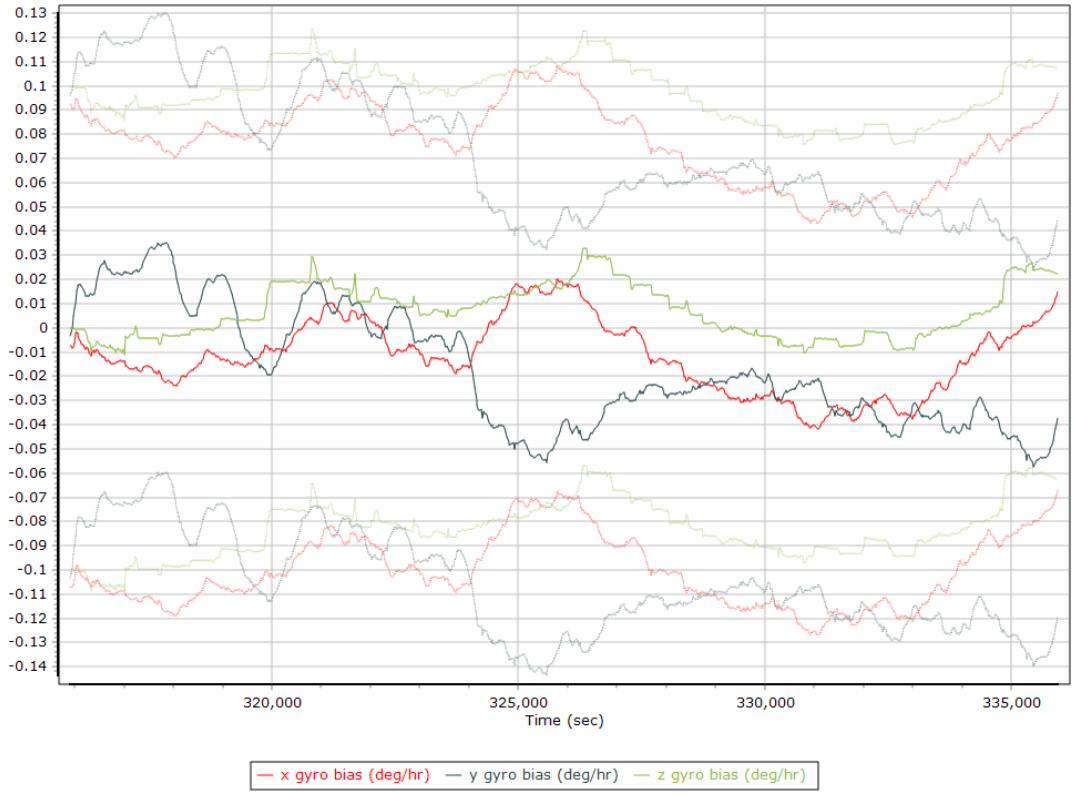

X Gyro Bias (deg/h)

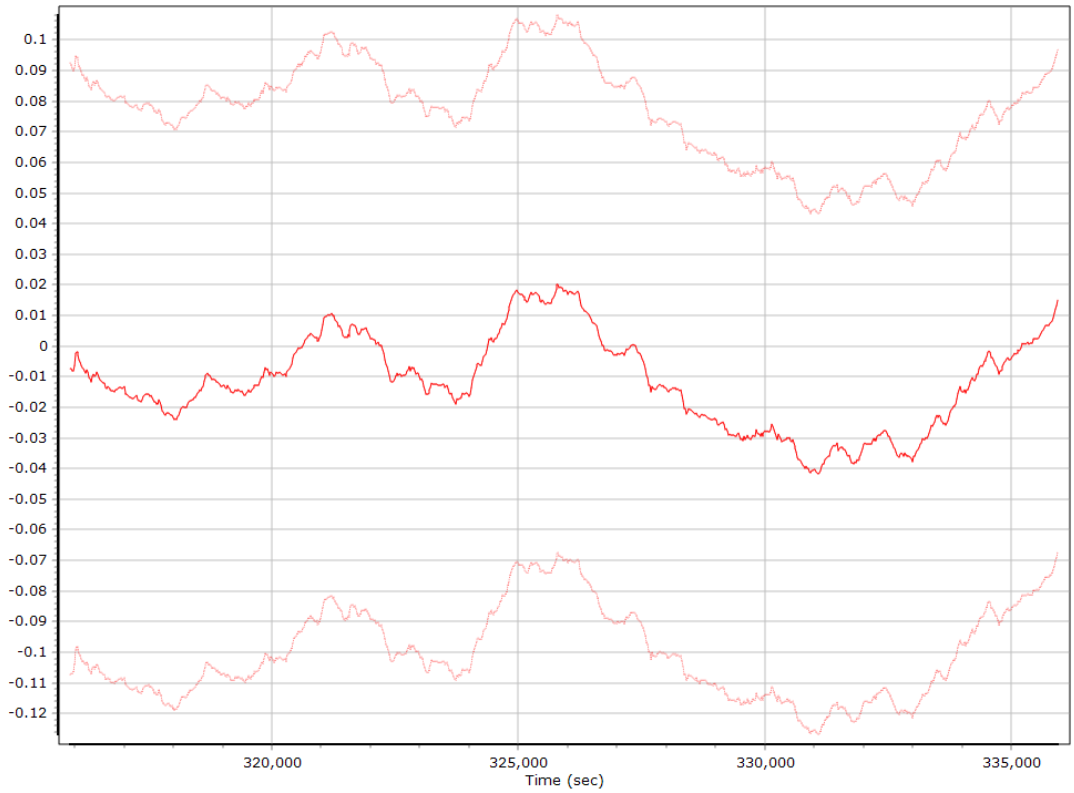

Y Gyro Bias (deg/h)

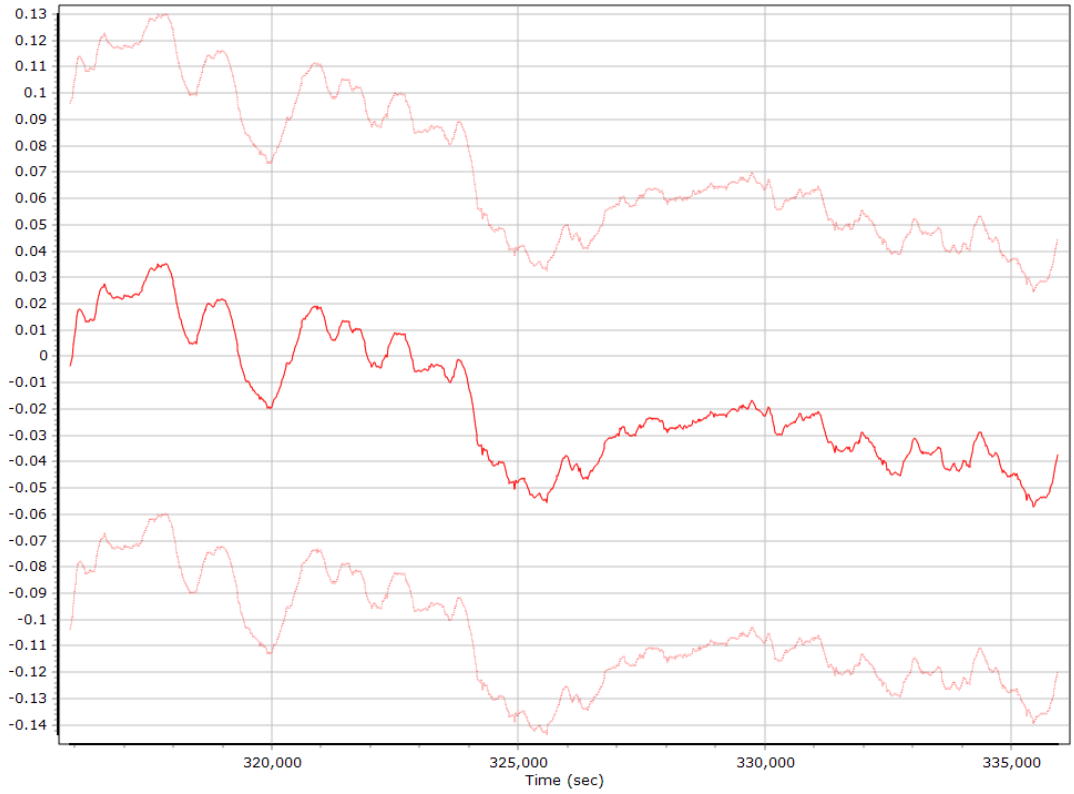

Z Gyro Bias (deg/h)

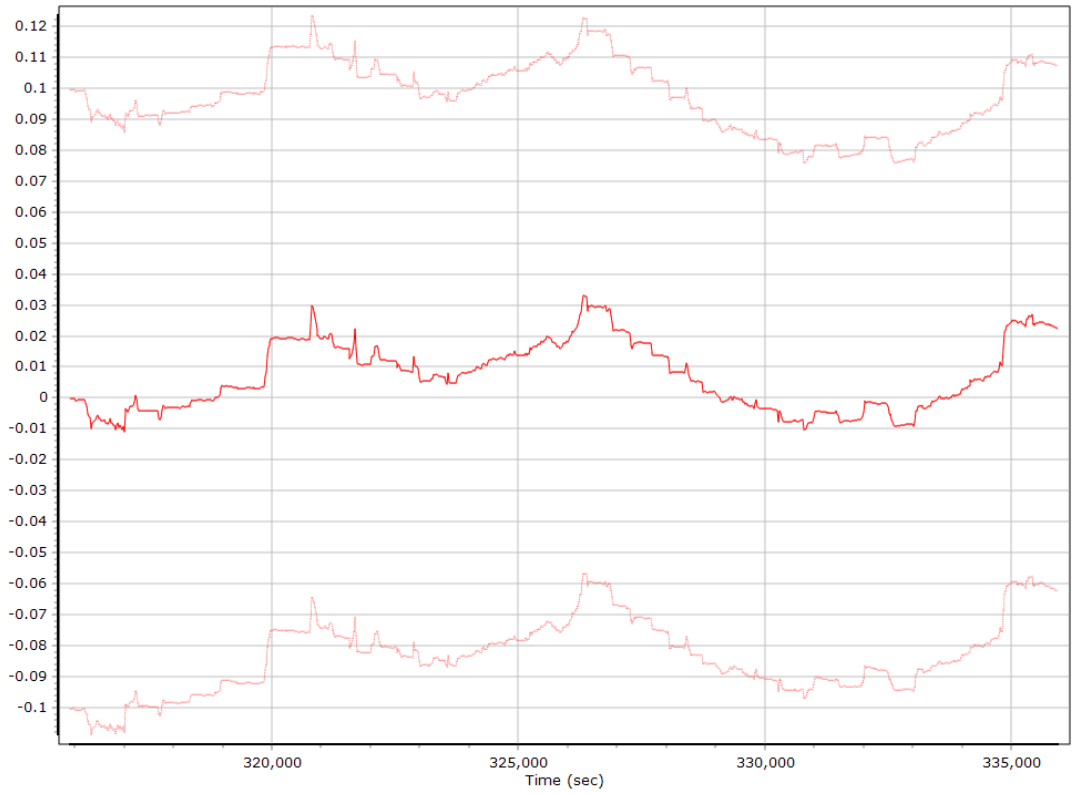

Gyro Scale Error (ppm)

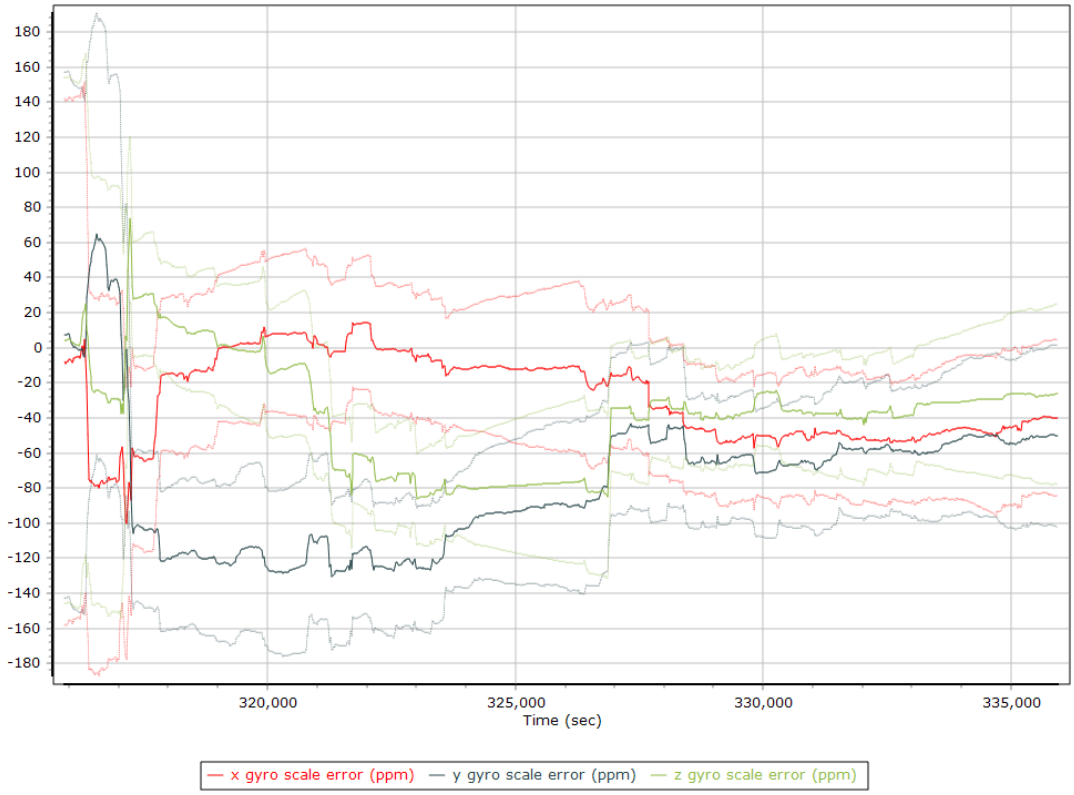

X Gyro Scale Error (ppm)

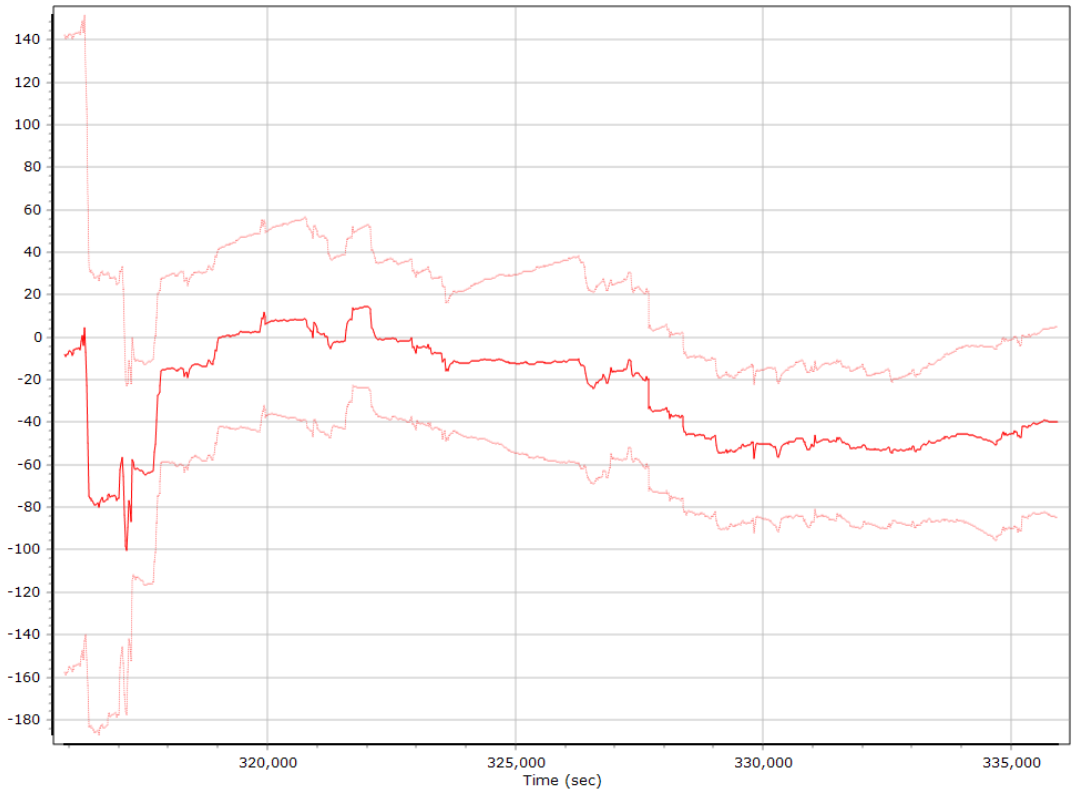

Y Gyro Scale Error (ppm)

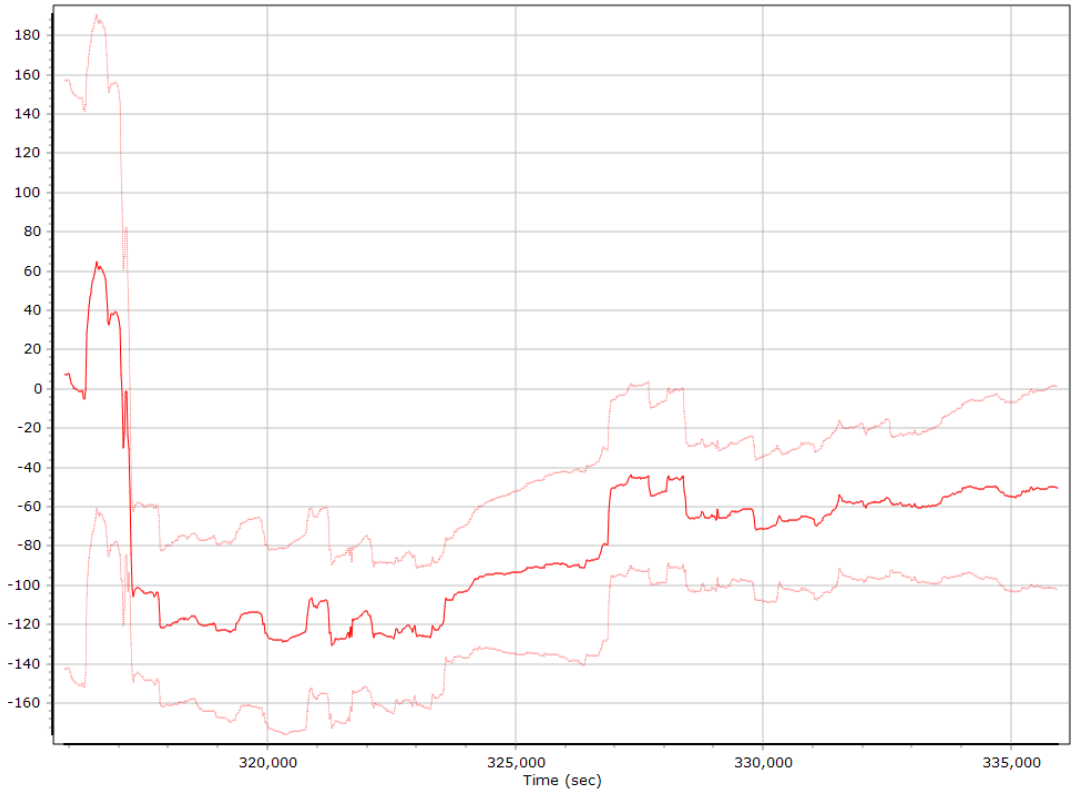

Z Gyro Scale Error (ppm)

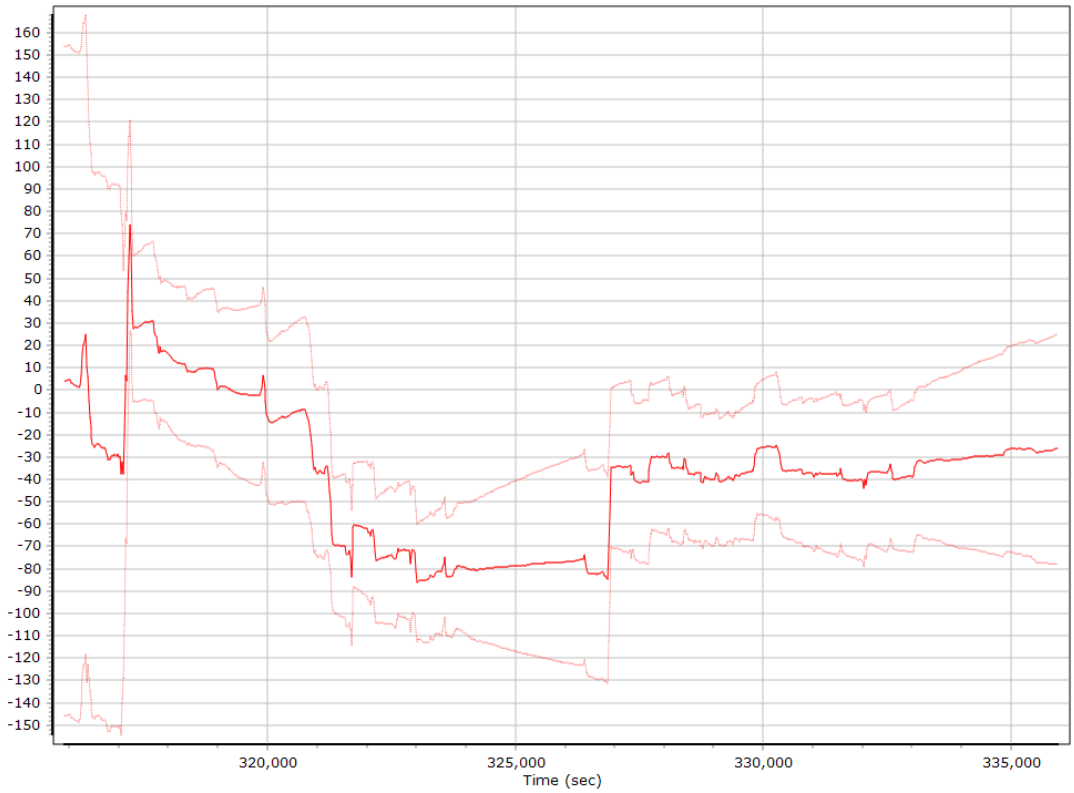

Forward Processed Estimated Constant Errors, Reference Frame

Accelerometer Bias (micro-g)

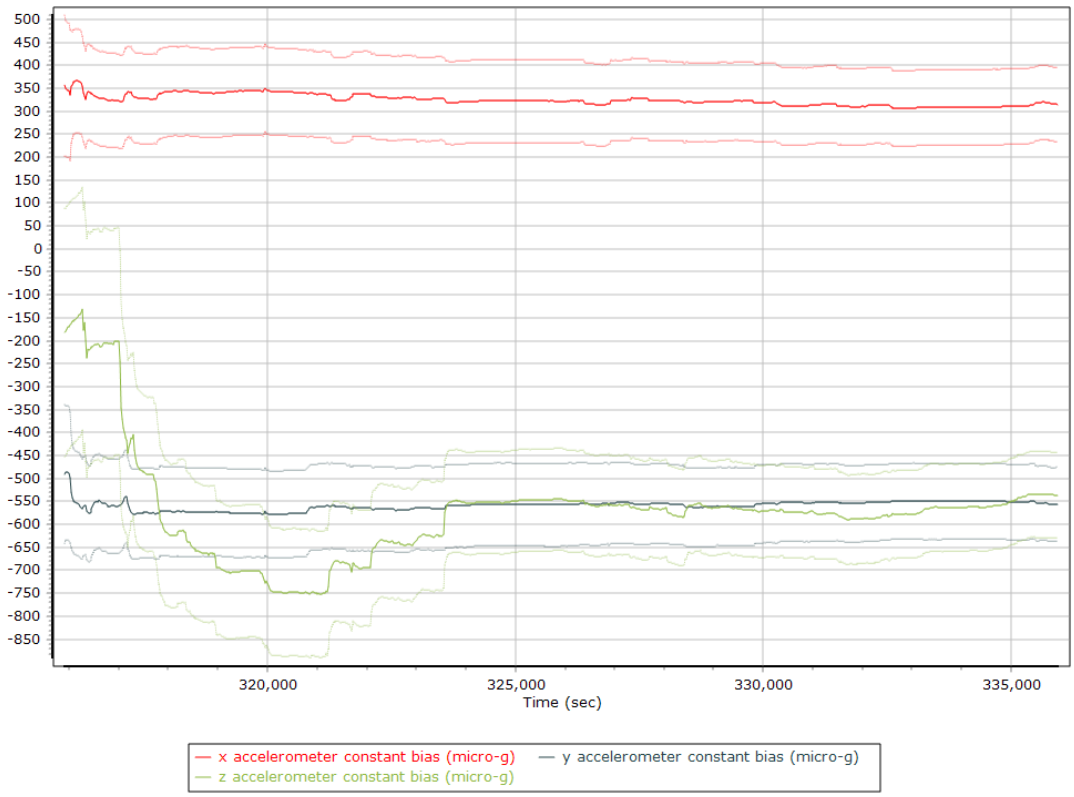

X Accelerometer Bias (micro-g)

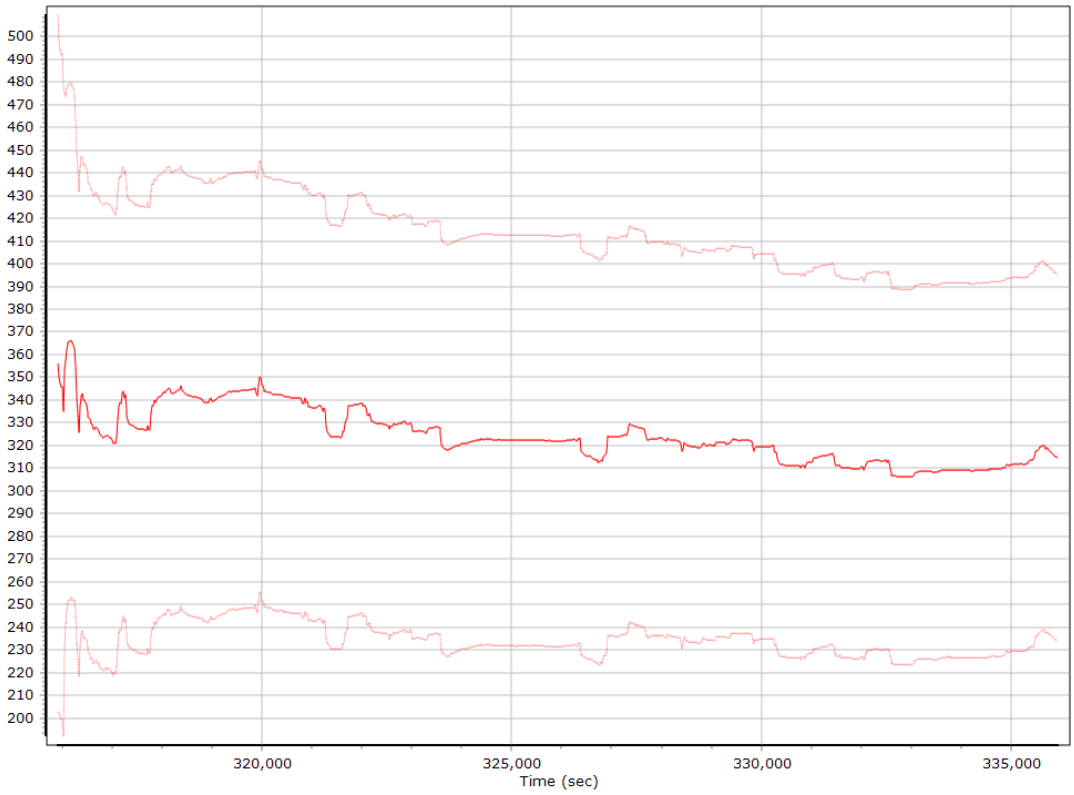

Y Accelerometer Bias (micro-g)

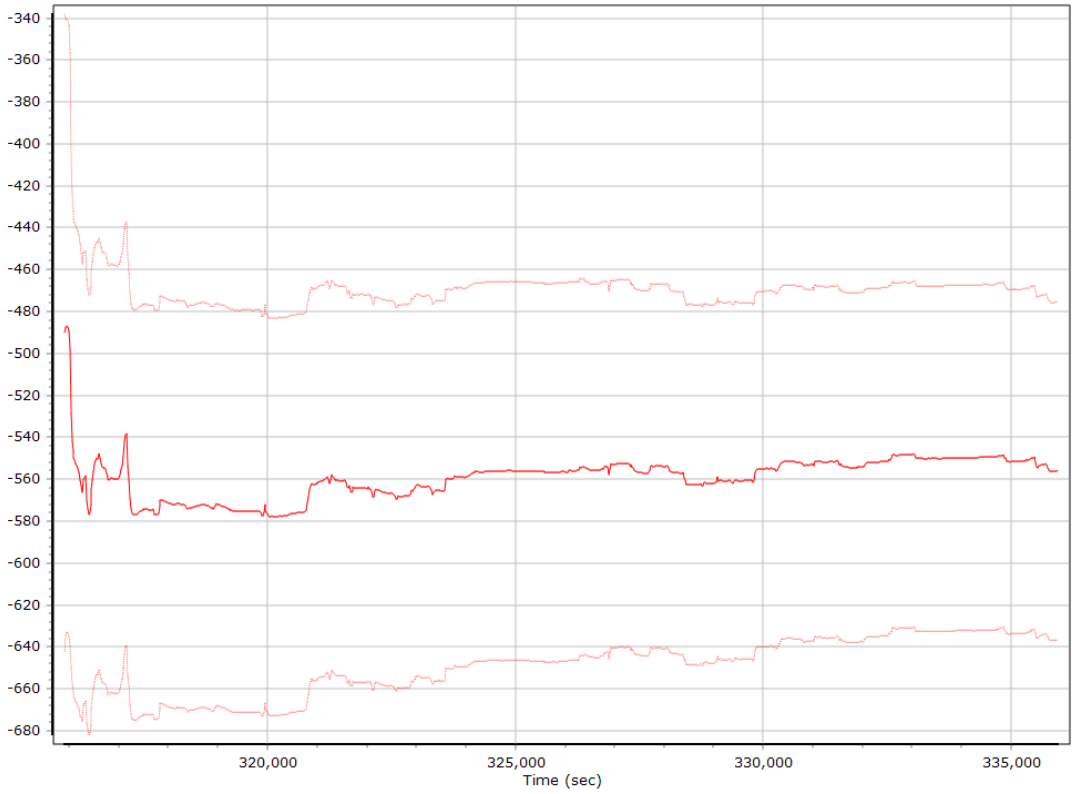

Z Accelerometer Bias (micro-g)

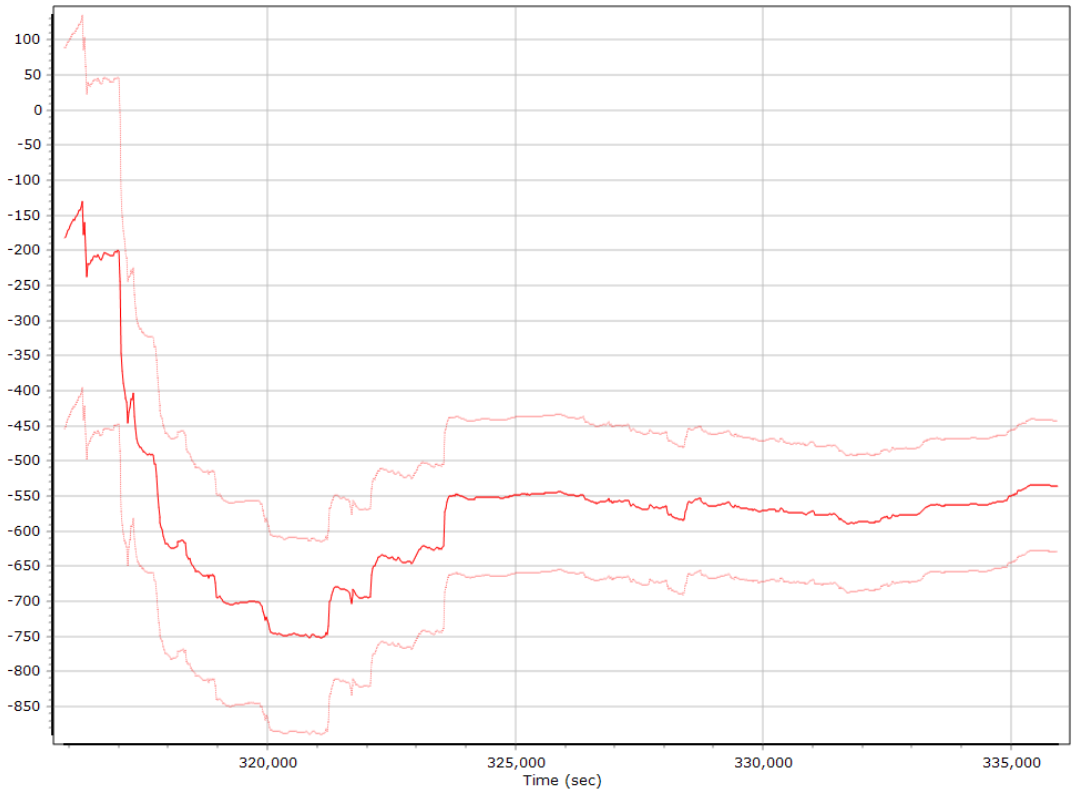

Gyro Bias (deg/h)

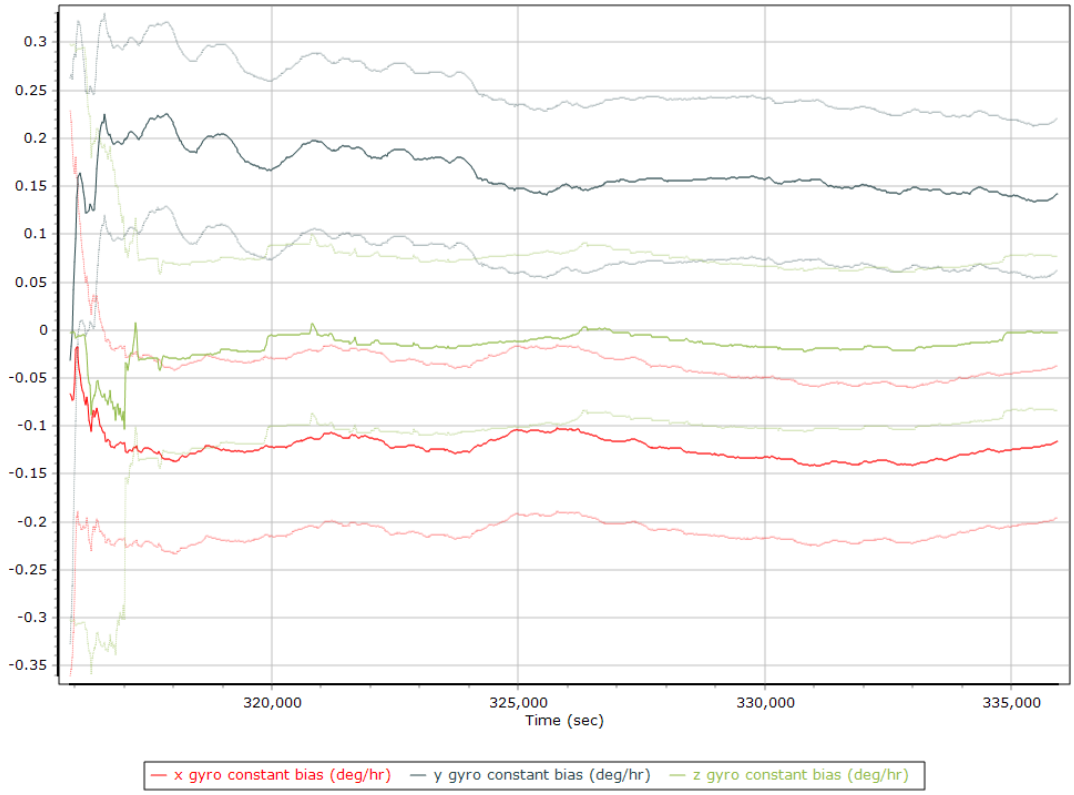

X Gyro Bias (deg/h)

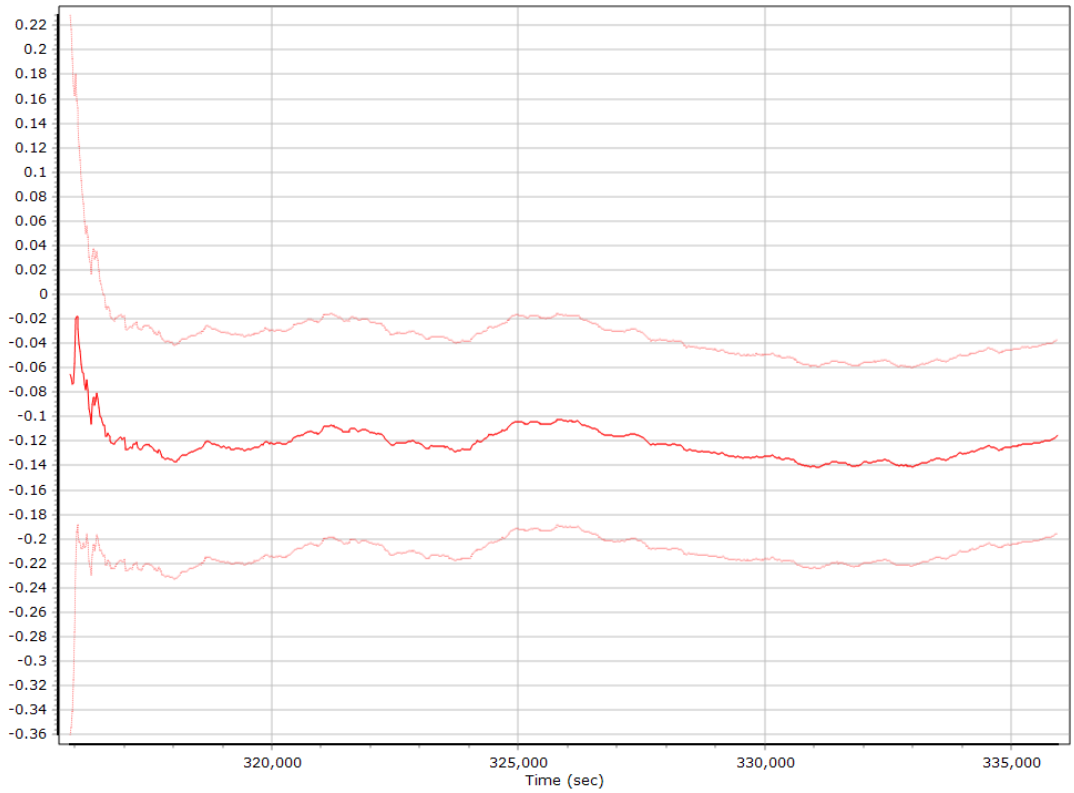

Y Gyro Bias (deg/h)

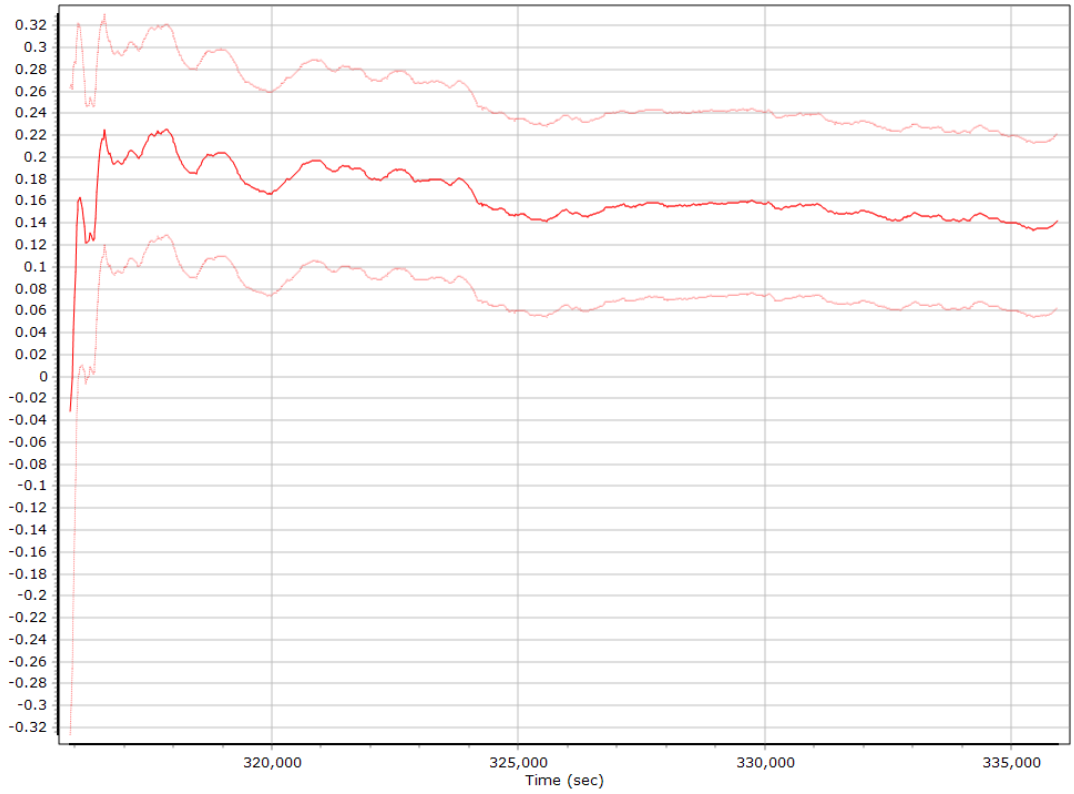

Z Gyro Bias (deg/h)

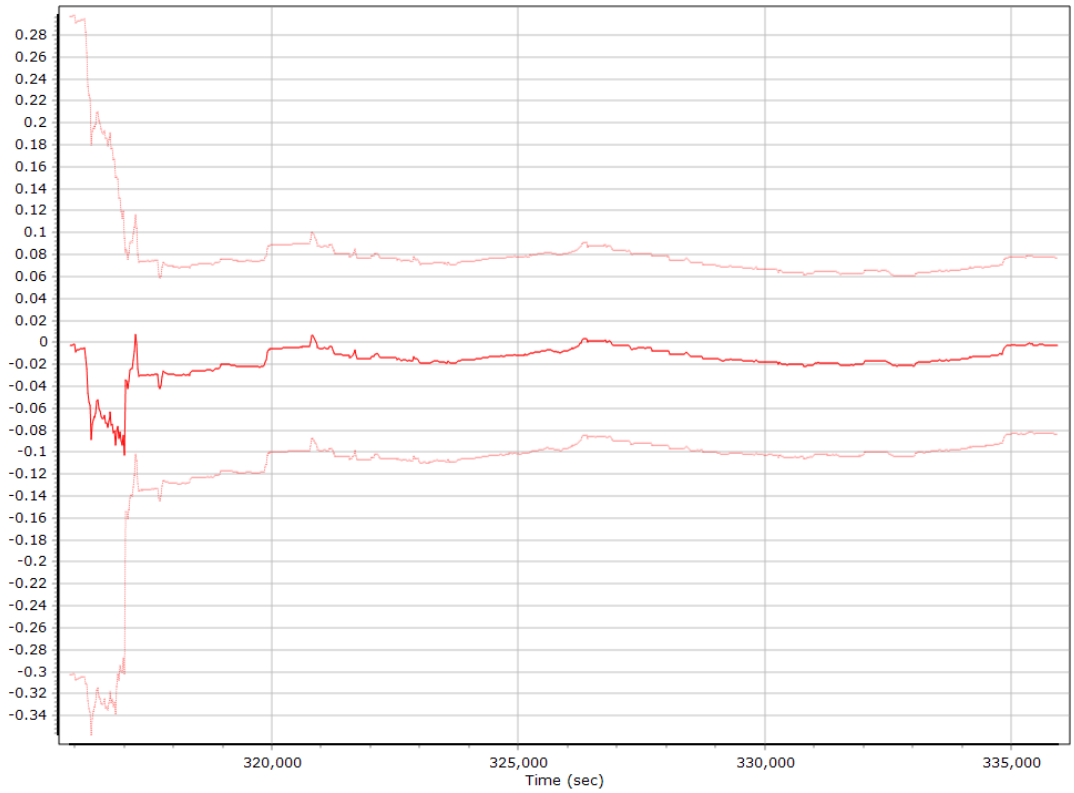

Smoothed Performance Metrics

Position Error RMS (m)

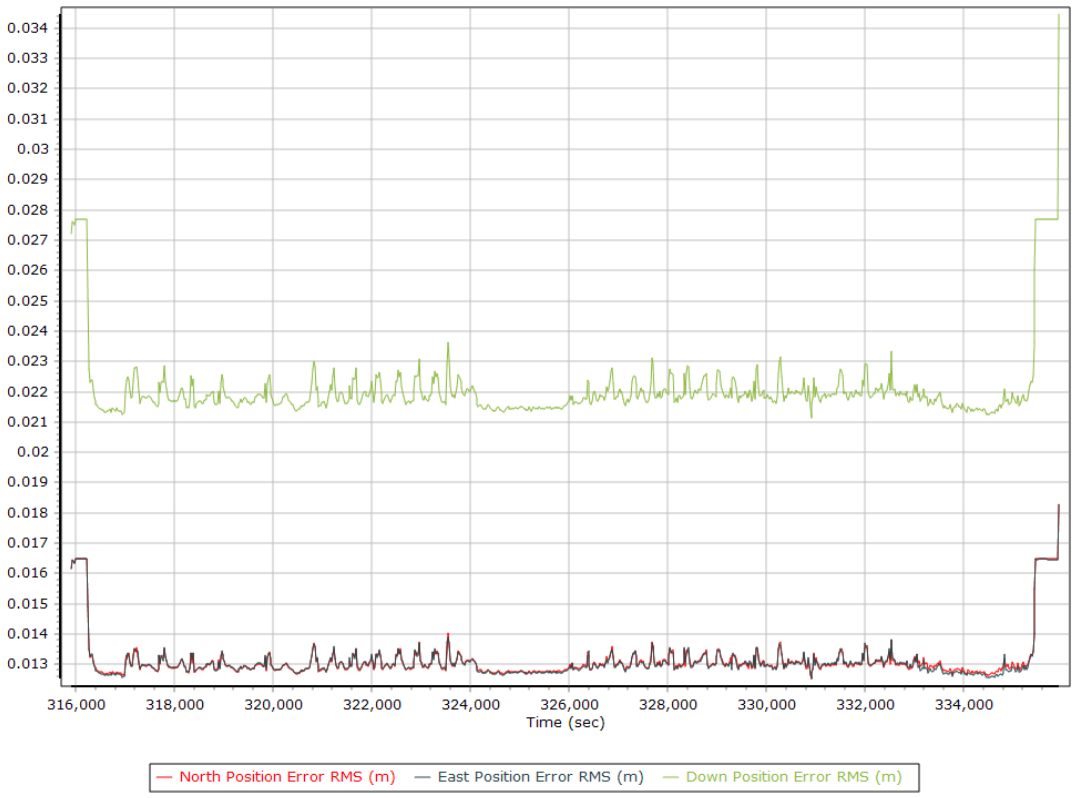

Velocity Error RMS (m/s)

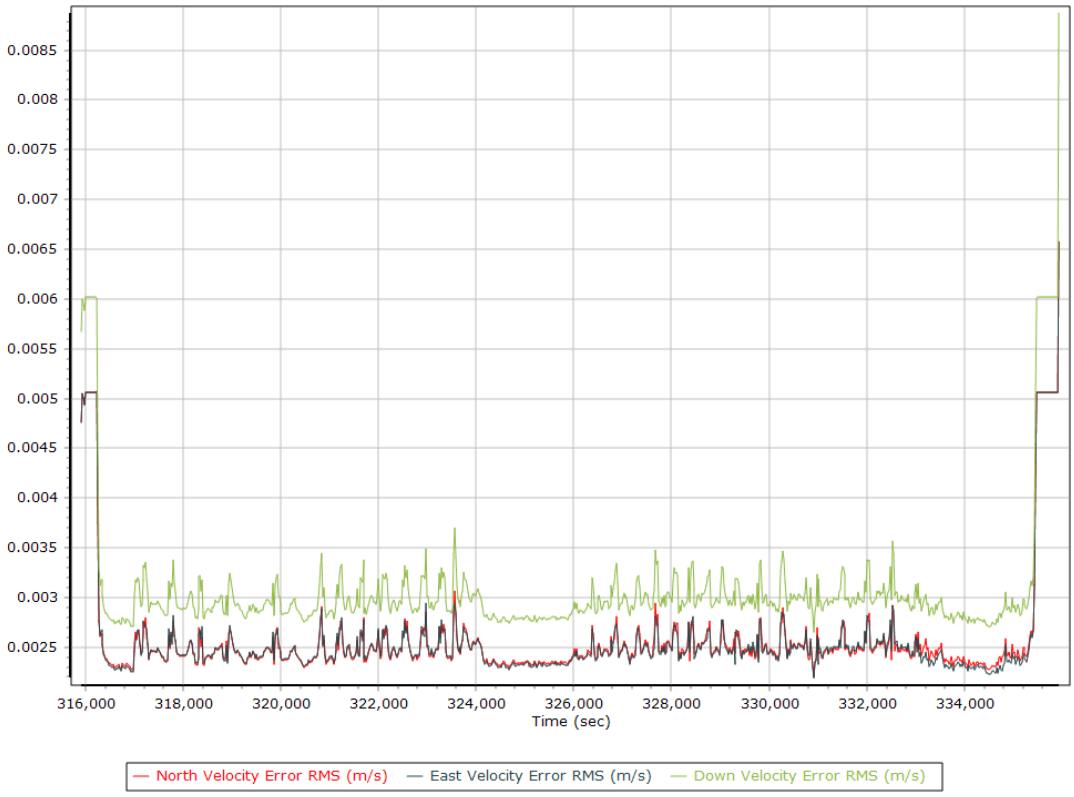

Roll/Pitch Error RMS (arc-min)

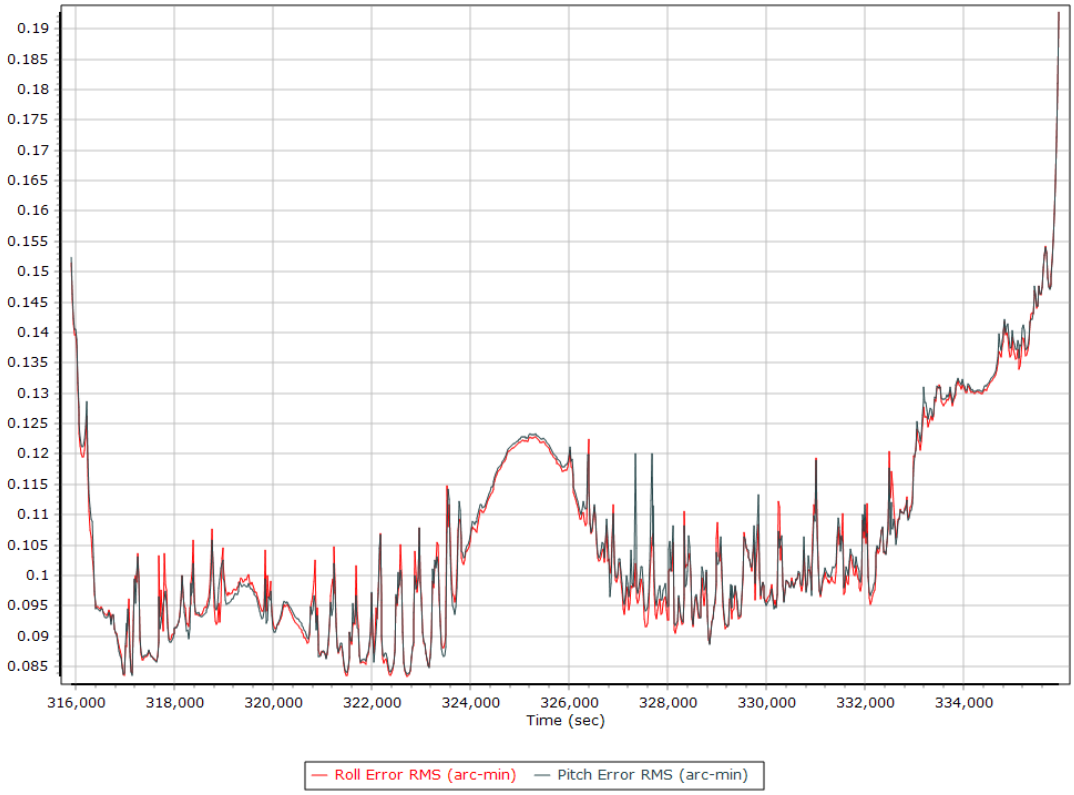

Heading Error RMS (arc-min)

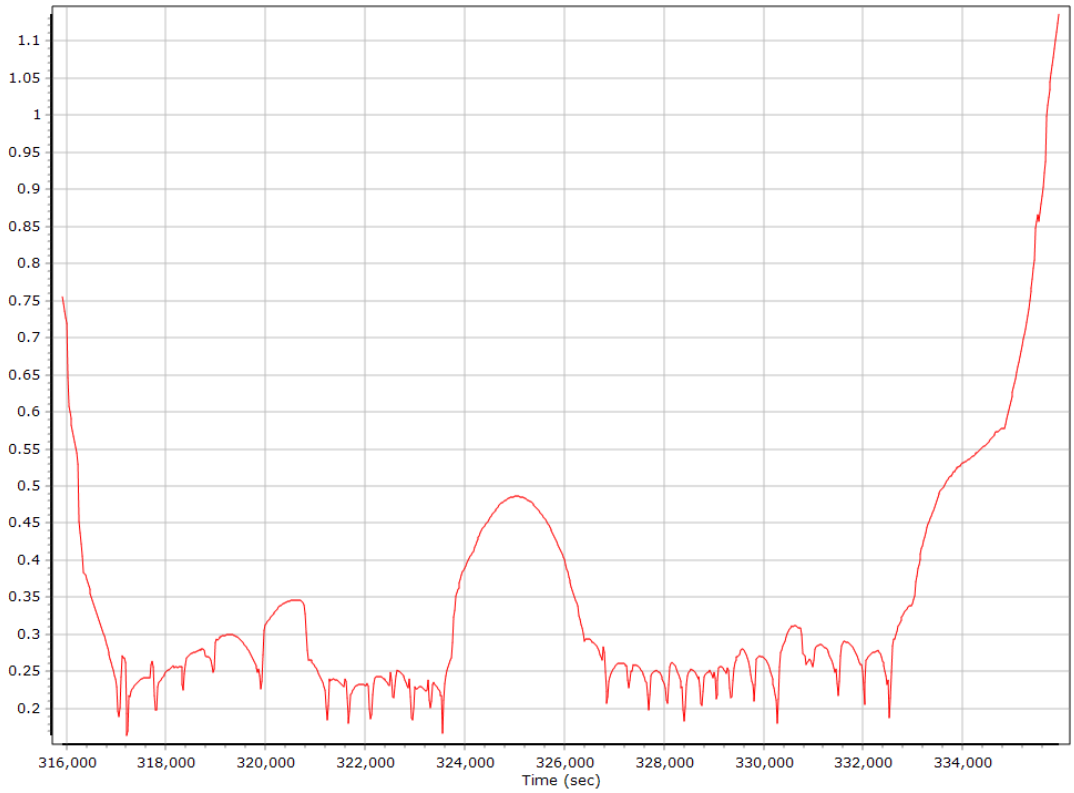

Forward Processed Performance Metrics

Position Error RMS (m)

Velocity Error RMS (m/s)

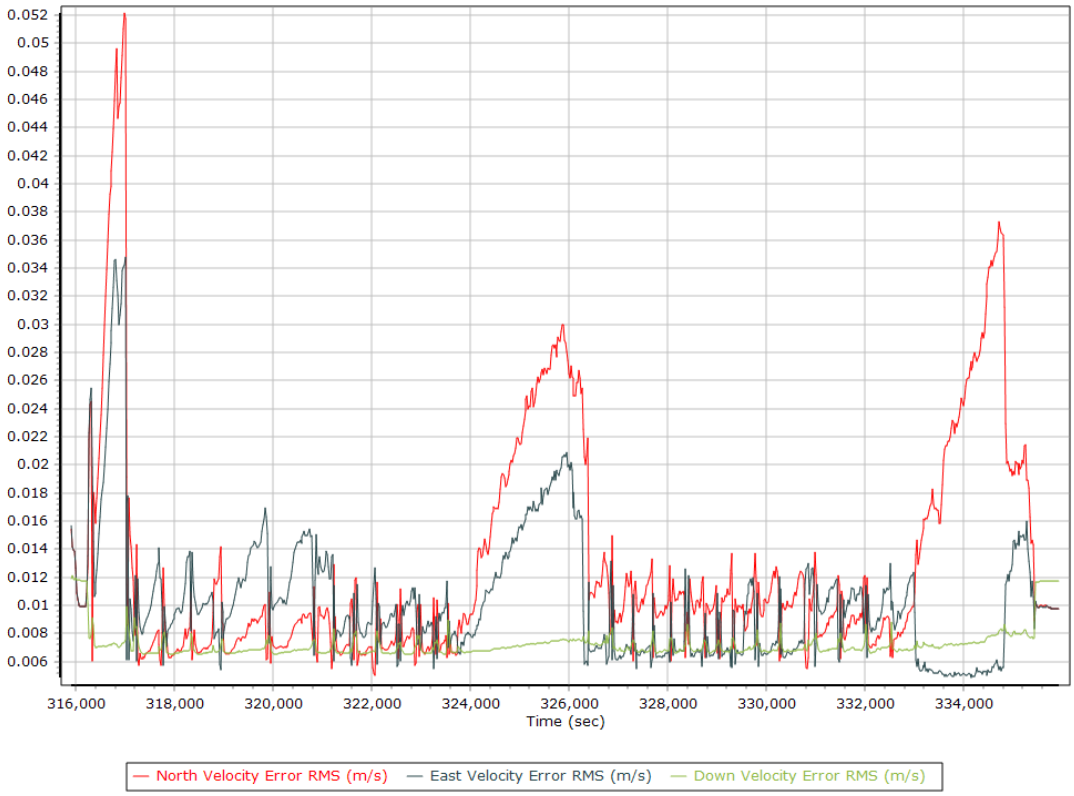

Roll/Pitch Error RMS (arc-min)

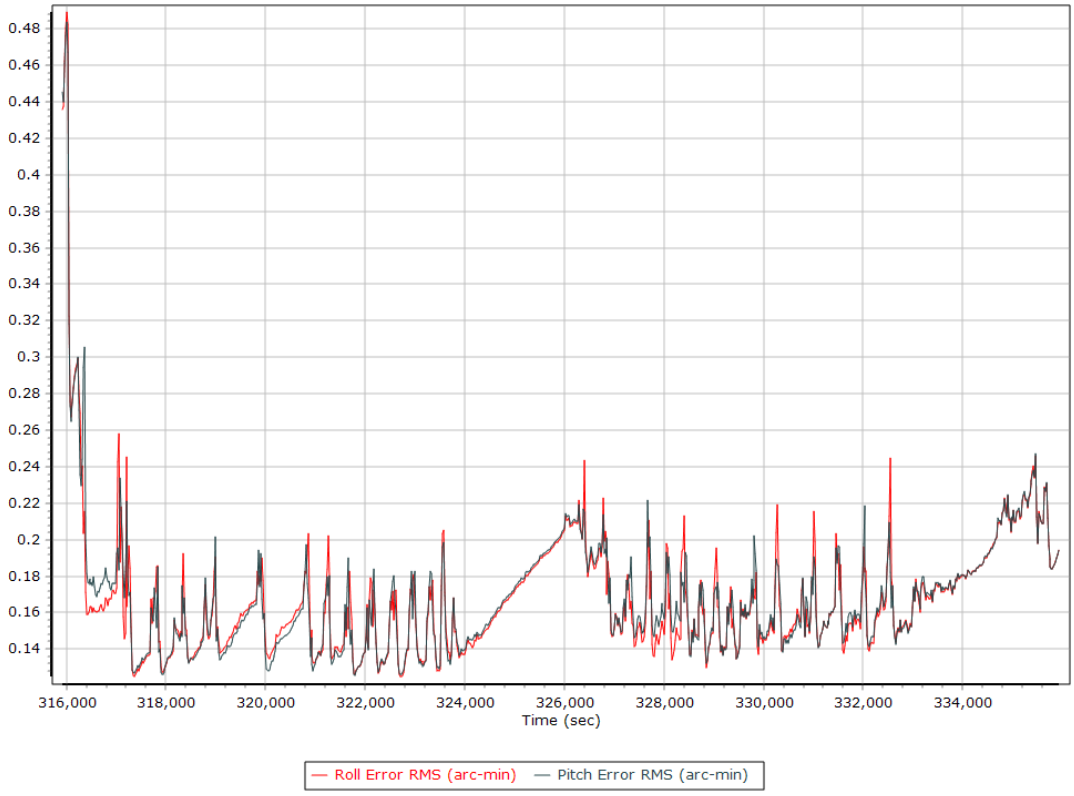

Heading Error RMS (arc-min)

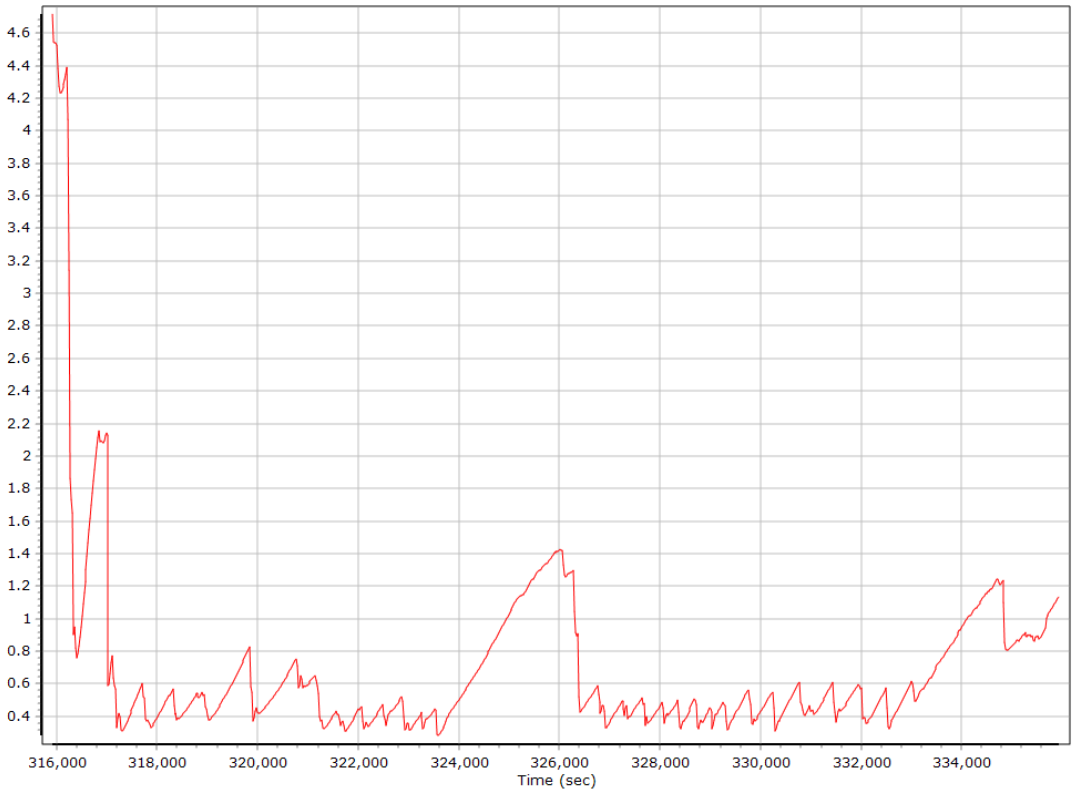

Forward Processed Solution Status

Processing Mode

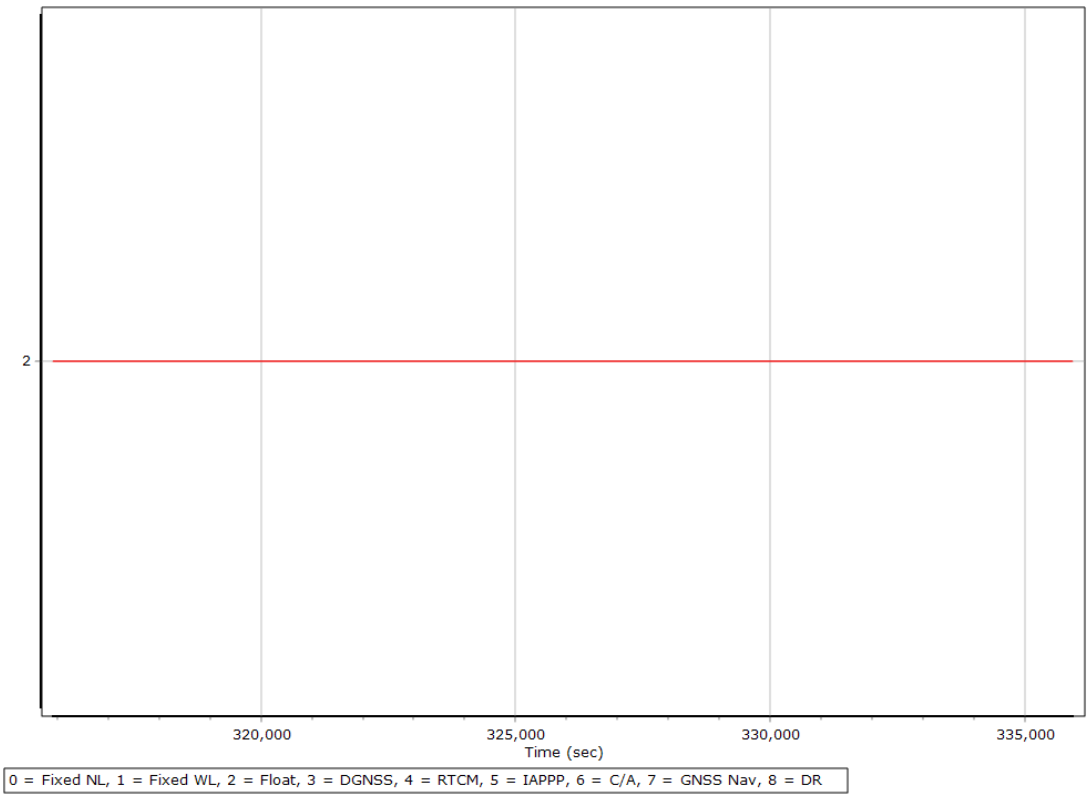

Number of Satellites

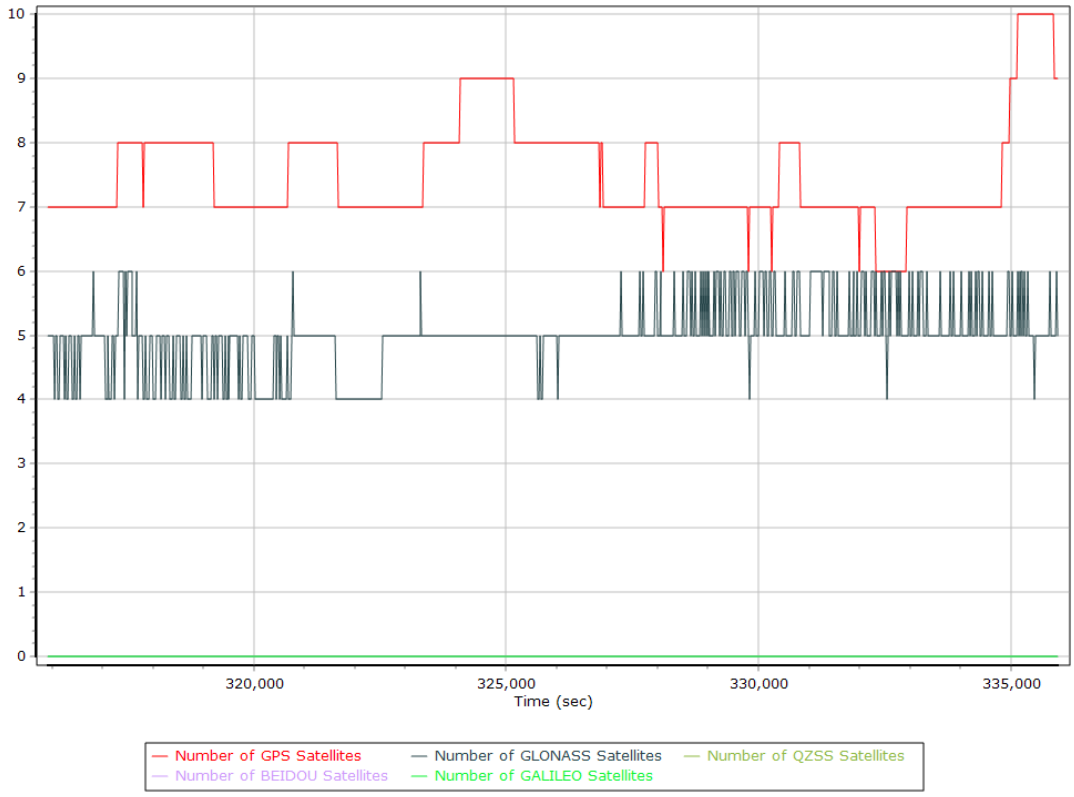
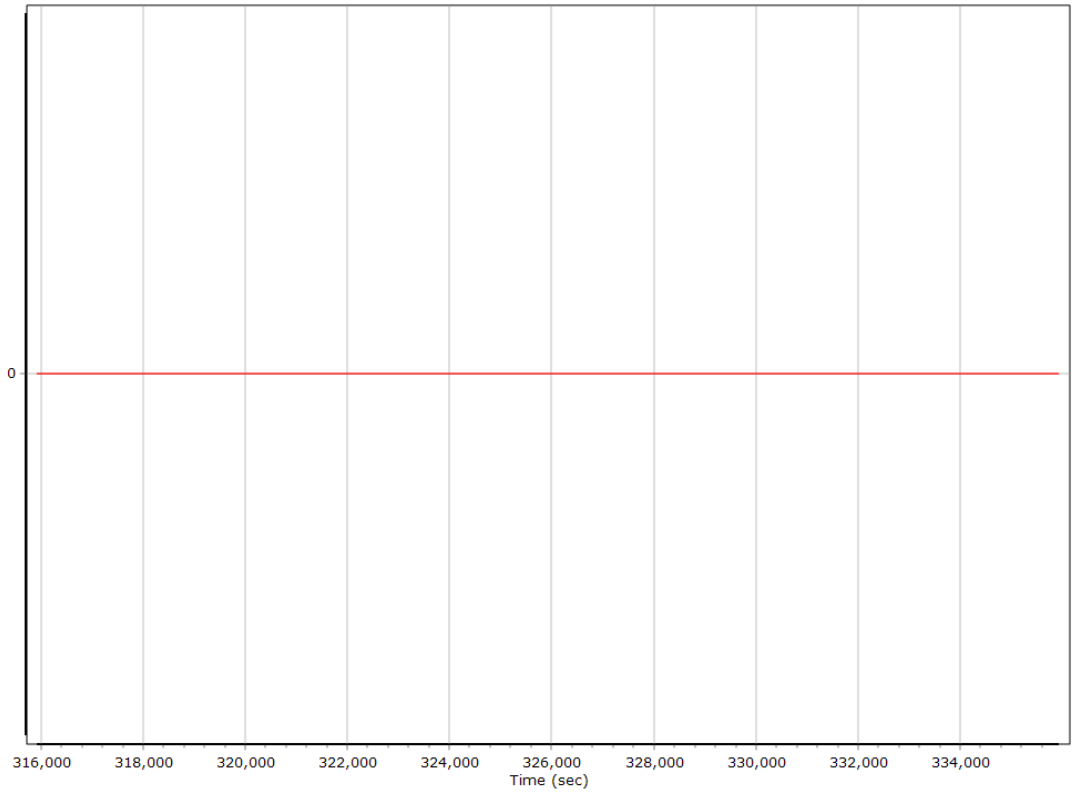
Baseline Length