General Information

Mission Information

Project name	19-058_061320b
Processing date	2020-07-20 22:28:49
Mission date	2020-06-13 19:37:44
Mission duration	01:26:23.000
Processing mode	IN-Fusion Trimble RTX Nav

Rover Hardware Information

Product	POS AV 610 VER6 HW2.4-12
Serial number	S/N6310
IMU type	57
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
ALS.742	POS Data
ALS.743	POS Data
ALS.744	POS Data
ALS.745	POS Data
ALS.746	POS Data
ALS.747	POS Data
ALS.748	POS Data
ALS.749	POS Data
ALS.750	POS Data
ALS.751	POS Data
ALS.752	POS Data
ALS.753	POS Data

Input Files

File Name	File Type
Ephm1650.20g	GLONASS Broadcast Ephemeris
Ephm1650.20n	GPS Broadcast Ephemeris
igl21095.sp3	GLONASS Precise Ephemeris
igl21096.sp3	GLONASS Precise Ephemeris
igl21100.sp3	GLONASS Precise Ephemeris
igs21095.sp3	GPS Precise Ephemeris
igs21096.sp3	GPS Precise Ephemeris
igs21100.sp3	GPS Precise Ephemeris

Output Files

Filename	File type
sbet_19-058_061320b.out	SBET Trajectory File

Rover Data Summary

First raw data file	ALS.742		
Last raw data file	ALS.753		
Start GPS week	2109		
Start time	589076.022 (06/13/2020 19:37:38)		
End time	594247.269 (06/13/2020 21:03:49)		
Start of fine alignment	589154.846 (06/13/2020 19:38:56)		
Available subsystems	Primary GNSS, Gimbal, IMU		
POS Event Input	Event 1 Input		
Correction data	Trimble RTX		
IMU Installation Lever Arms & Mounting Angles			
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	-0.011	0.039	-1.317
Gimbal to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Rover Data QC

Raw IMU Import QC Summary

IMU data input file	imu_19-058_061320b.dat
IMU data check log file	imudt_19-058_061320b.log
IMU Records Processed	1036439
Termination Status	Warnings
IMU Anomalies	1
IMU Failure Messages	
589075.787 : WARNING : Gap of 589063.8257 seconds in CHECKDT input data	

Primary Observables & Satellite Data

L1 Satellite Lock/Elevation

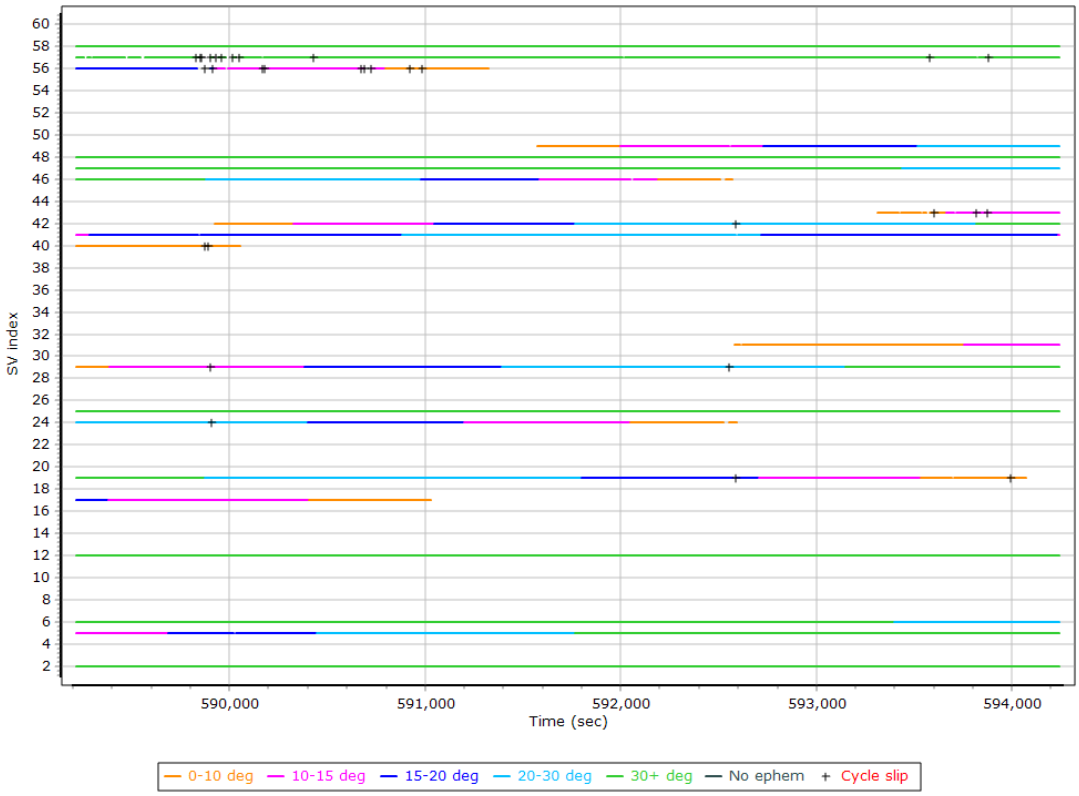

L2 Satellite Lock/Elevation

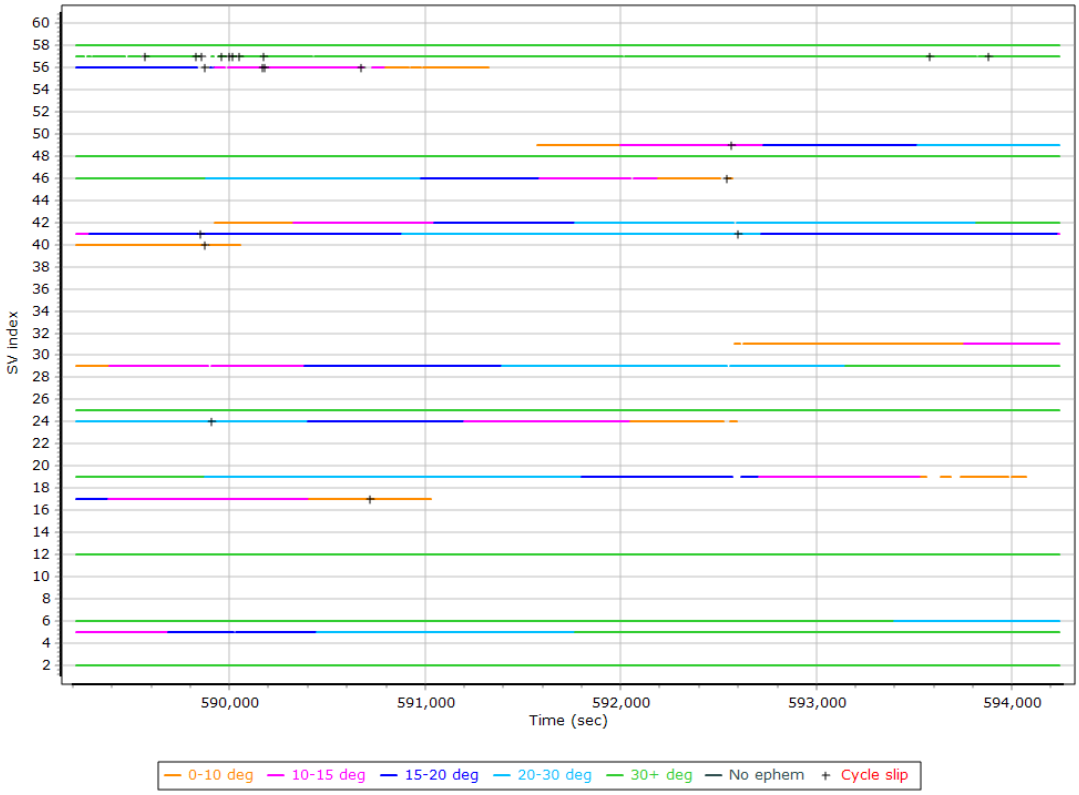

GPS L1 SNR

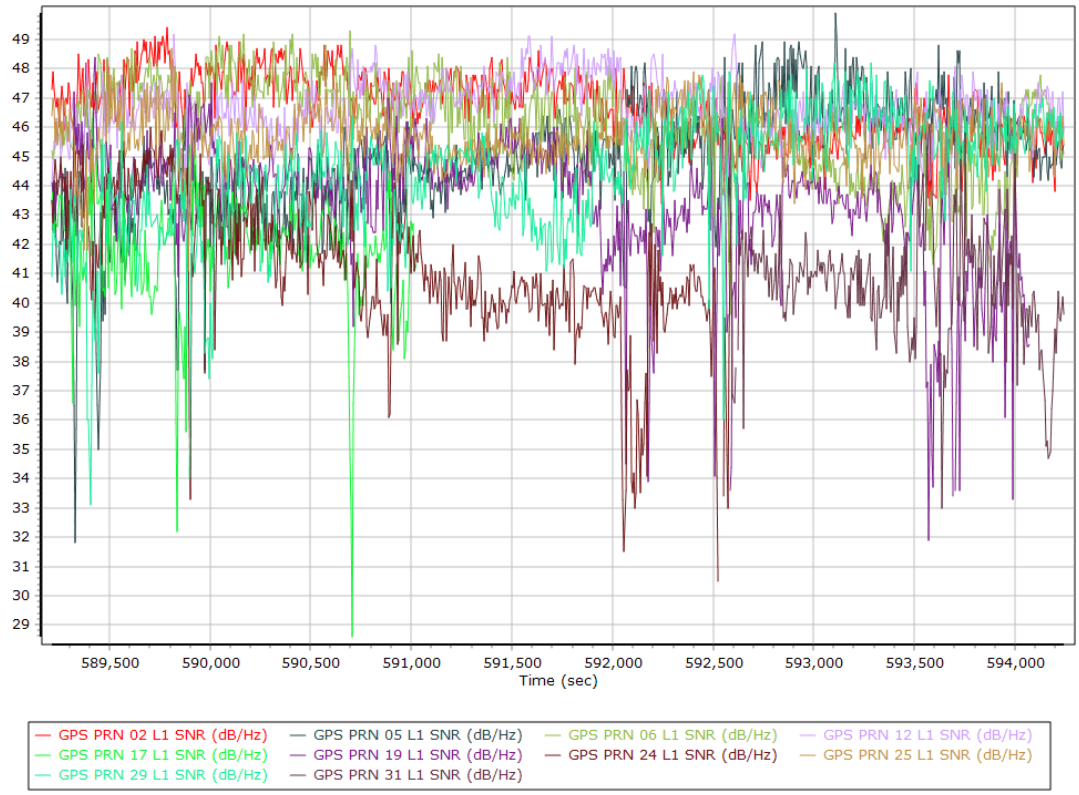

GPS L2 SNR

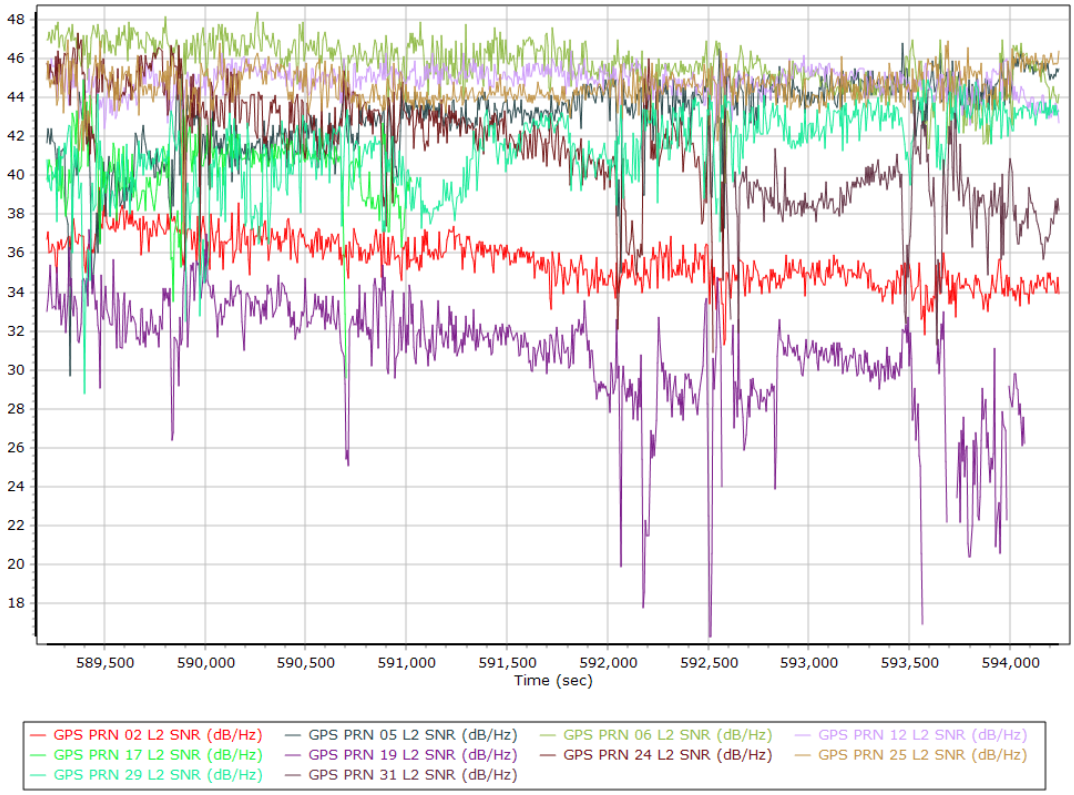

GLONASS L1 SNR

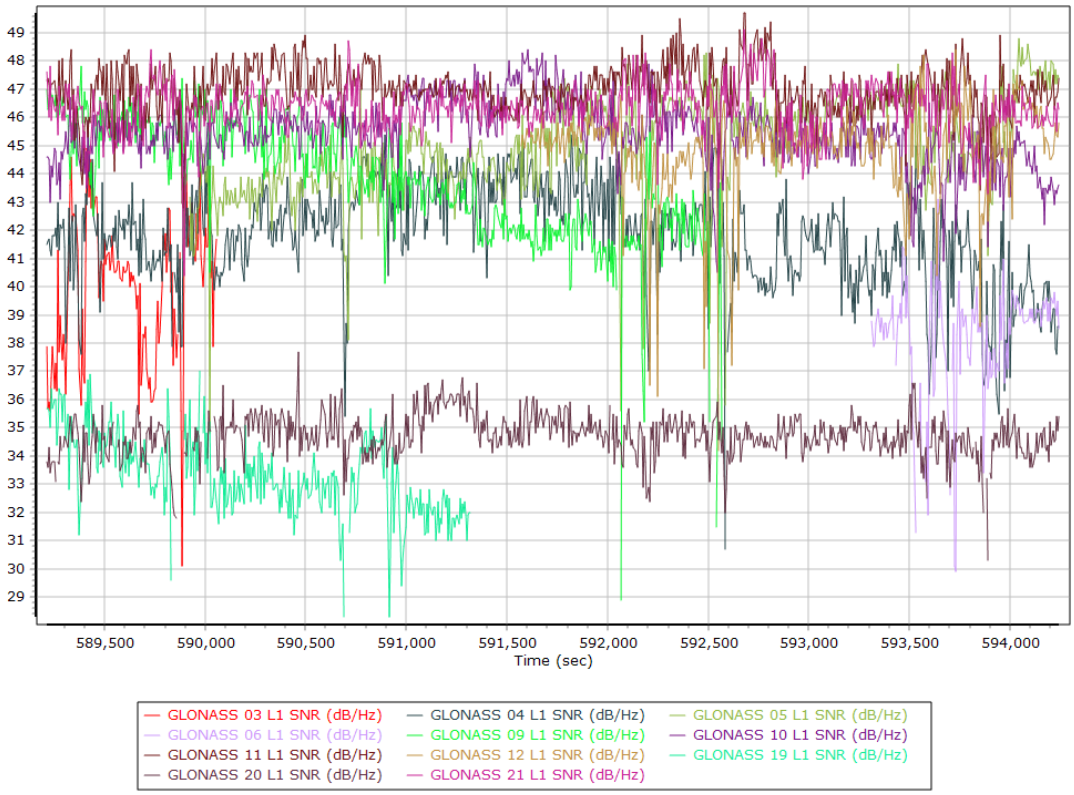

GLONASS L2 SNR

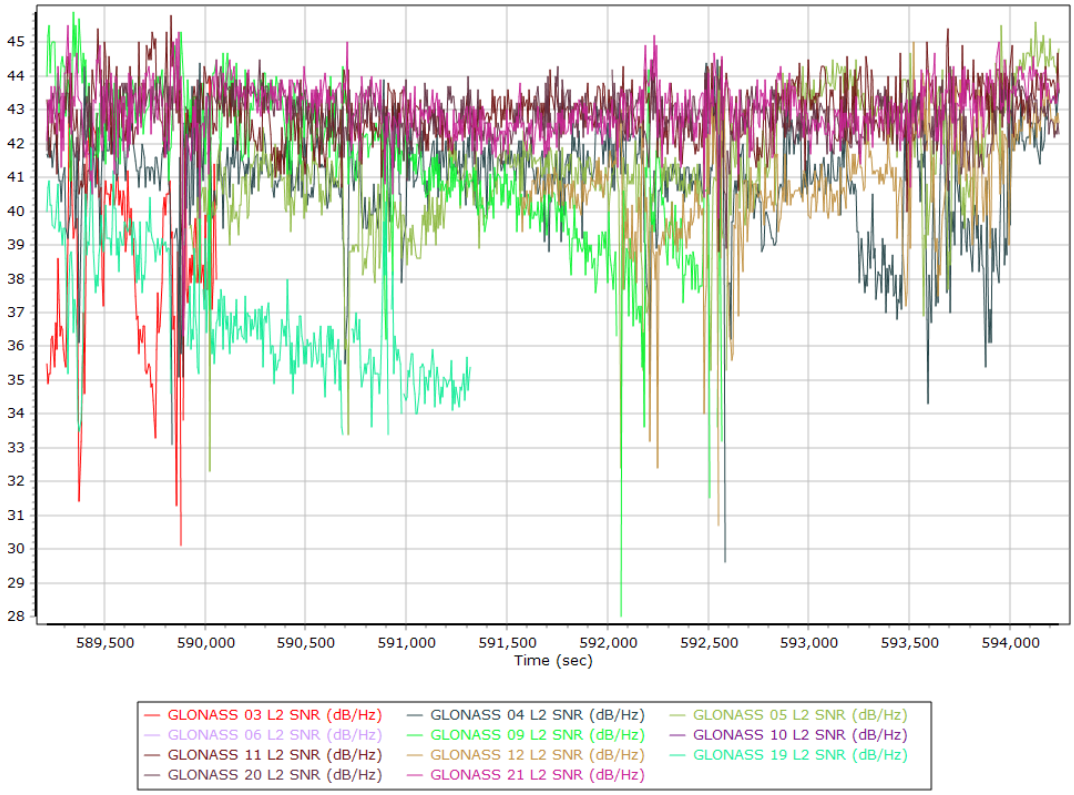

BEIDOU SNR

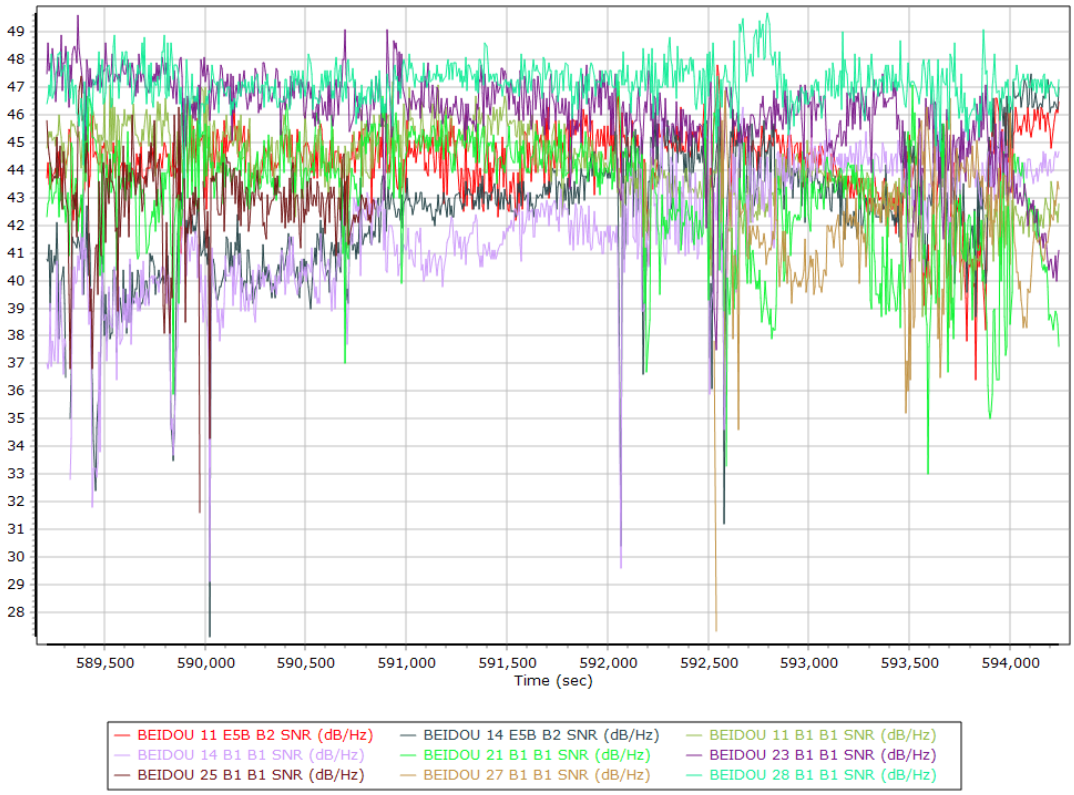

GALILEO SNR

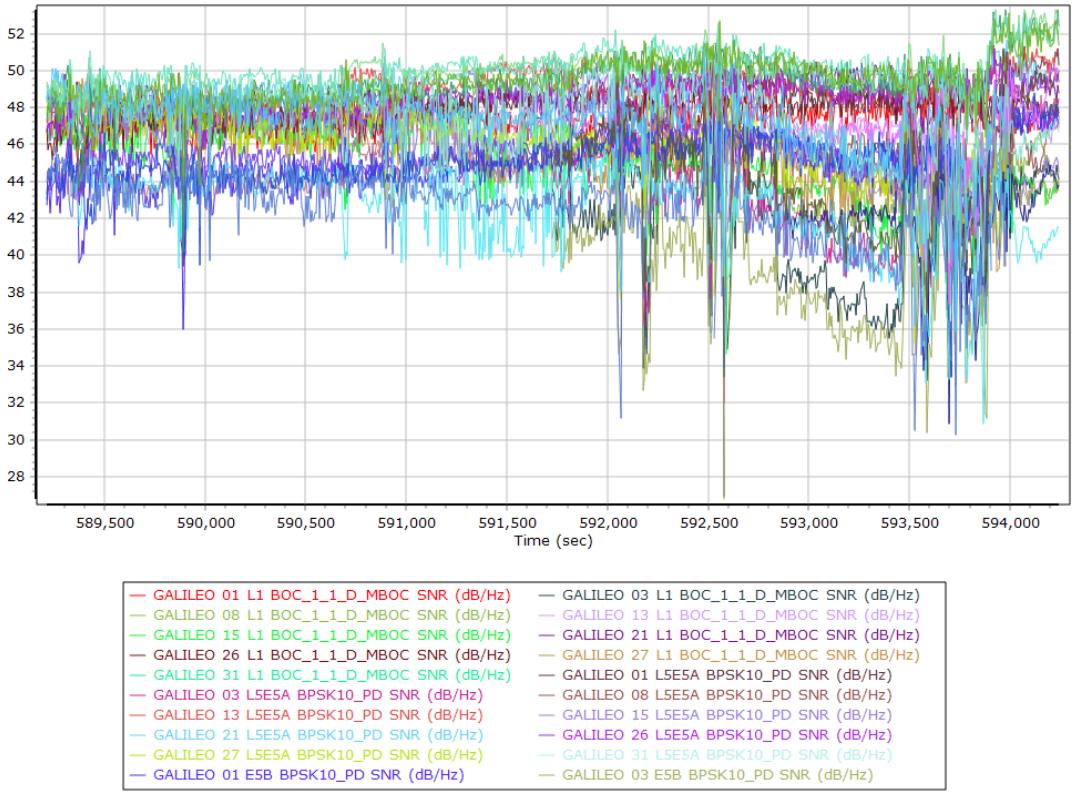
52
50
48
46
44
42
40
38
36
34
32
30
28
589,500
590,000
590,500
591,000
591,500
592,000
592,500
593,000
593,500
594,000
Time (sec)
GALILEO 01 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 03 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 08 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 13 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 15 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 21 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 26 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 27 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 31 L1 BOC_1_1_D_MBOC SNR (dB/Hz)
GALILEO 01 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 03 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 08 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 13 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 15 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 21 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 26 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 27 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 31 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 01 E5B BPSK10_PD SNR (dB/Hz)
GALILEO 03 E5B BPSK10_PD SNR (dB/Hz)

Smoothed Trajectory Information

Top View

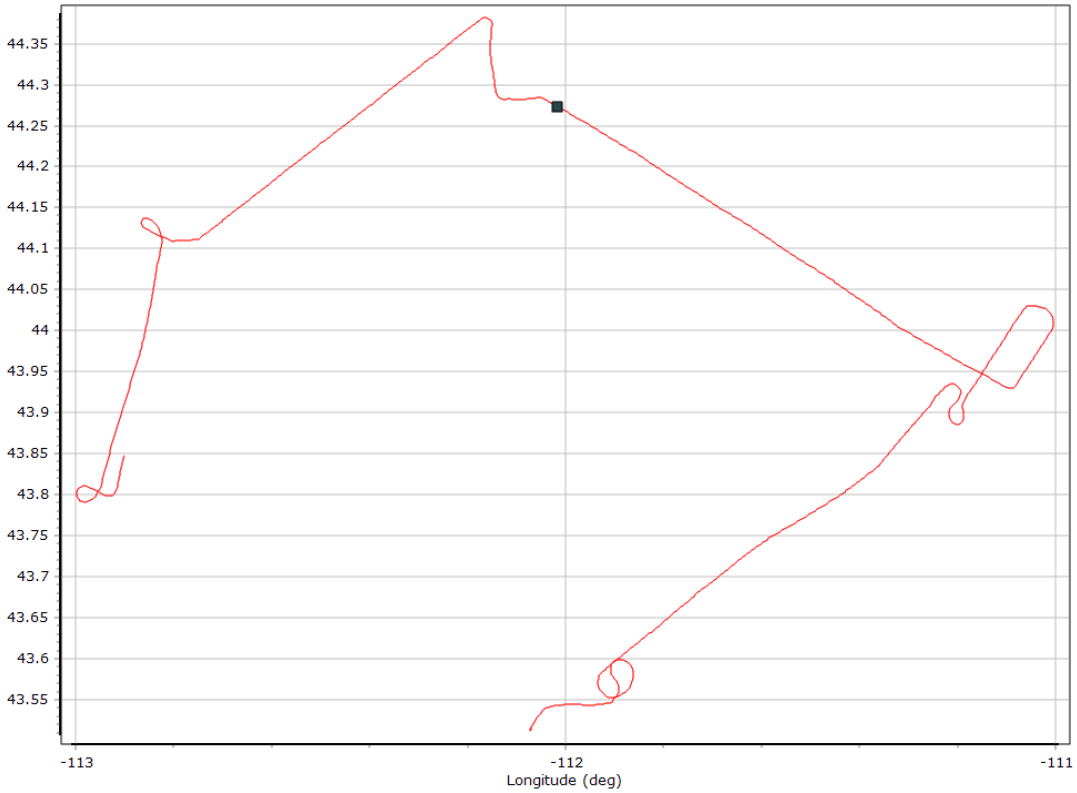

Altitude

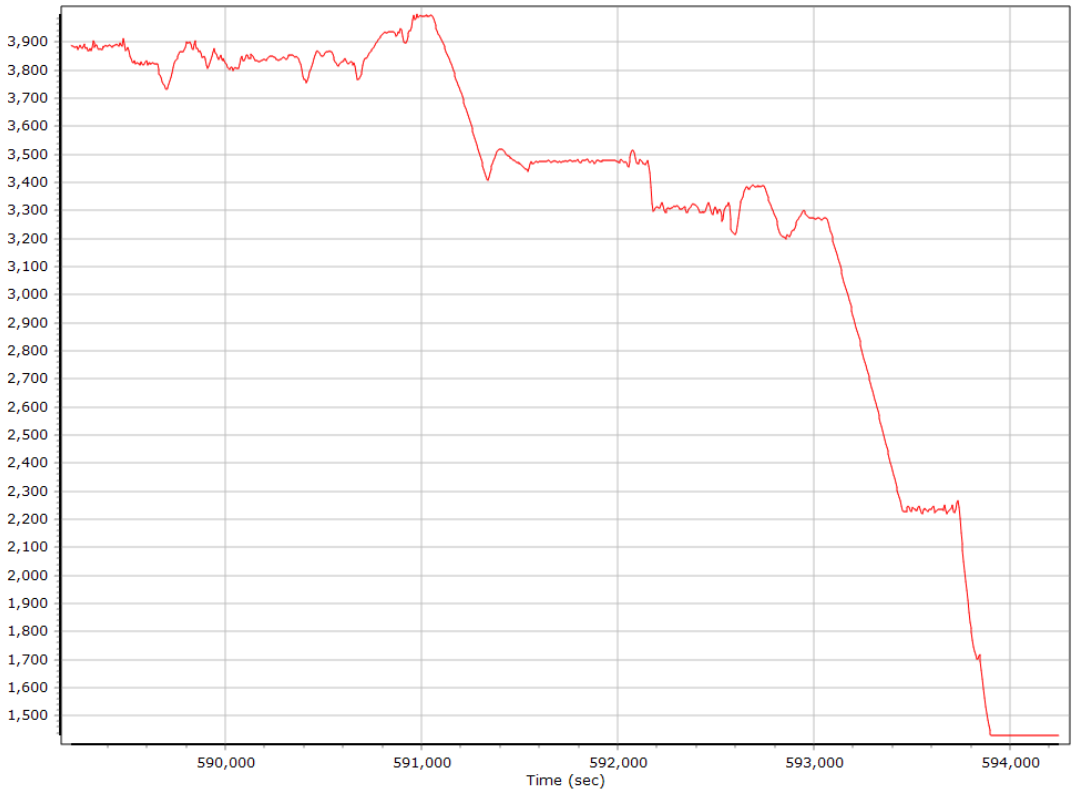

Roll/Pitch

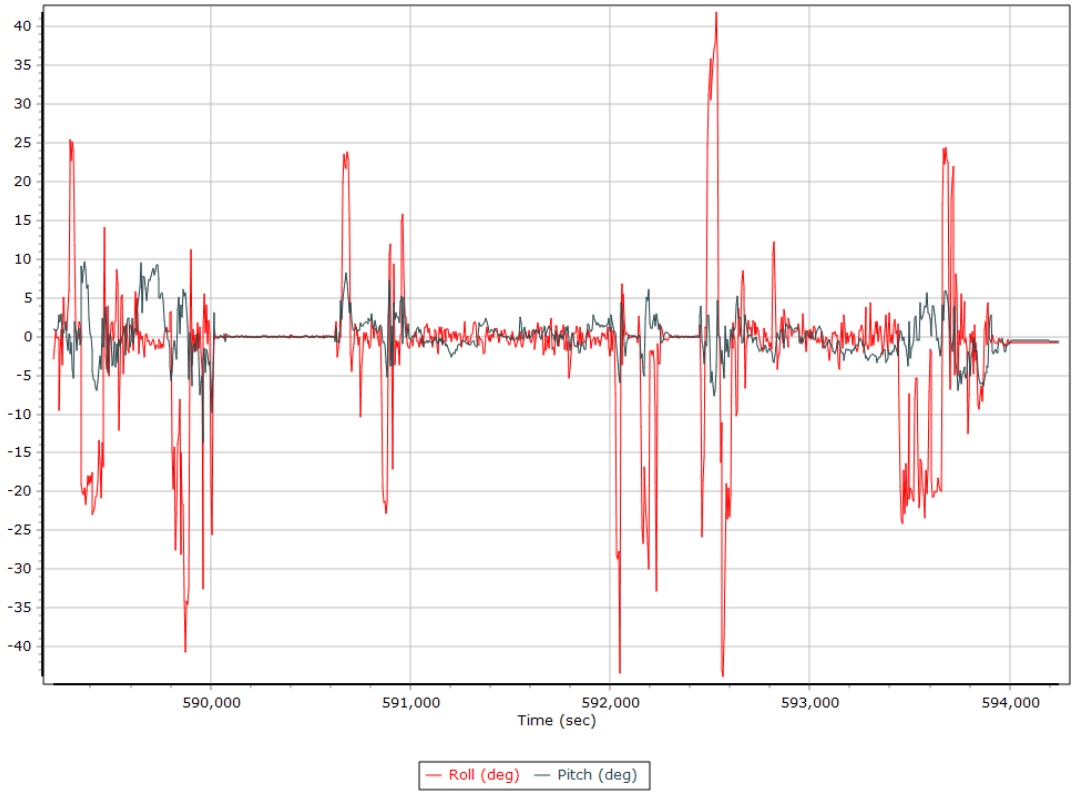

Heading

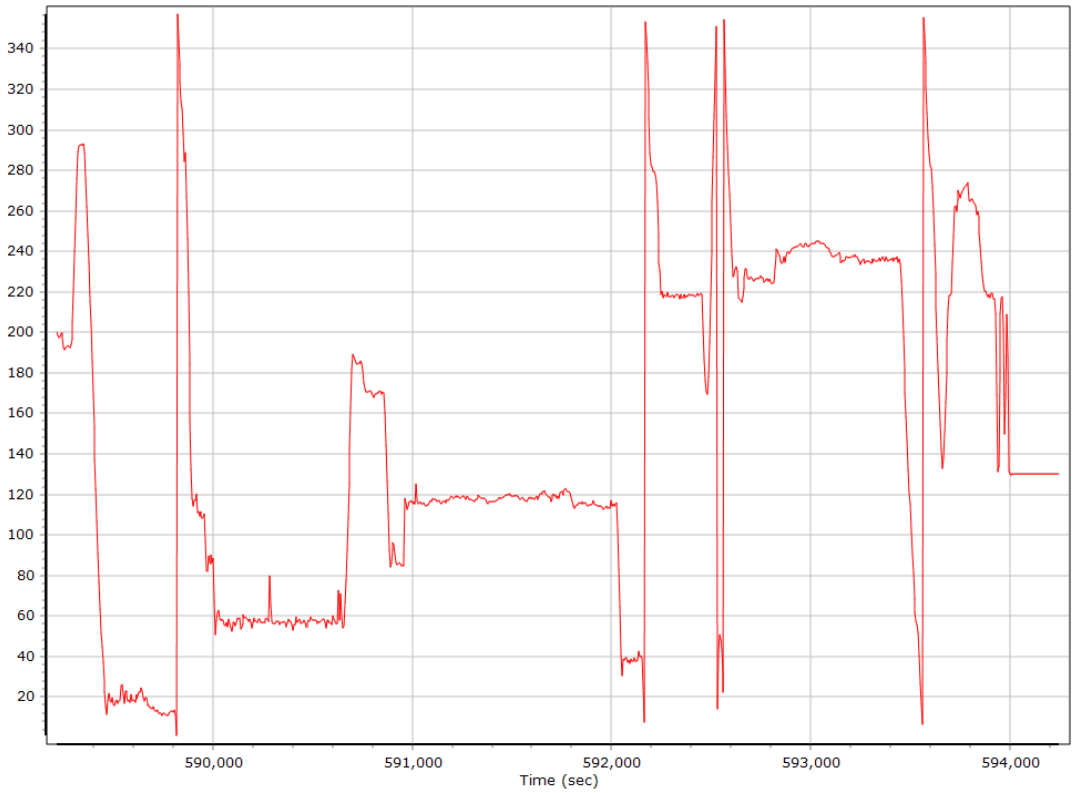

North/East Velocity

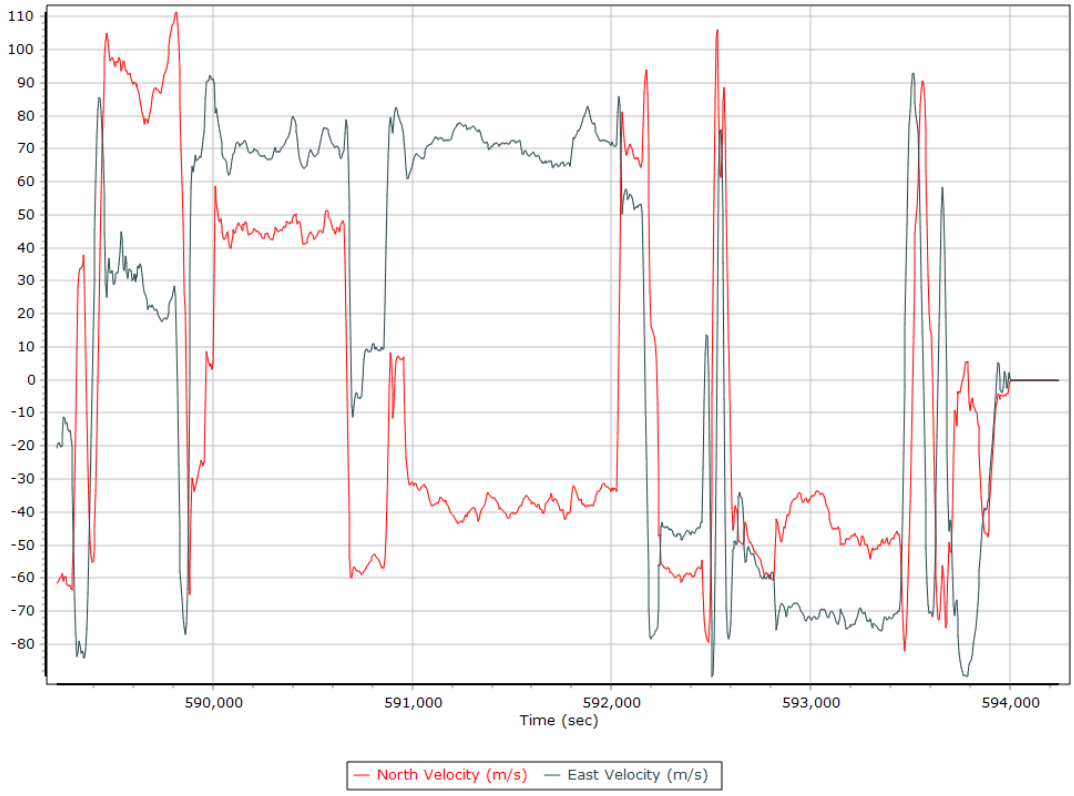

Down Velocity

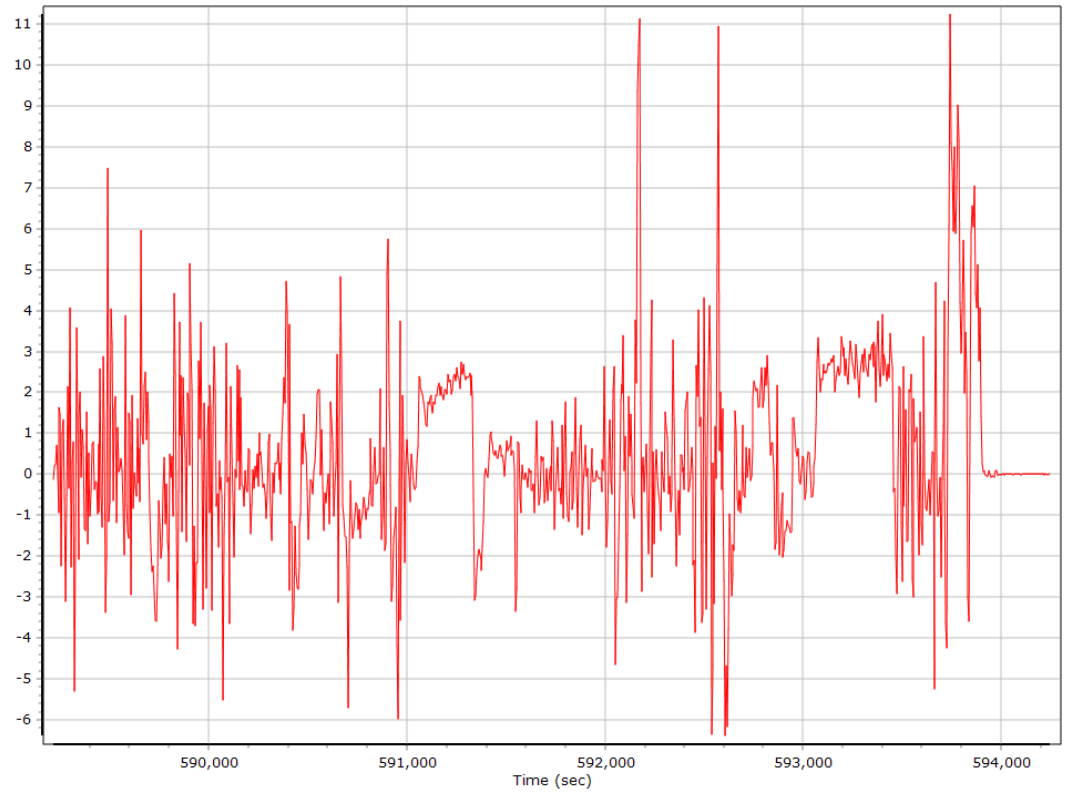

Total Speed

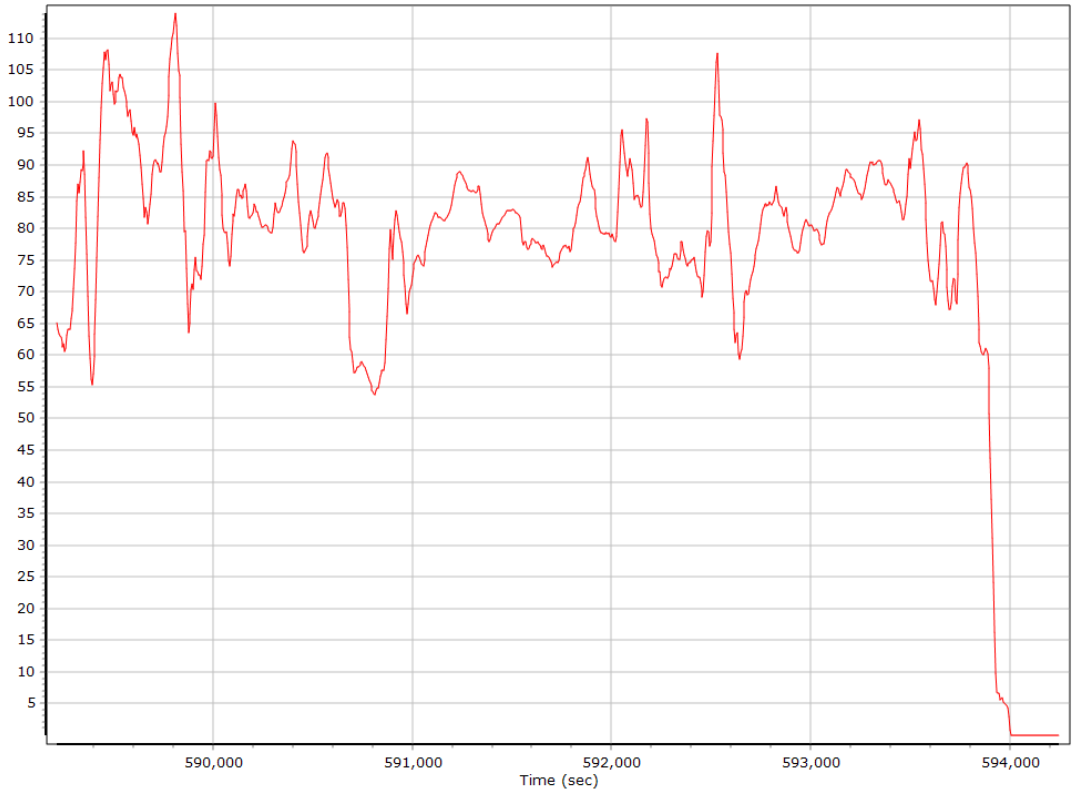

Ground Speed

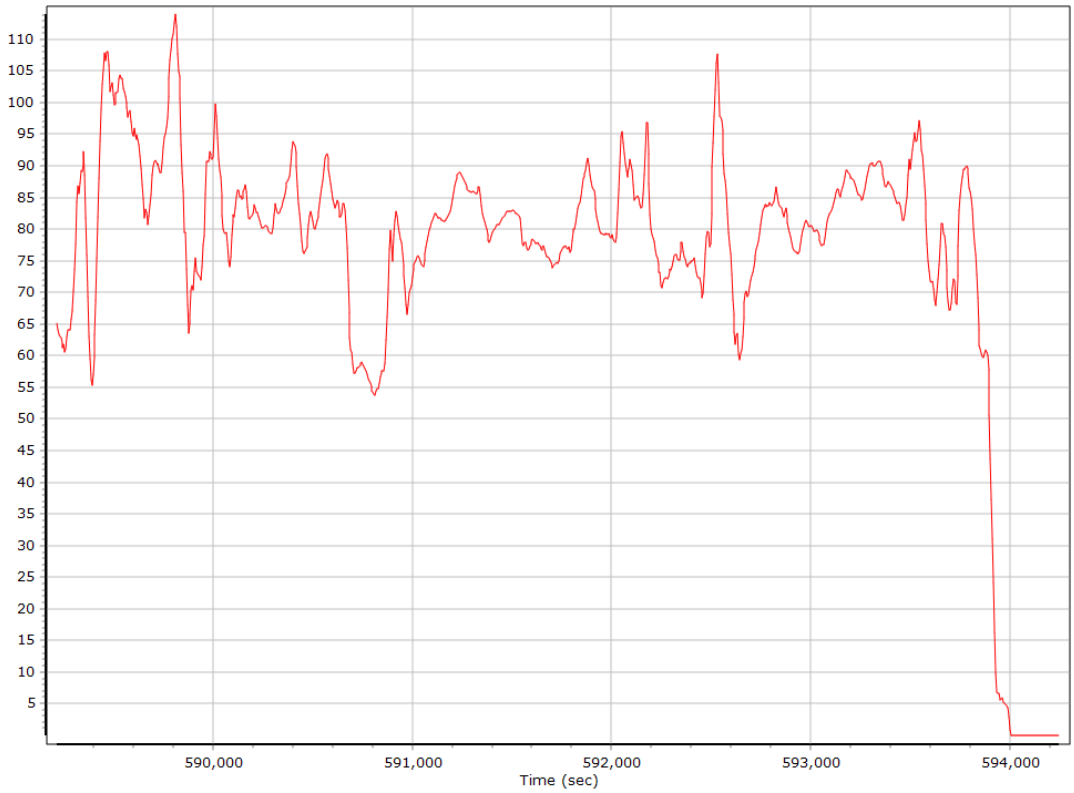

Body Acceleration

Total Body Acceleration

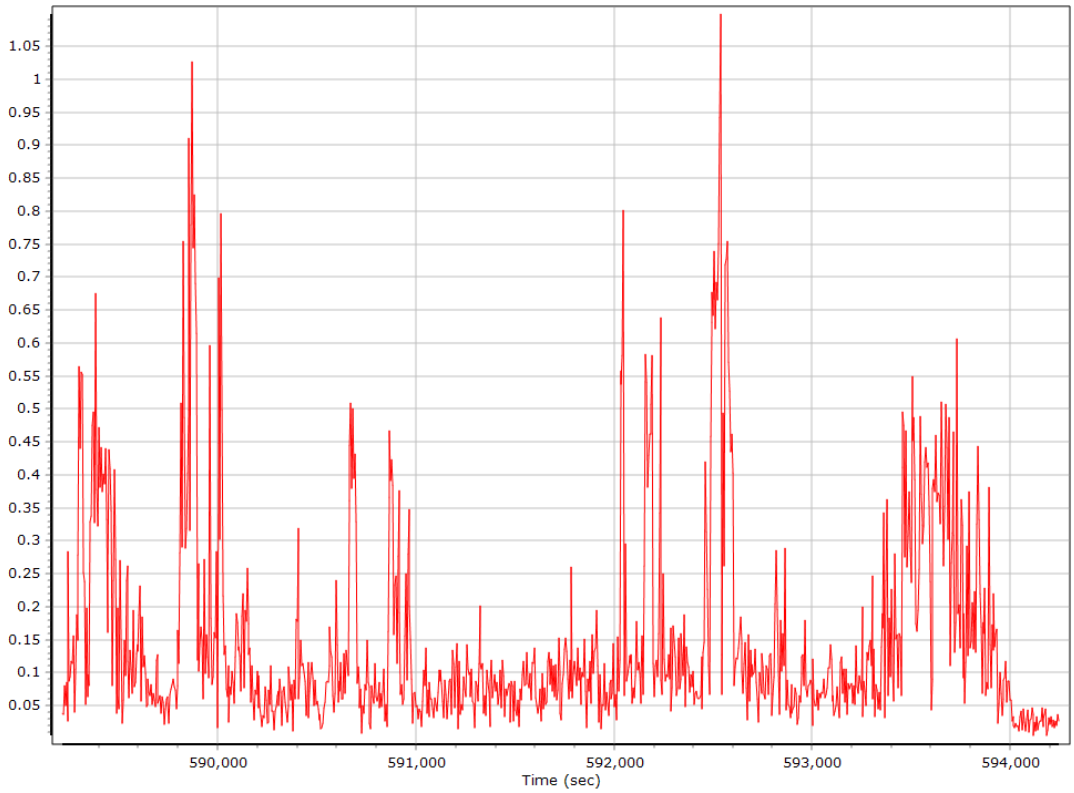

Body Angular Rate

Forward Processed Trajectory Information

Top View

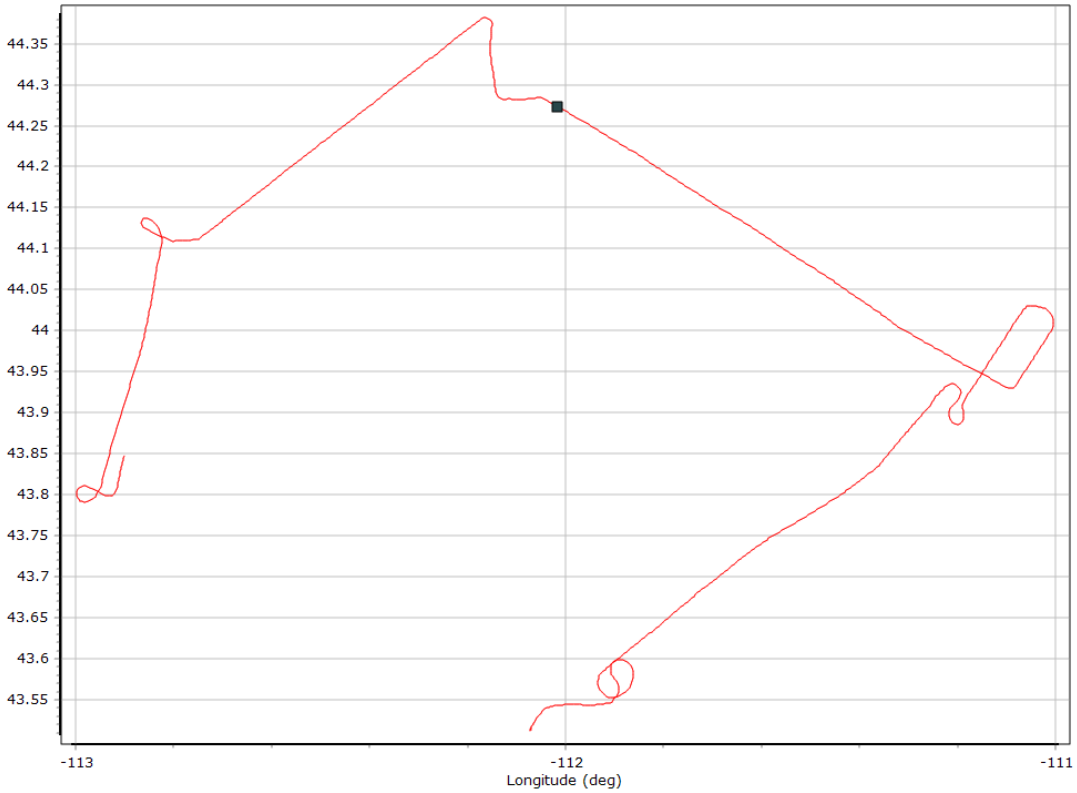

Altitude

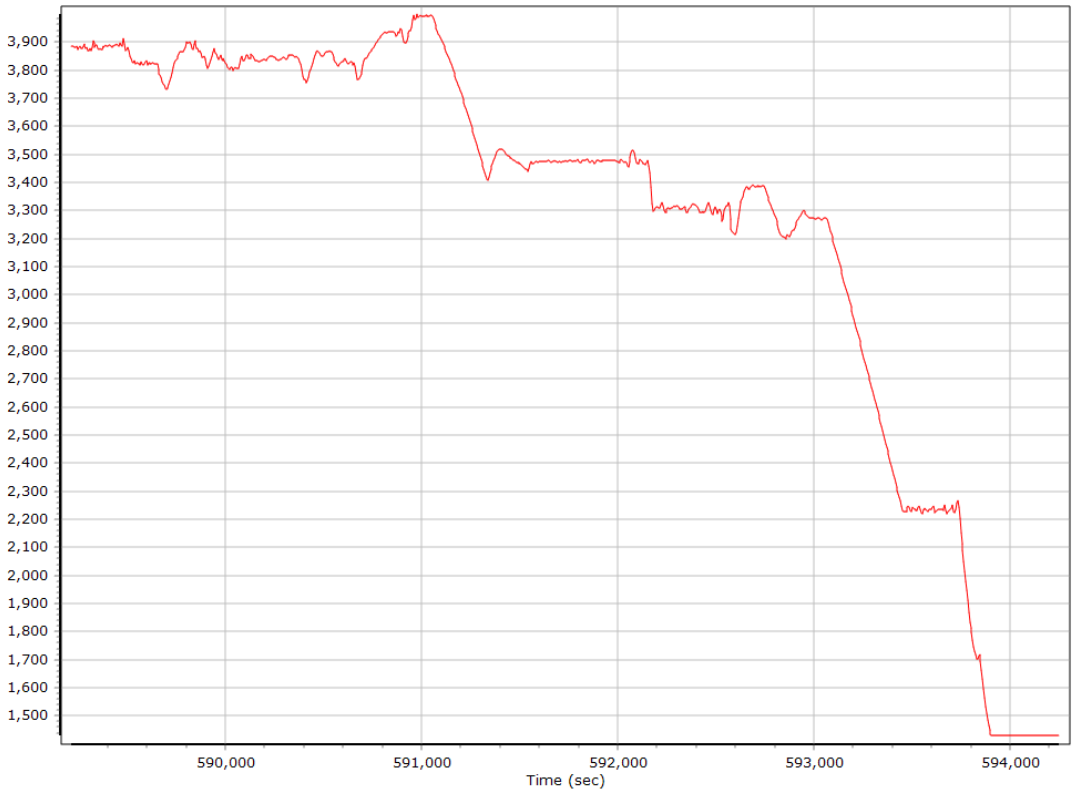

Roll/Pitch

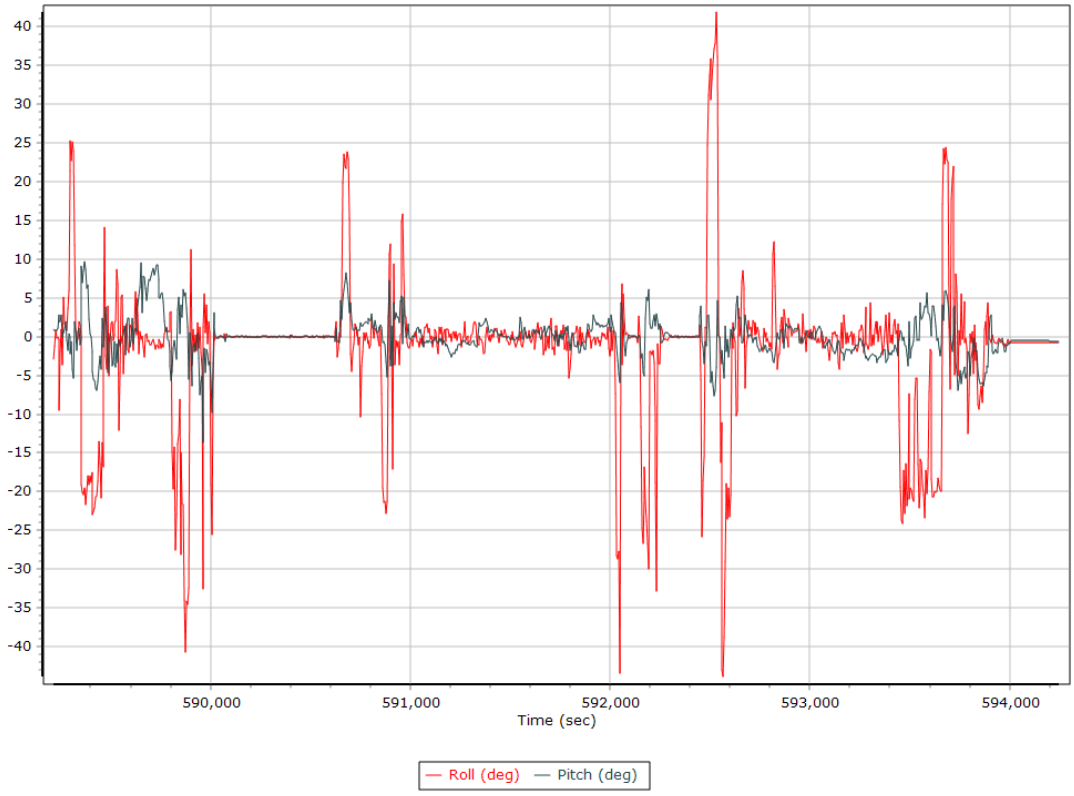

Heading

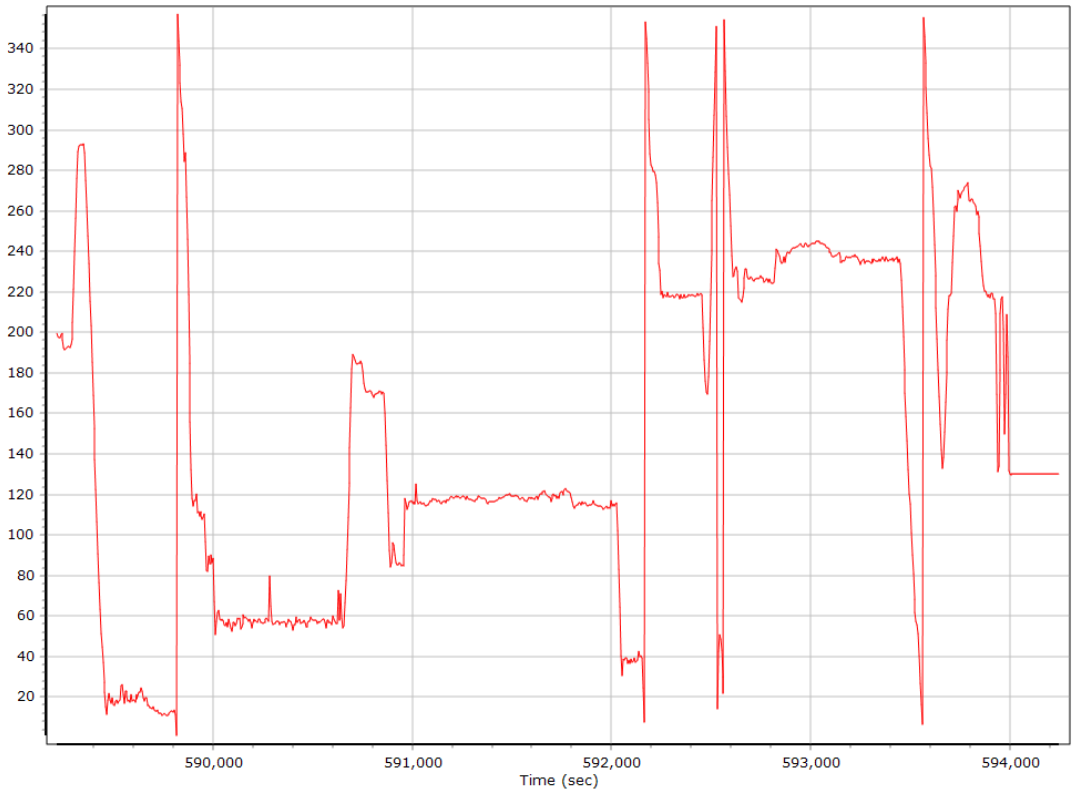

North/East Velocity

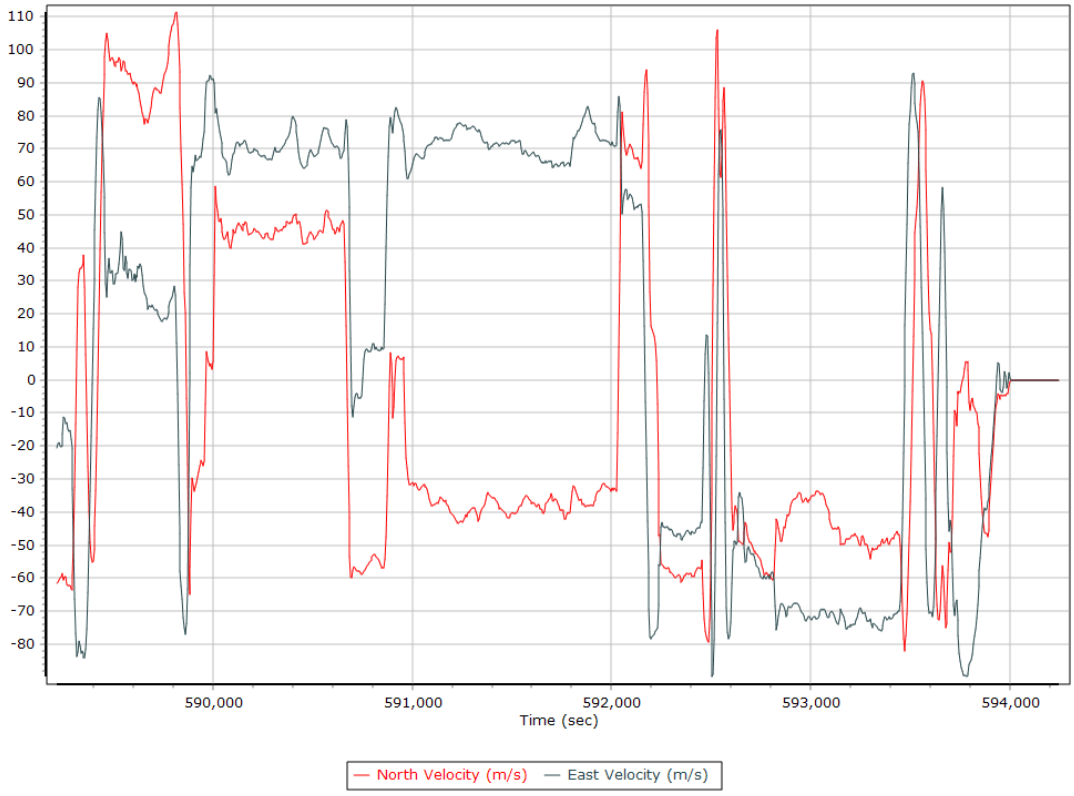

Down Velocity

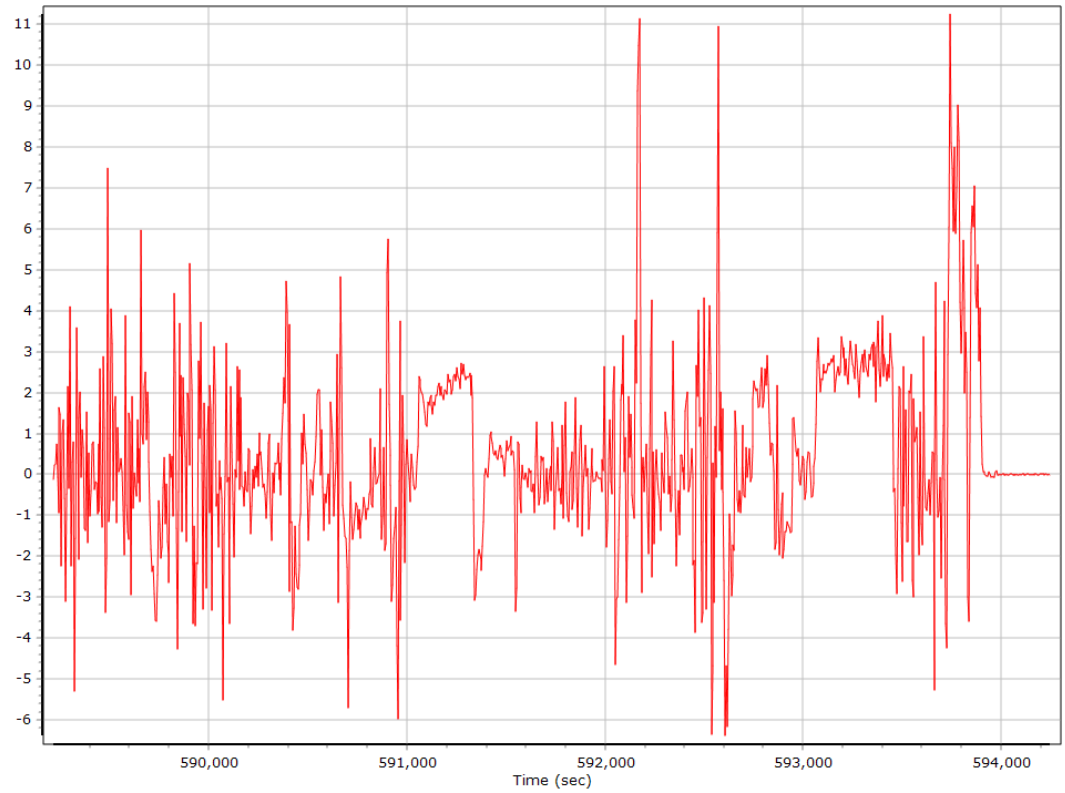

Total Speed

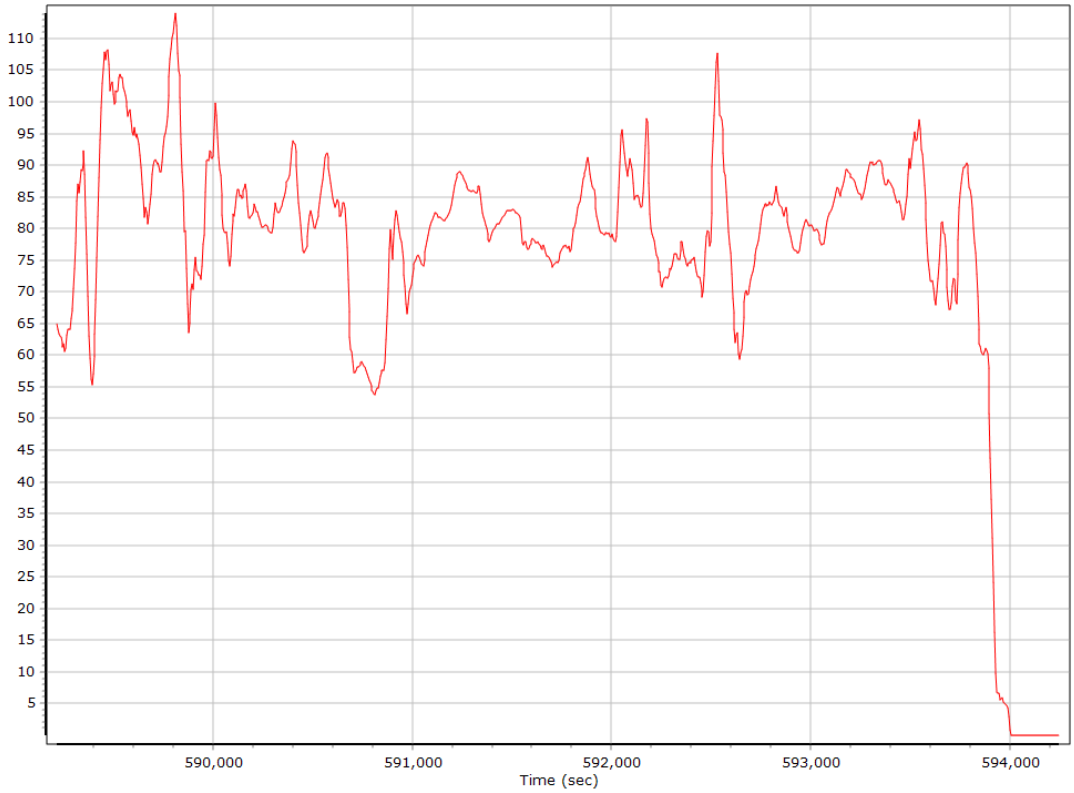

Ground Speed

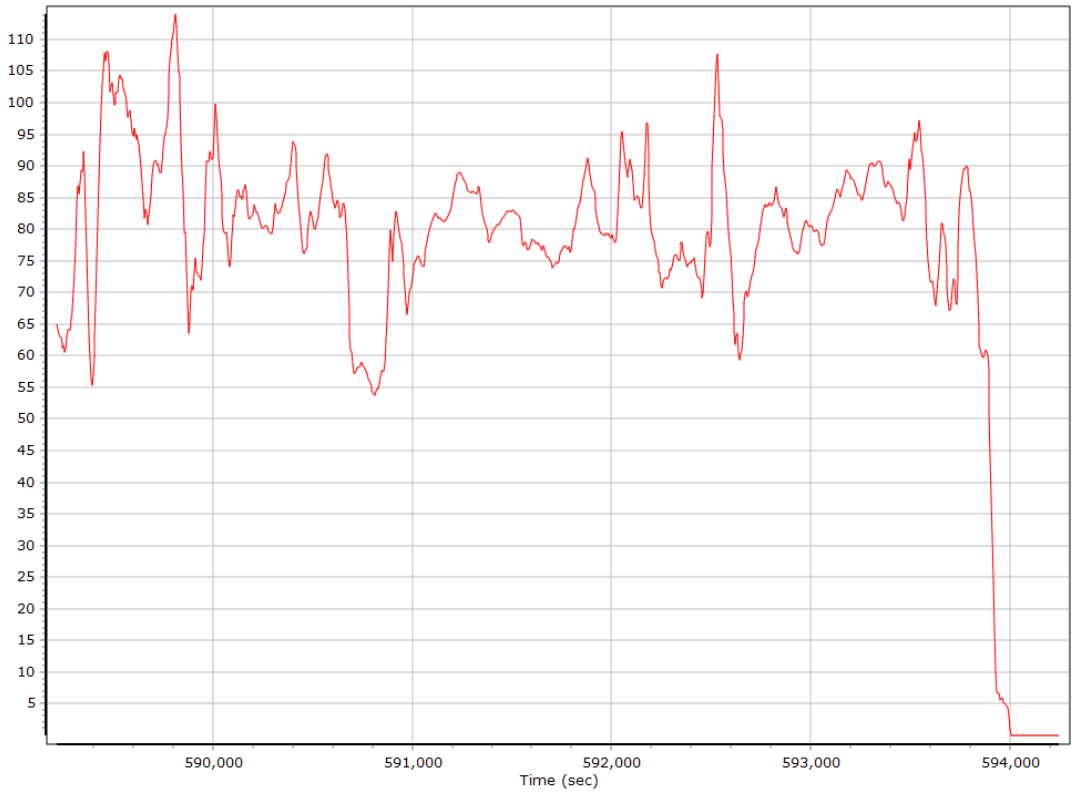

Body Acceleration

Total Body Acceleration

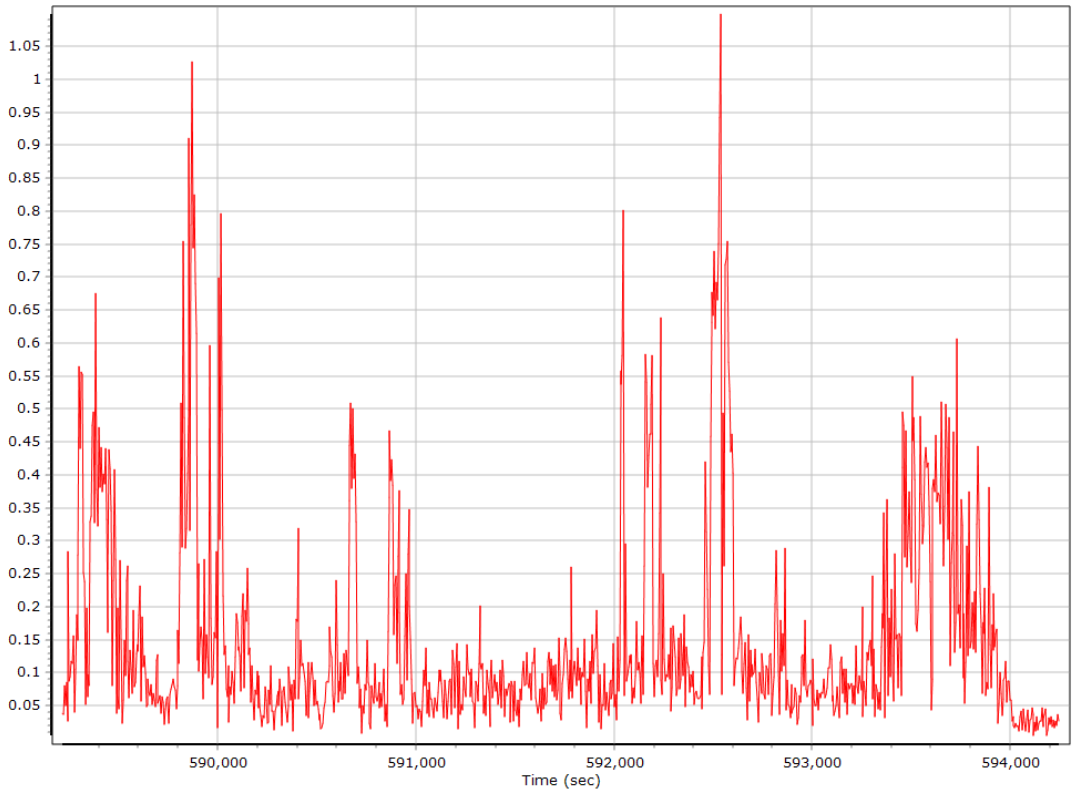

Body Angular Rate

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion Trimble RTX Nav		
Stabilized mount	True		
Processing start time	589064.000 (06/13/2020 19:37:26)		
Processing end time	594247.000 (06/13/2020 21:03:49)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Gimbal to IMU lever arm (m)	0.000	0.000	0.000
Gimbal to IMU mounting angles (deg)	0.000	0.000	0.000
Gimbal to Primary GNSS lever arm (m)	-0.215	-0.027	-0.964
Gimbal to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm (m)

X Reference-Primary GNSS Lever Arm (m)

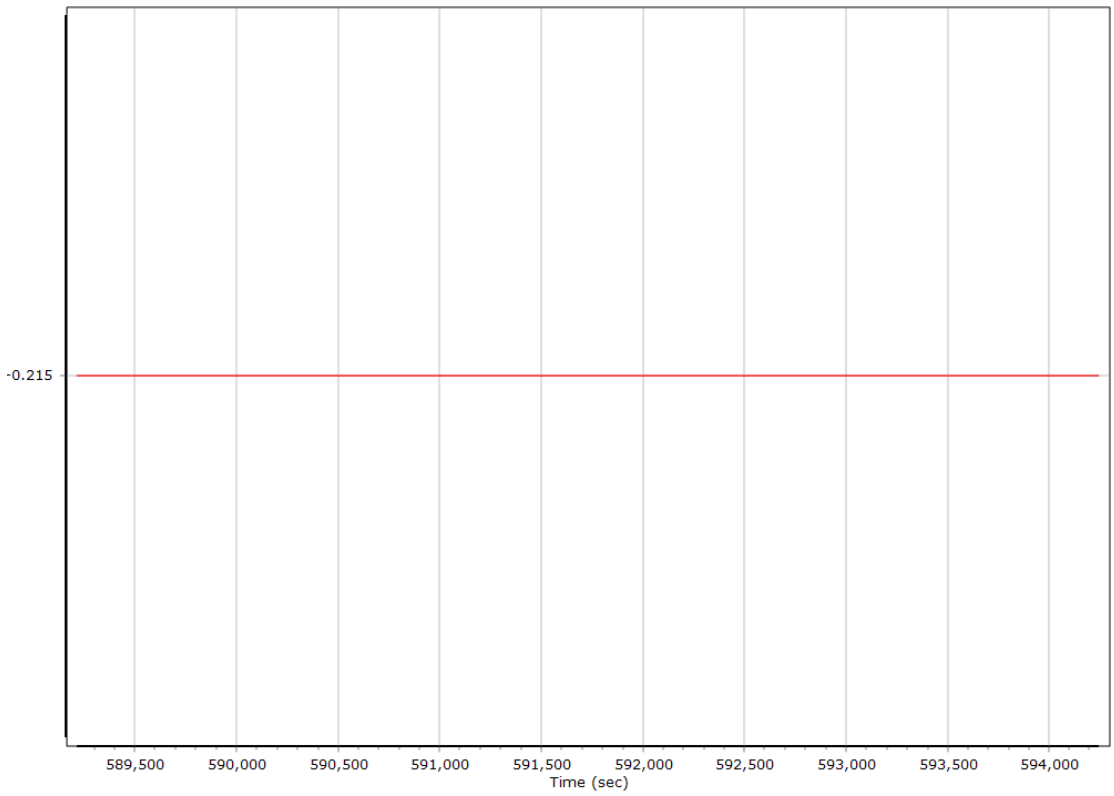

Y Reference-Primary GNSS Lever Arm (m)

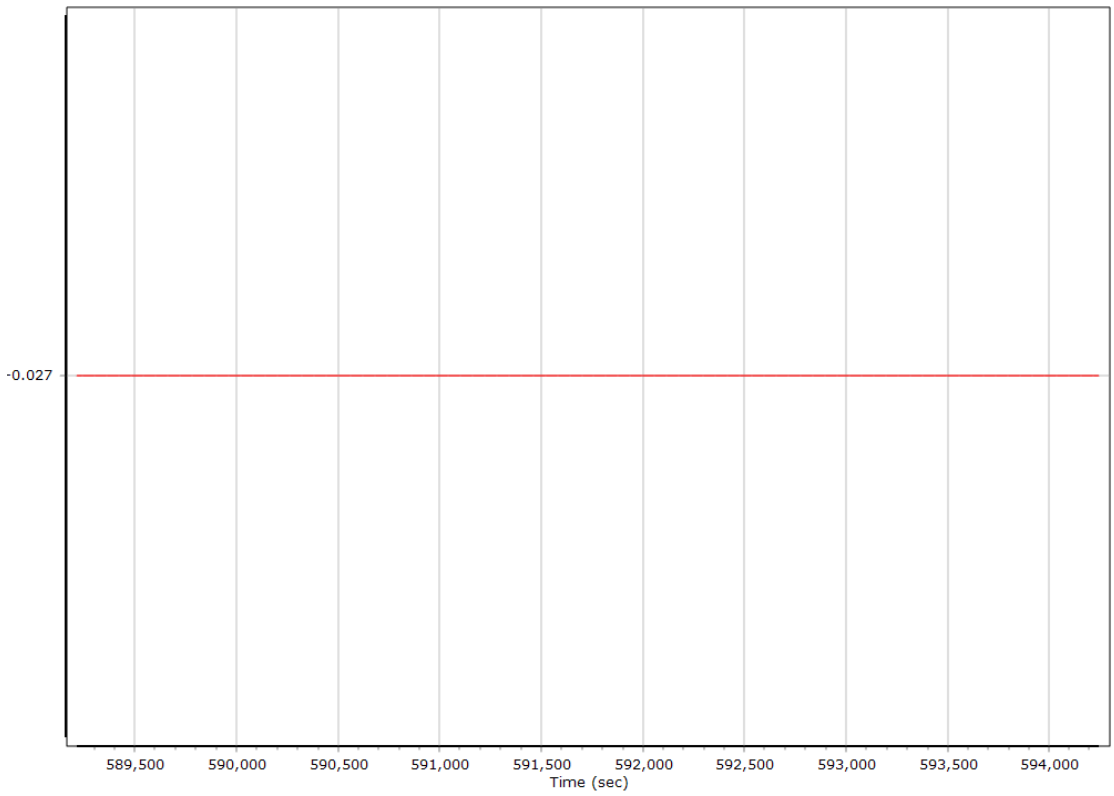

Z Reference-Primary GNSS Lever Arm (m)

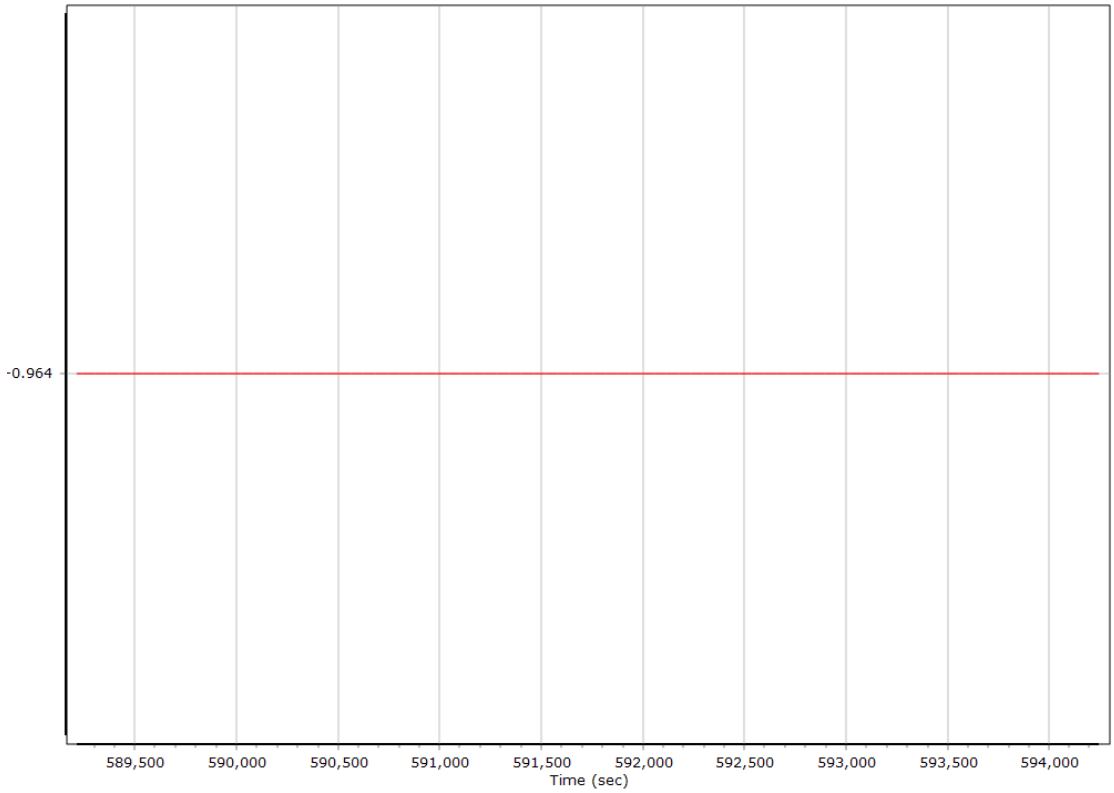

Reference-Primary GNSS Lever Arm Figure of Merit

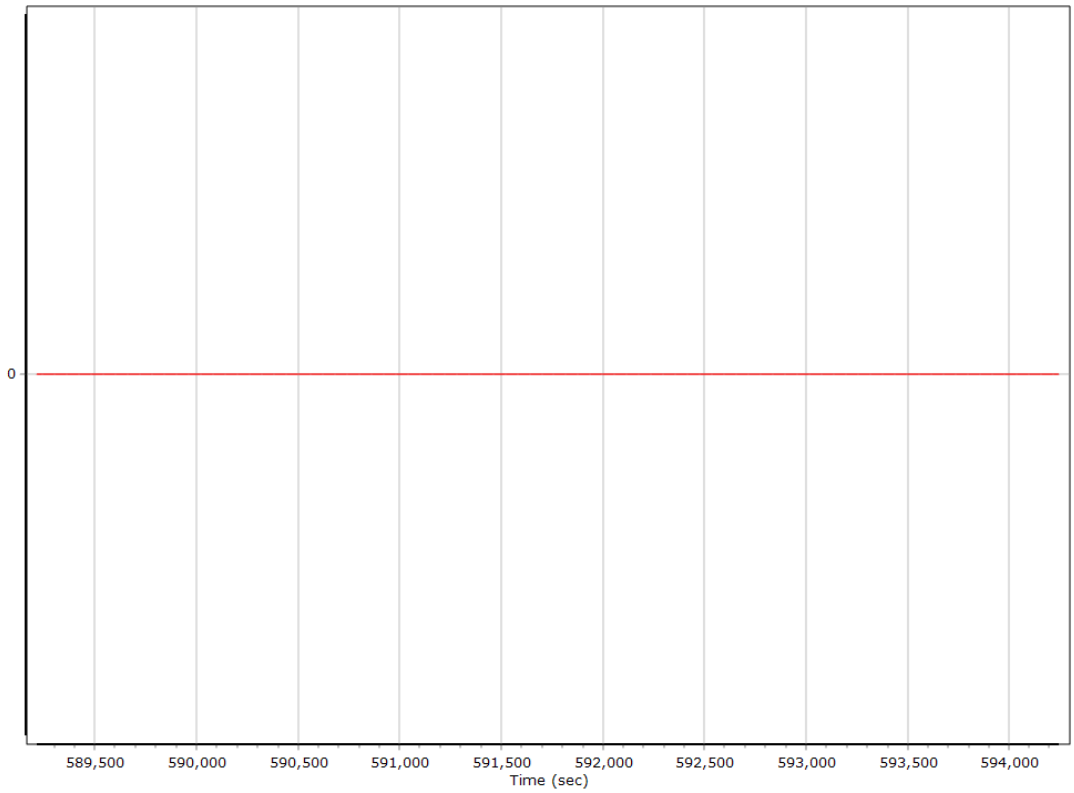

IN-Fusion QC

Forward Processed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

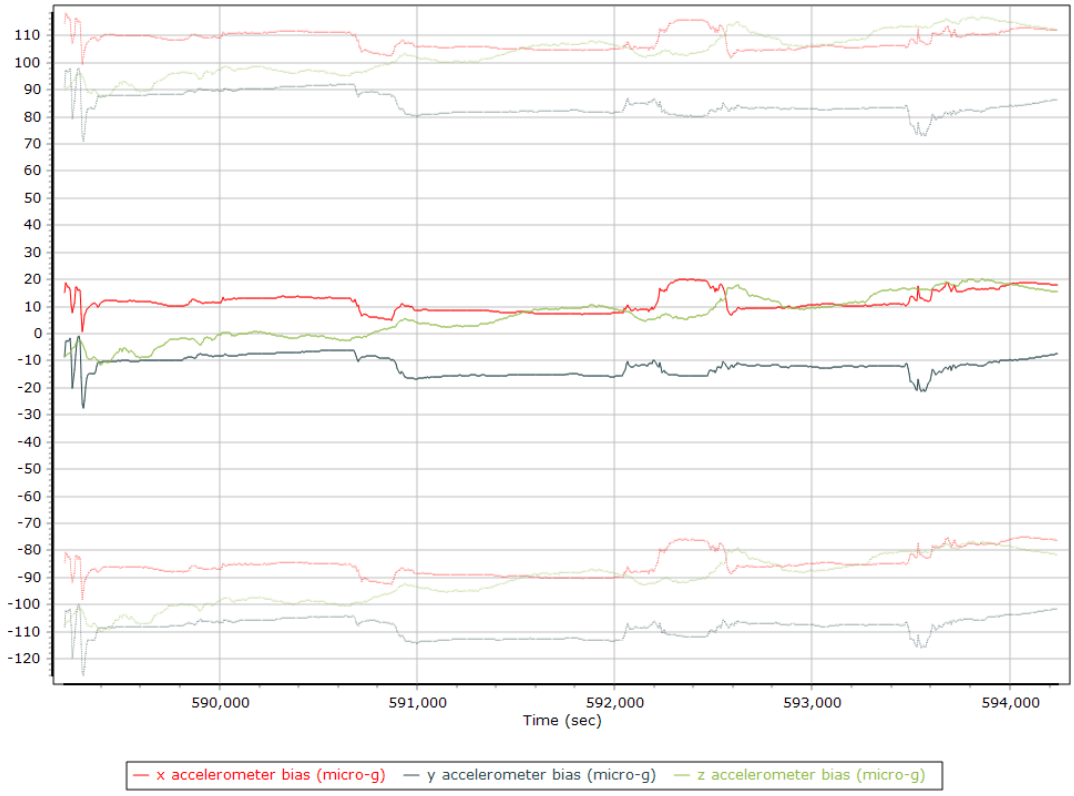

X Accelerometer Bias (micro-g)

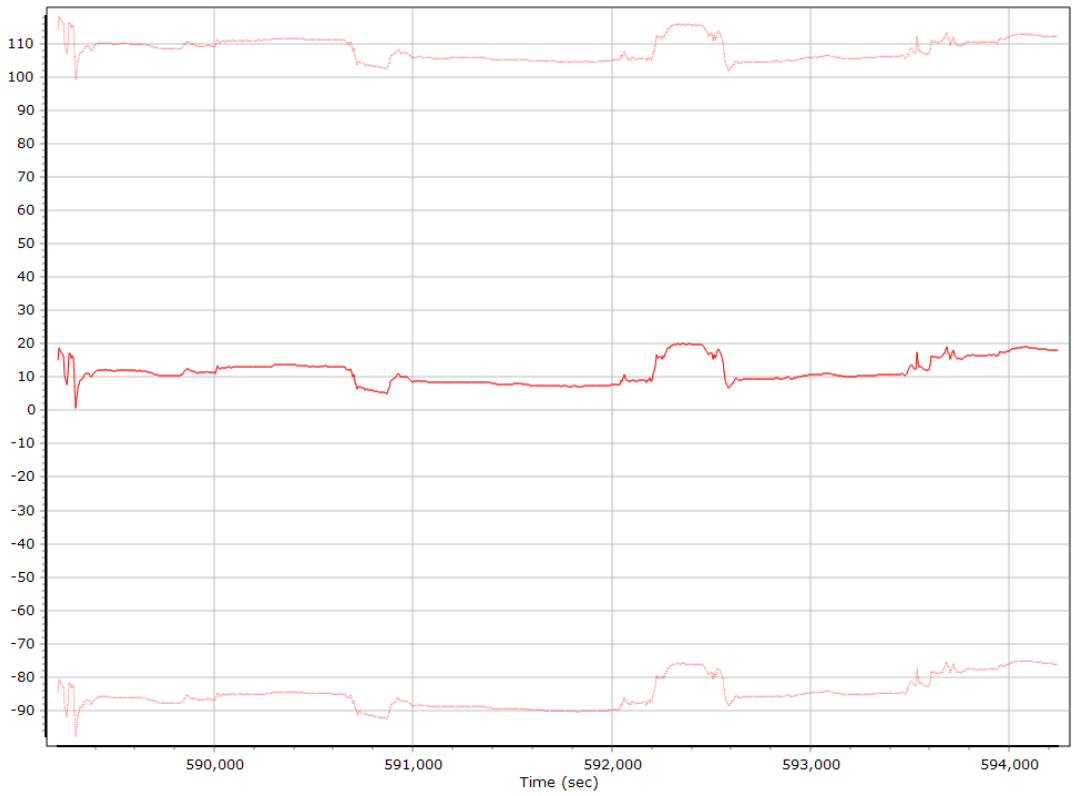

Y Accelerometer Bias (micro-g)

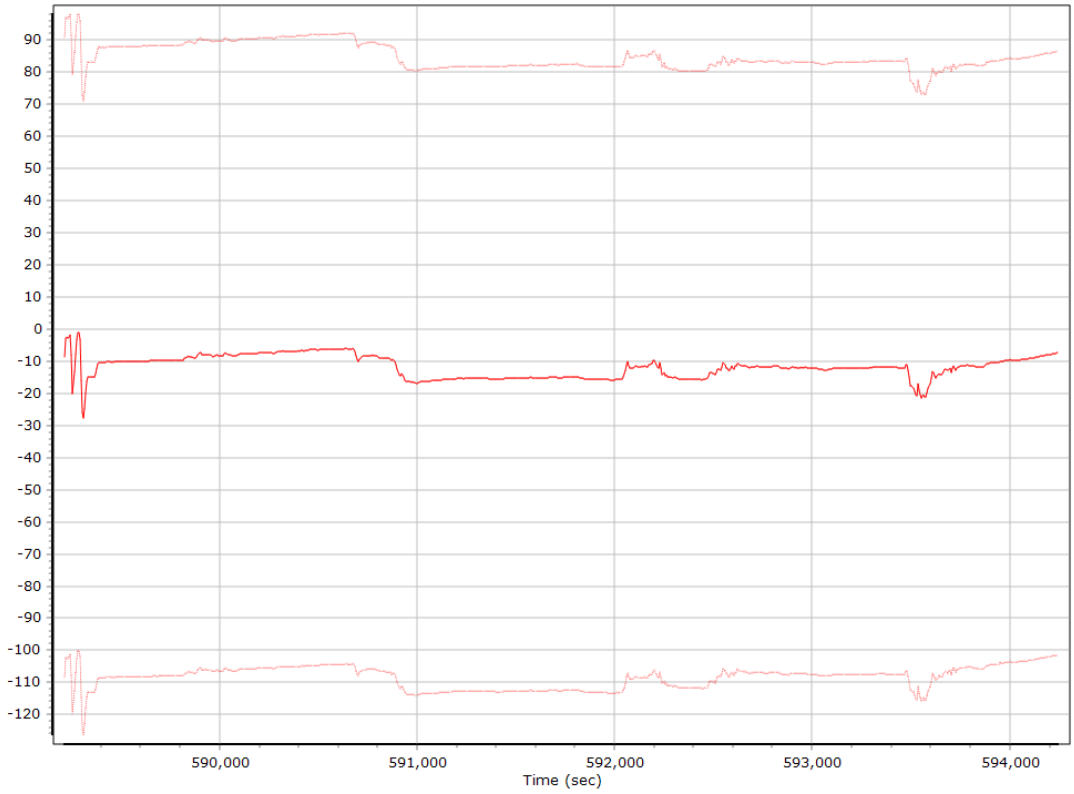

Z Accelerometer Bias (micro-g)

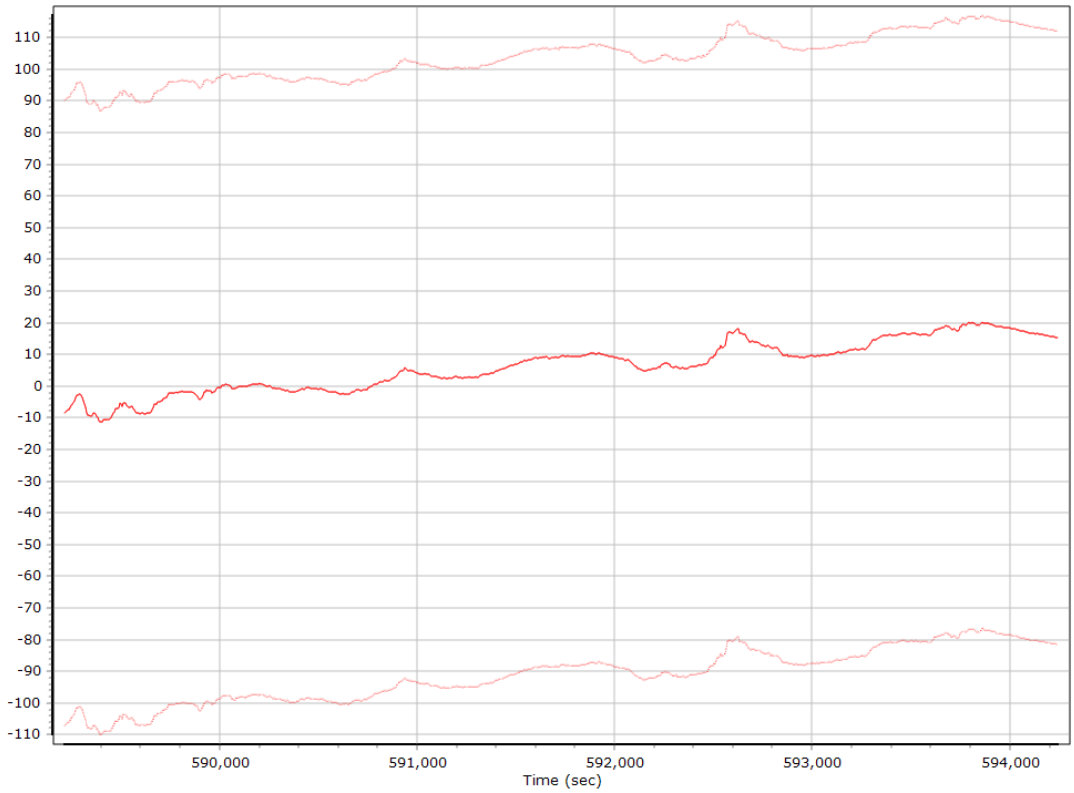

Accelerometer Scale Error (ppm)

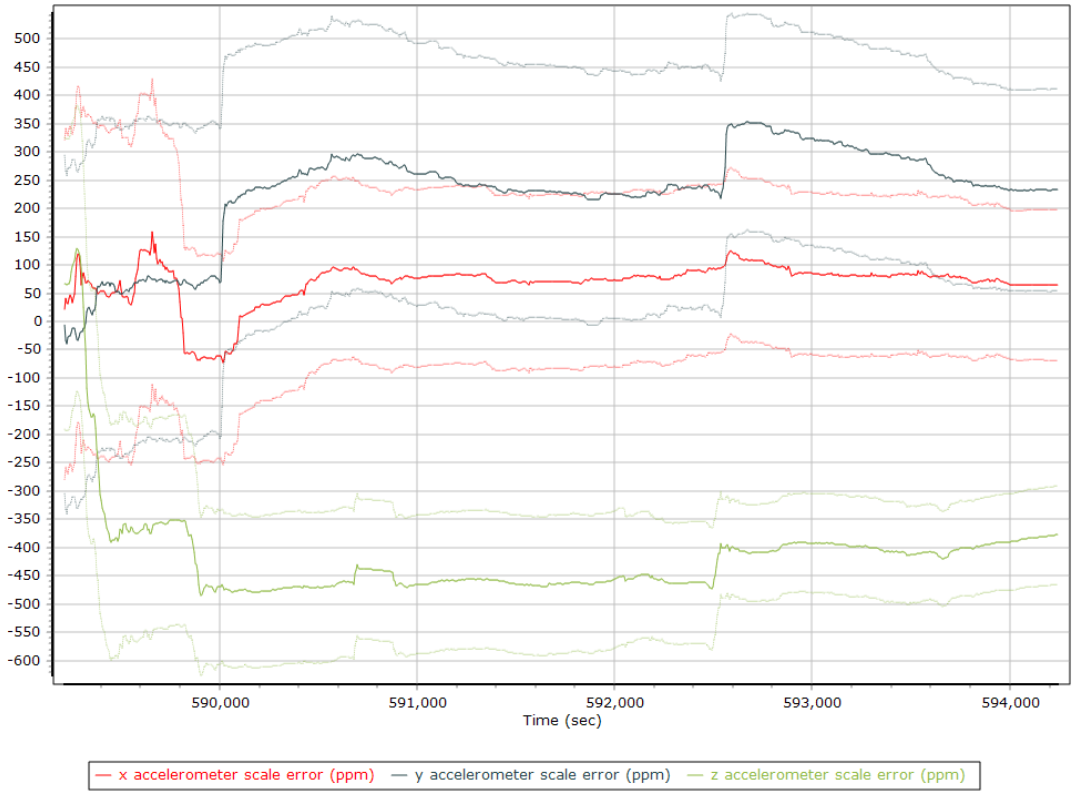

X Accelerometer Scale Error (ppm)

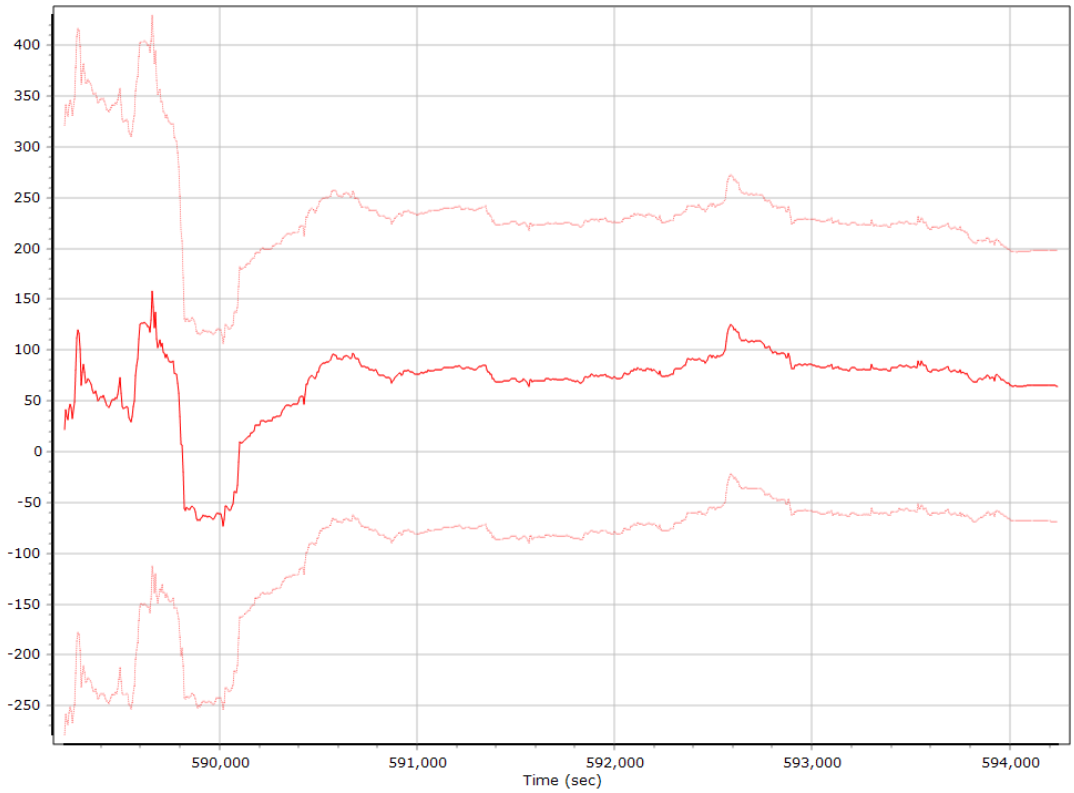

Y Accelerometer Scale Error (ppm)

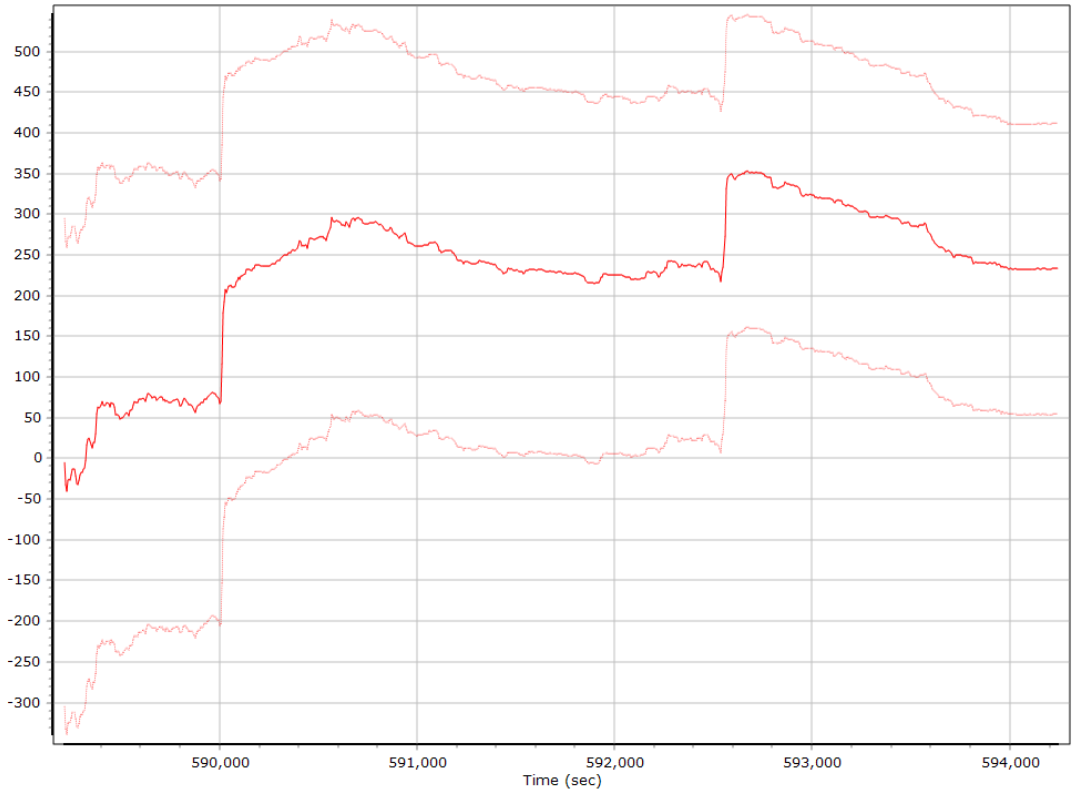

Z Accelerometer Scale Error (ppm)

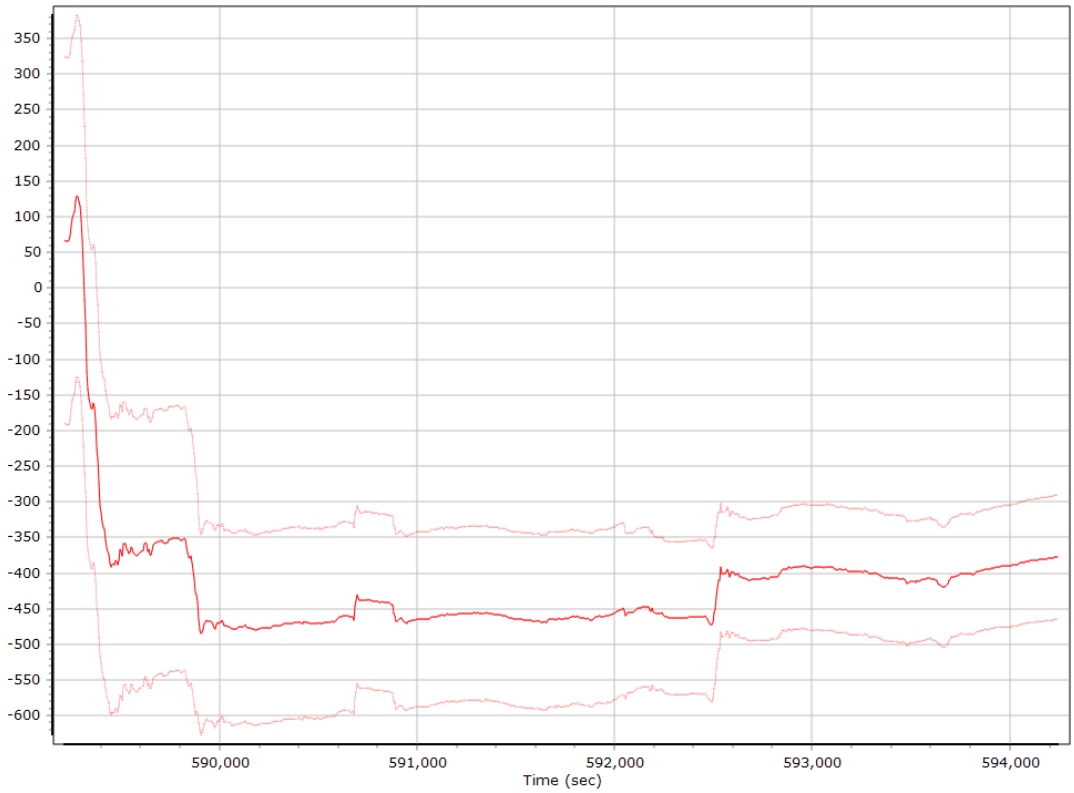

Gyro Bias (deg/h)

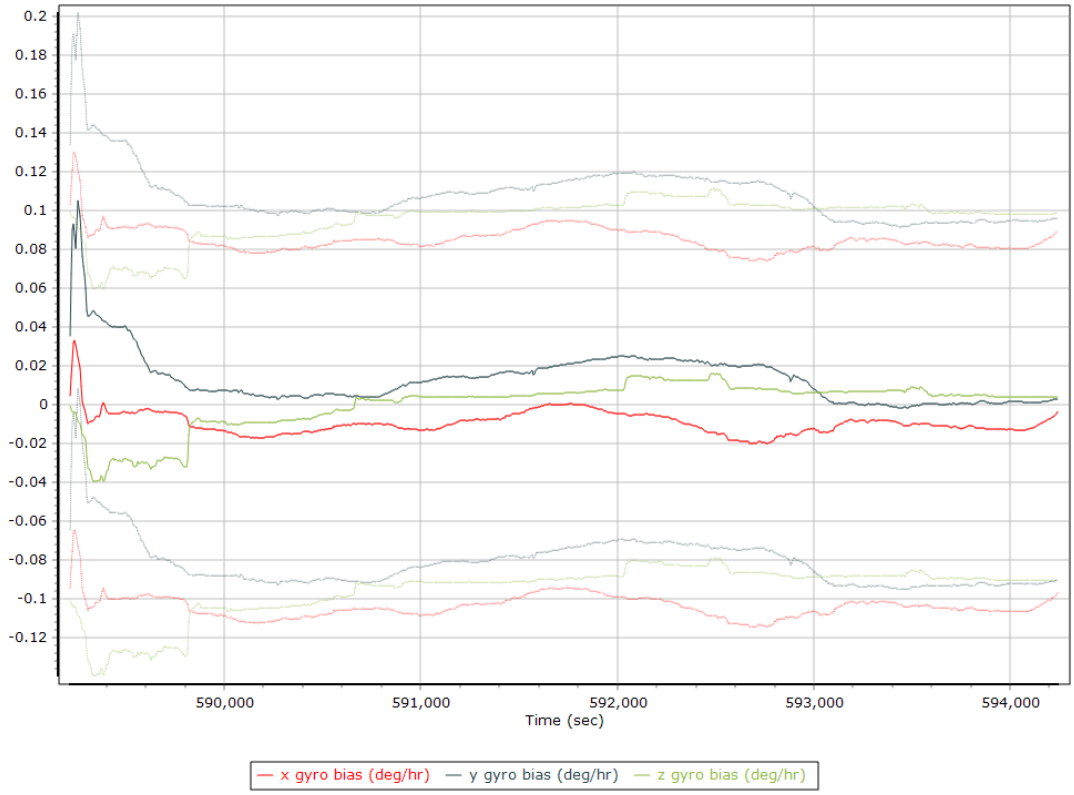

X Gyro Bias (deg/h)

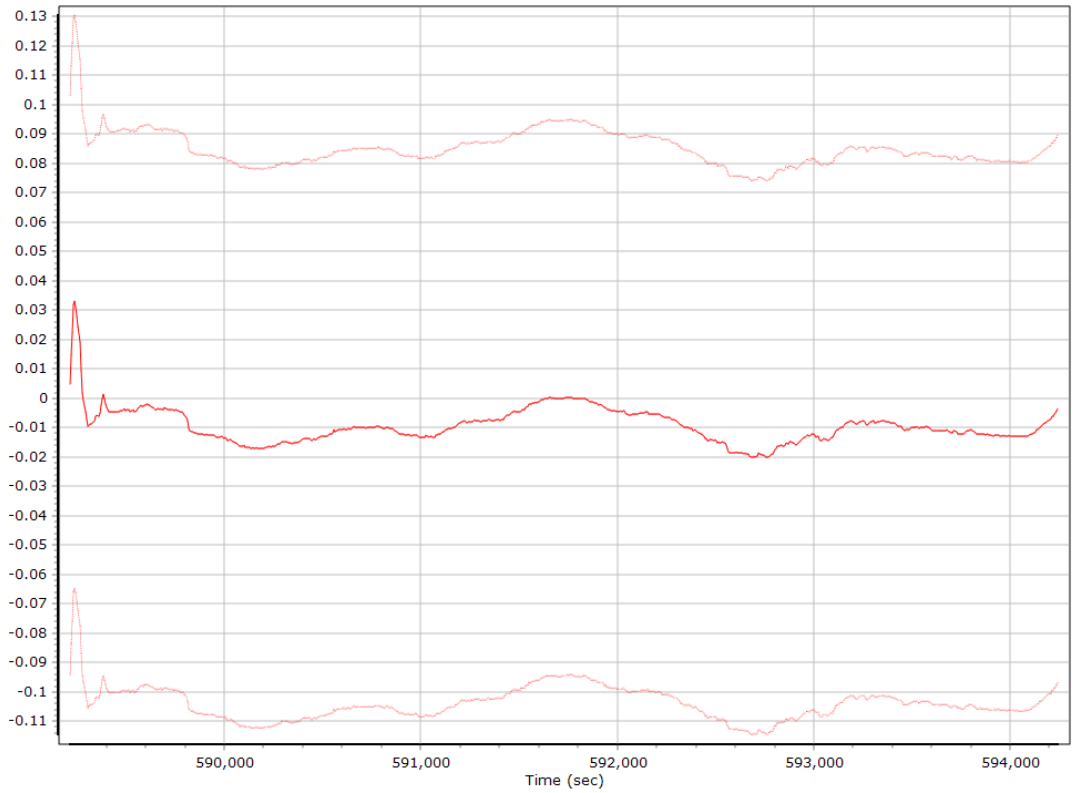

Y Gyro Bias (deg/h)

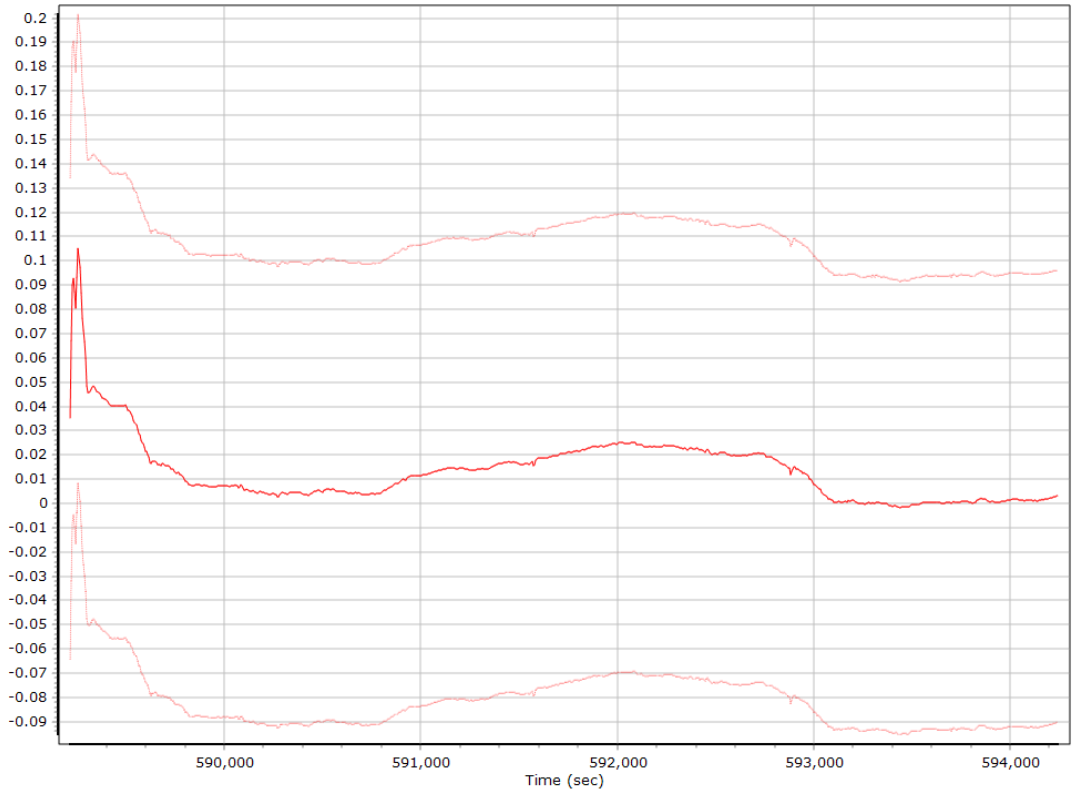

Z Gyro Bias (deg/h)

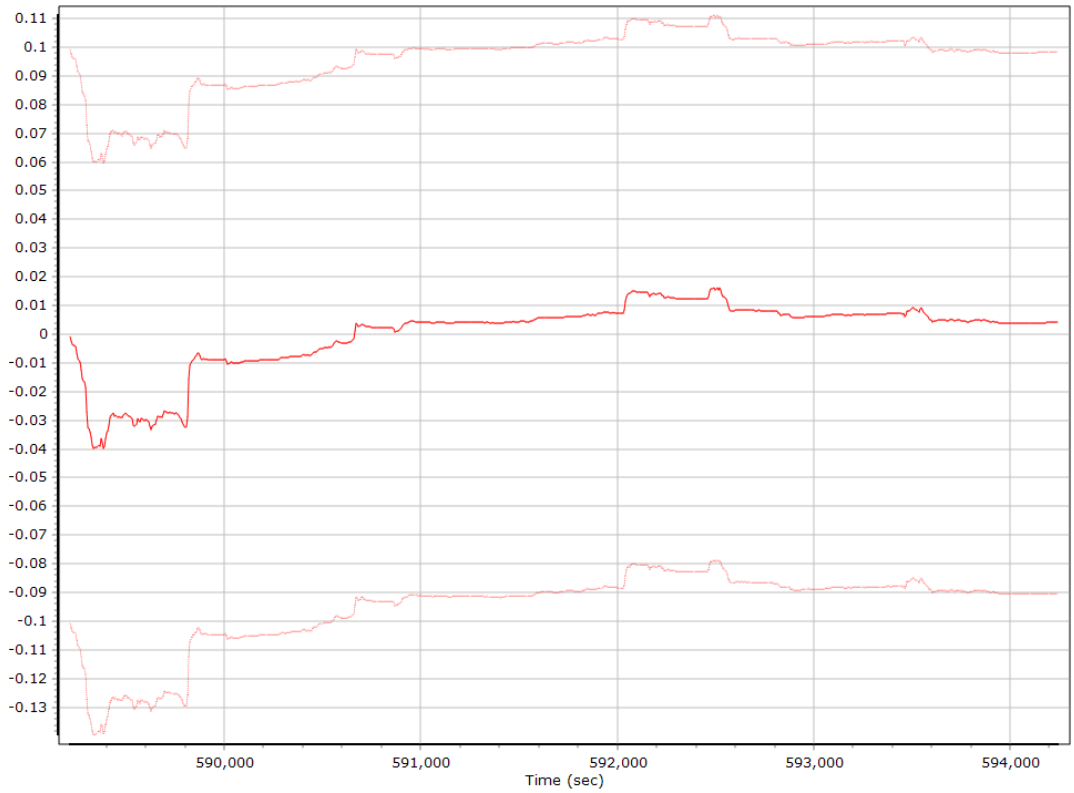

Gyro Scale Error (ppm)

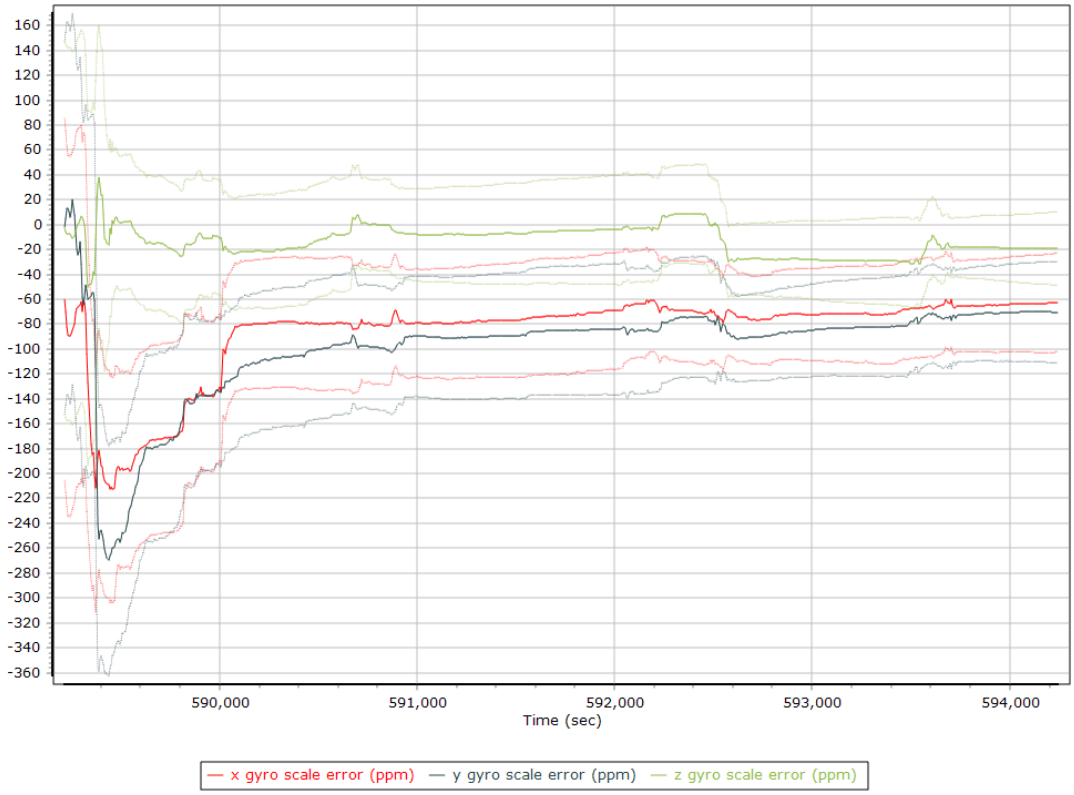

X Gyro Scale Error (ppm)

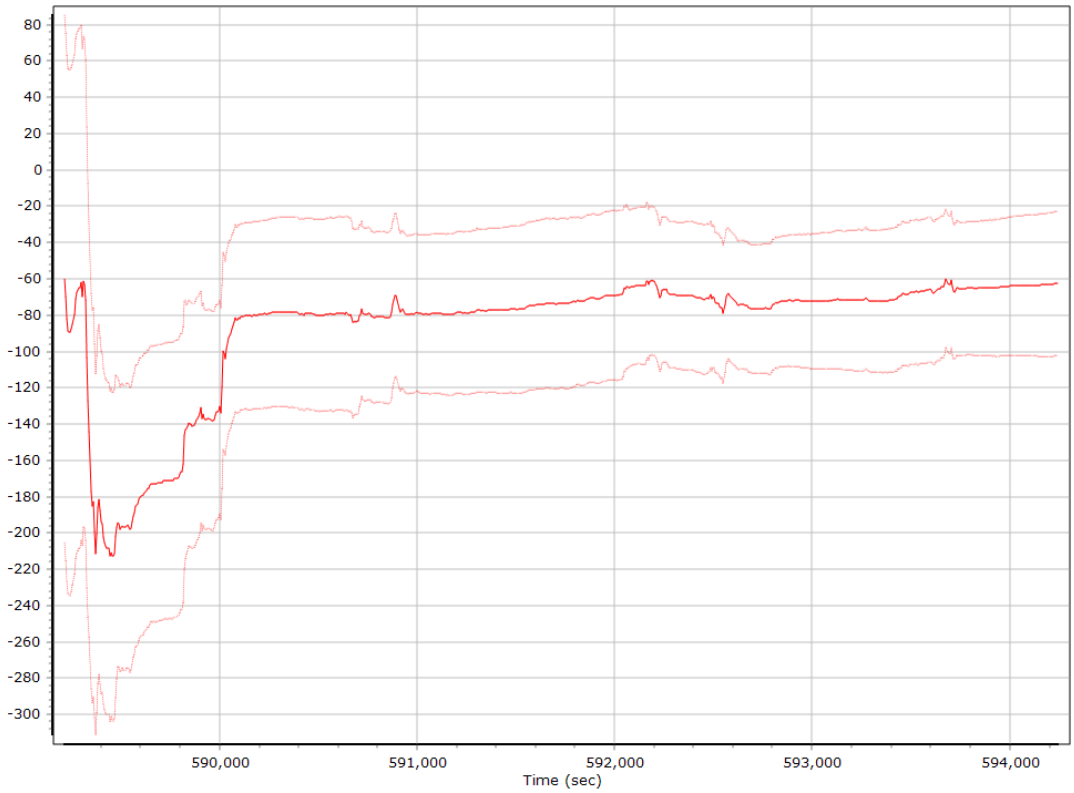

Y Gyro Scale Error (ppm)

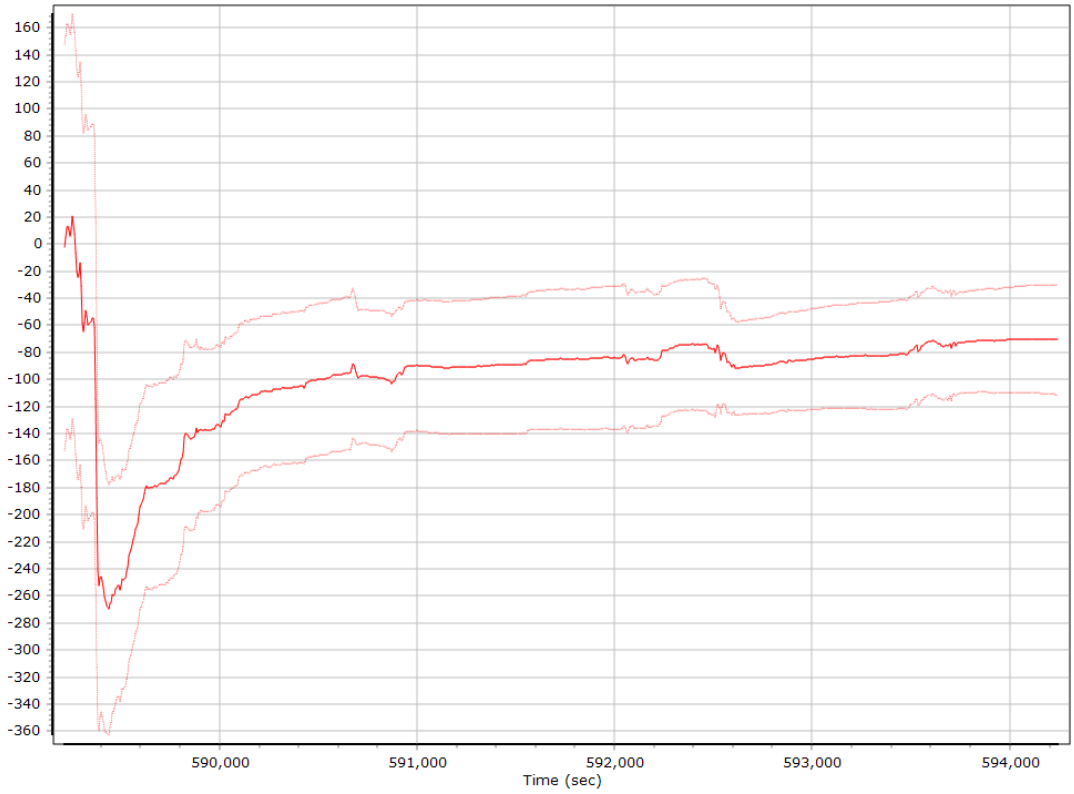

Z Gyro Scale Error (ppm)

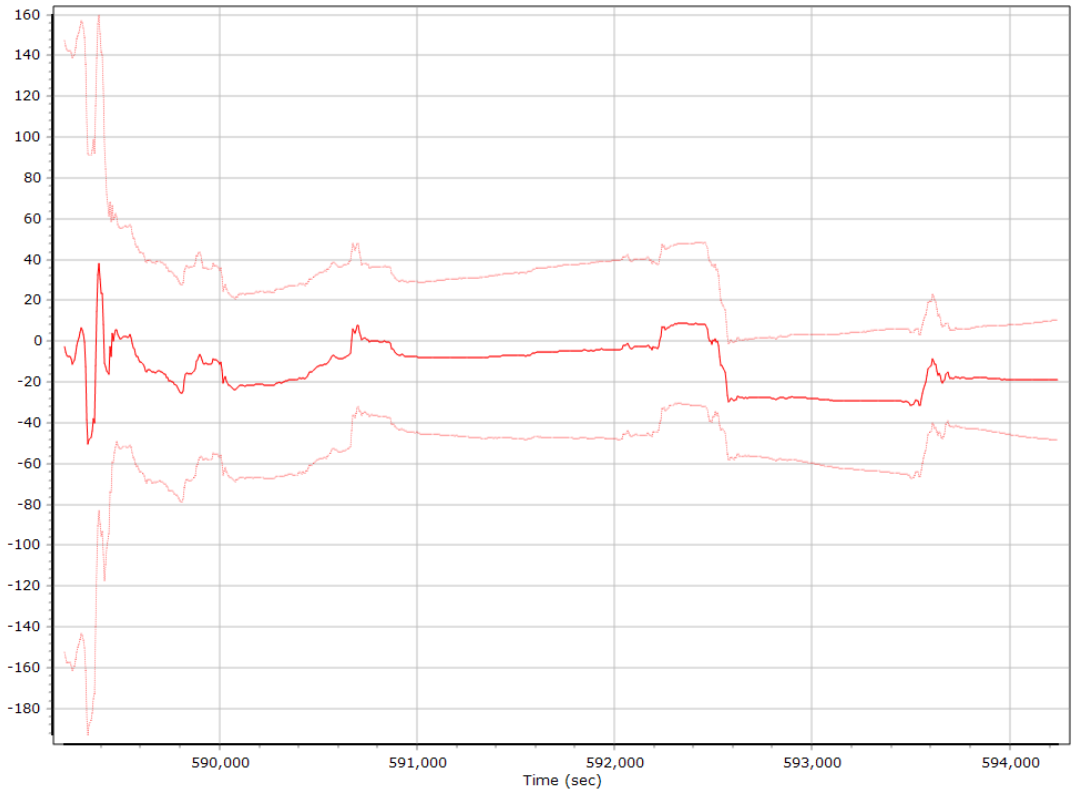

Forward Processed Estimated Constant Errors, Reference Frame

Accelerometer Bias (micro-g)

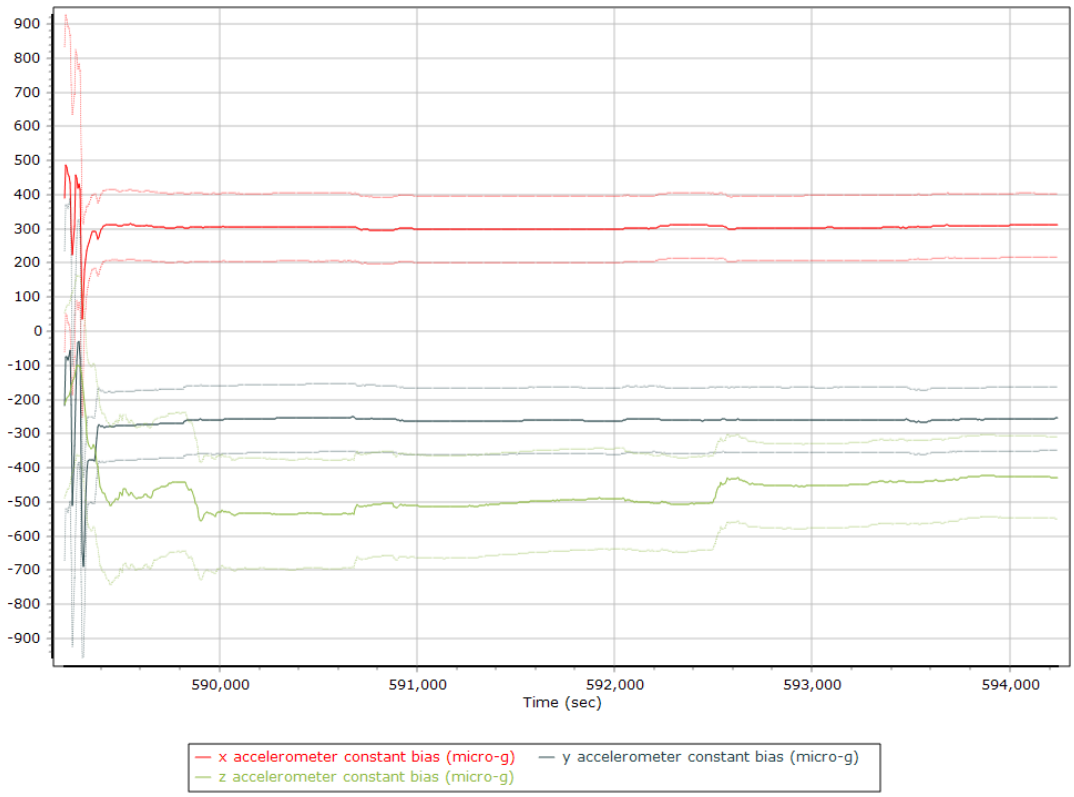

X Accelerometer Bias (micro-g)

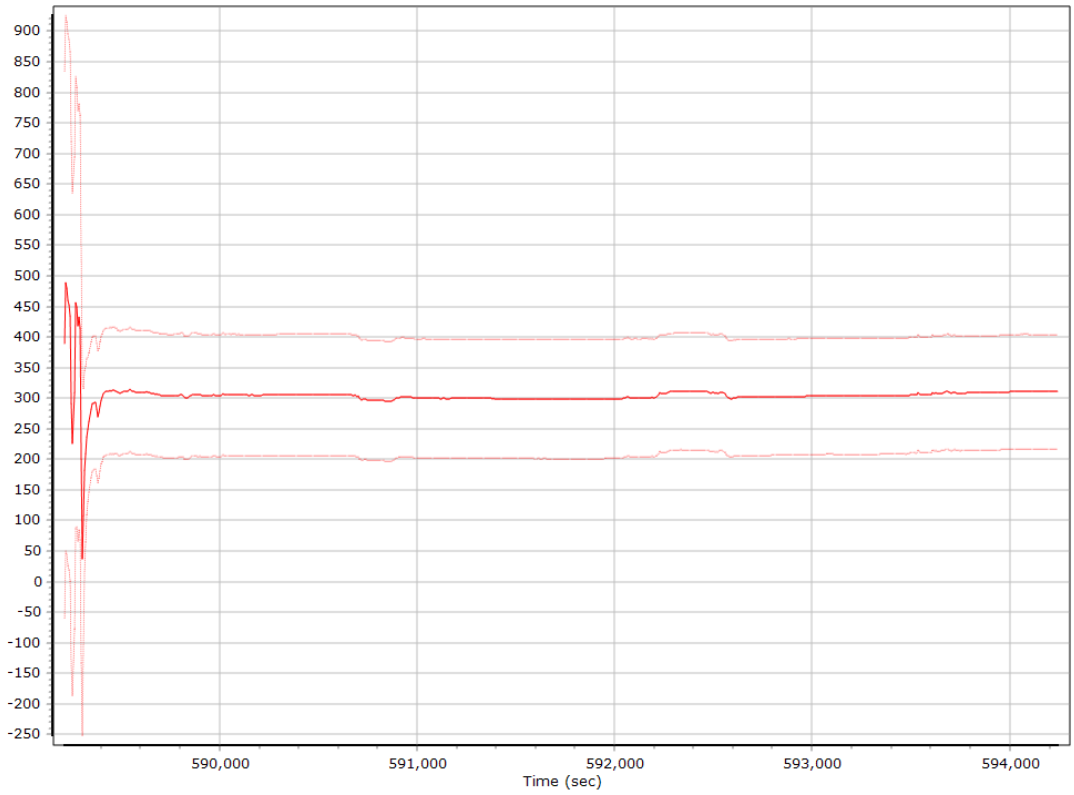

Y Accelerometer Bias (micro-g)

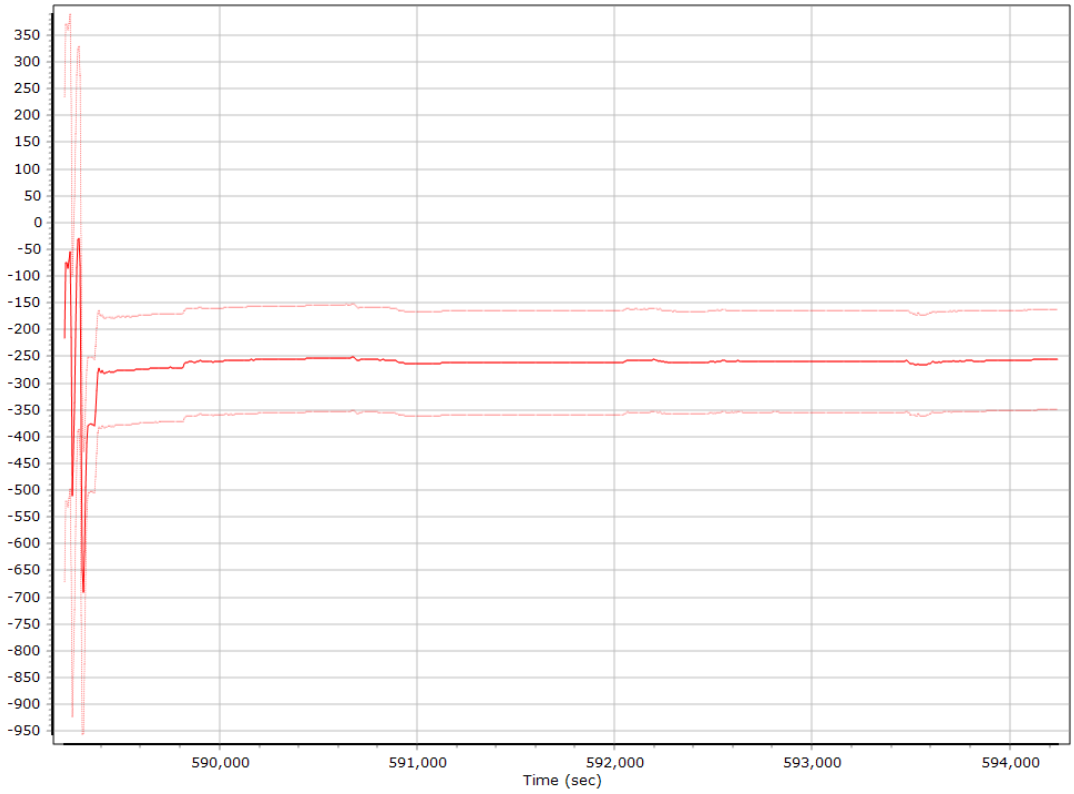

Z Accelerometer Bias (micro-g)

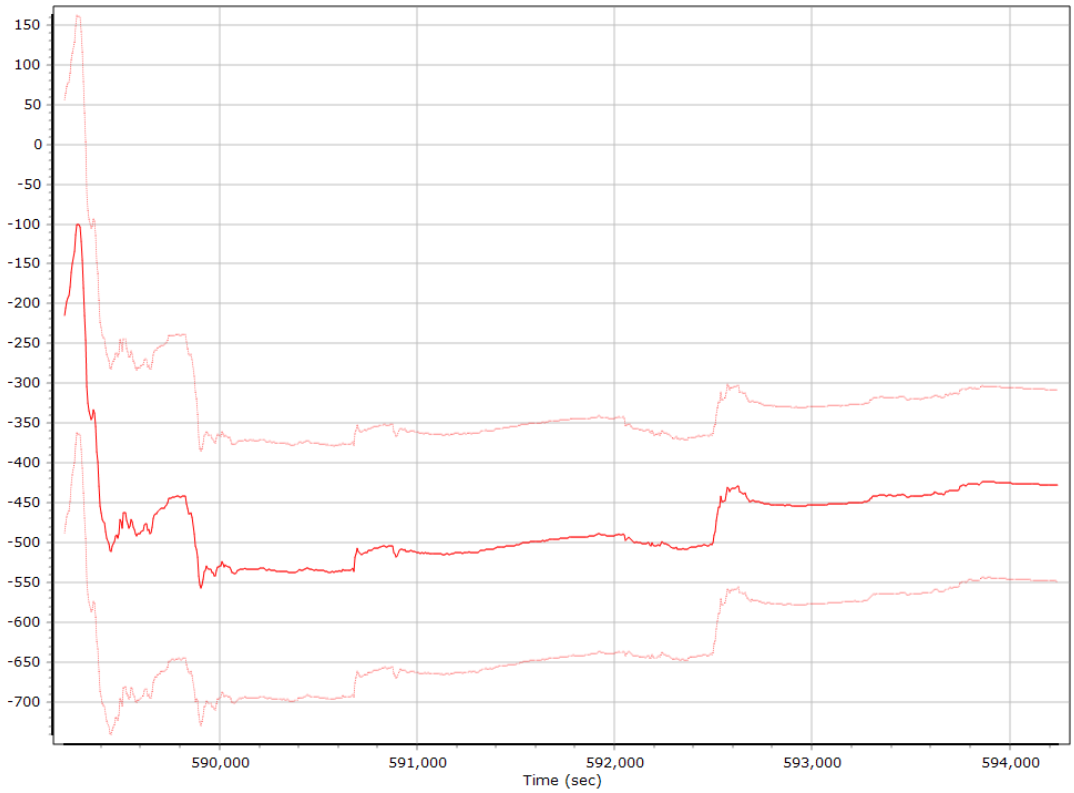

Gyro Bias (deg/h)

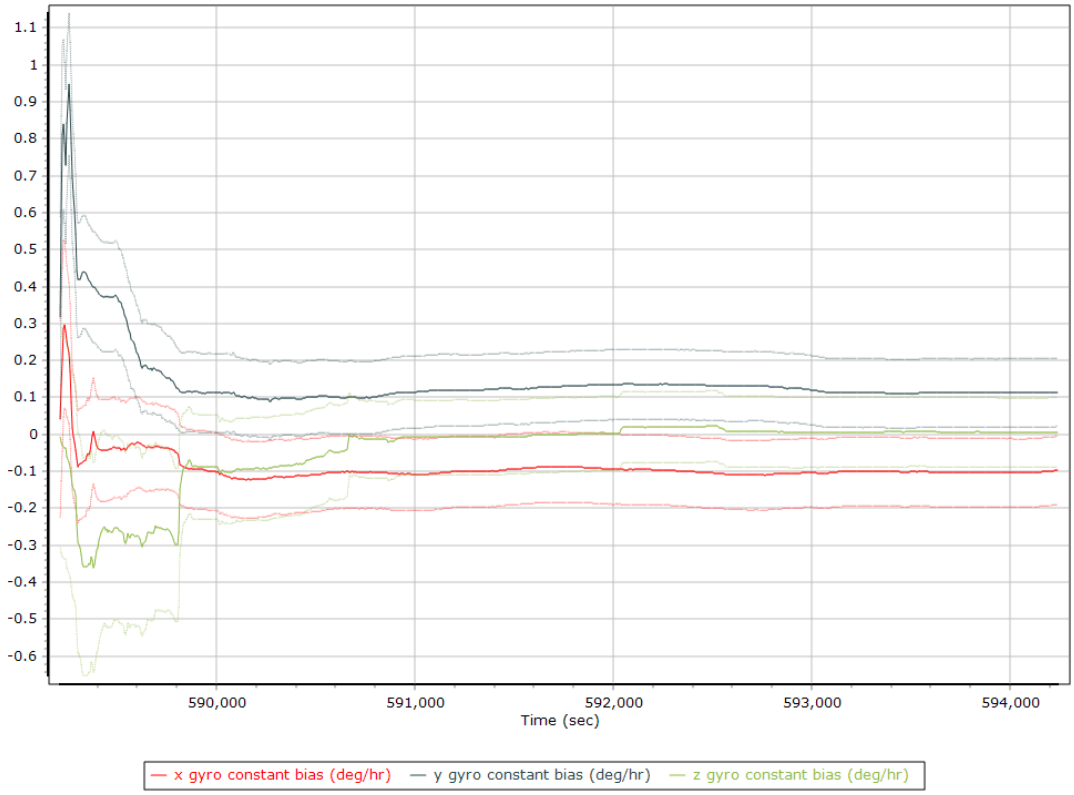

X Gyro Bias (deg/h)

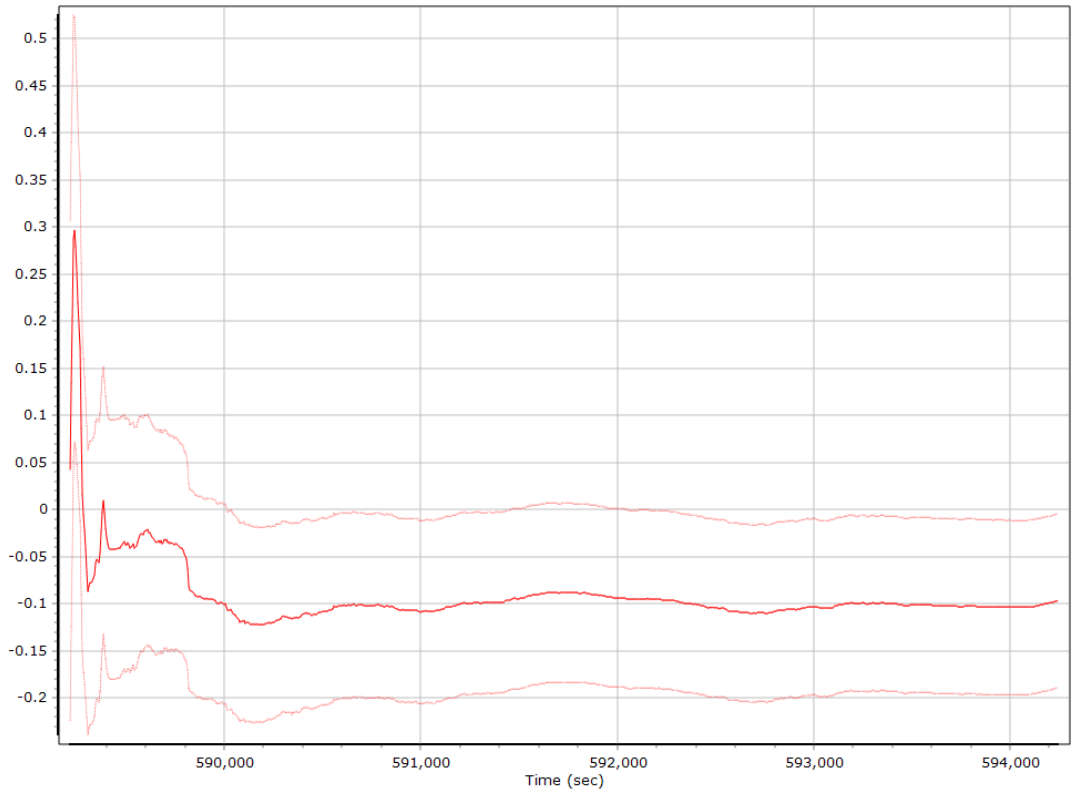

Y Gyro Bias (deg/h)

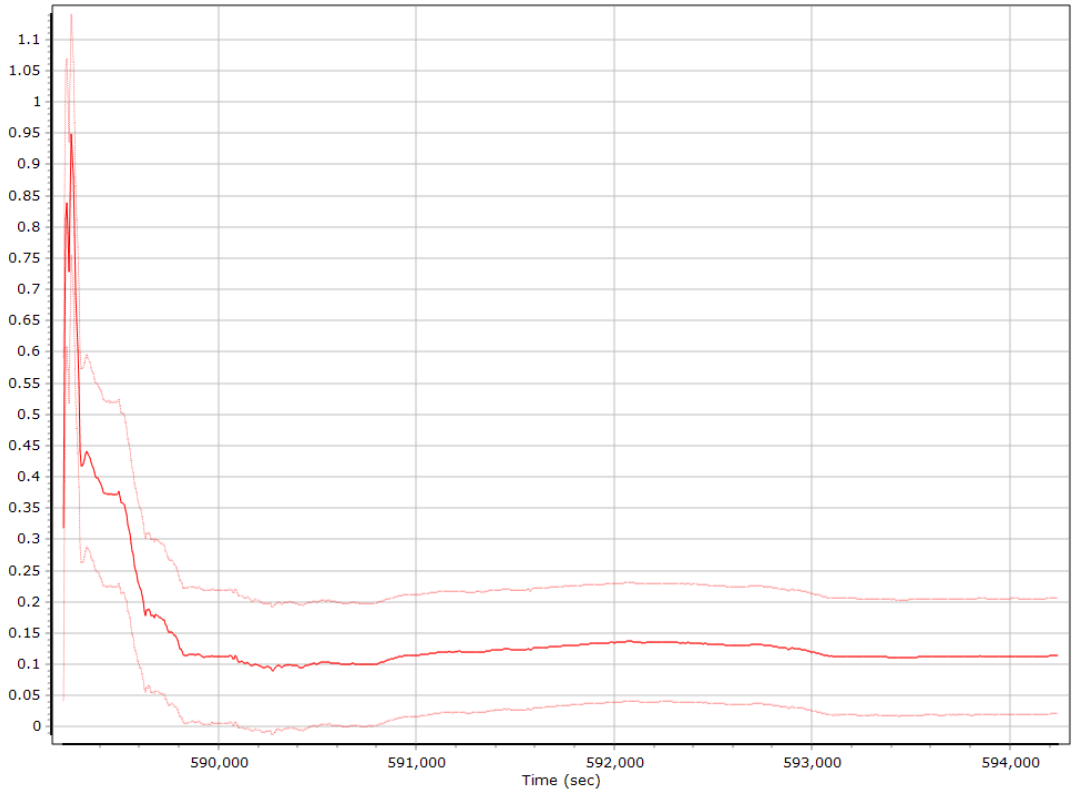

Z Gyro Bias (deg/h)

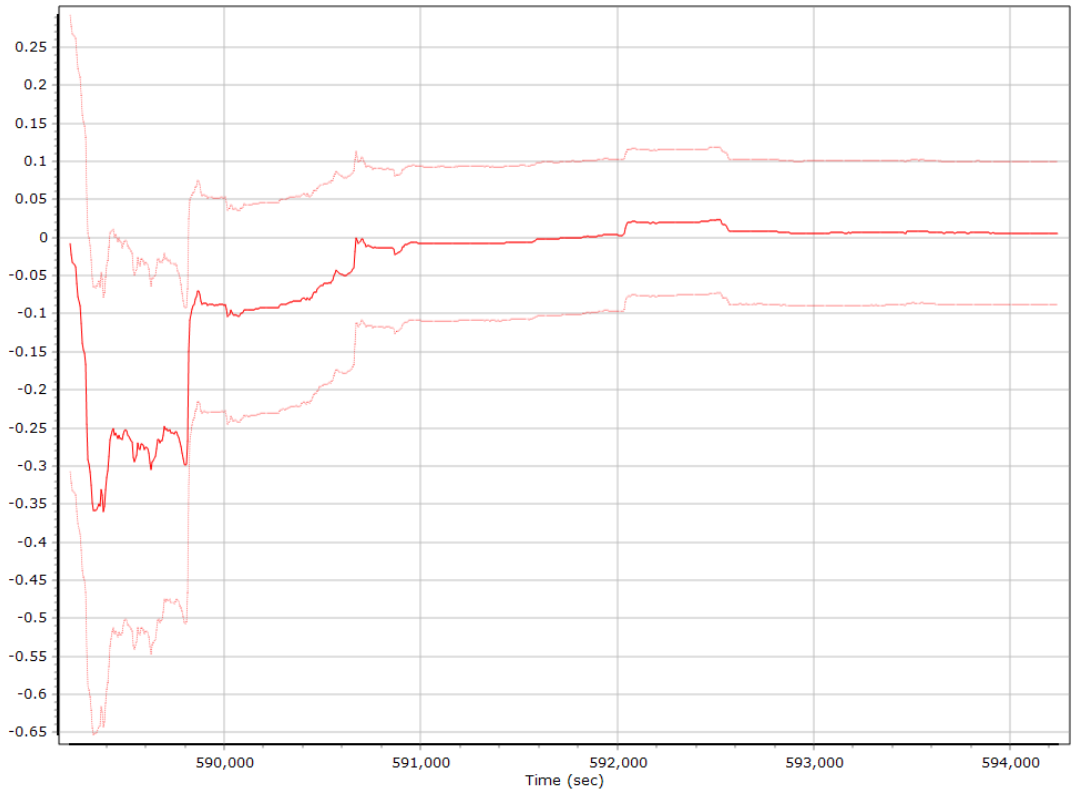

Smoothed Performance Metrics

Position Error RMS (m)

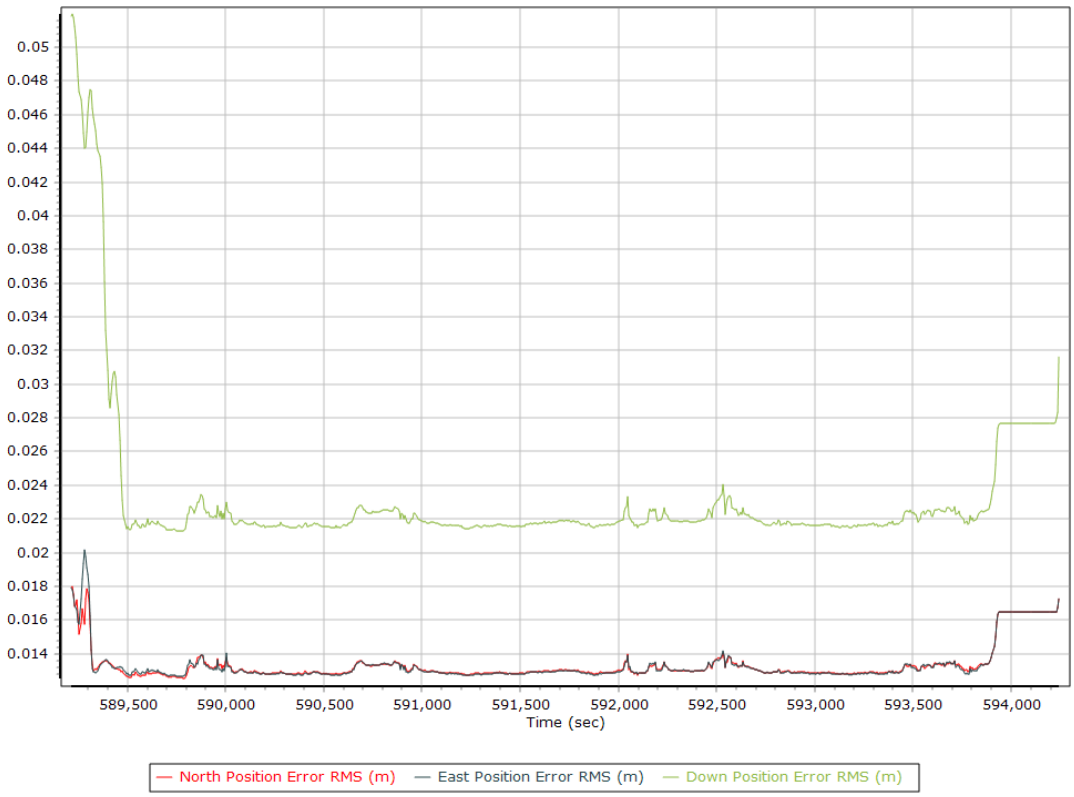

Velocity Error RMS (m/s)

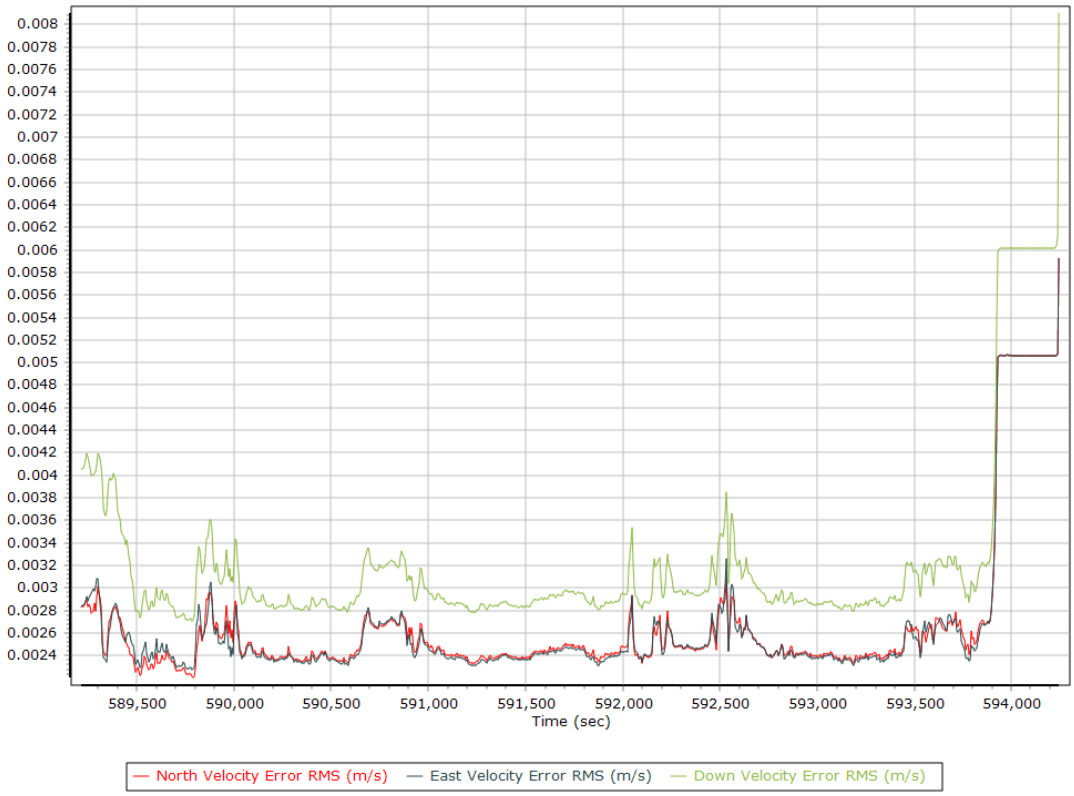

Roll/Pitch Error RMS (arc-min)

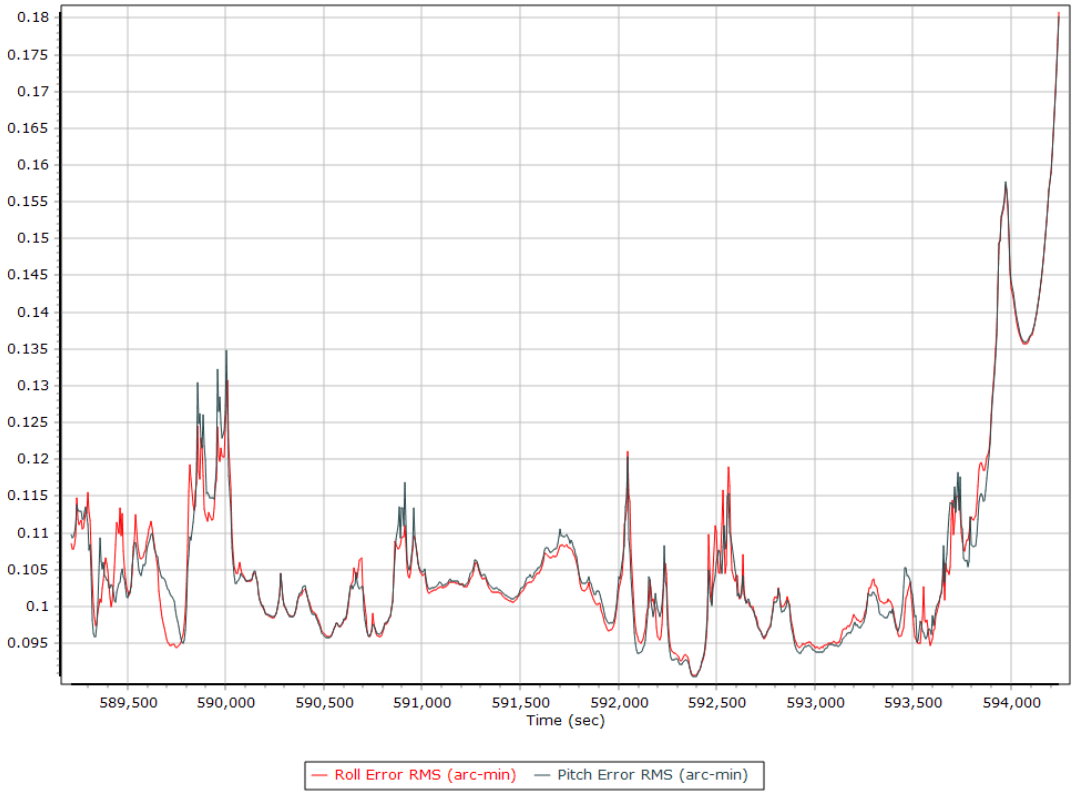

Heading Error RMS (arc-min)

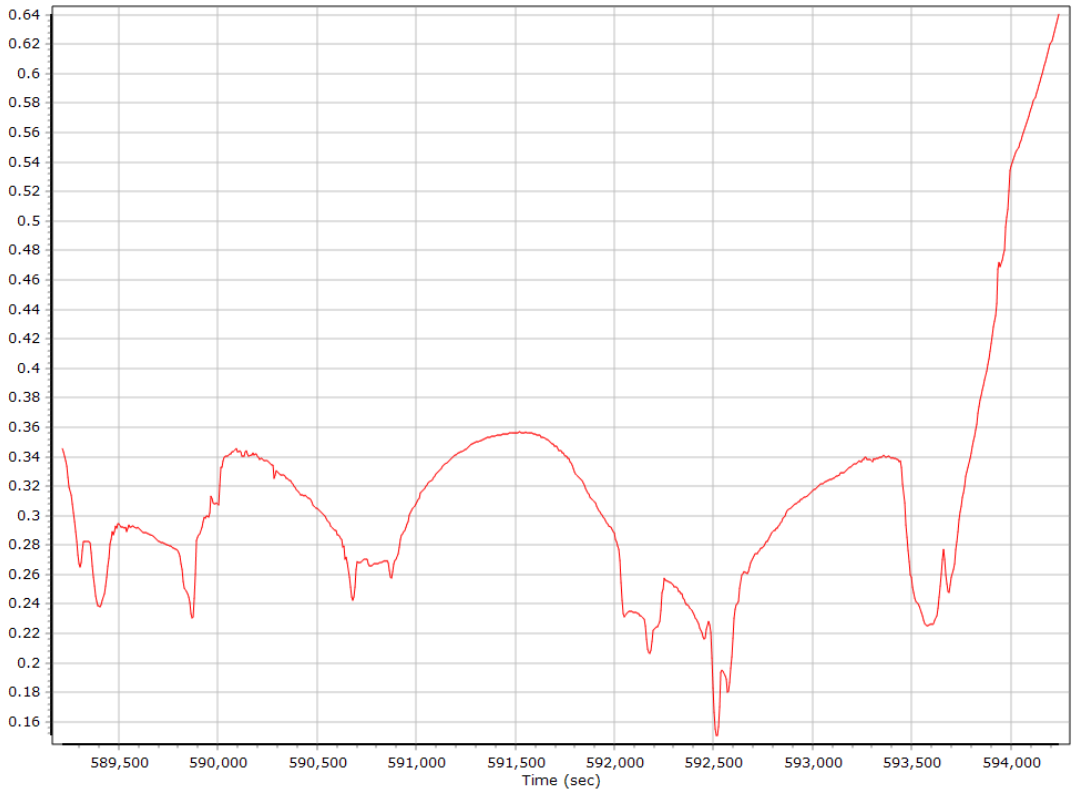

Forward Processed Performance Metrics

Position Error RMS (m)

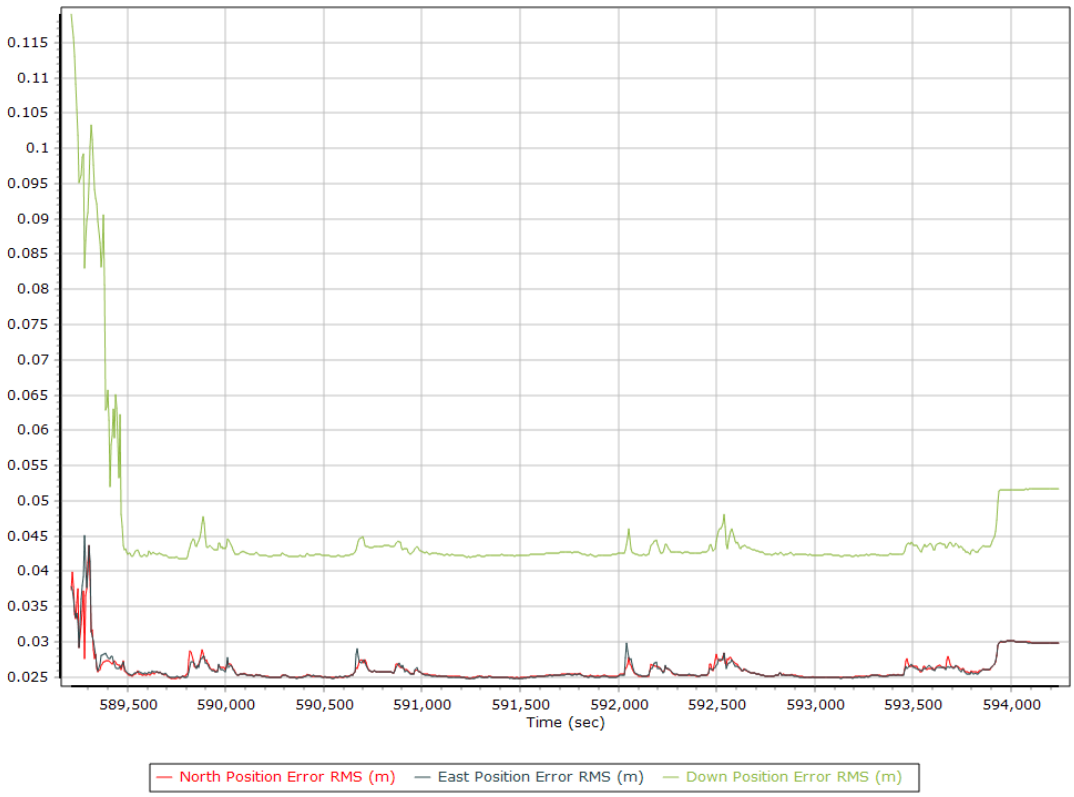

Velocity Error RMS (m/s)

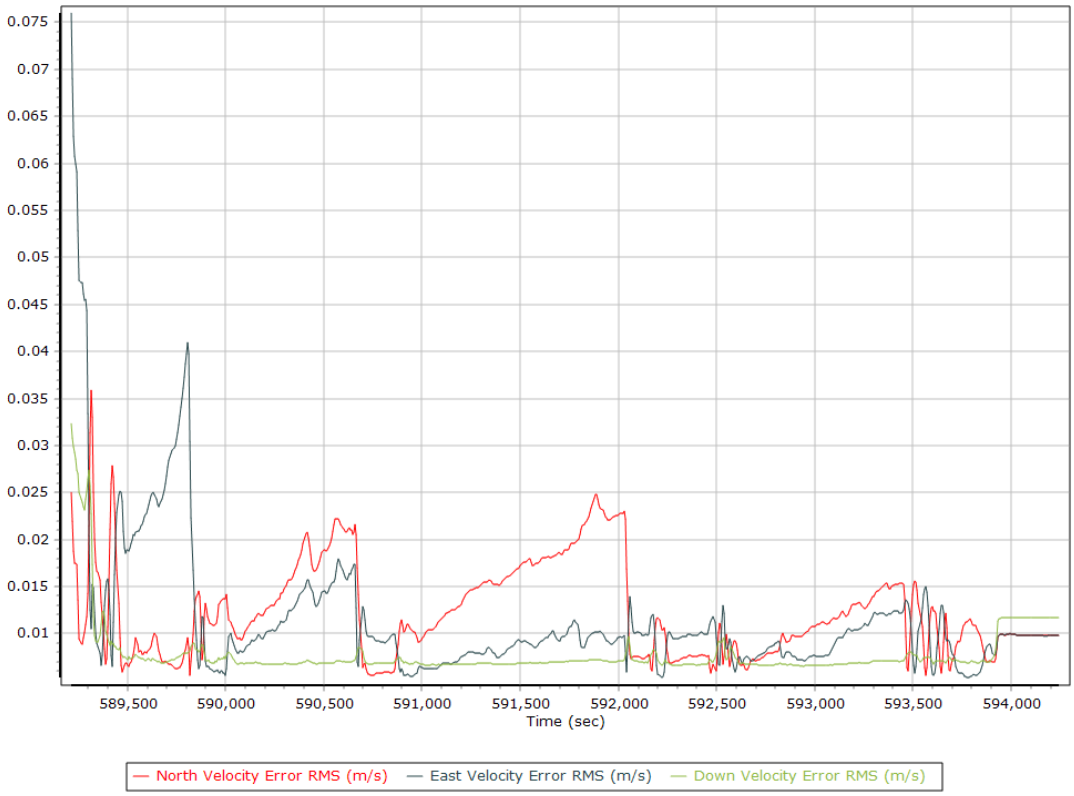

Roll/Pitch Error RMS (arc-min)

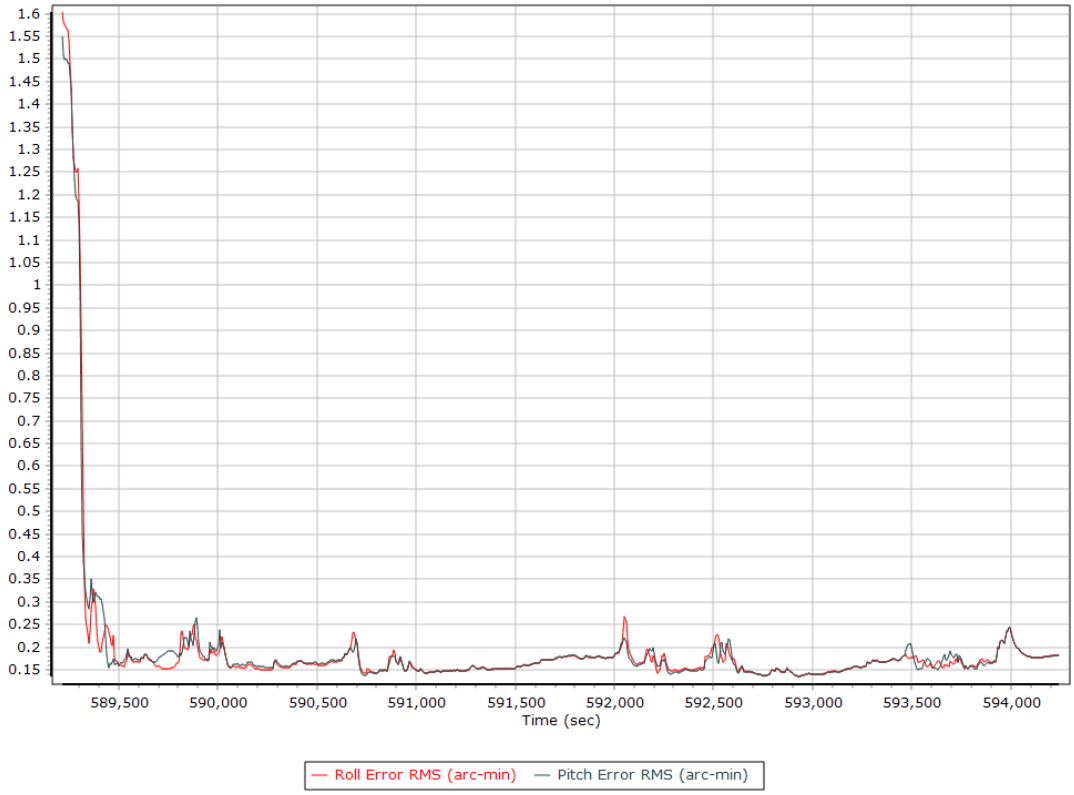

Heading Error RMS (arc-min)

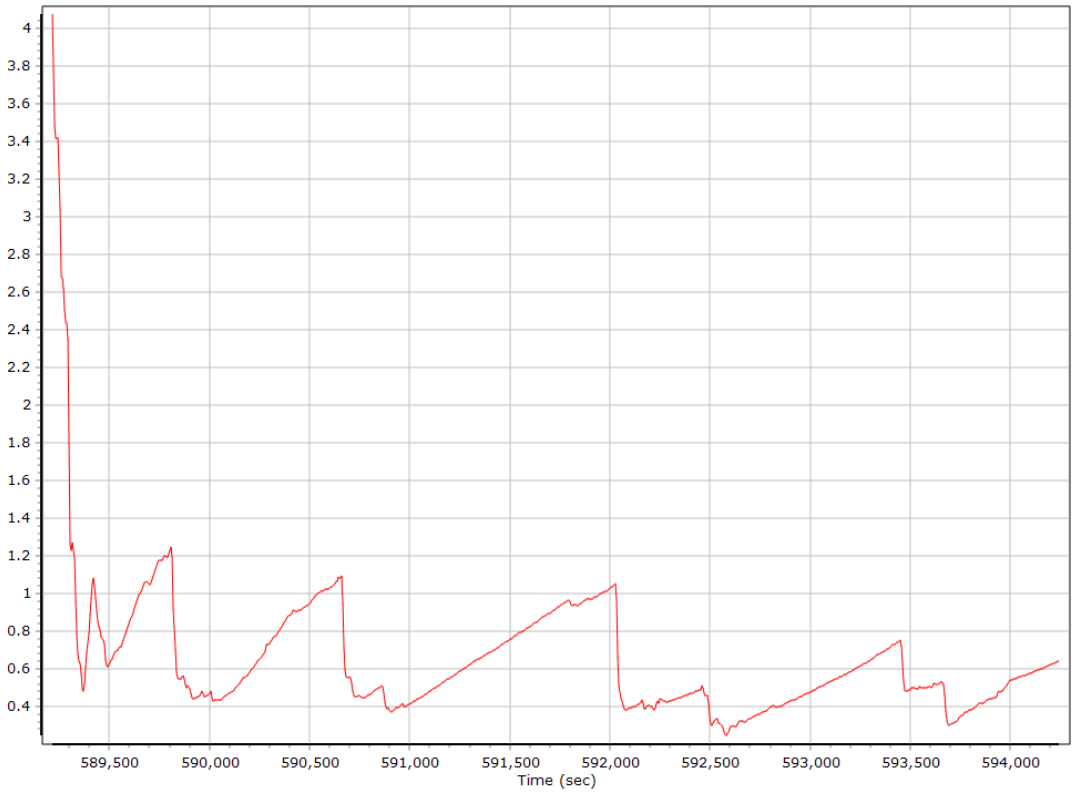

Forward Processed Solution Status

Processing Mode

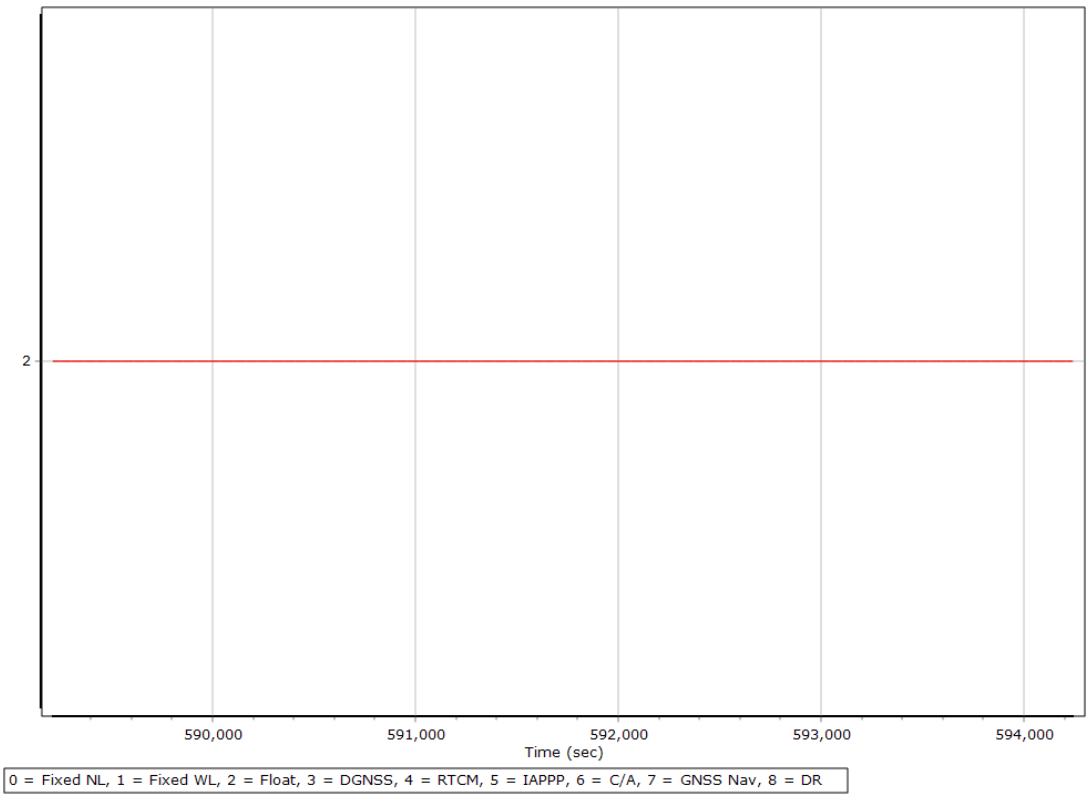

Number of Satellites

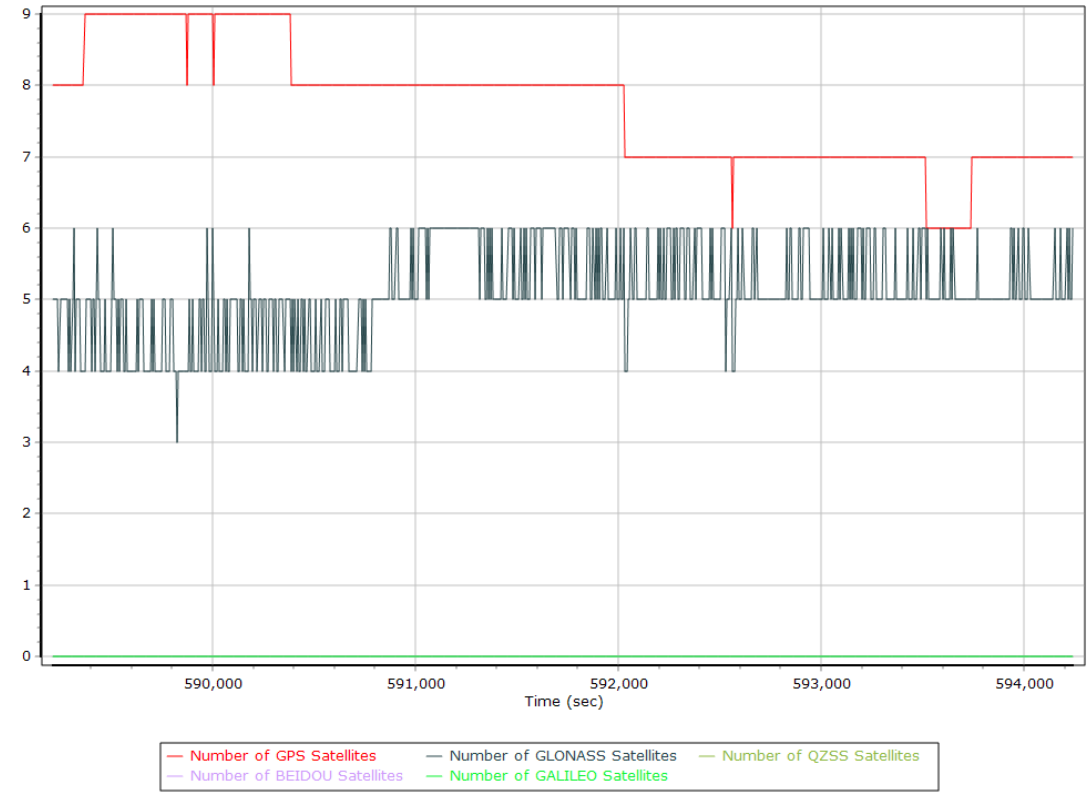
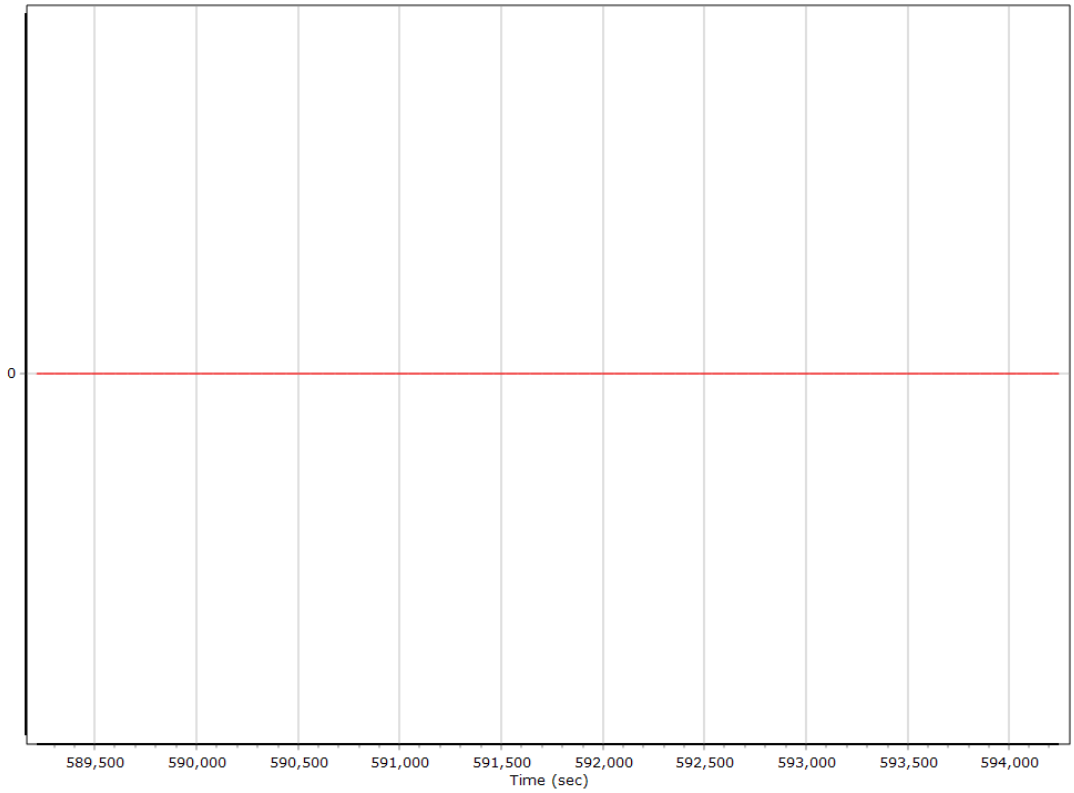
Baseline Length