General Information

Mission Information

Project name	210410_A_5060428_nad2011_FINAL
Processing date	2021-04-13 17:44:23
Mission date	2021-04-10 16:06:42
Mission duration	02:20:01.000
Processing mode	IN-Fusion PP-RTX

Rover Hardware Information

Product	POS AV 610 VER6 HW2.5-12
Serial number	S/N9825
IMU type	57
Receiver type	BD982
Antenna type	AV39

Project File List

Rover Data Files

File name	File type
survey3.pos	POS Data

Input Files

File Name	File Type
Ephm1000.21g	GLONASS Broadcast Ephemeris
Ephm1000.21n	GPS Broadcast Ephemeris

Output Files

Filename	File type
sbet_210410_A_5060428_nad2011_FINAL.out	SBET Trajectory File
sbet_210410_A_5060428_nad2011_FINAL.shp	Shapefile Export Output

Rover Data Summary

First raw data file	survey3.pos		
Last raw data file	survey3.pos		
Start GPS week	2152		
Start time	576401.483 (04/10/2021 16:06:41)		
End time	584802.460 (04/10/2021 18:26:42)		
Start of fine alignment	576777.634 (04/10/2021 16:12:57)		
Available subsystems	Primary GNSS, IMU		
POS Event Input	None		
Correction data	None		
IMU Installation Lever Arms & Mounting Angles			
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	180.000
Reference to Primary GNSS lever arm (m)	0.205	-0.303	0.853
Reference to Primary GNSS lever arm std dev (m)	-1.000		
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Rover Data QC

Raw IMU Import QC Summary

IMU data input file	imu_210410_A_5060428_nad2011_FINAL.dat
IMU data check log file	imudt_210410_A_5060428_nad2011_FINAL.log
IMU Records Processed	1680005
Termination Status	Normal
IMU Anomalies	0

Primary Observables & Satellite Data

GPS/GLONASS L1 Satellite Lock/Elevation

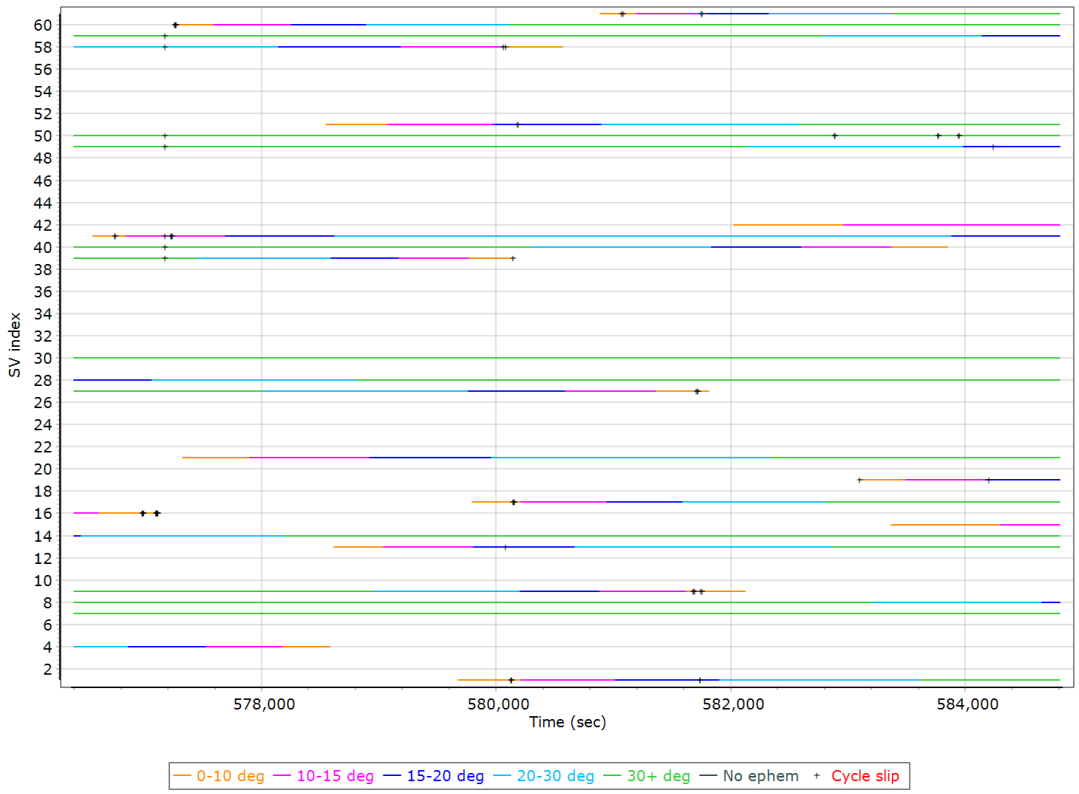

GPS L1 SNR

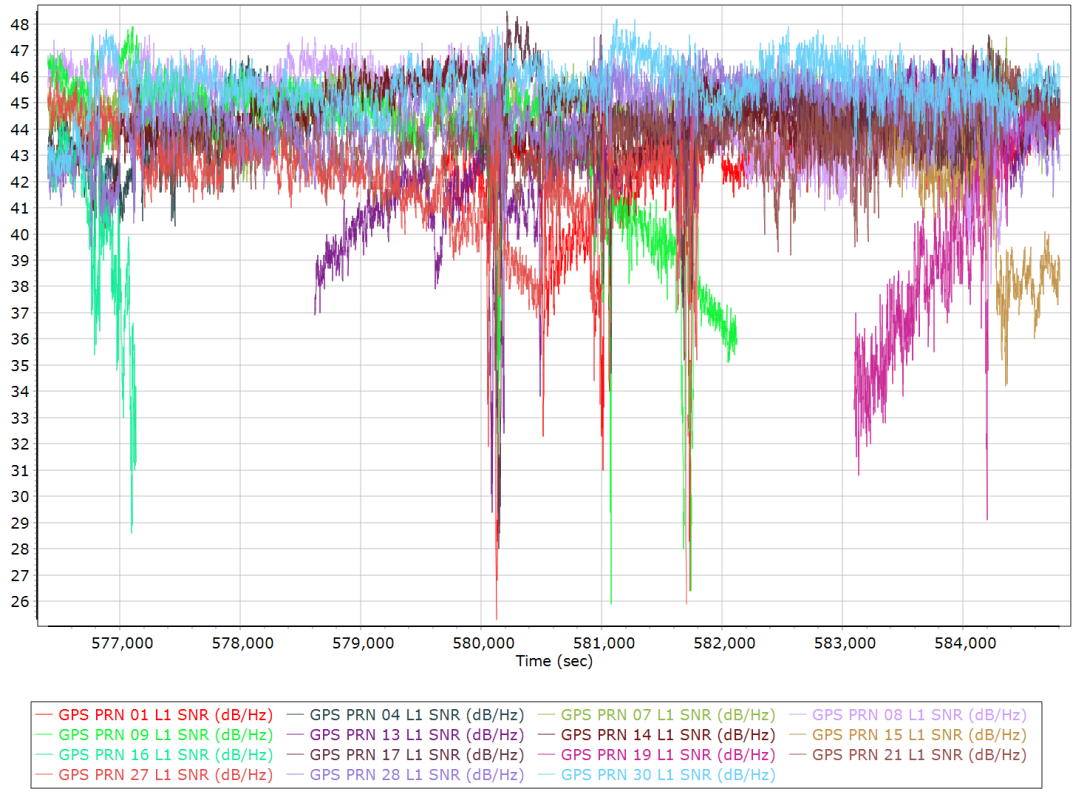

GLONASS L1 SNR

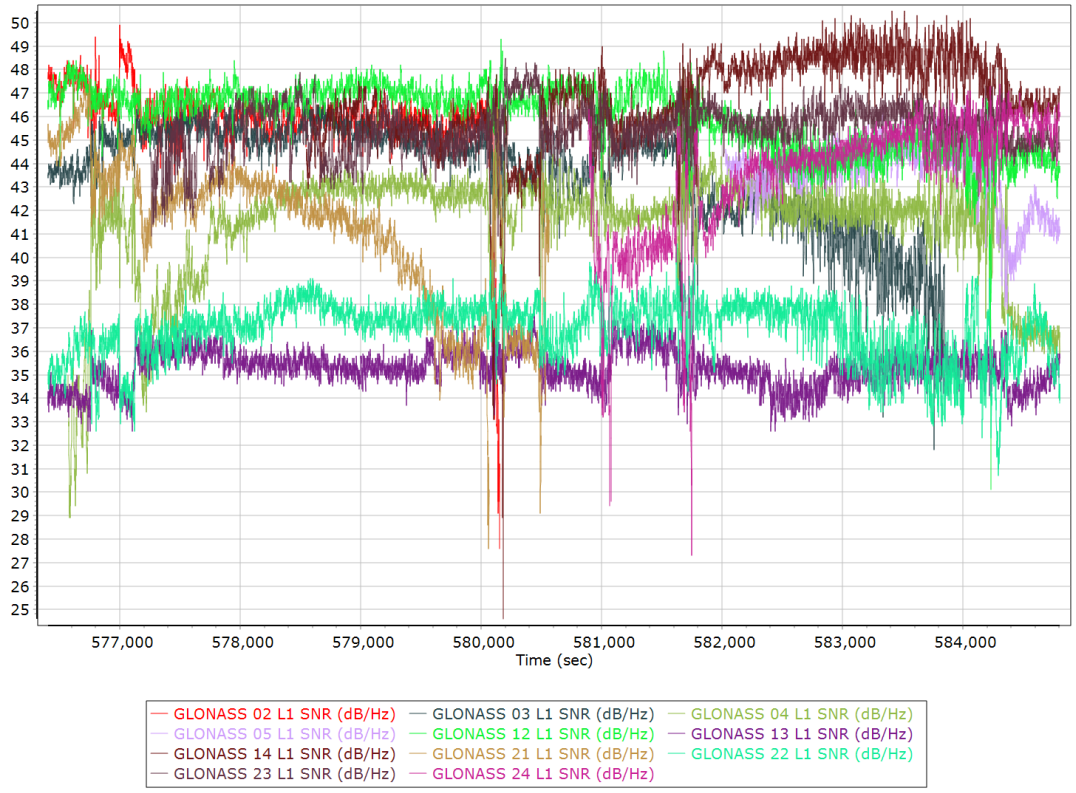

GPS/GLONASS L2 Satellite Lock/Elevation

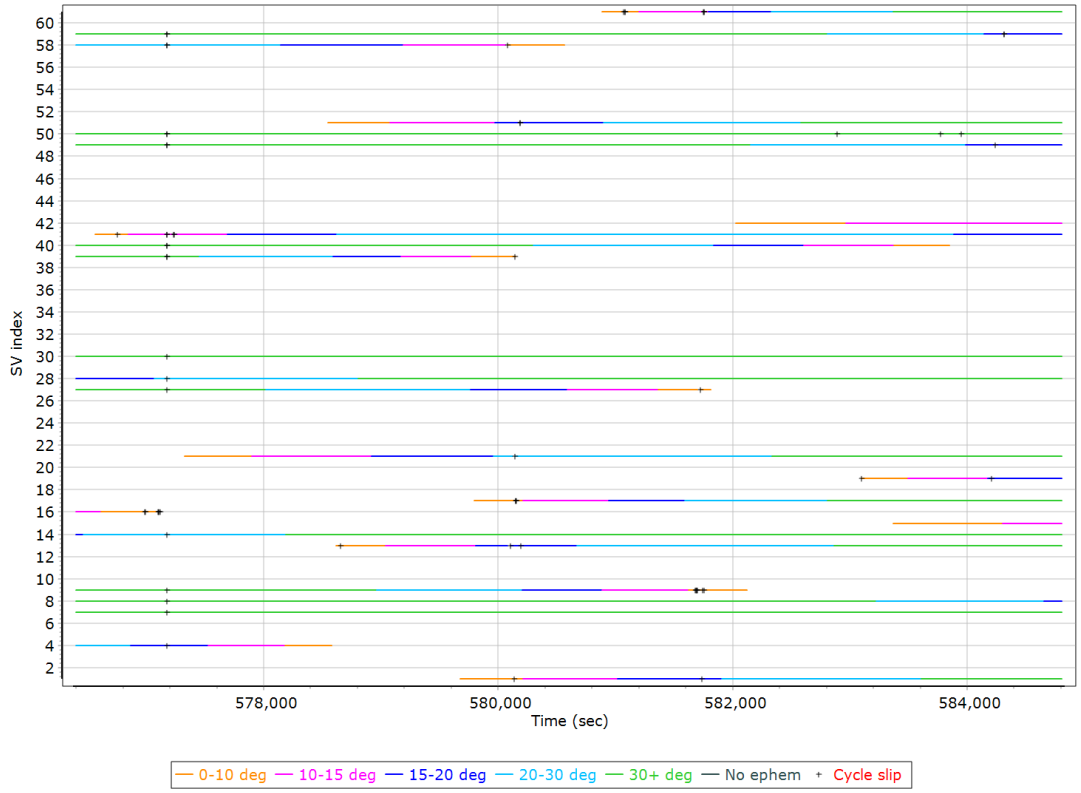

GPS L2 SNR

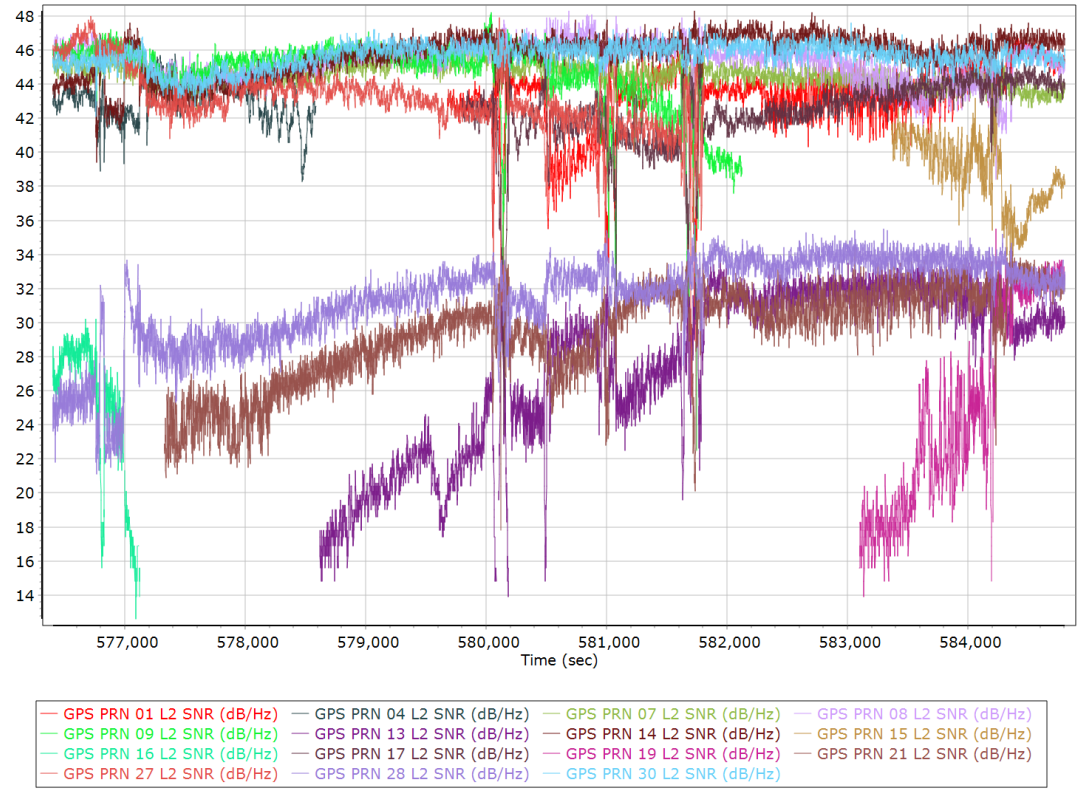

GLONASS L2 SNR

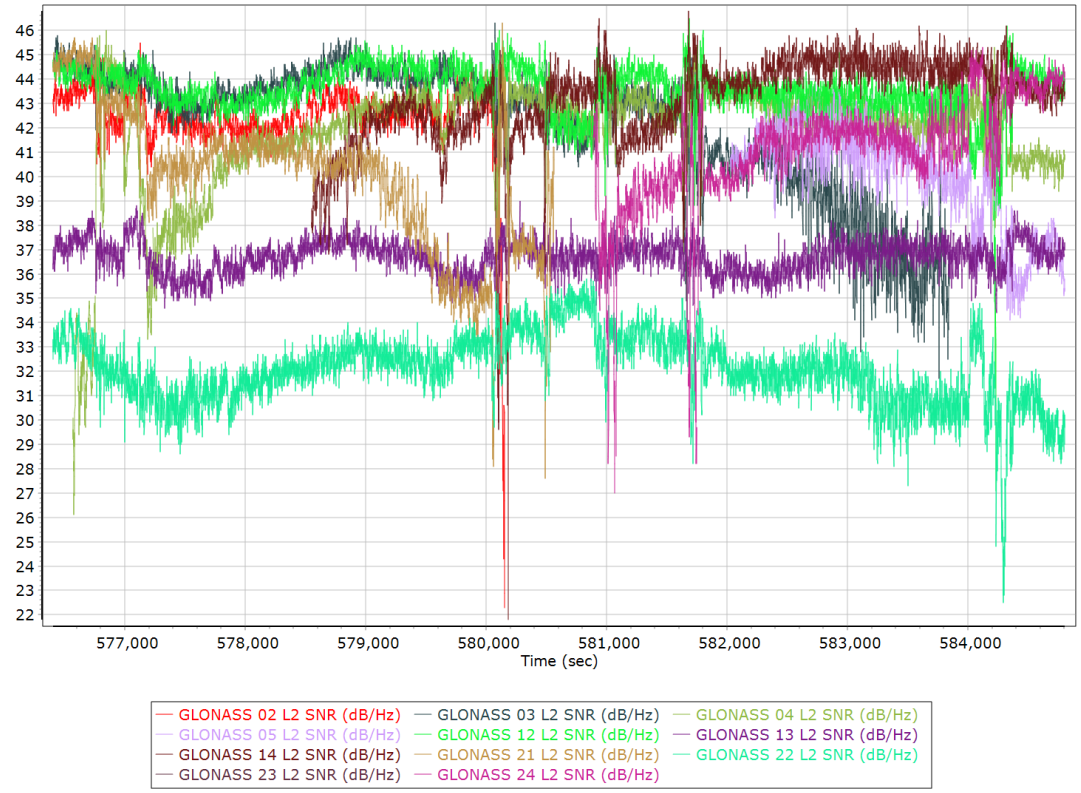

BEIDOU Satellite Lock/Elevation

BEIDOU SNR

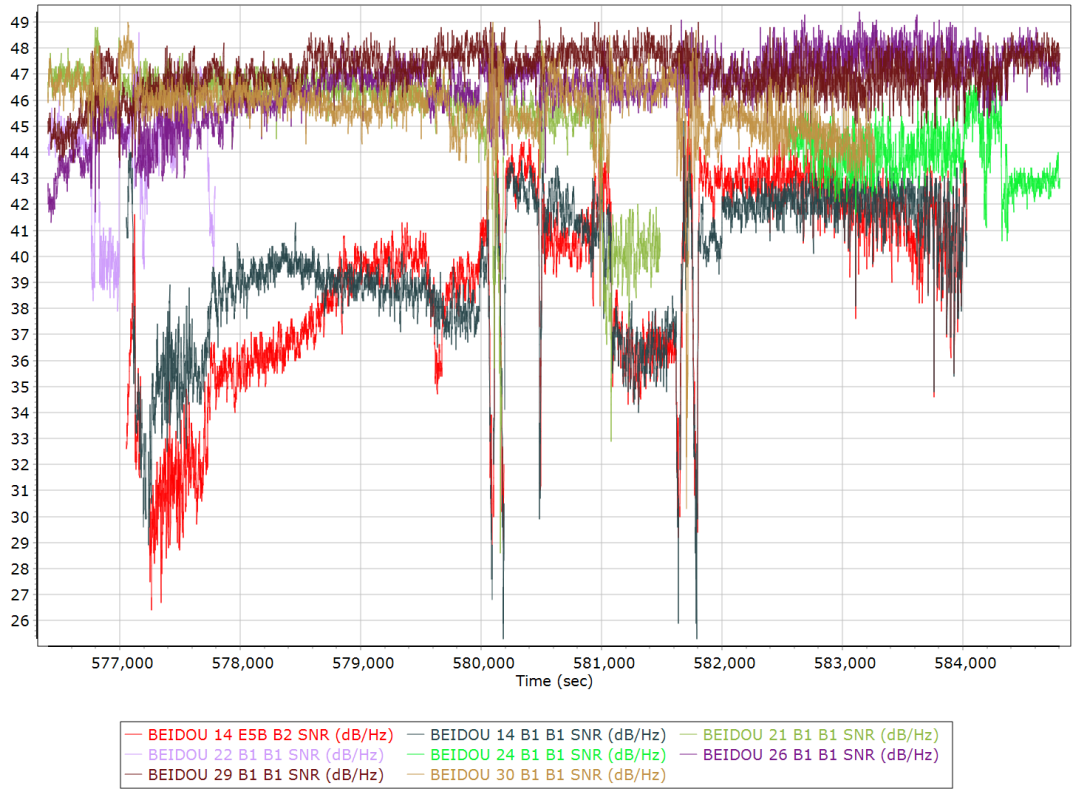

GALILEO Satellite Lock/Elevation

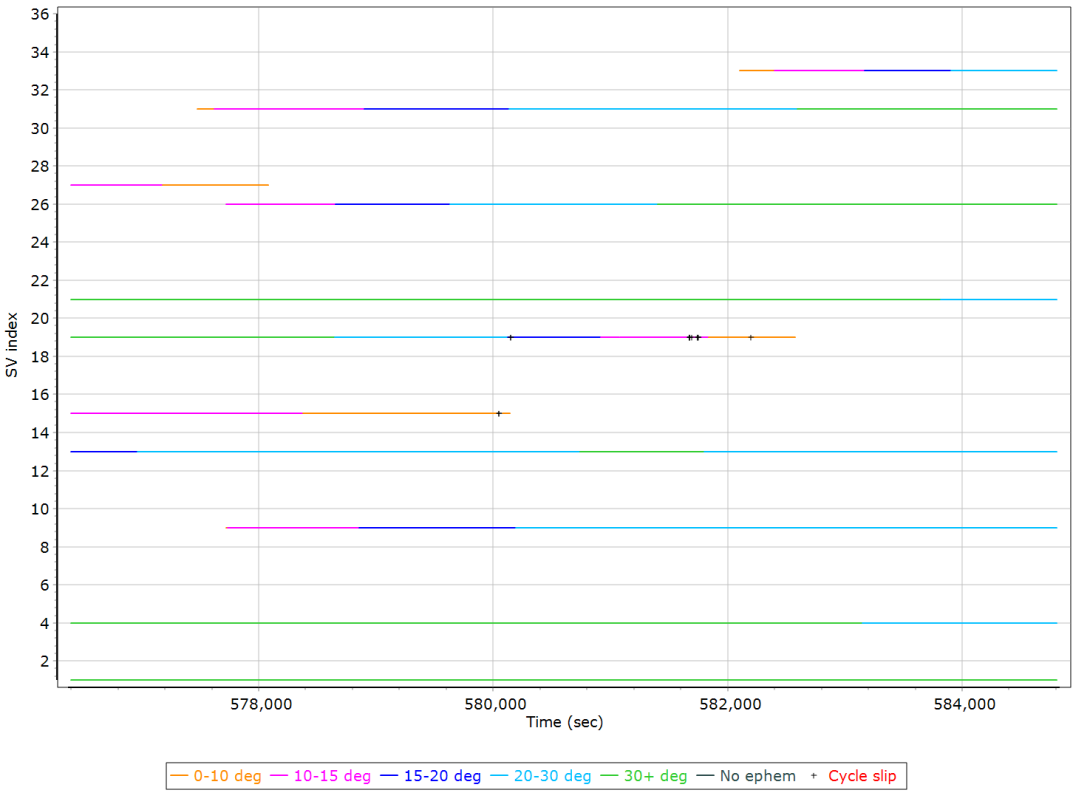

GALILEO SNR

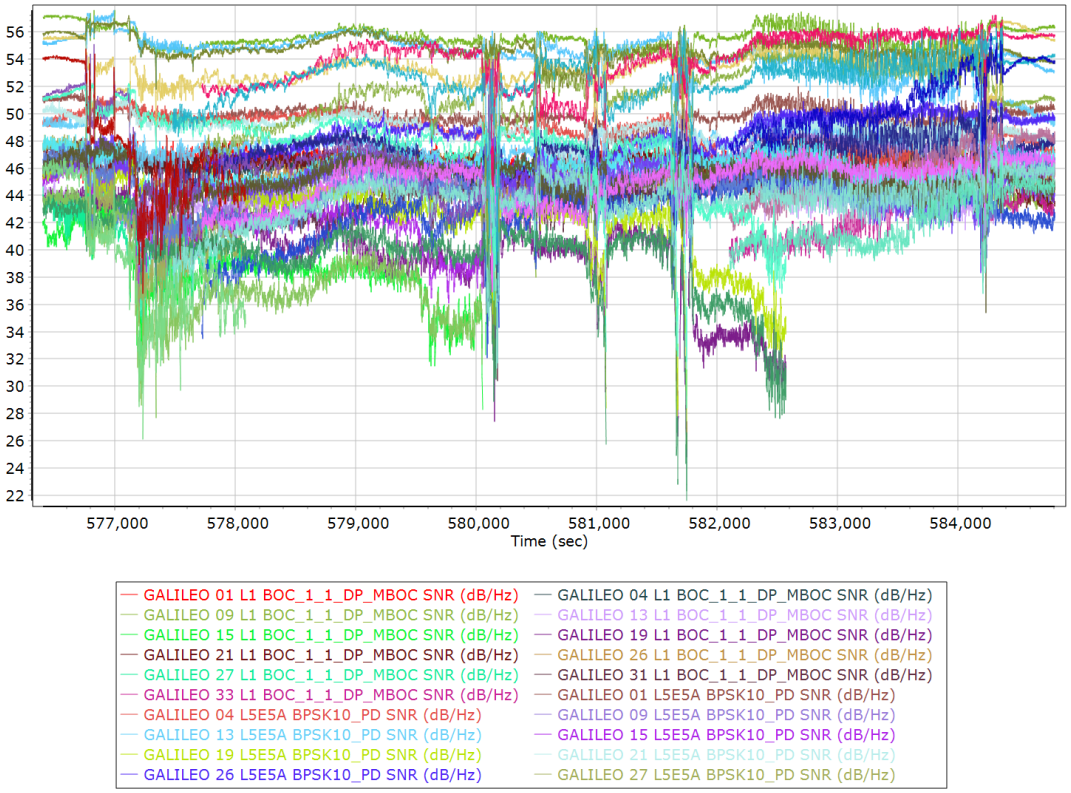
56
54
52
50
48
46
44
42
40
38
36
34
32
30
28
26
24
22
577,000
578,000
579,000
580,000
581,000
582,000
583,000
584,000
Time (sec)
GALILEO 01 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 04 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 09 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 13 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 15 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 19 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 21 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 26 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 27 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 31 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 33 L1 BOC_1_1_DP_MBOC SNR (dB/Hz)
GALILEO 01 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 04 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 09 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 13 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 15 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 19 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 21 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 26 L5E5A BPSK10_PD SNR (dB/Hz)
GALILEO 27 L5E5A BPSK10_PD SNR (dB/Hz)

Smoothed Trajectory Information

Top View

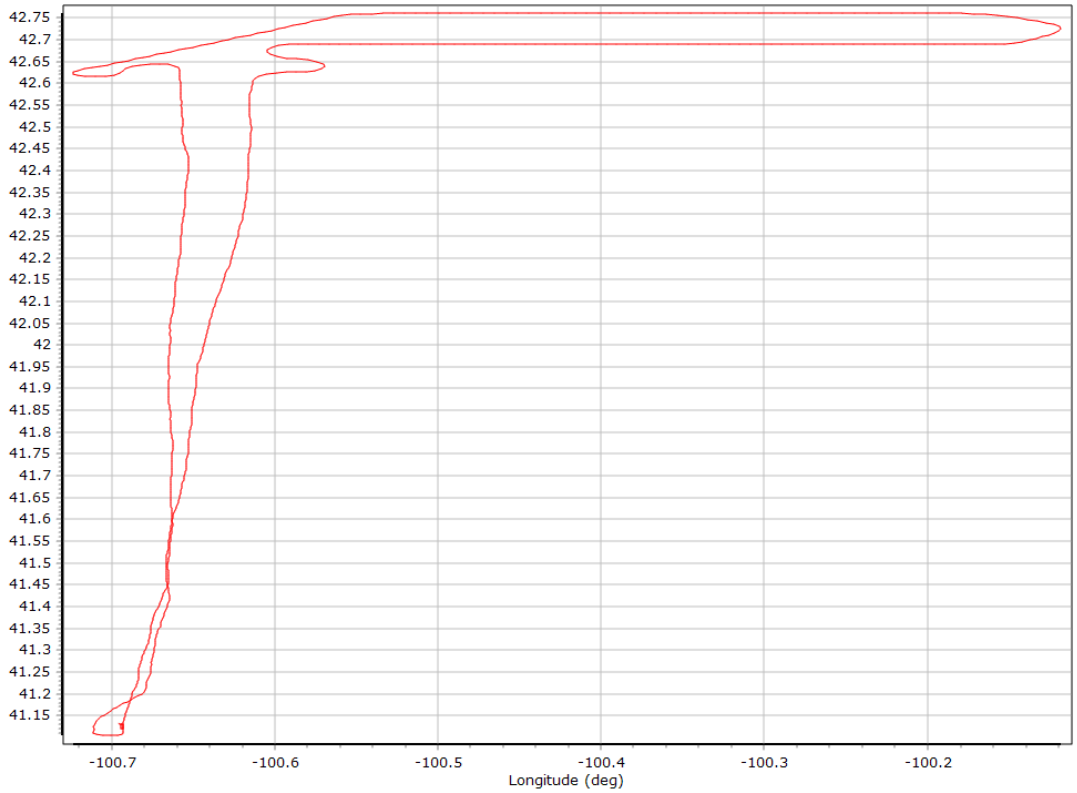

Altitude

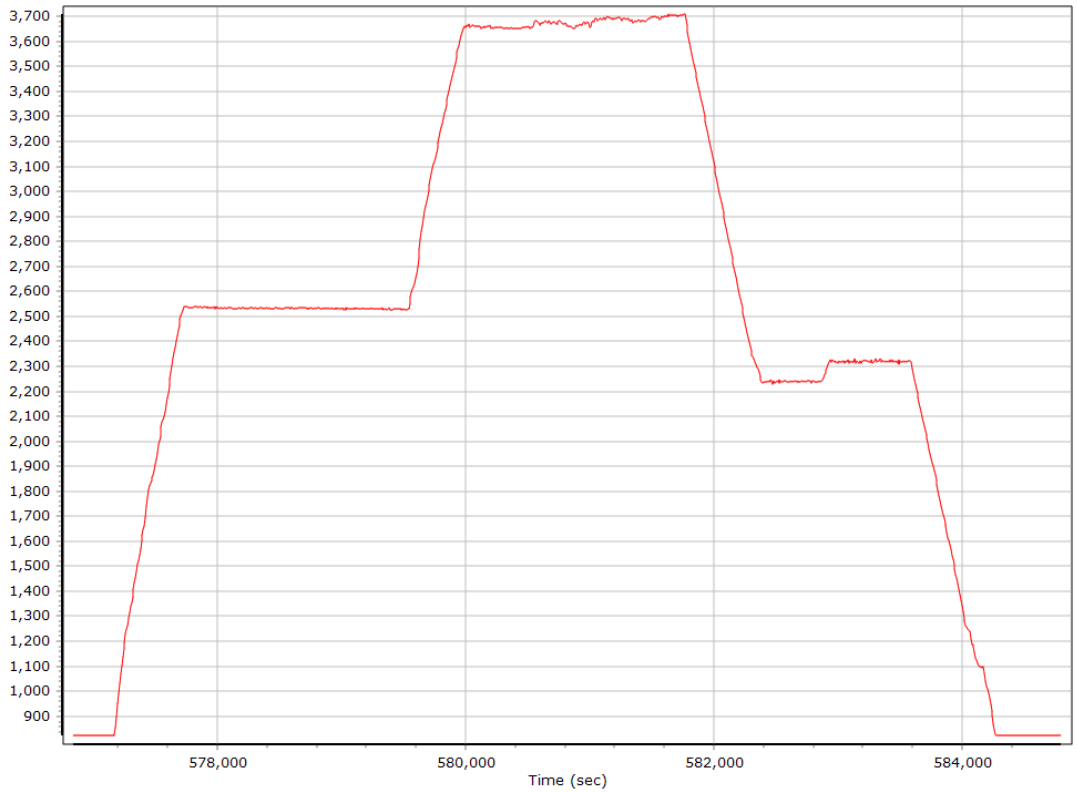

Roll/Pitch

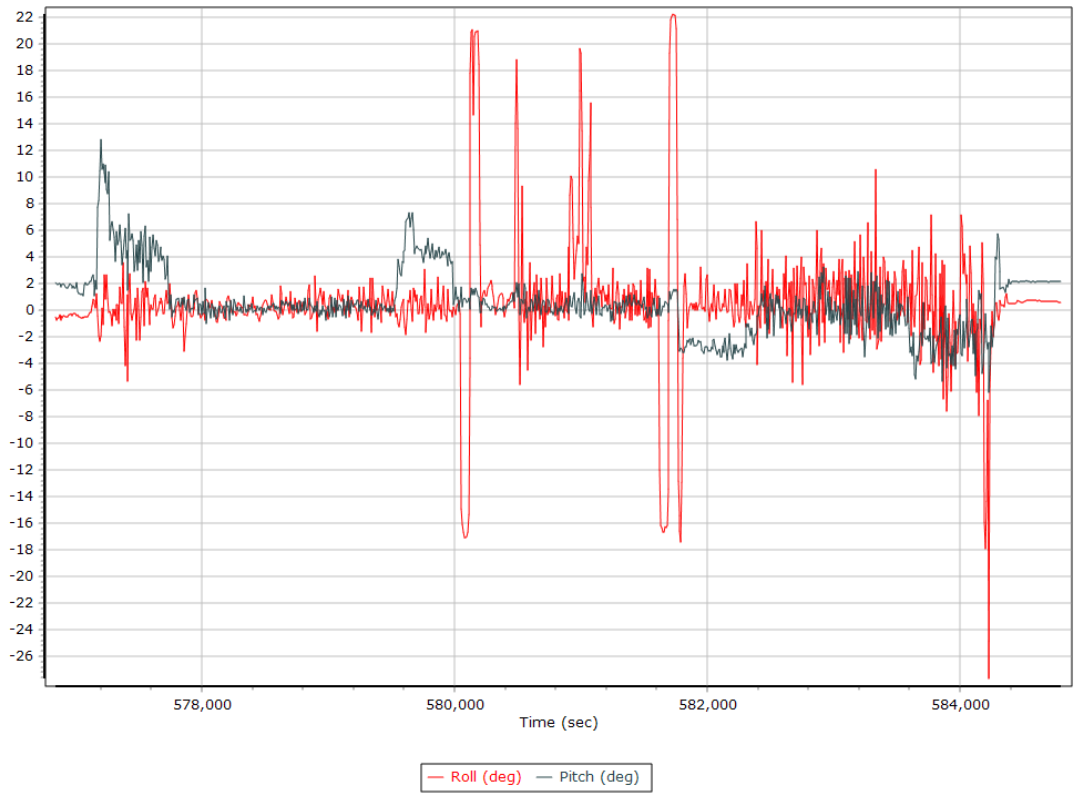

Heading

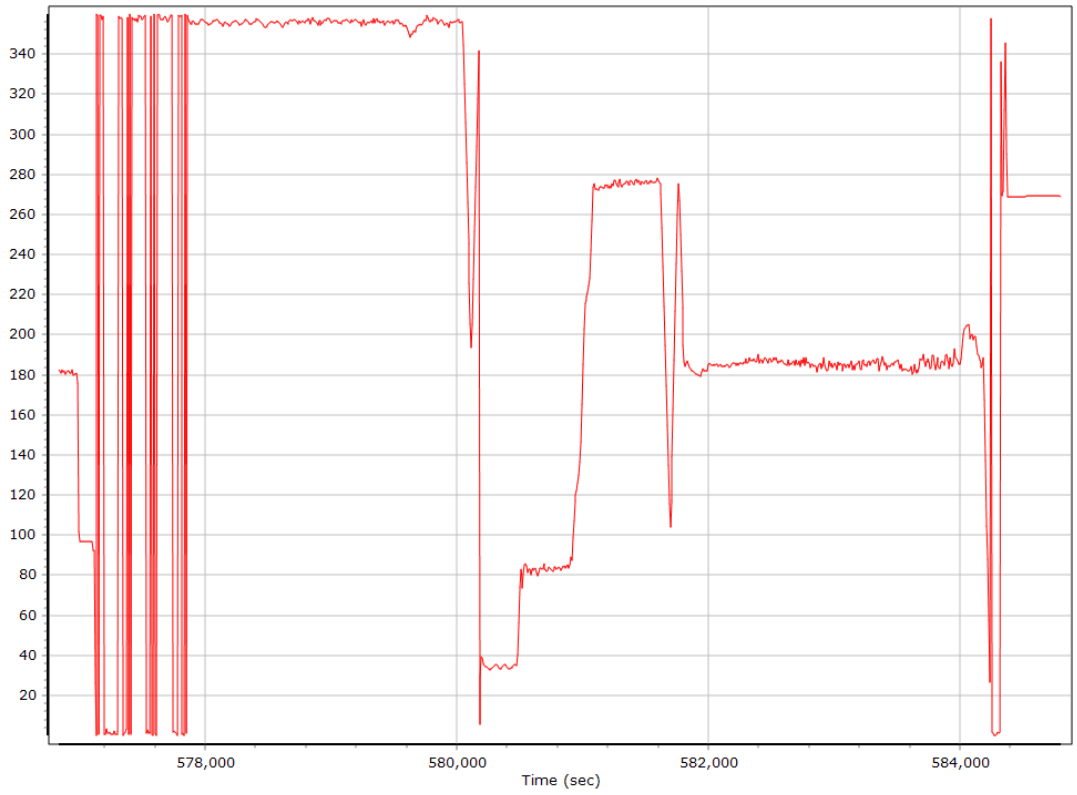

North/East Velocity

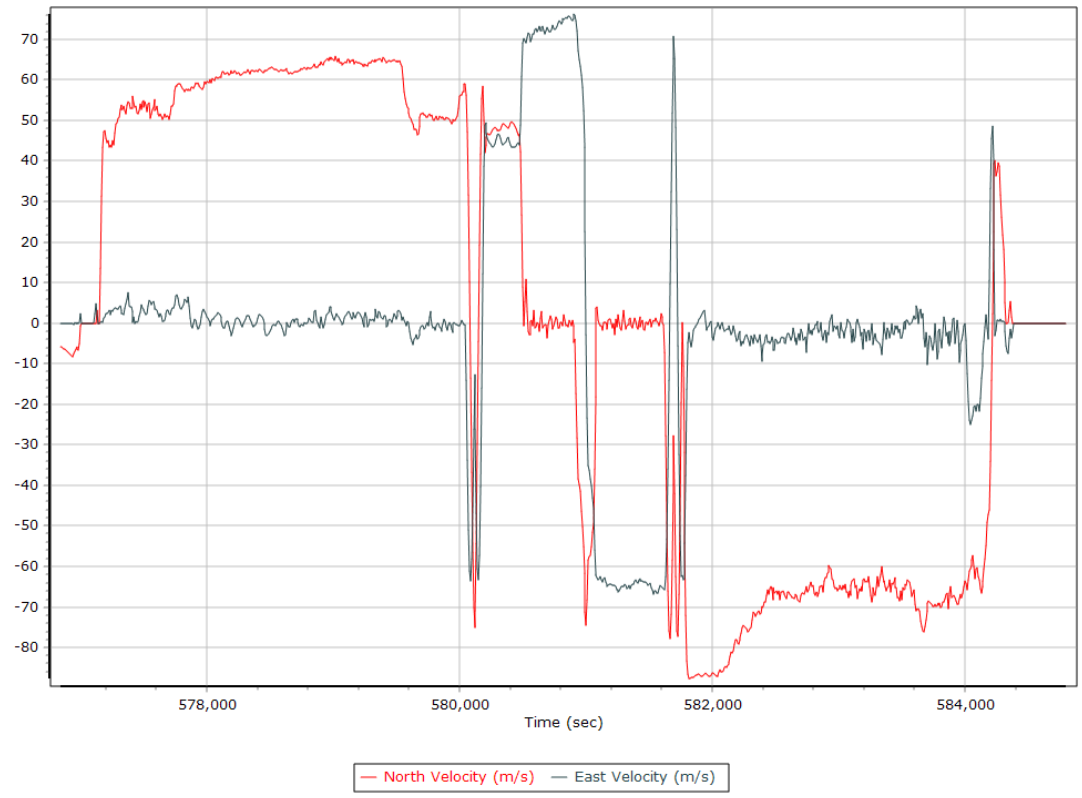

Down Velocity

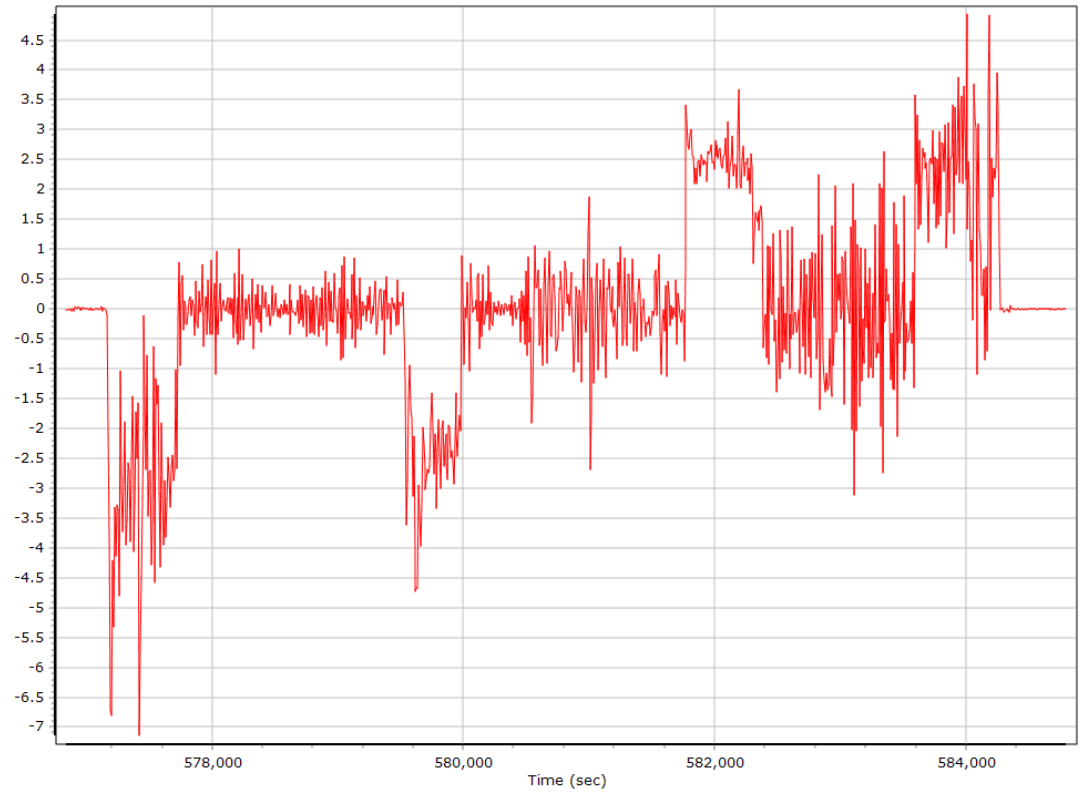

Total Speed

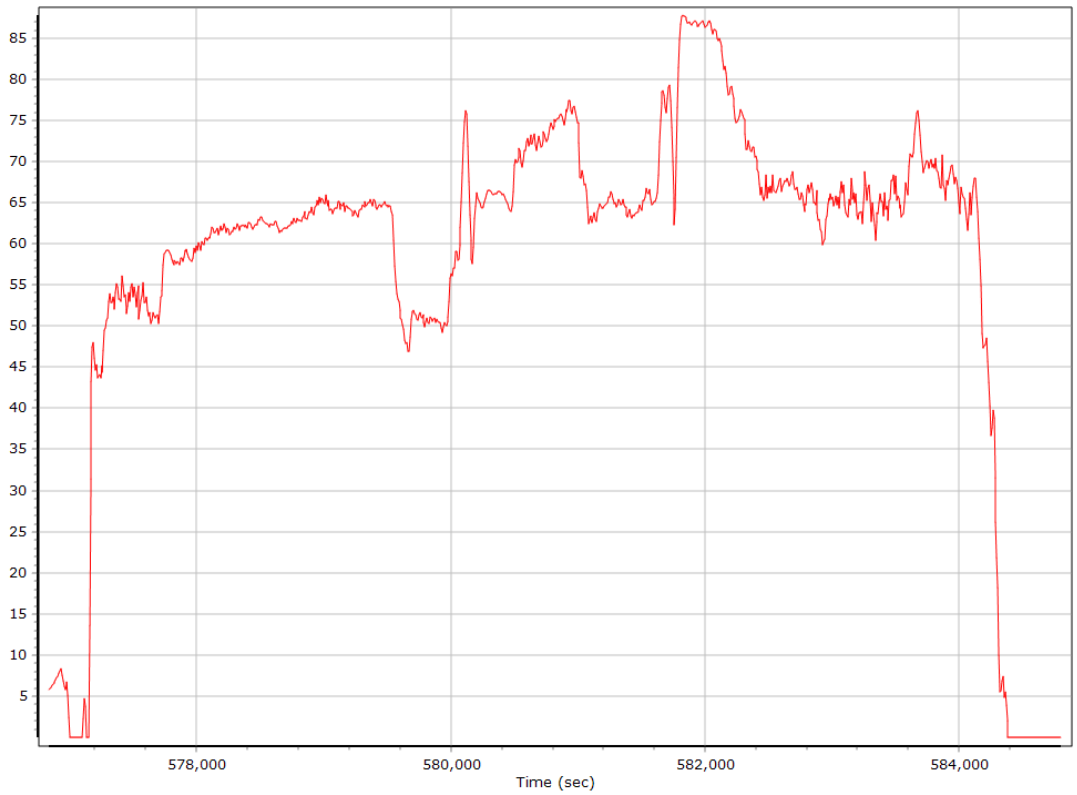

Ground Speed

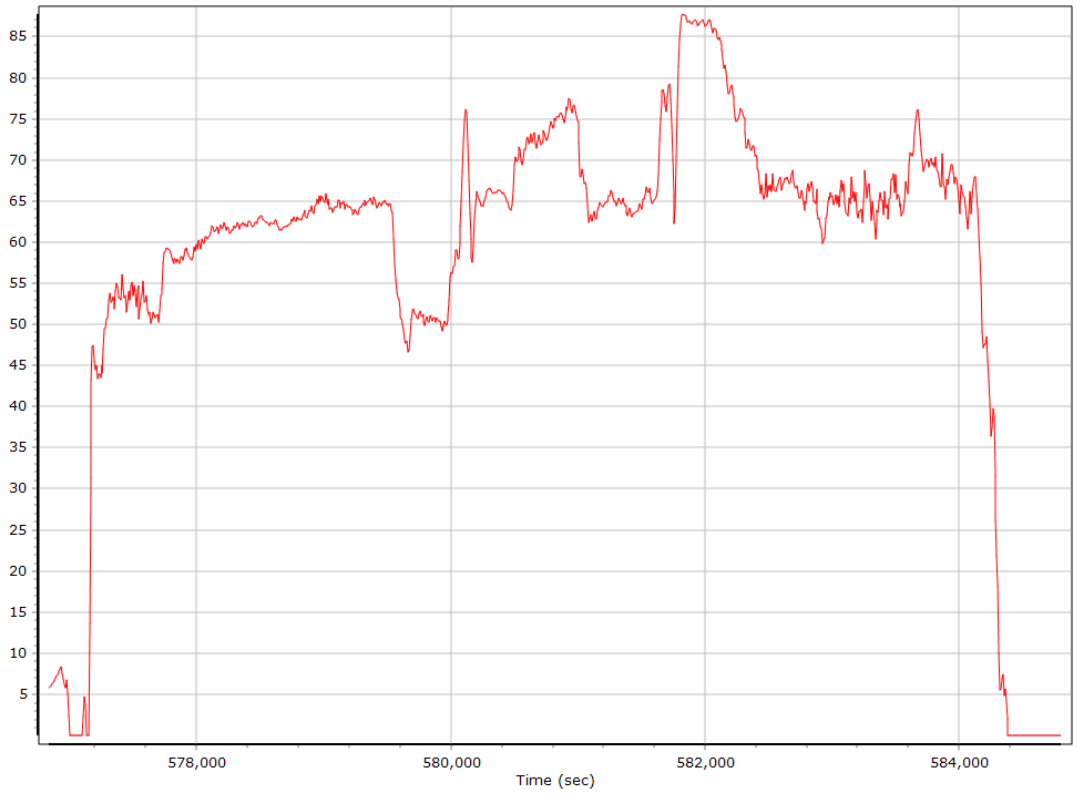

Body Acceleration

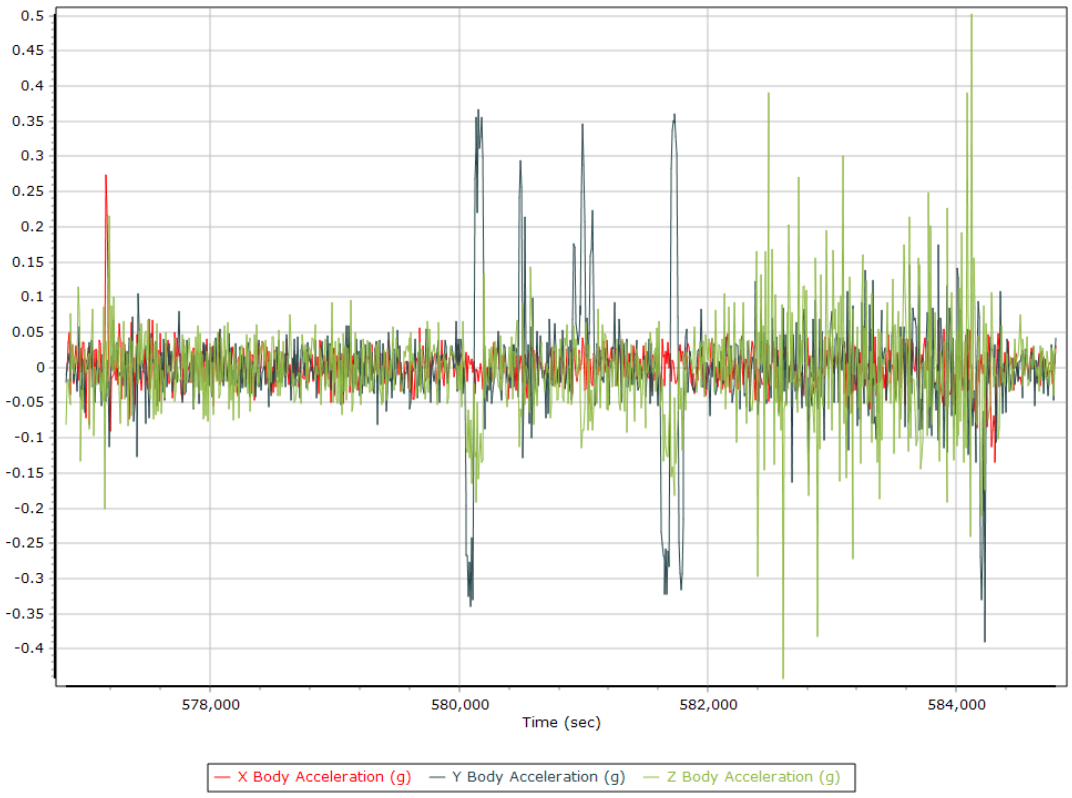

Total Body Acceleration

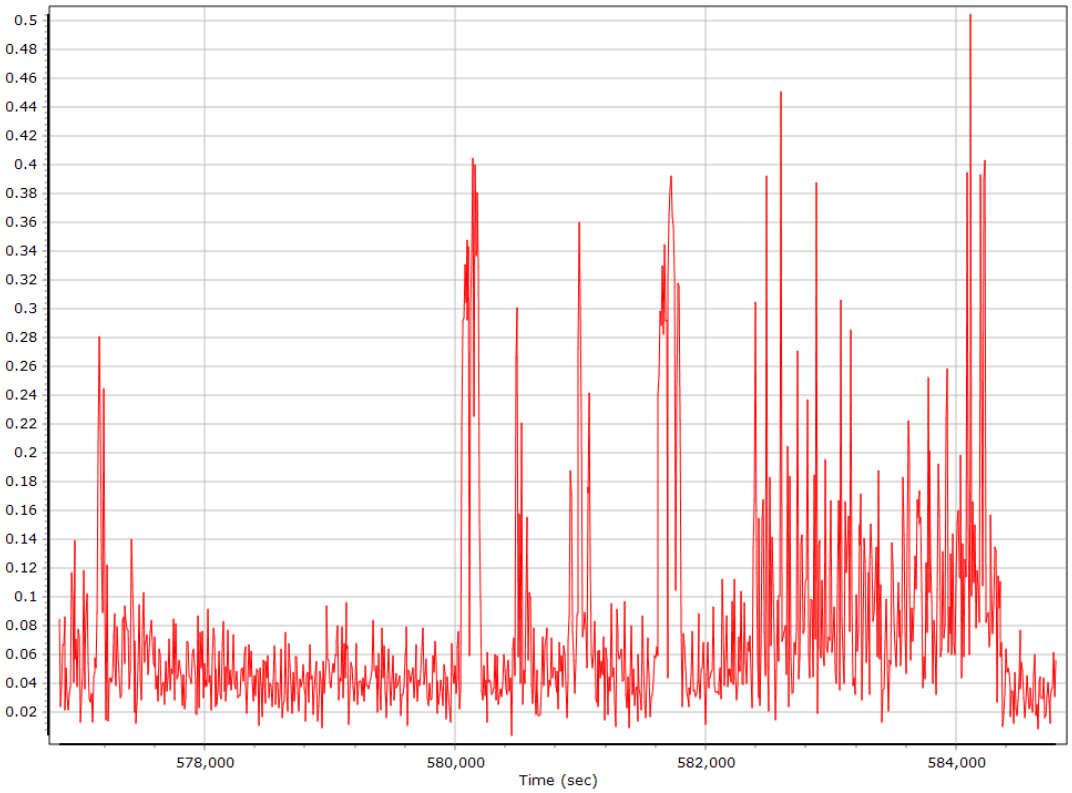

Body Angular Rate

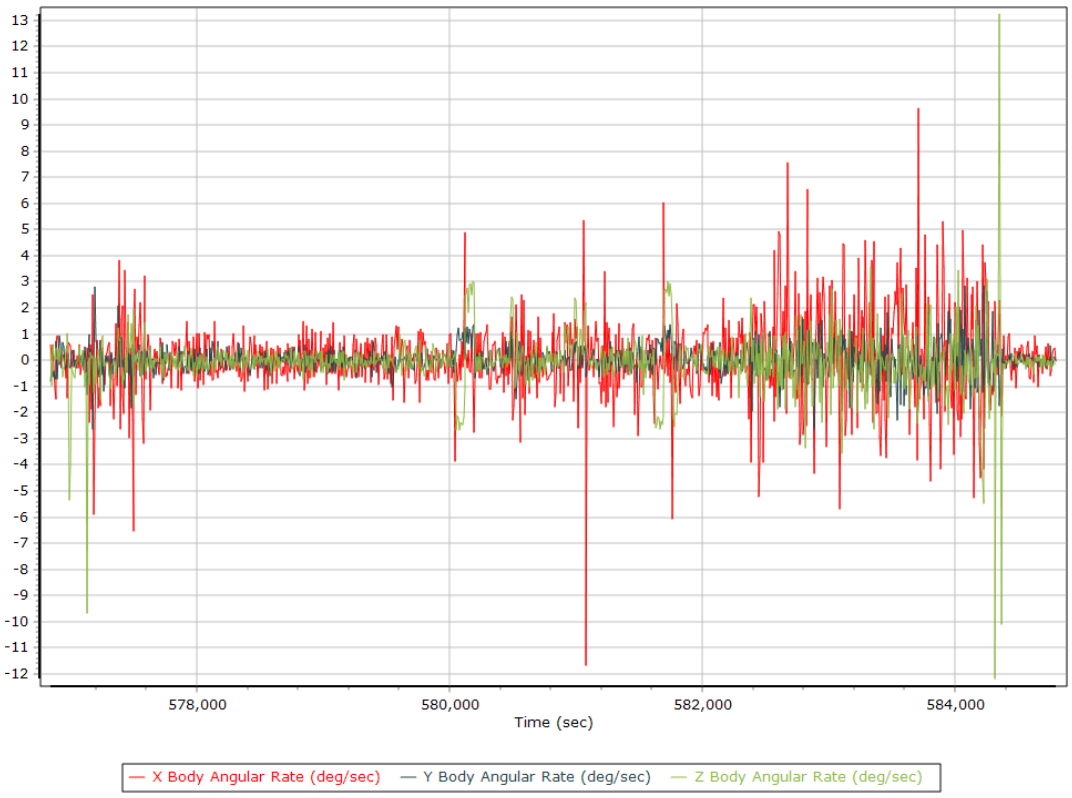

Forward Processed Trajectory Information

Top View

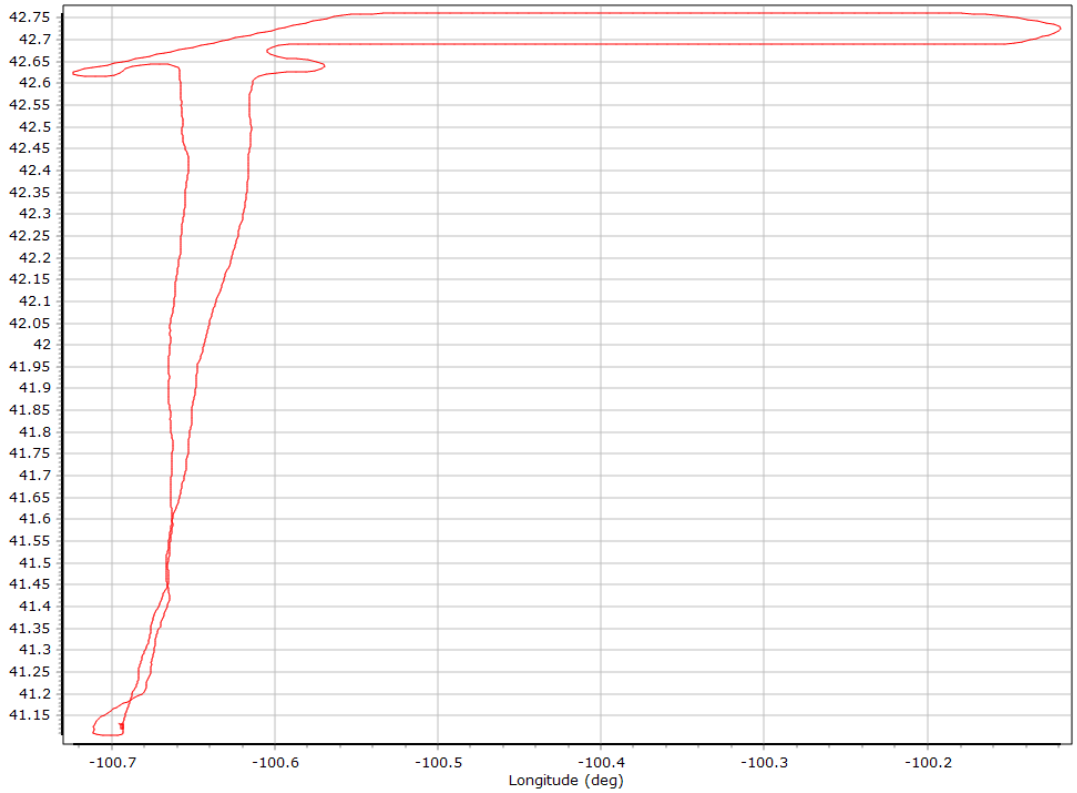

Altitude

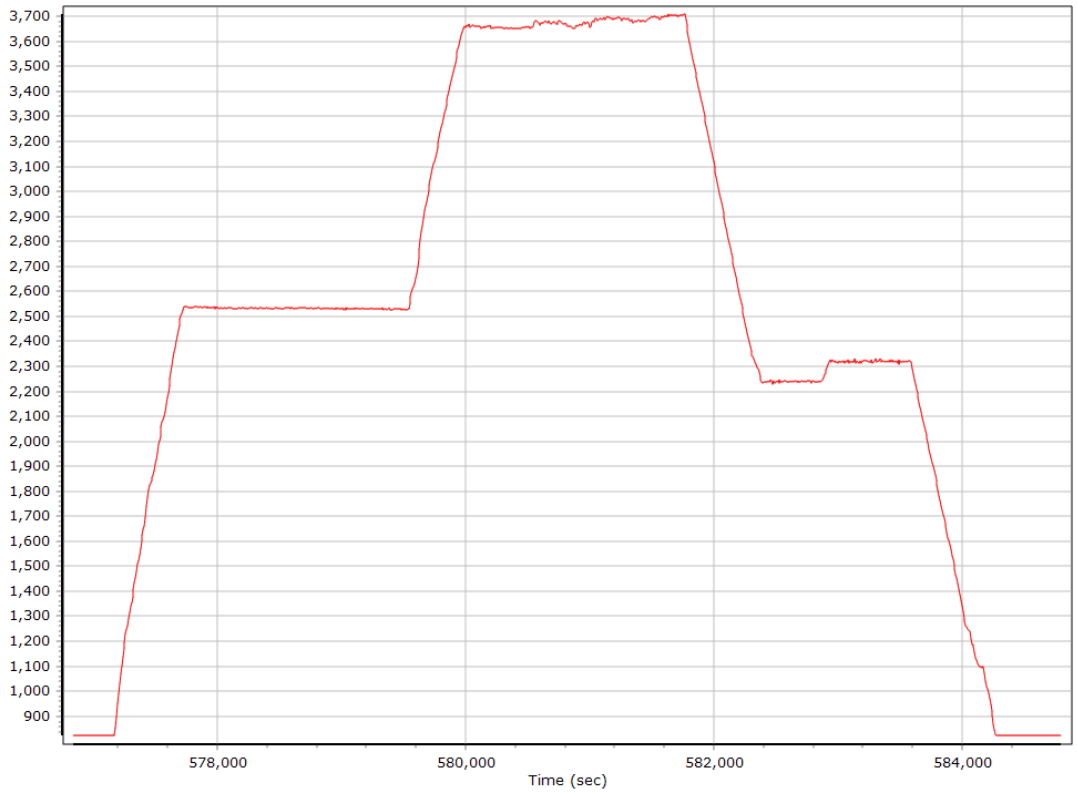

Roll/Pitch

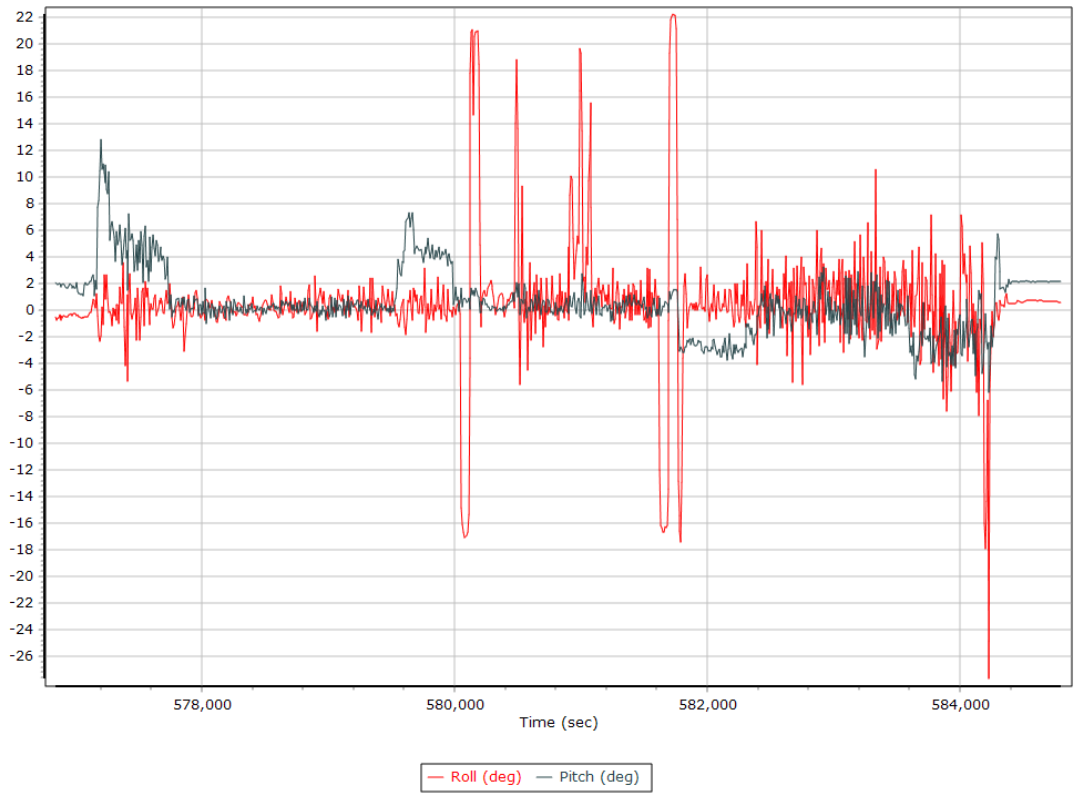

Heading

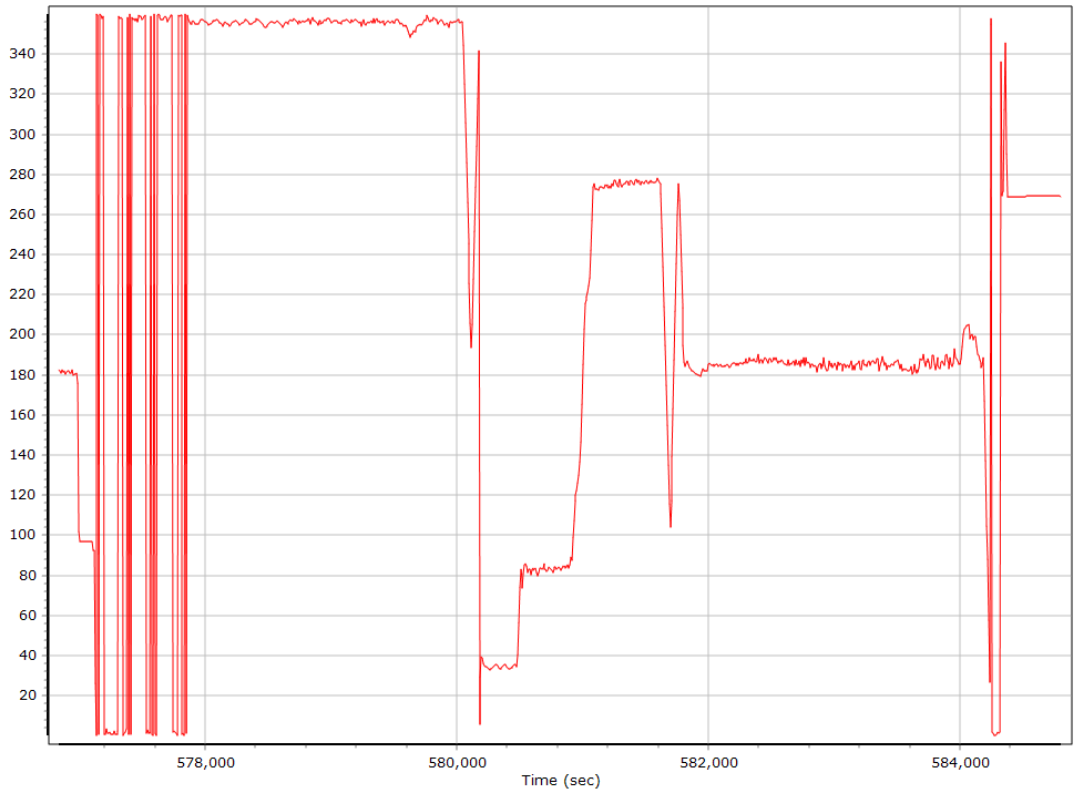

North/East Velocity

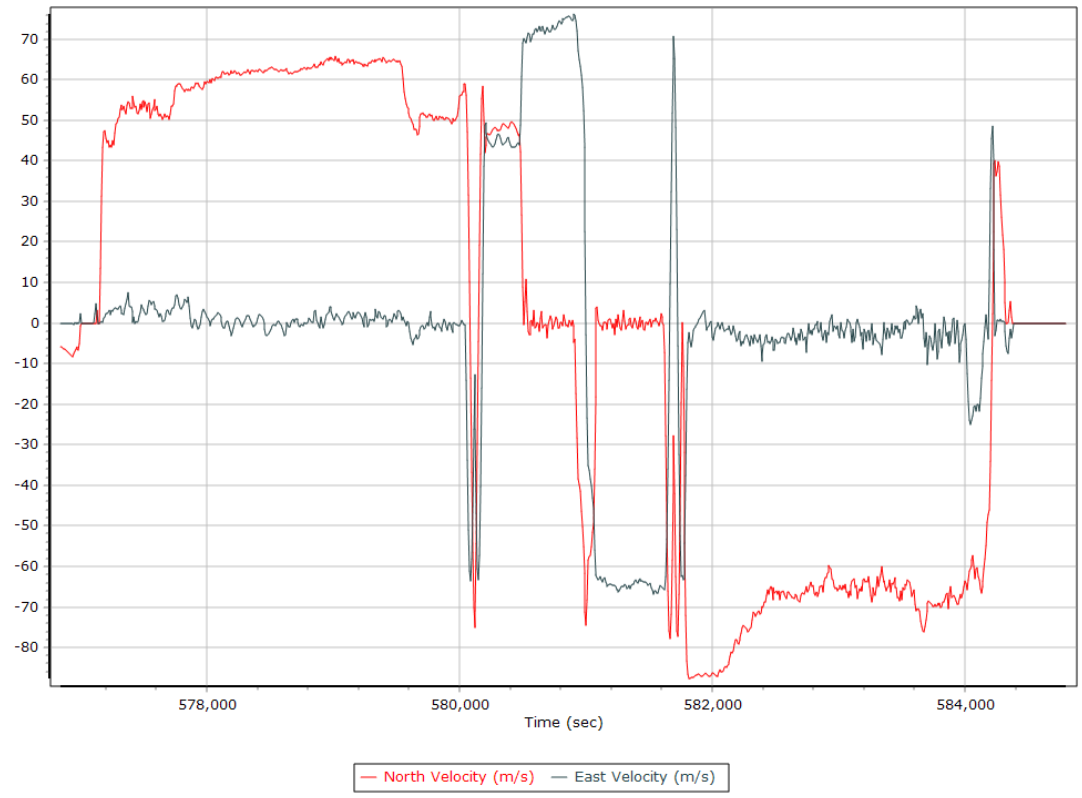

Down Velocity

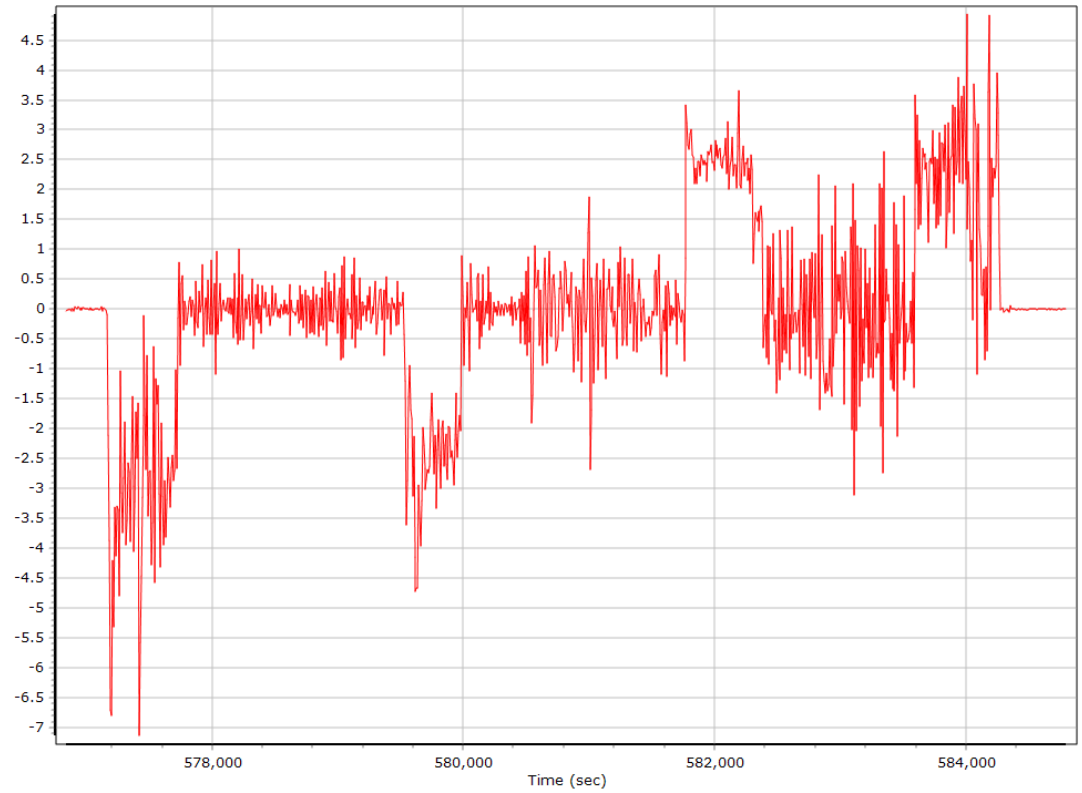

Total Speed

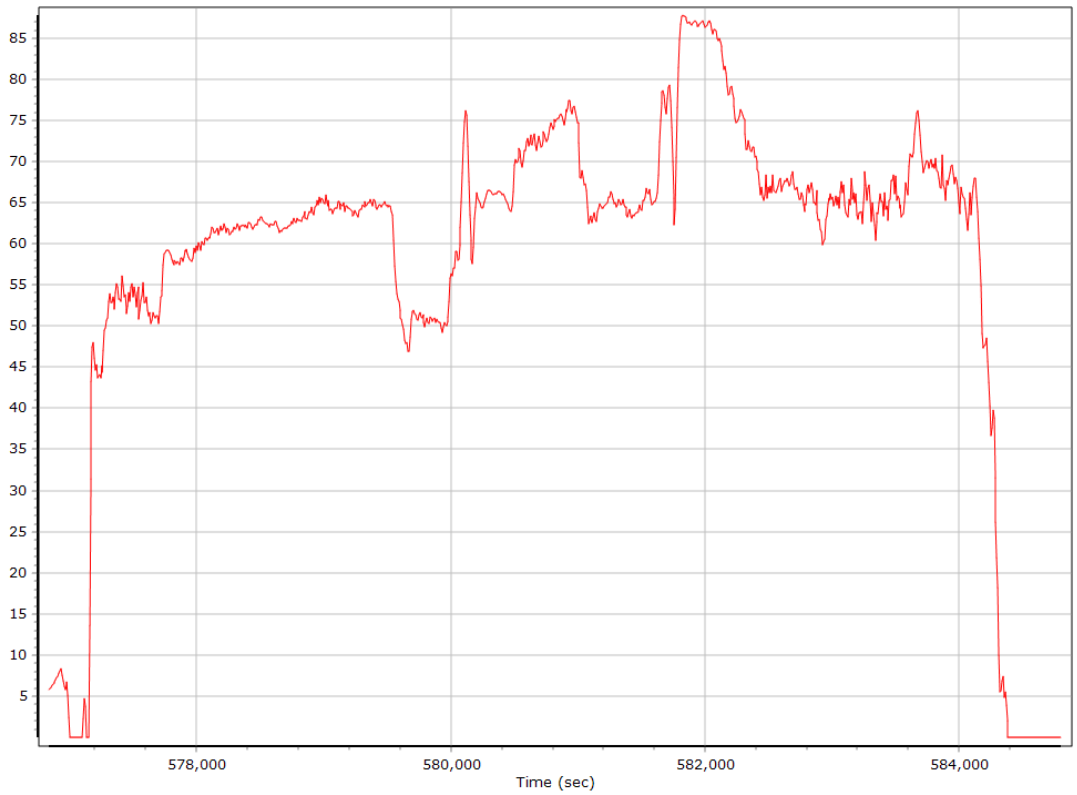

Ground Speed

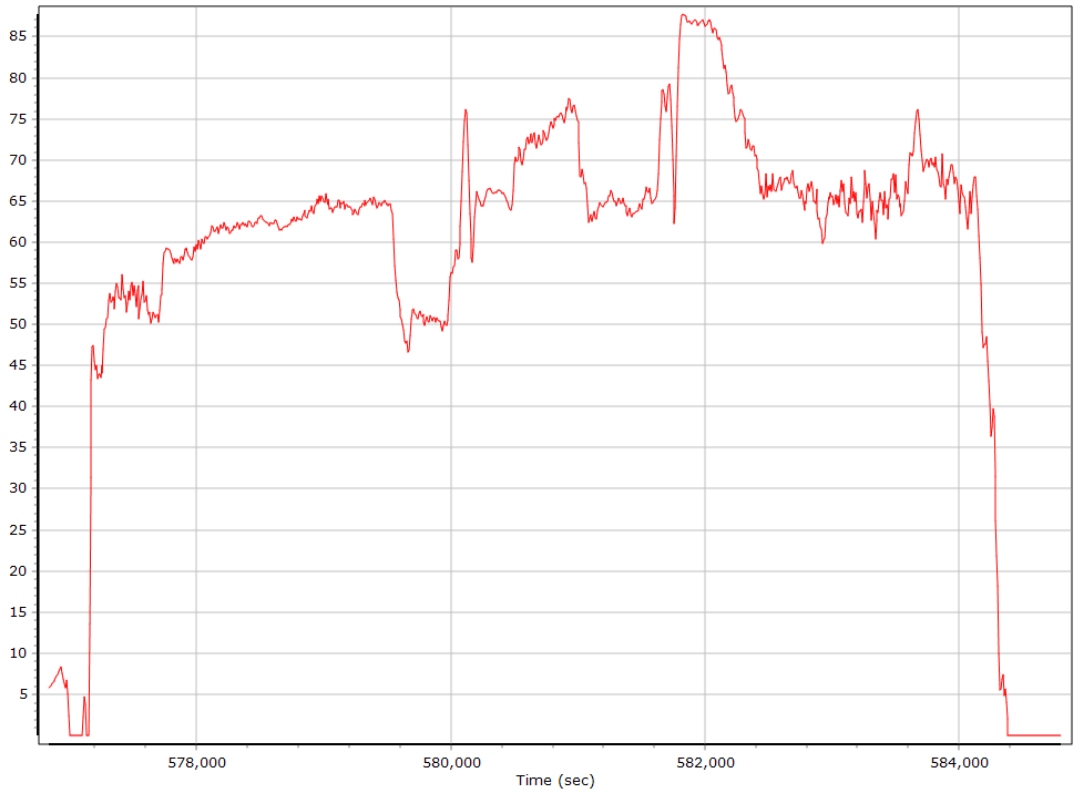

Body Acceleration

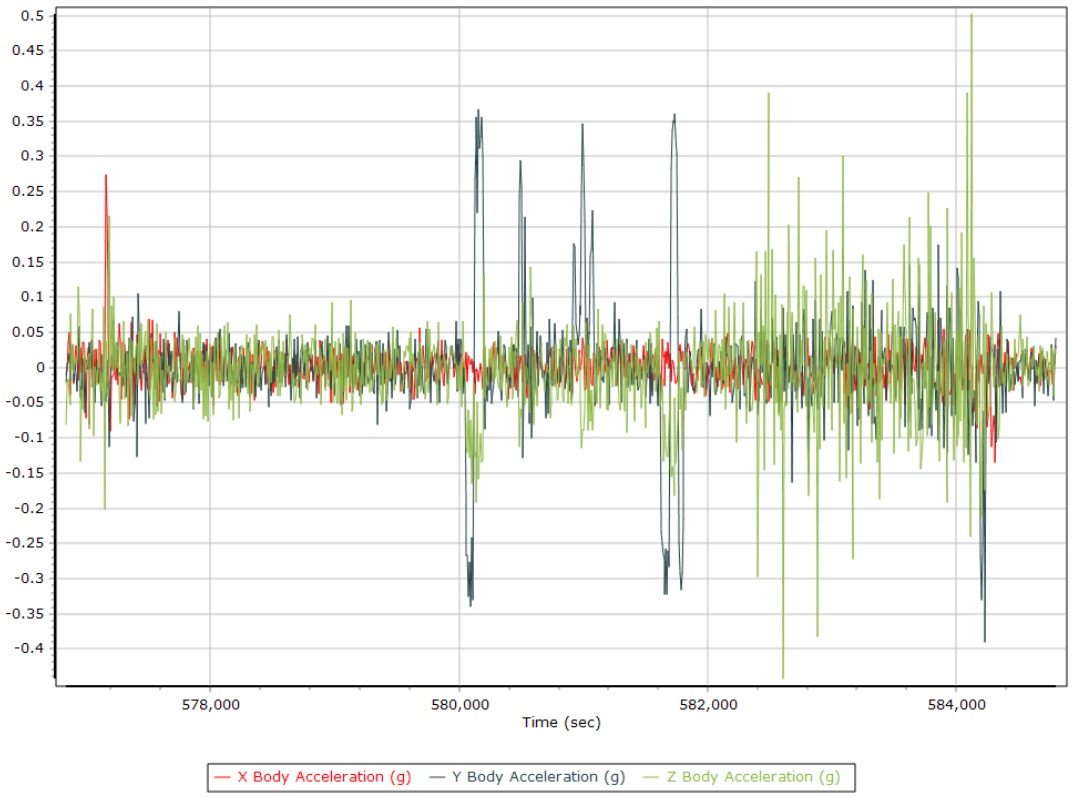

Total Body Acceleration

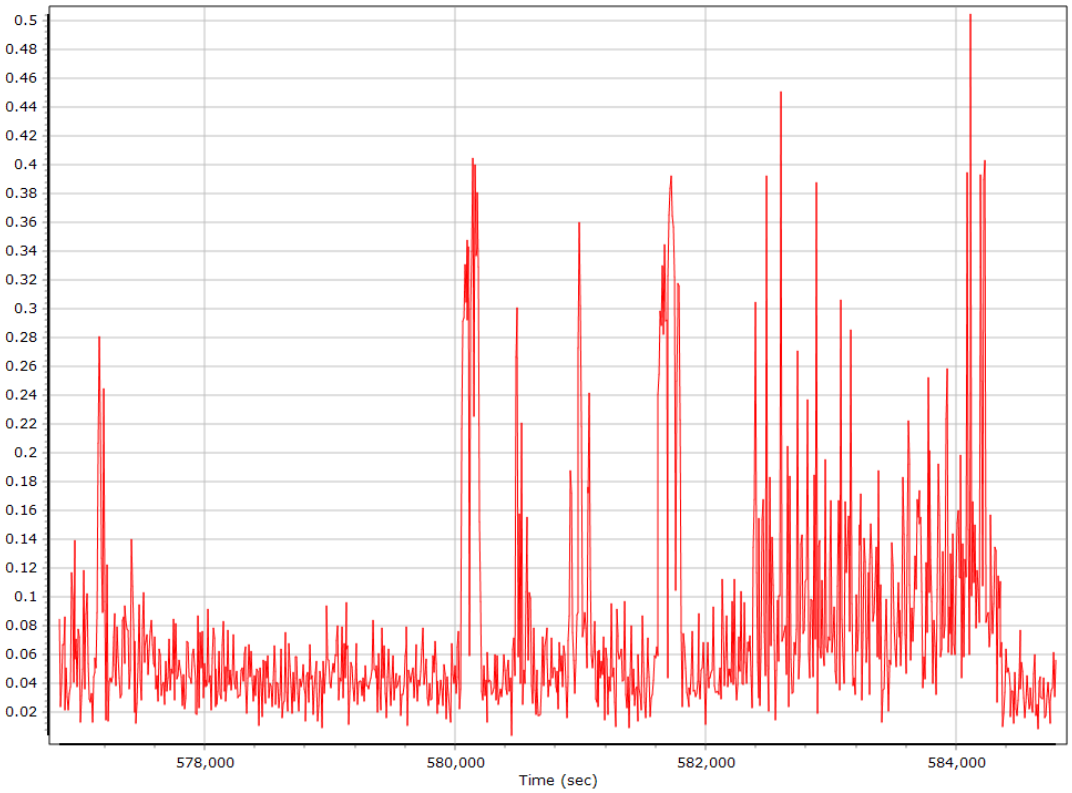

Body Angular Rate

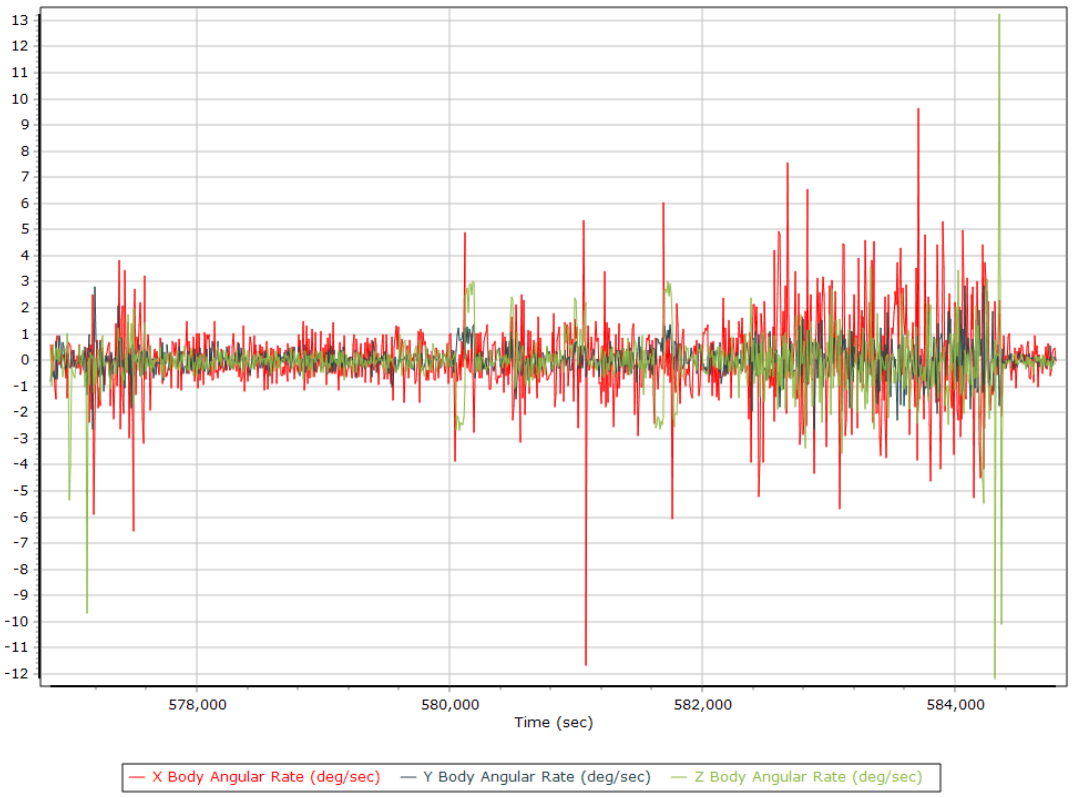

GNSS QC

GNSS QC Statistics

Statistics	Min	Max	Mean
Baseline length (km)	0.00	0.00	
Number of GPS SV	8	11	9
Number of GLONASS SV	0	8	7
Number of QZSS SV	0	0	0
Number of BEIDOU SV	0	0	0
Number of GALILEO SV	6	9	8
Total number of SV	15	26	24
PDOP	0.98	1.41	1.13
QC Solution Gaps	1.00	1.00	
Solution Type	Fixed	Float	No solution
Epoch (sec)	8357.00	0.00	2.00
Percentage	99.98	0.00	0.02

Num SVs in solution

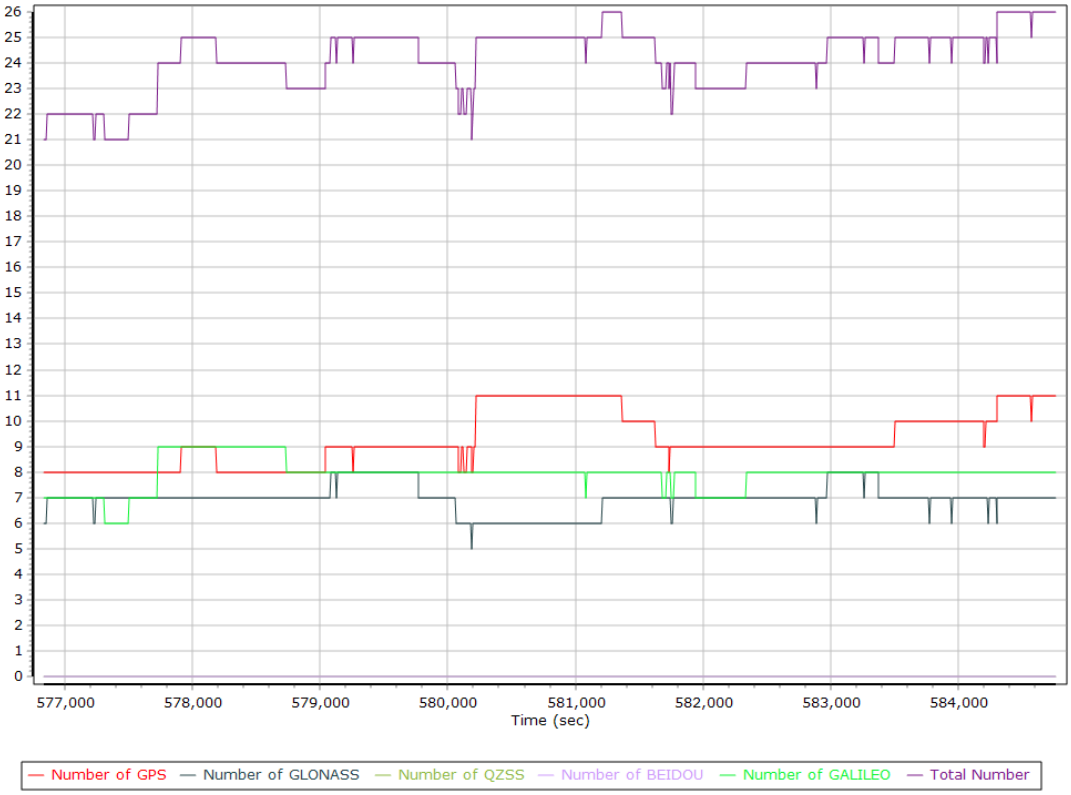

Forward/Reverse Separation

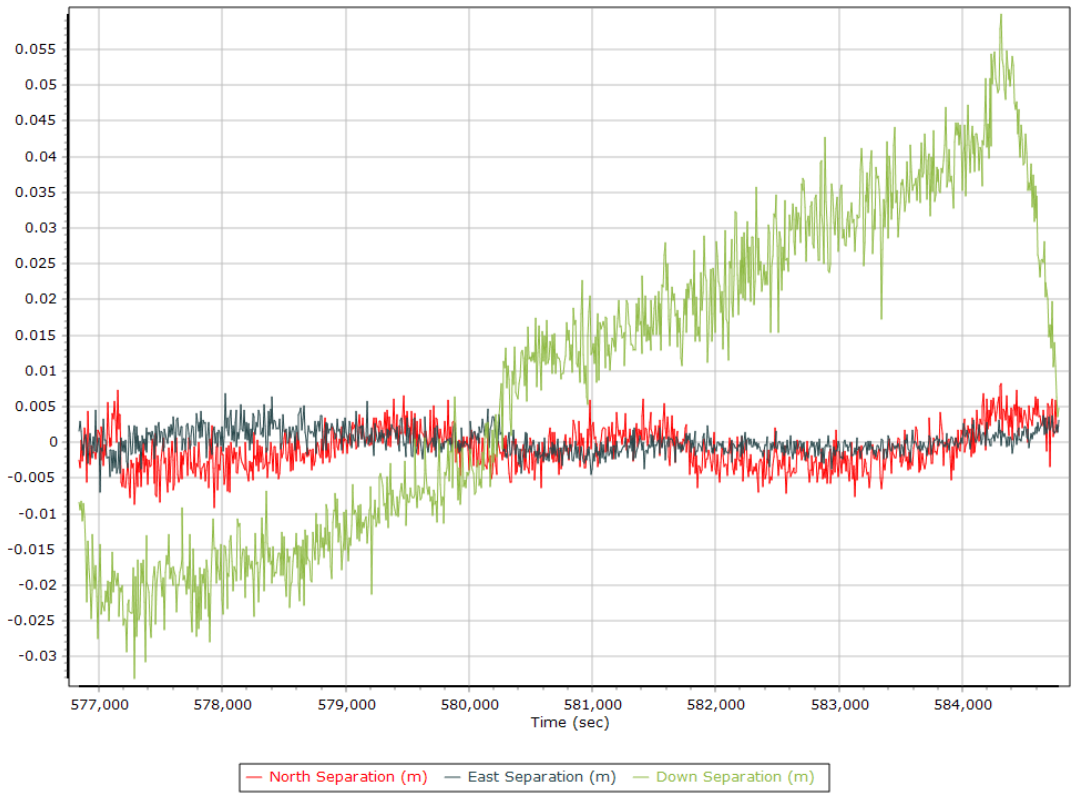

PDOP

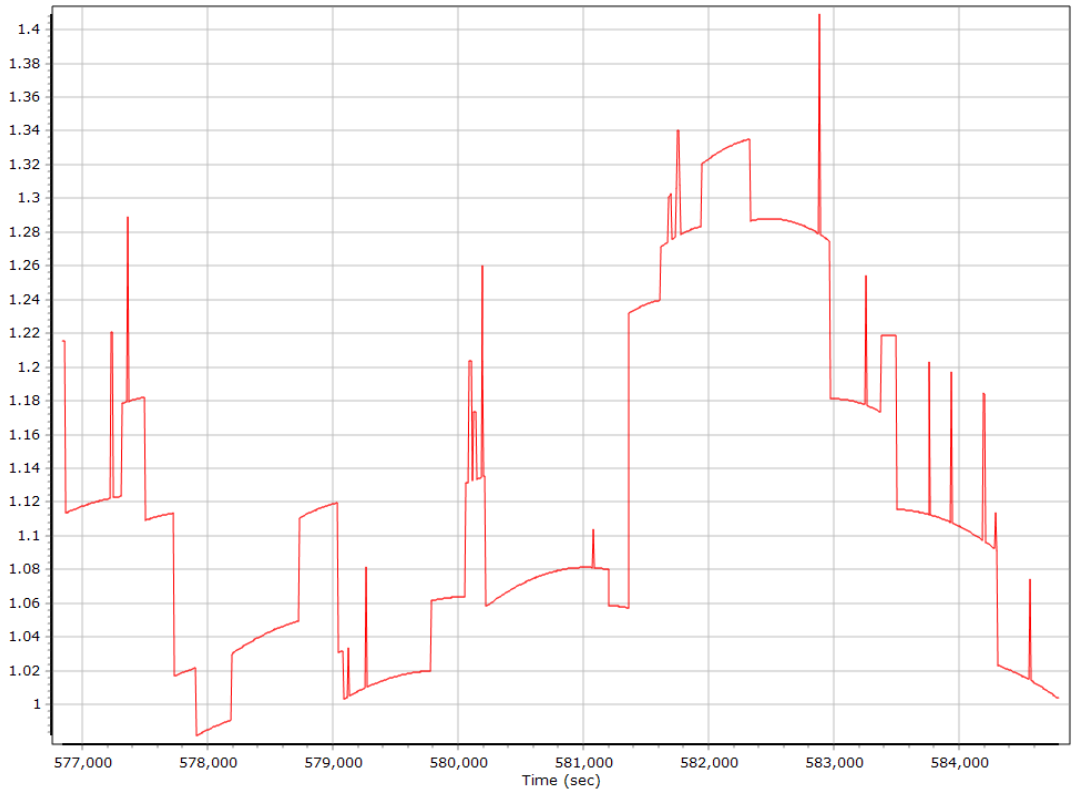

Estimated Position Accuracy

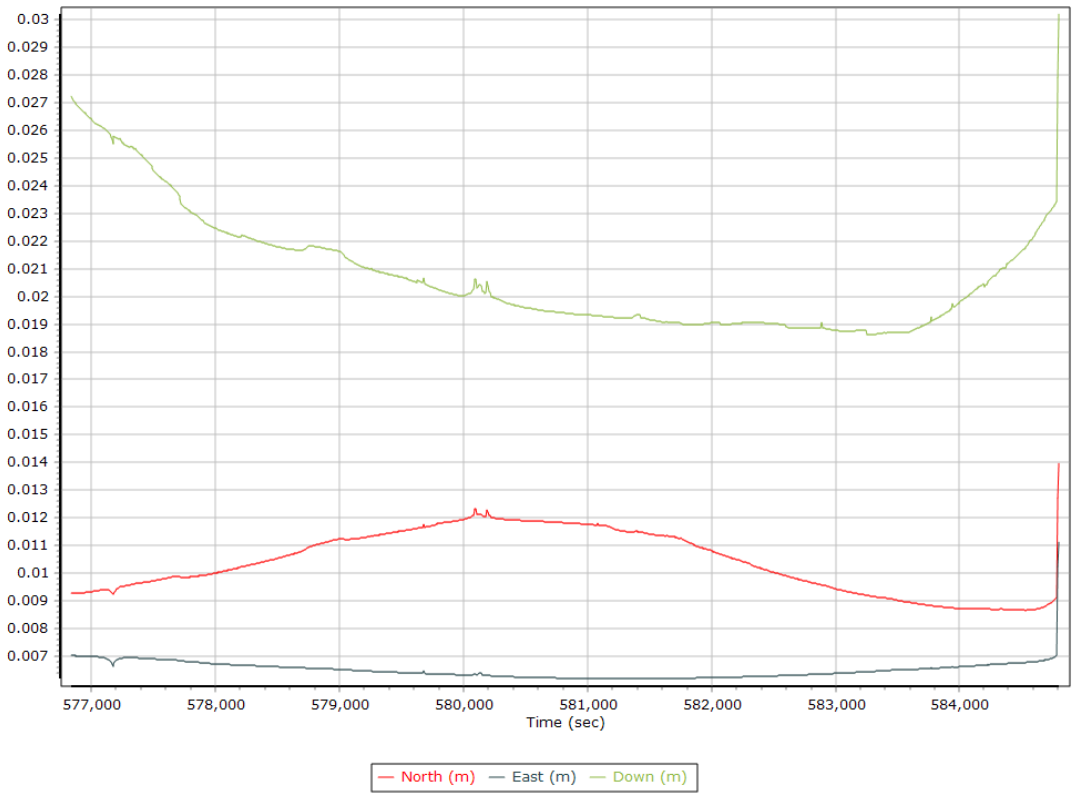

GPS Residuals

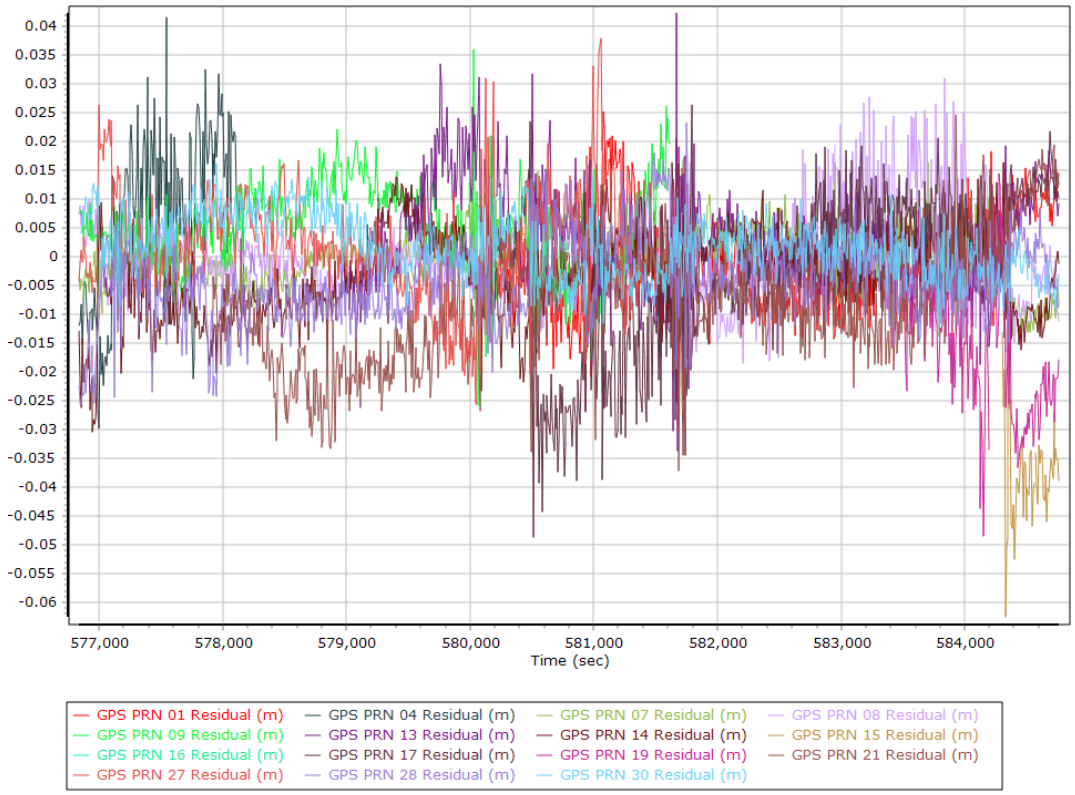

GLONASS Residuals

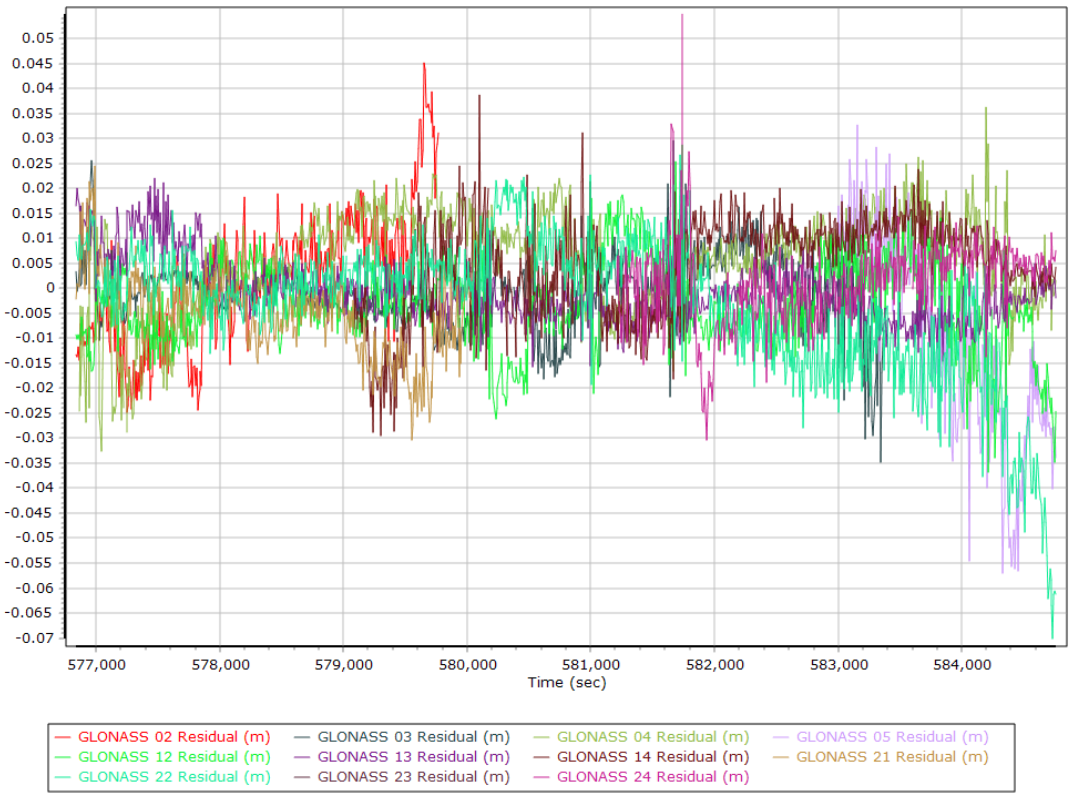

GALILEO Residuals

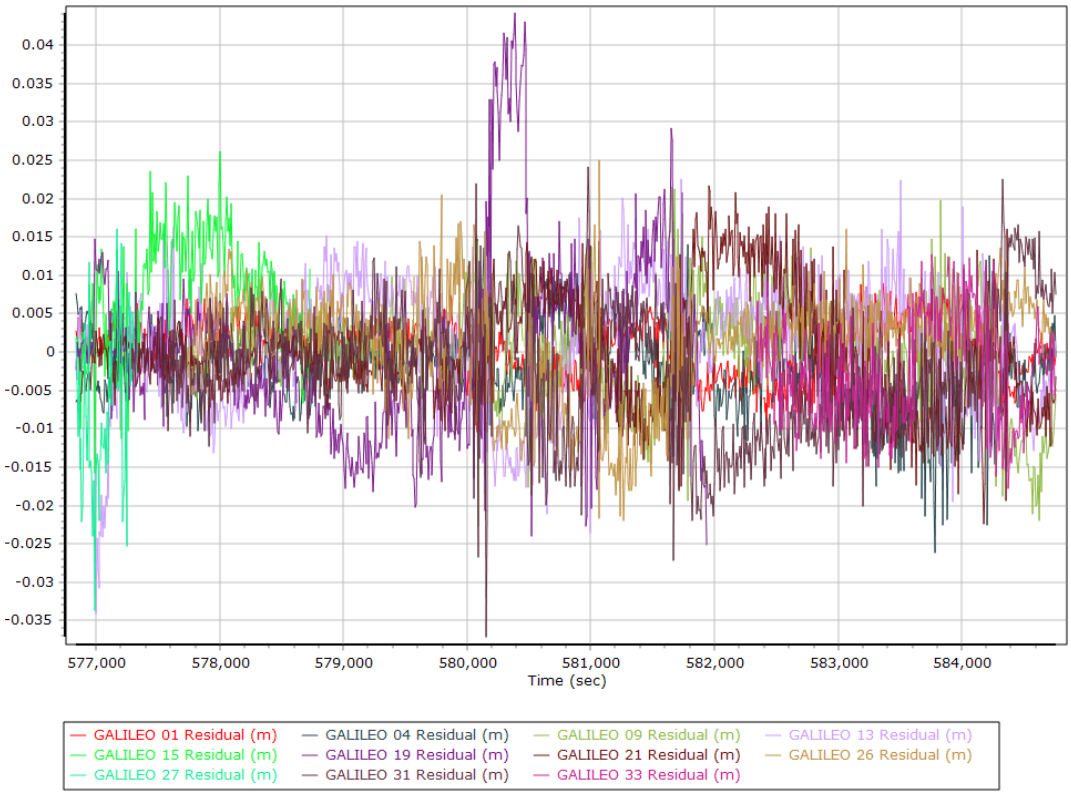

GNSS-Inertial Processor Configuration

Processing mode	IN-Fusion PP-RTX		
Stabilized mount	False		
Processing start time	576402.000 (04/10/2021 16:06:42)		
Processing end time	584803.000 (04/10/2021 18:26:43)		
Initial attitude source	Real-Time VNAV/RNAV Attitude		
IMU Sensor Context	Processing with Onboard IMU		
Reference to IMU lever arm (m)	0.000	0.000	0.000
Reference to IMU mounting angles (deg)	0.000	0.000	180.000
Reference to Primary GNSS lever arm (m)	0.067	-0.137	-0.926
Reference to Primary GNSS lever arm std dev (m)	0.030	0.030	0.030
Aircraft to Reference mounting angles (deg)	0.000	0.000	0.000

Calibrated Installation Parameters

Reference-Primary GNSS Lever Arm (m)

Reference-Primary GNSS Lever Arm Automatic Calibration Results

Original Reference to Primary GNSS lever arm (m)	0.046	-0.139	-0.923
Iteration 1 Reference to Primary GNSS lever arm (m)	0.067	-0.137	-0.926
Iteration 2 Reference to Primary GNSS lever arm (m)	0.067	-0.137	-0.926
Primary GNSS Lever Arm In use	Iteration 2		

X Reference-Primary GNSS Lever Arm (m)

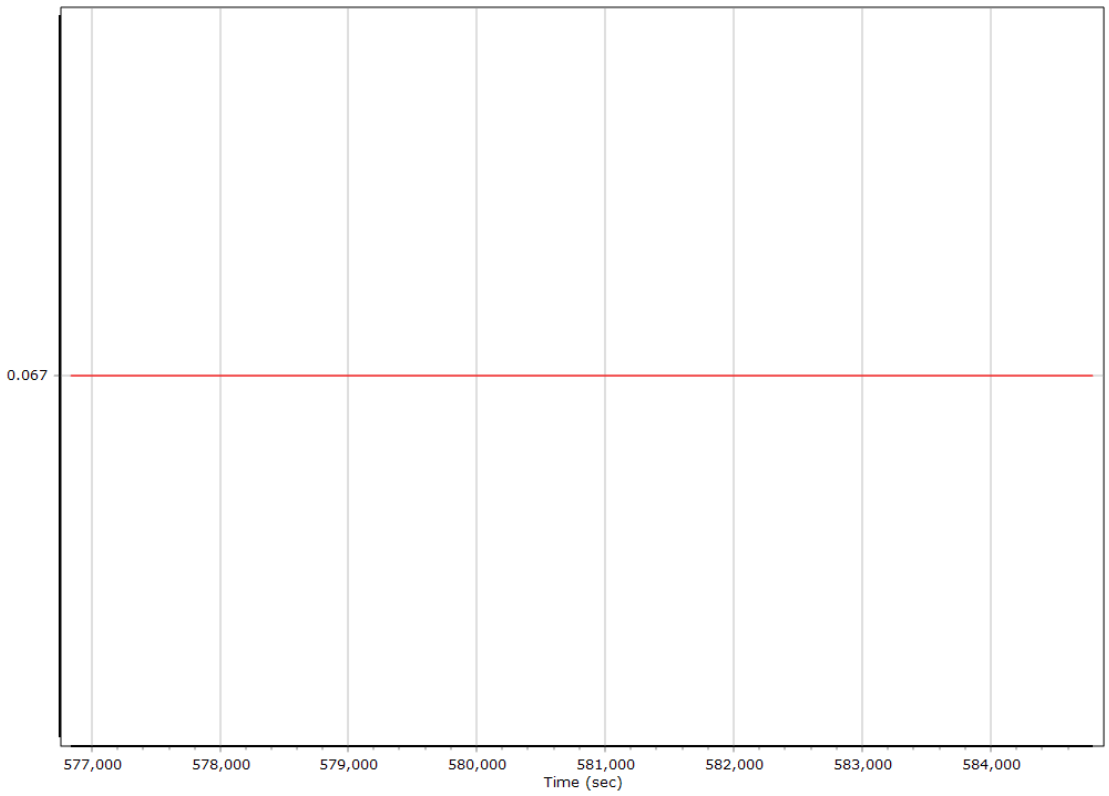

Y Reference-Primary GNSS Lever Arm (m)

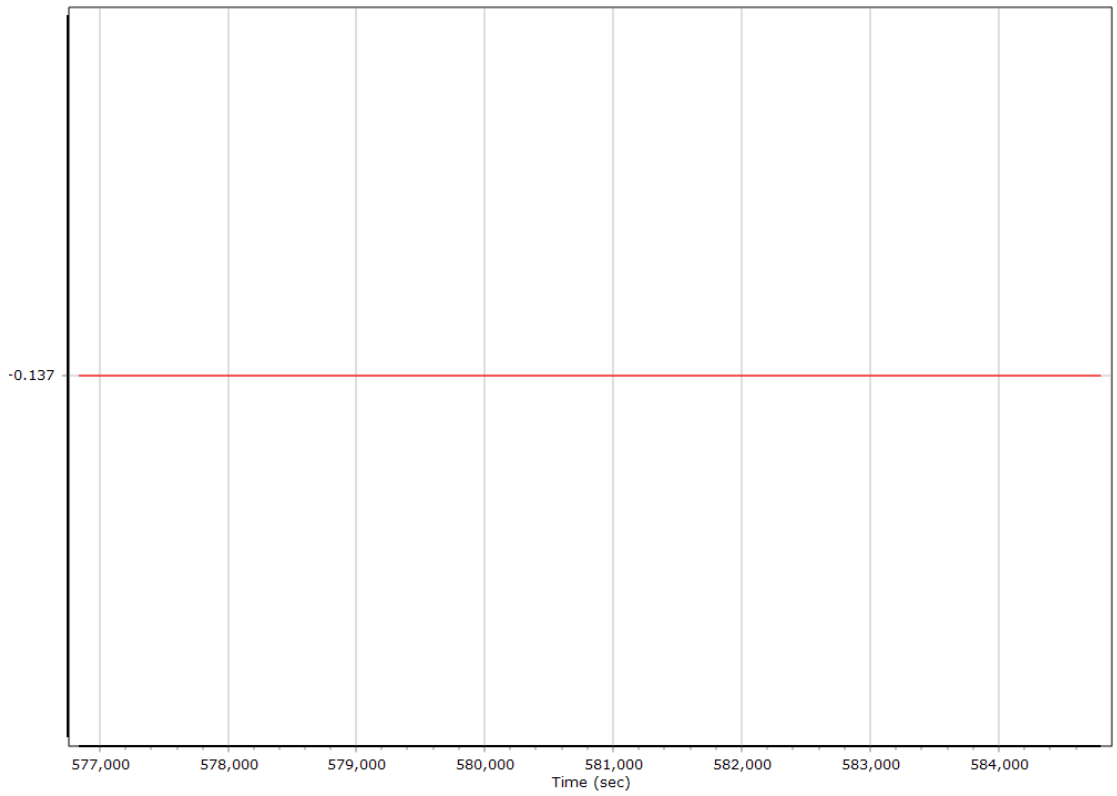

Z Reference-Primary GNSS Lever Arm (m)

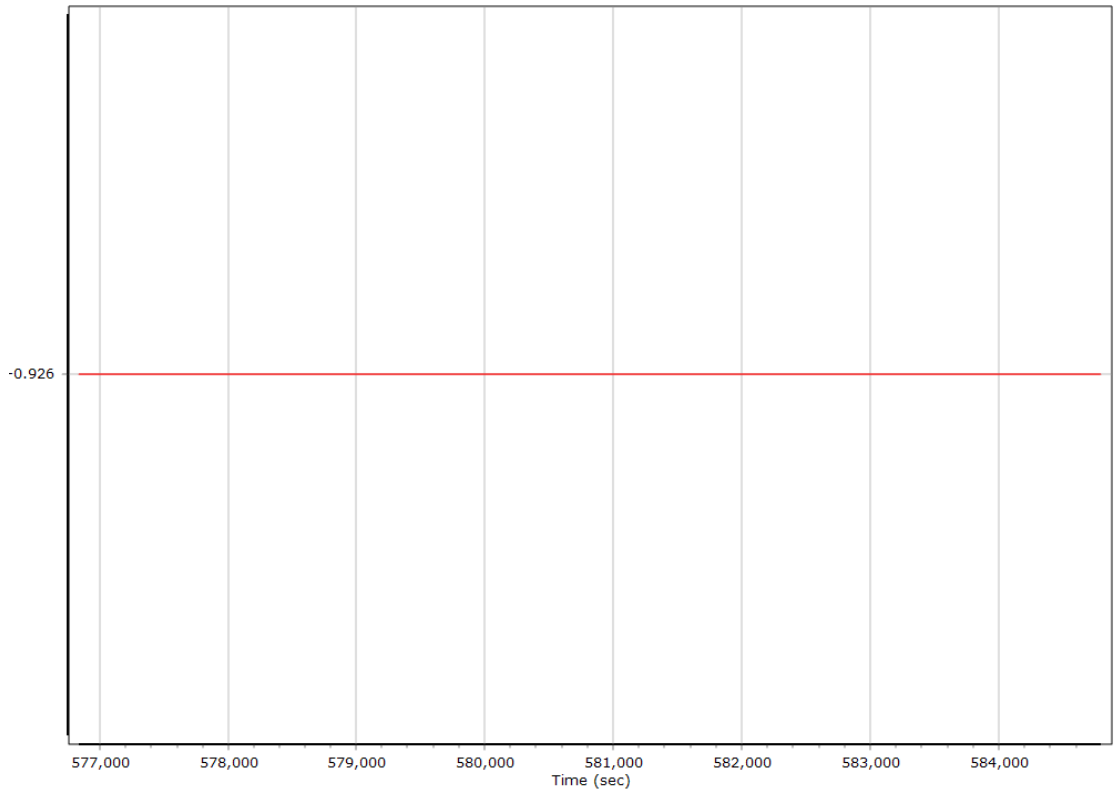

Reference-Primary GNSS Lever Arm Figure of Merit

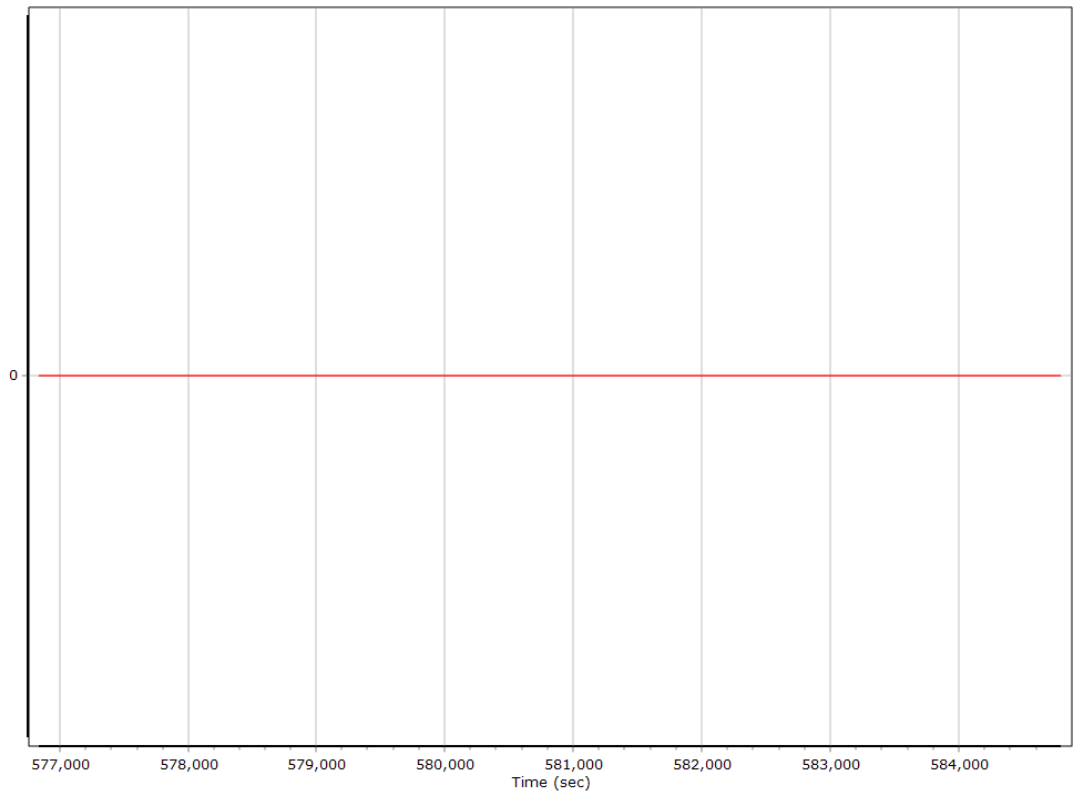

IN-Fusion QC

Forward Processed Estimated Errors, Reference Frame

Accelerometer Bias (micro-g)

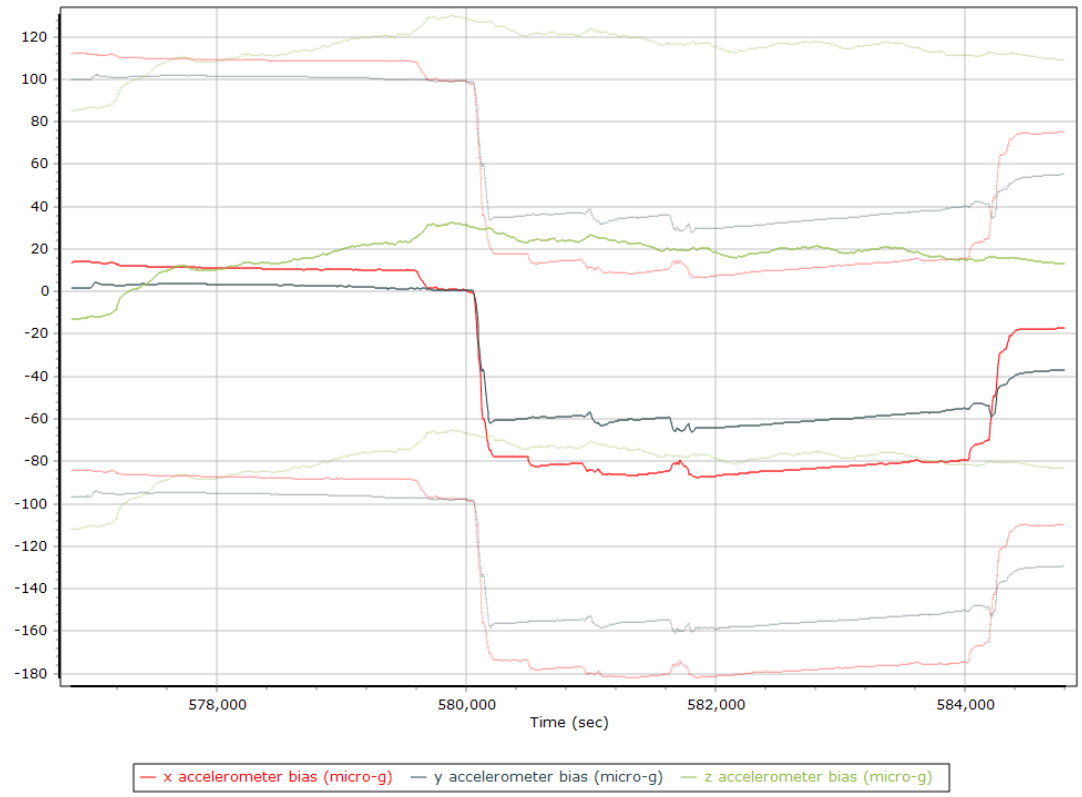

X Accelerometer Bias (micro-g)

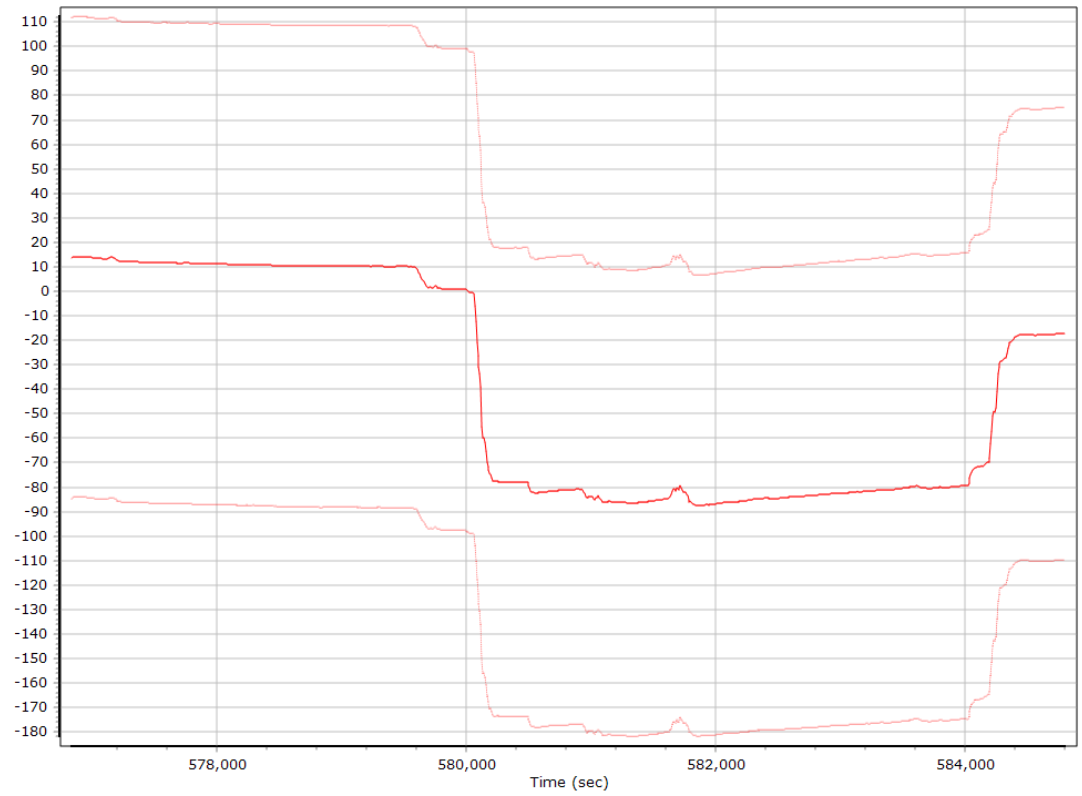

Y Accelerometer Bias (micro-g)

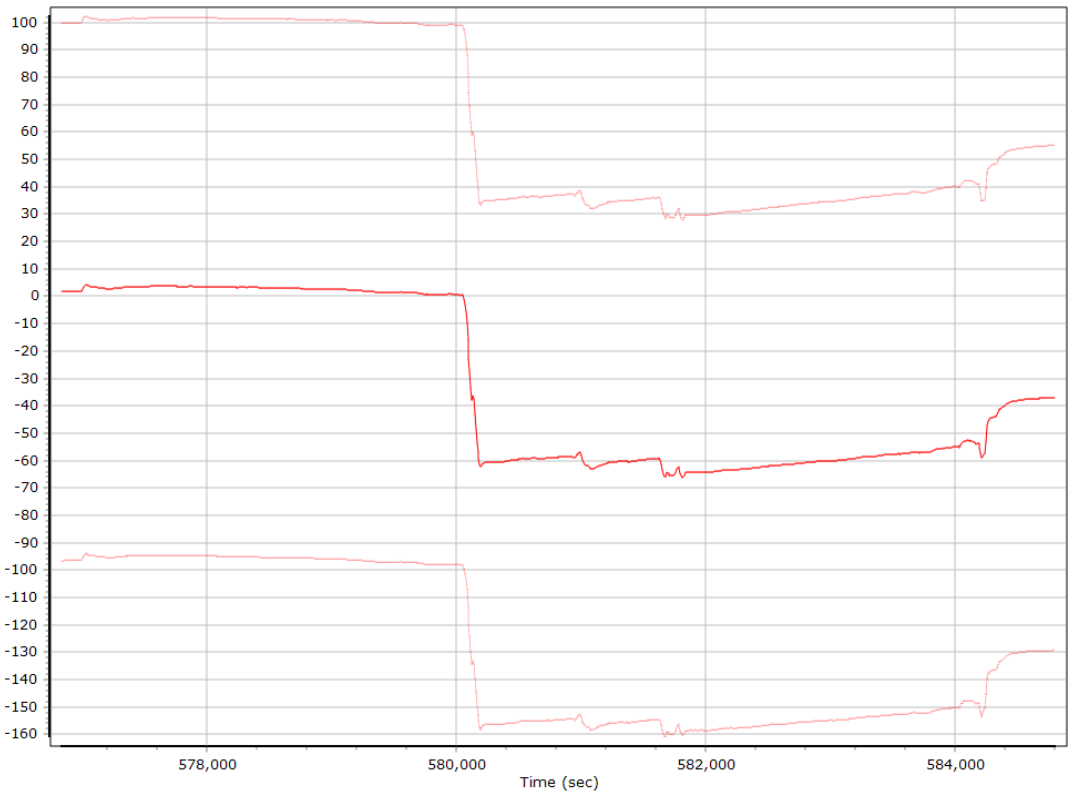

Z Accelerometer Bias (micro-g)

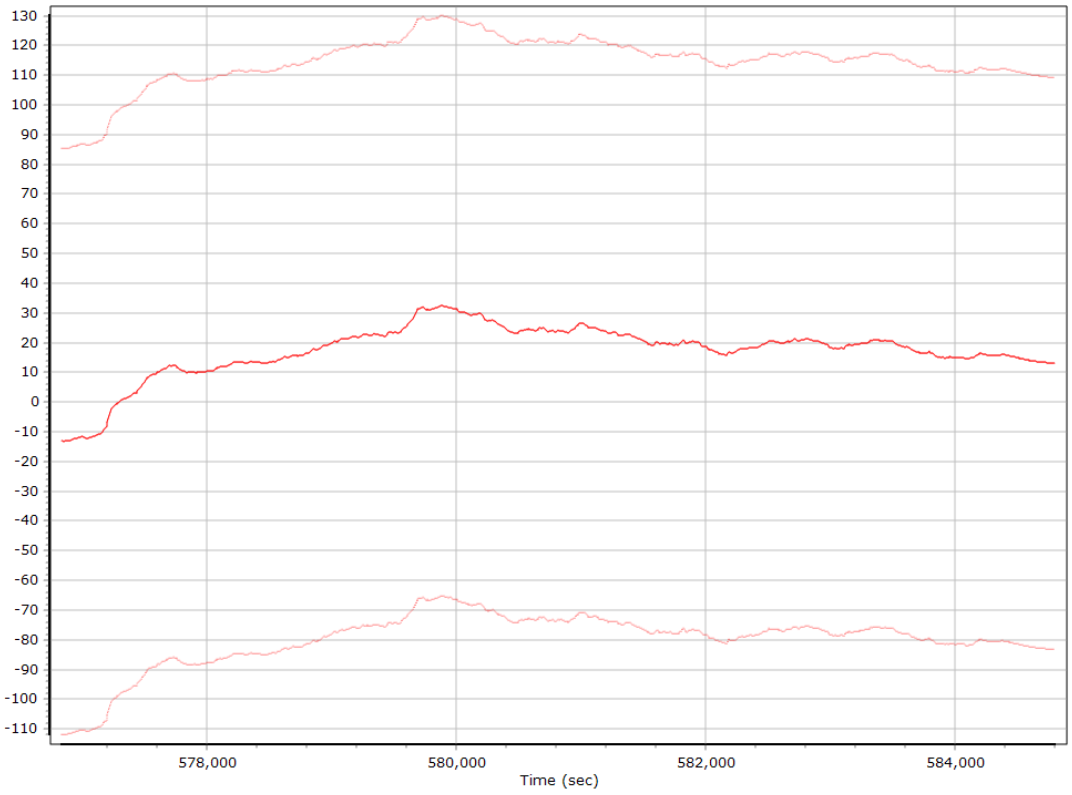

Accelerometer Scale Error (ppm)

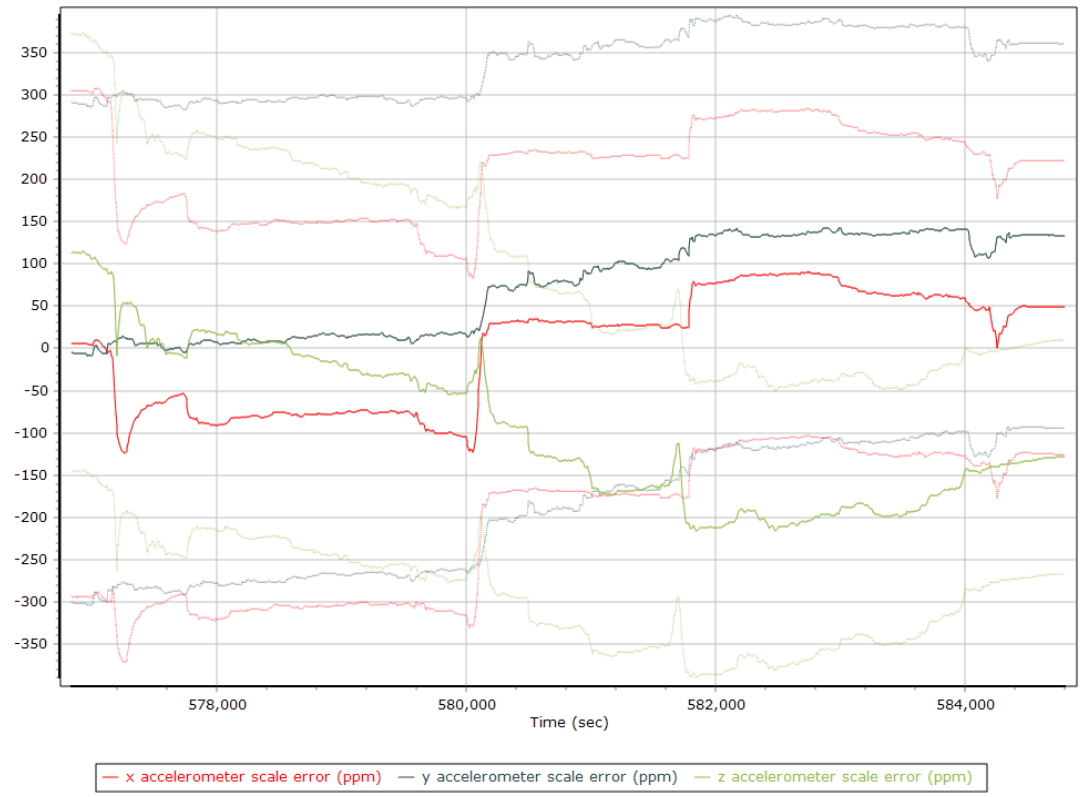

X Accelerometer Scale Error (ppm)

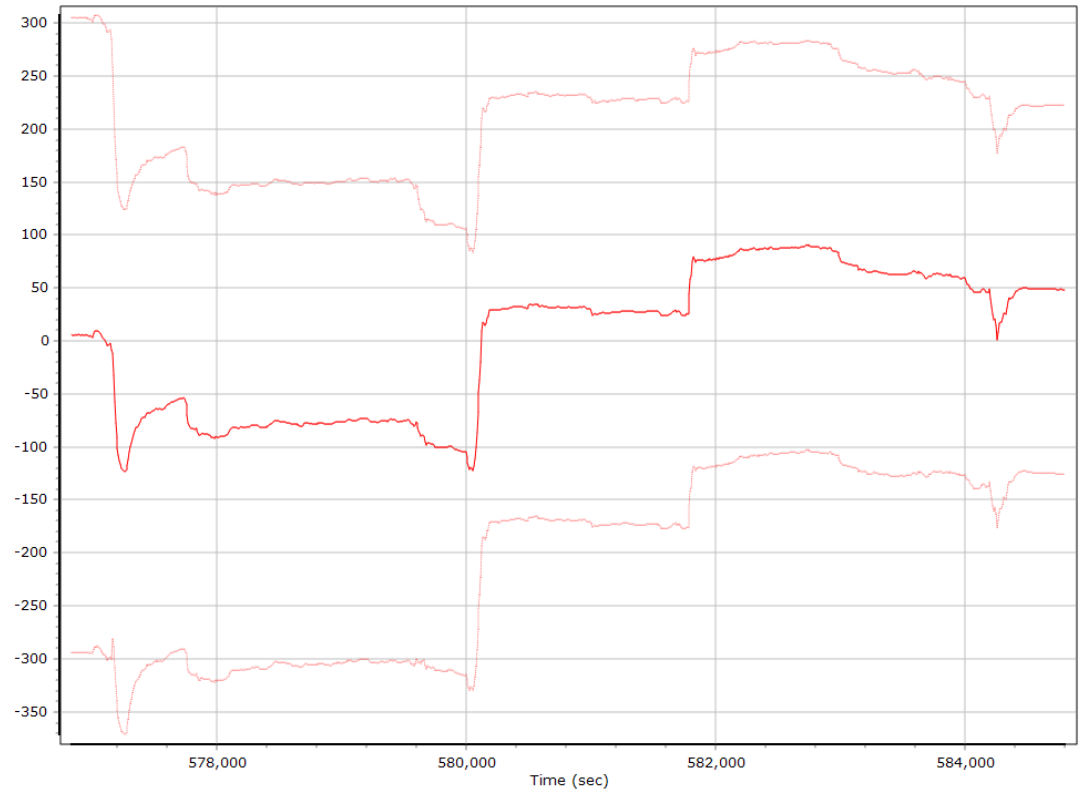

Y Accelerometer Scale Error (ppm)

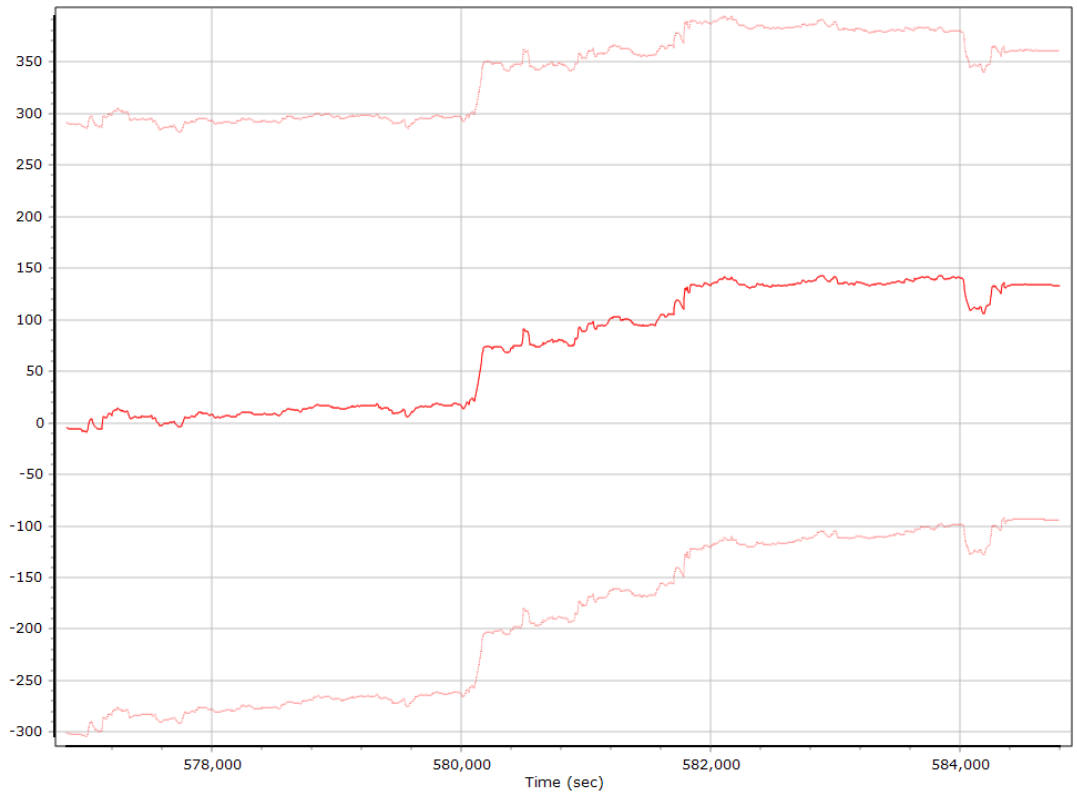

Z Accelerometer Scale Error (ppm)

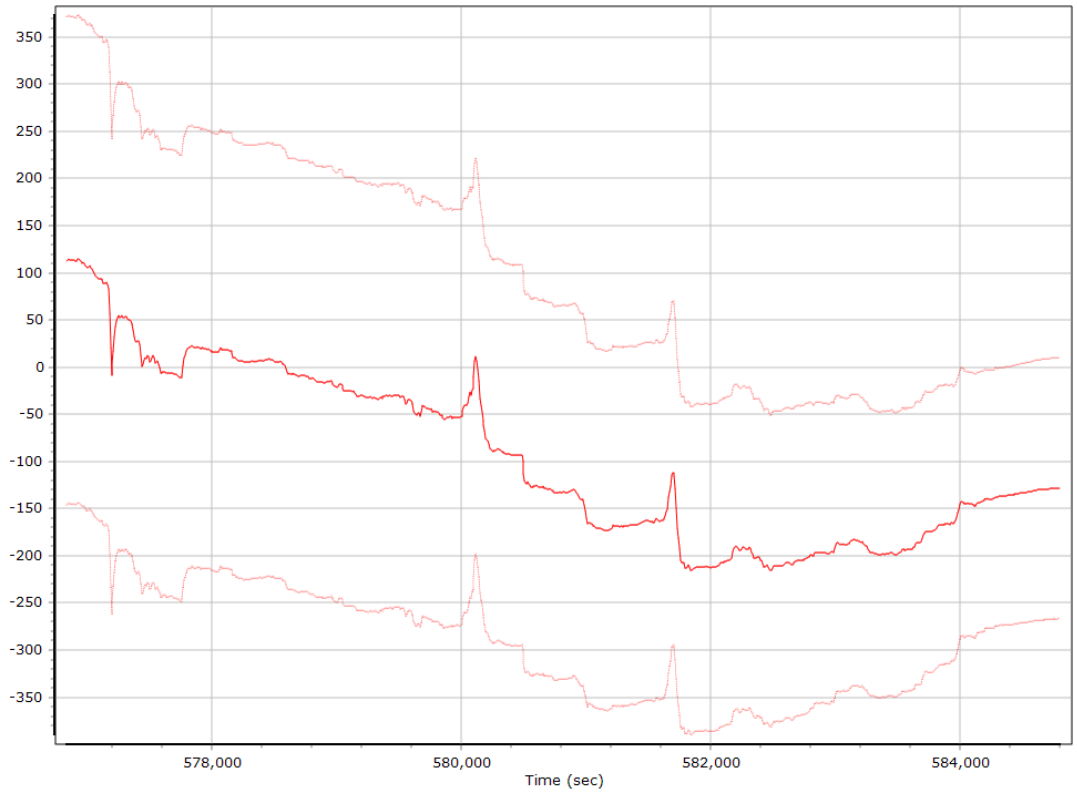

Gyro Bias (deg/h)

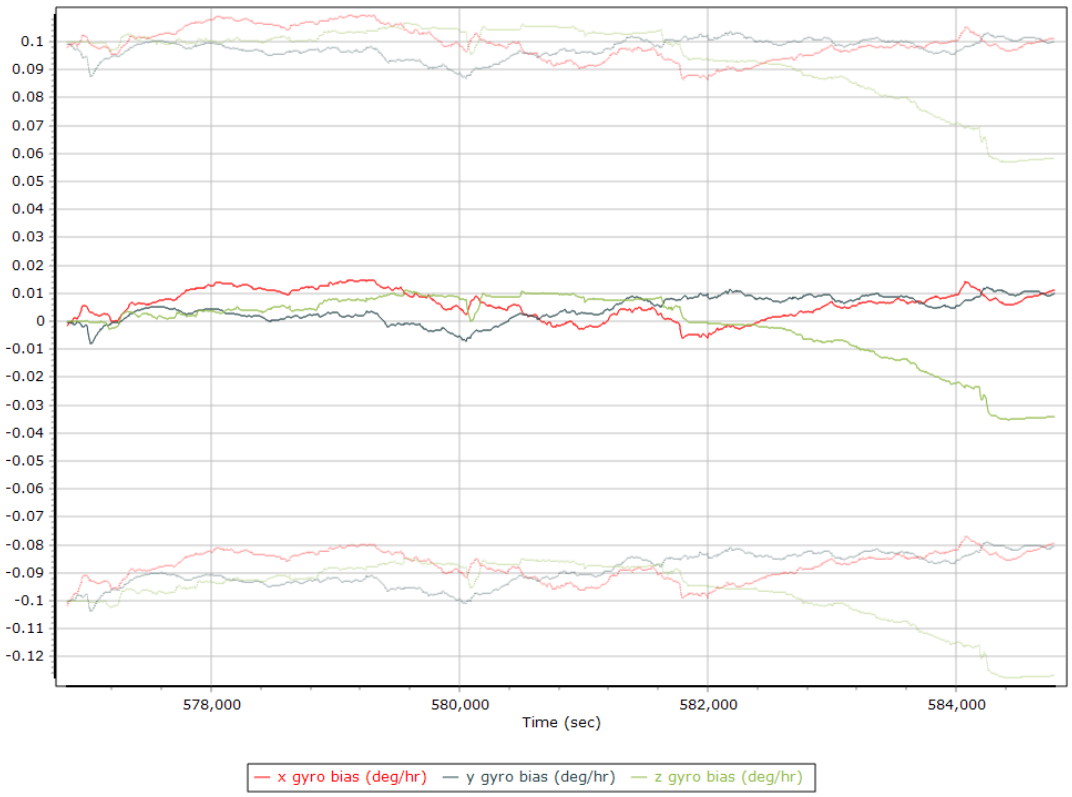

X Gyro Bias (deg/h)

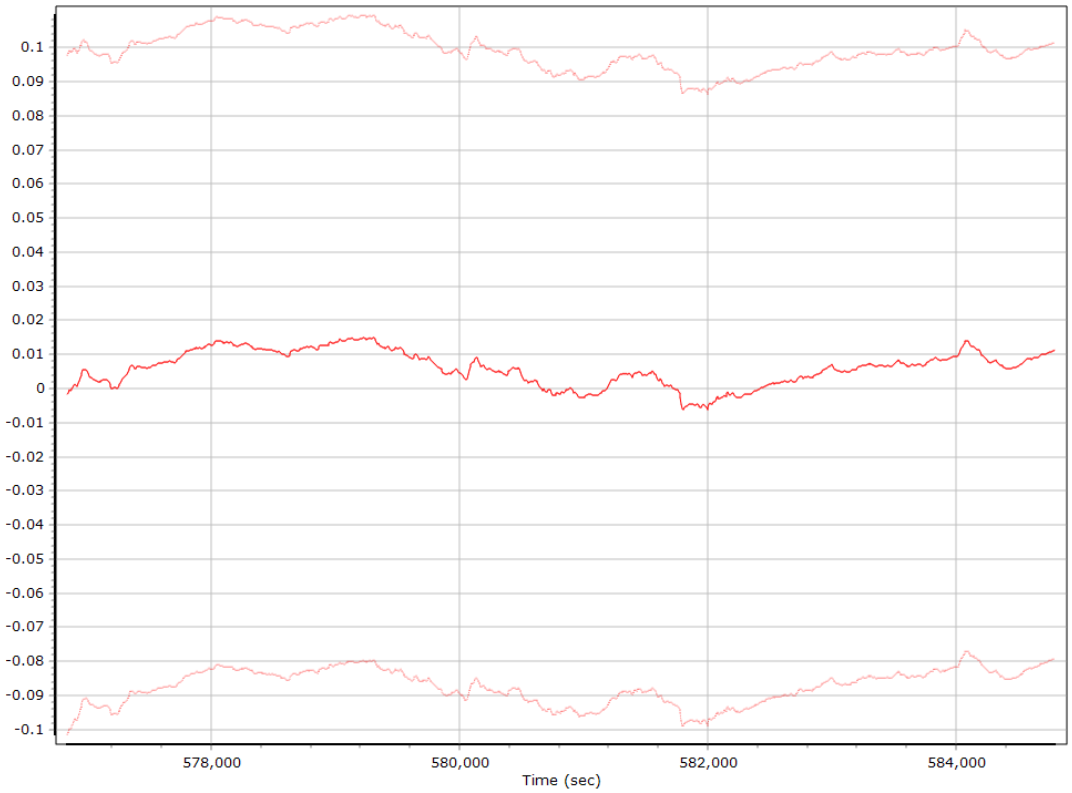

Y Gyro Bias (deg/h)

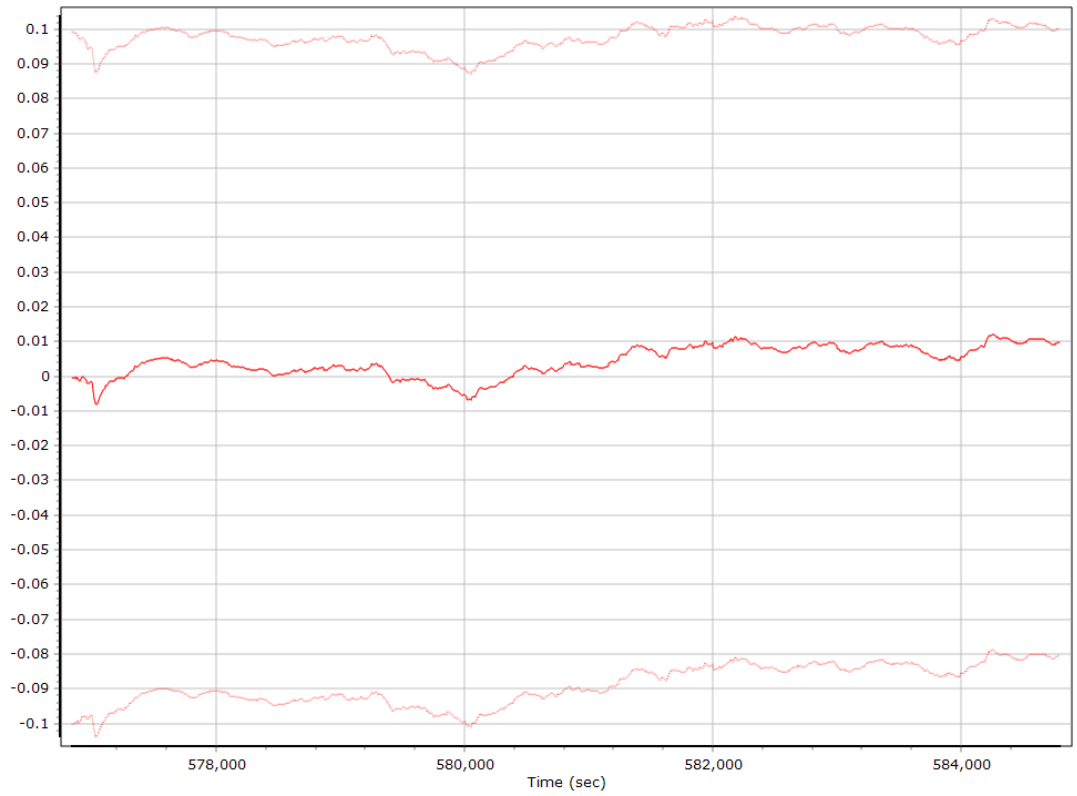

Z Gyro Bias (deg/h)

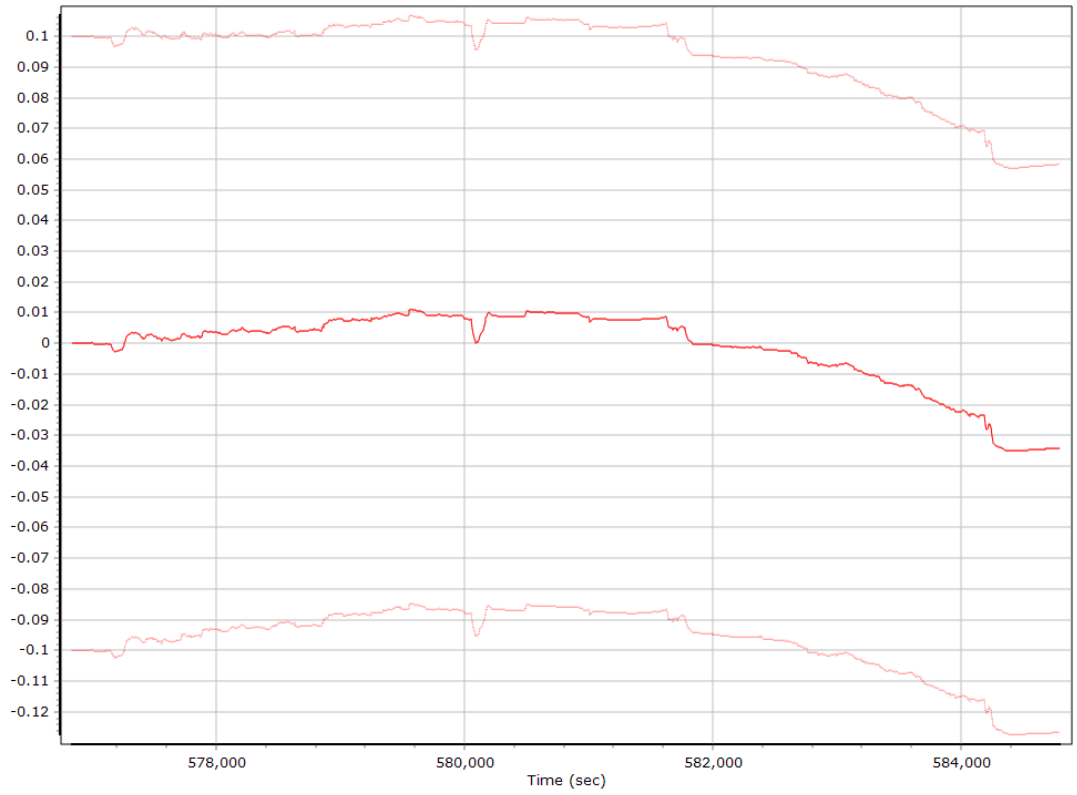

Gyro Scale Error (ppm)

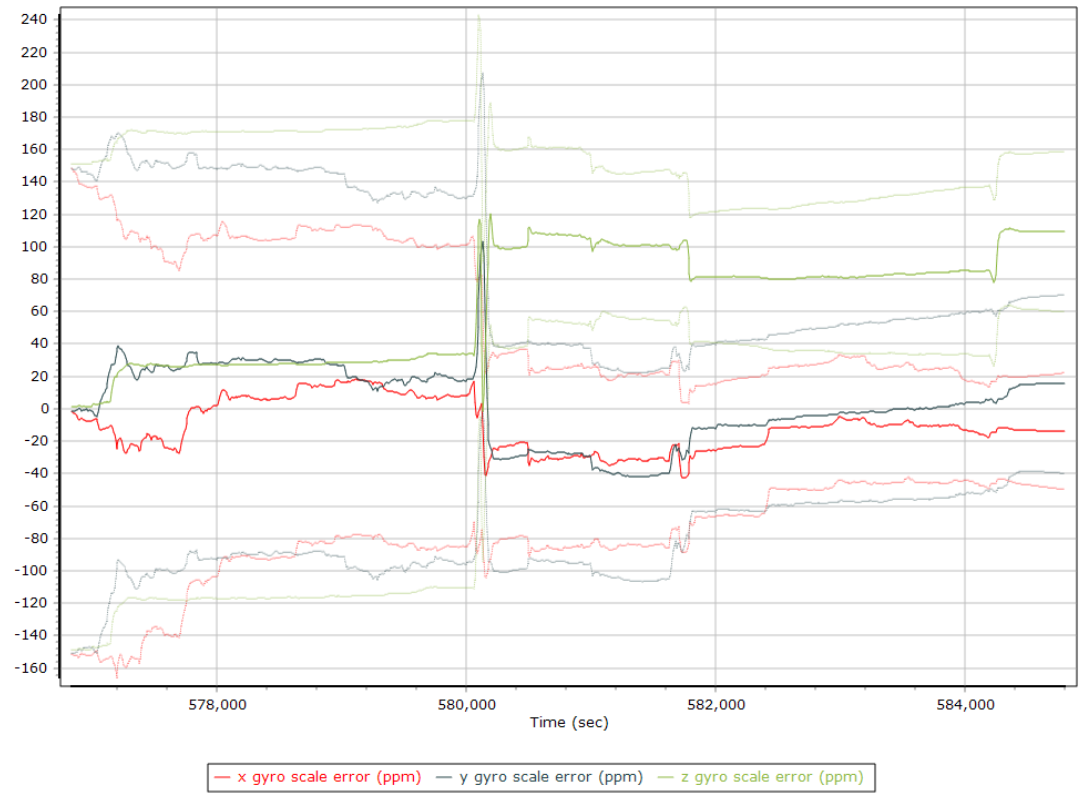

X Gyro Scale Error (ppm)

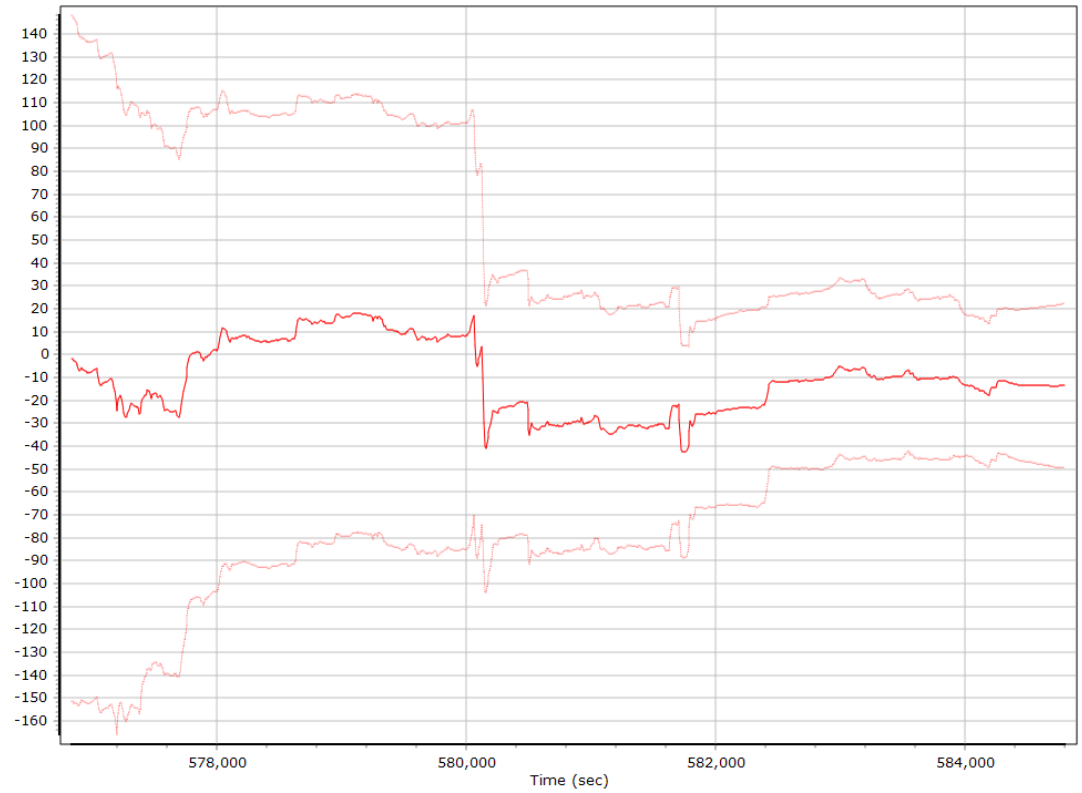

Y Gyro Scale Error (ppm)

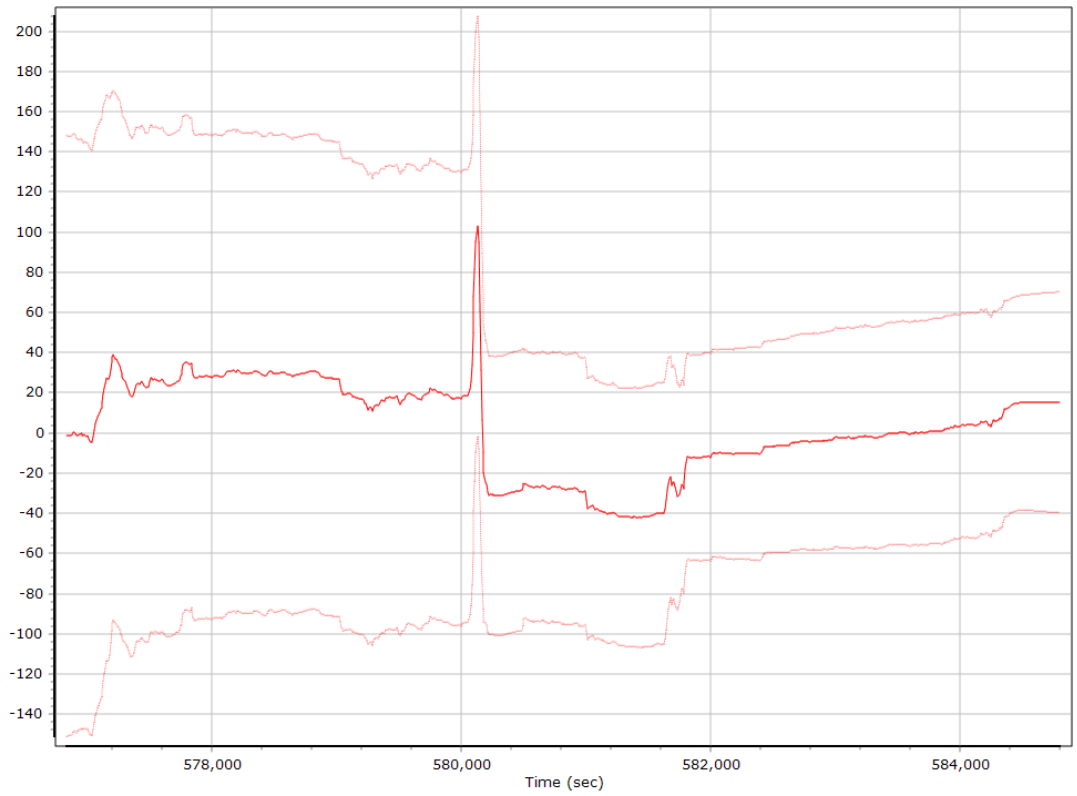

Z Gyro Scale Error (ppm)

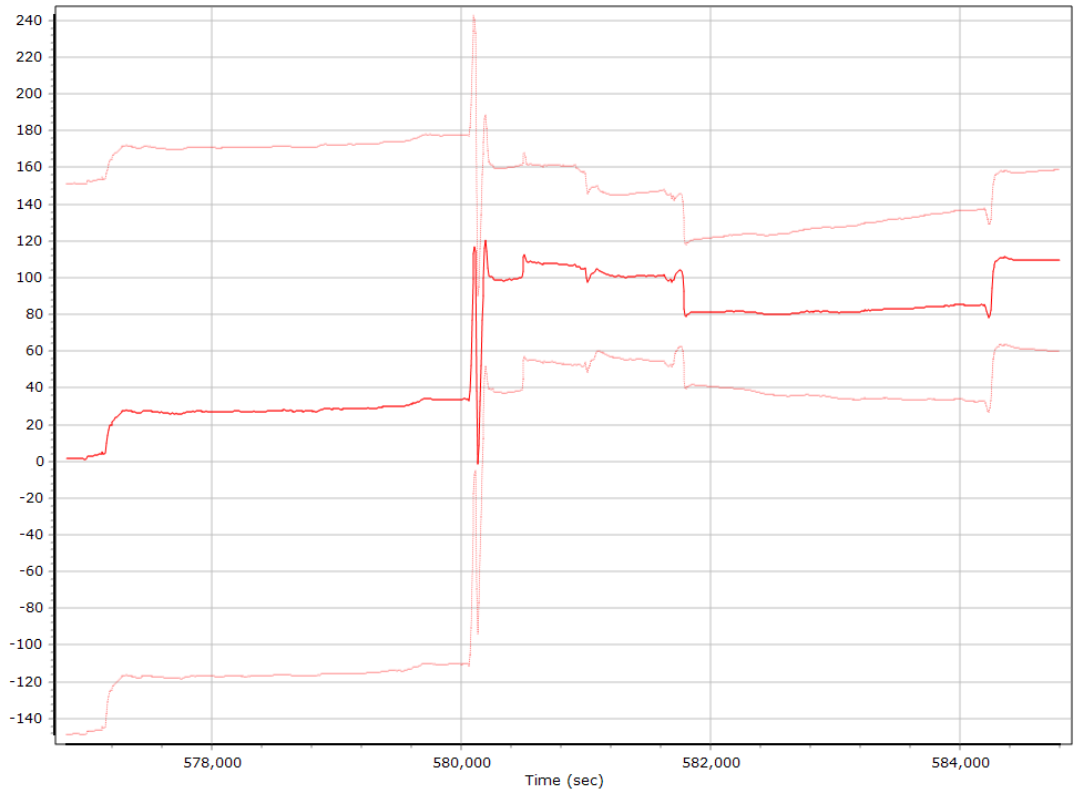

Forward Processed Estimated Constant Errors, Reference Frame

Accelerometer Bias (micro-g)

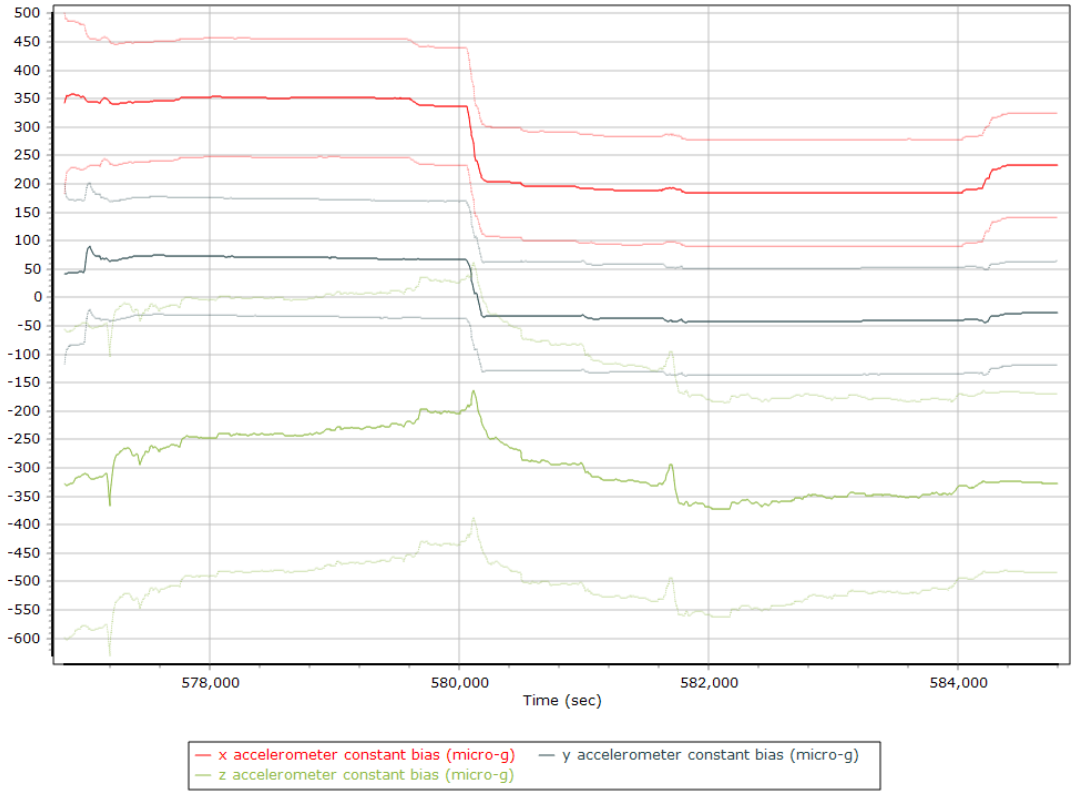

X Accelerometer Bias (micro-g)

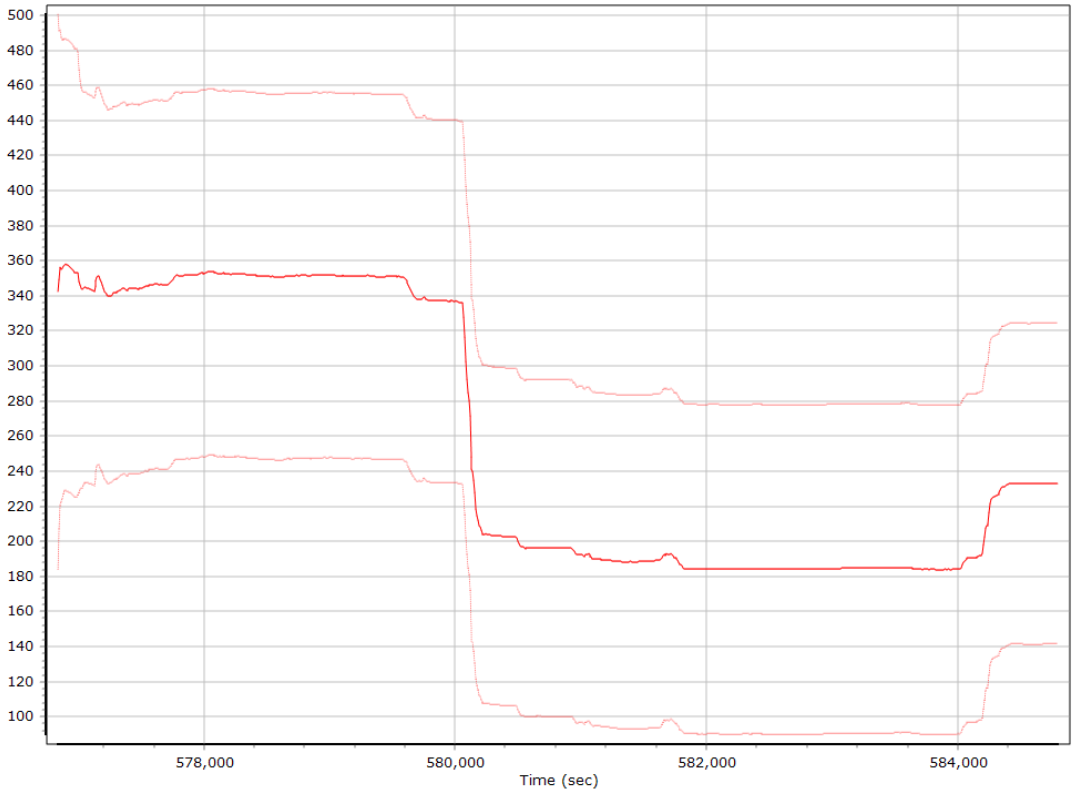

Y Accelerometer Bias (micro-g)

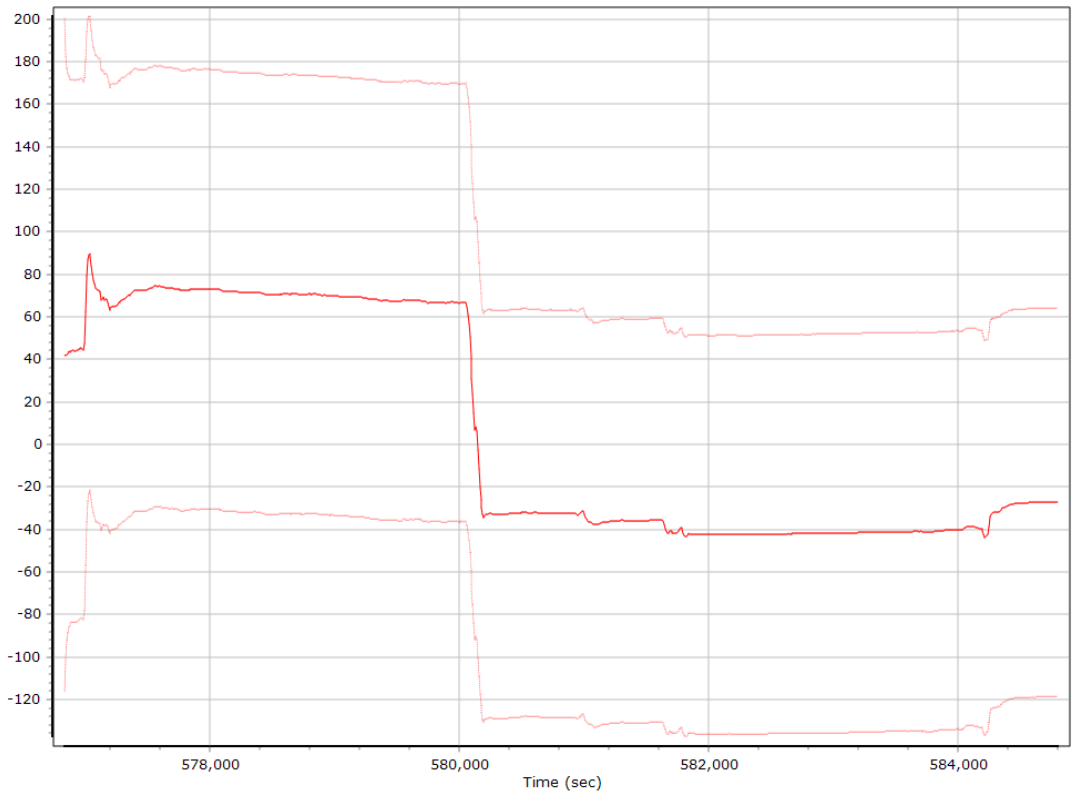

Z Accelerometer Bias (micro-g)

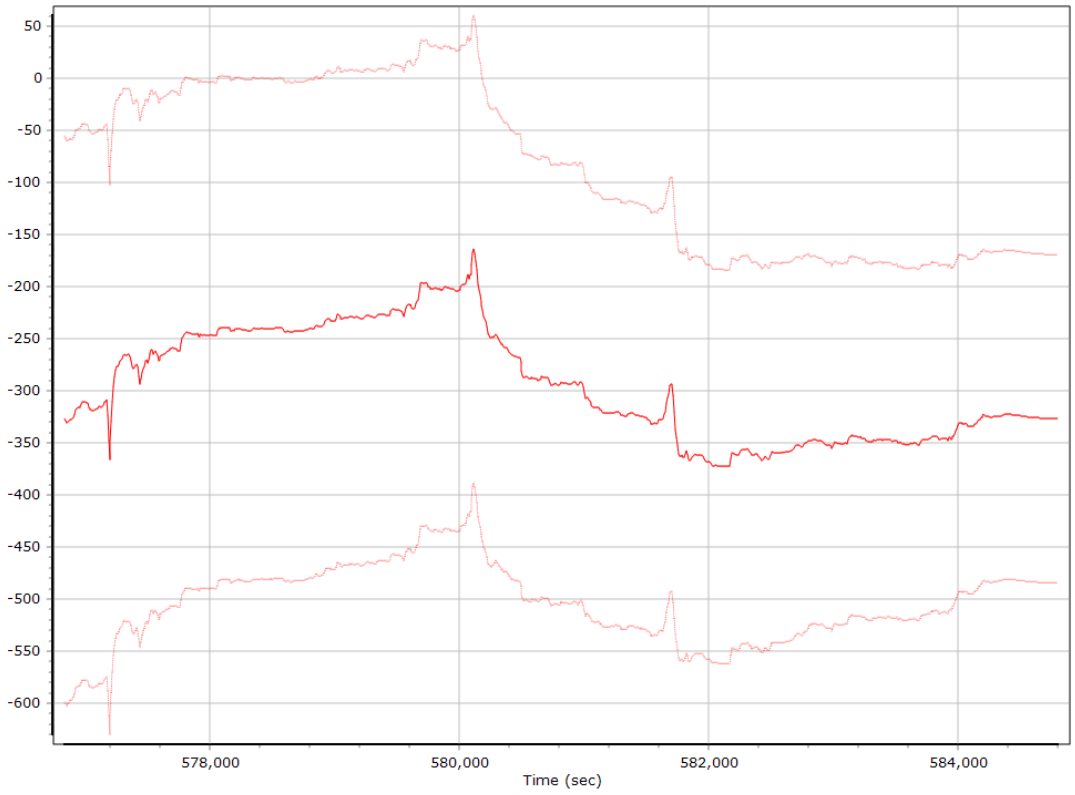

Gyro Bias (deg/h)

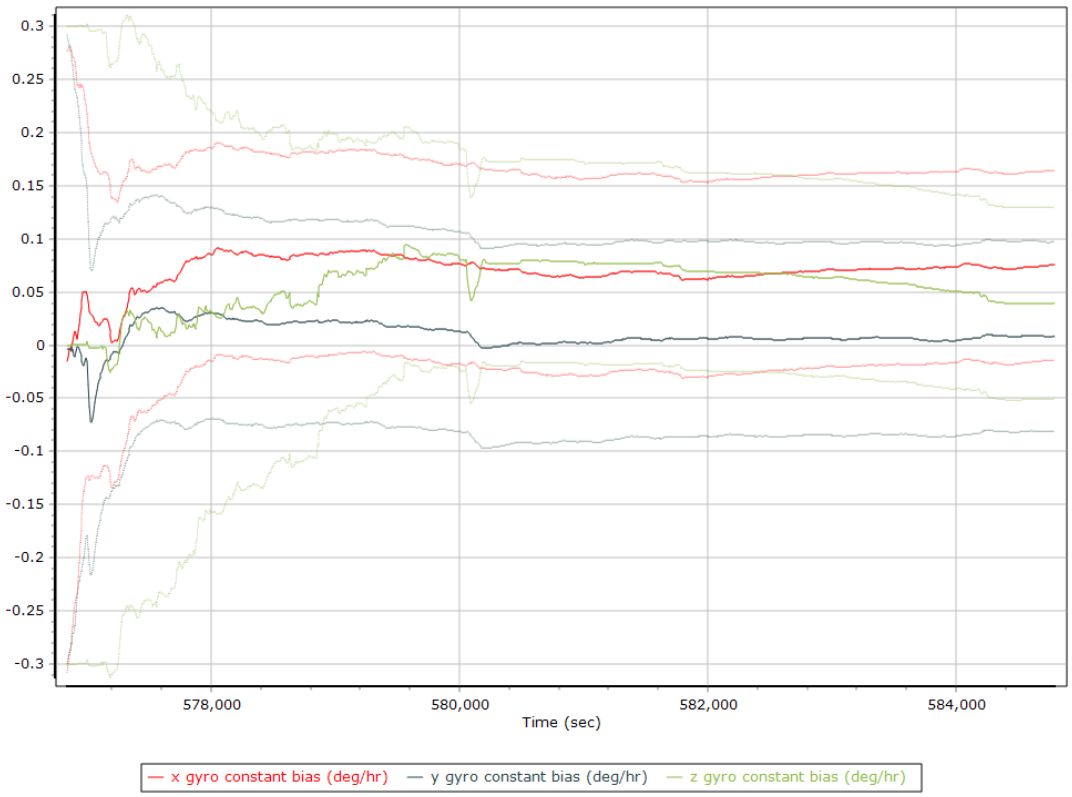

X Gyro Bias (deg/h)

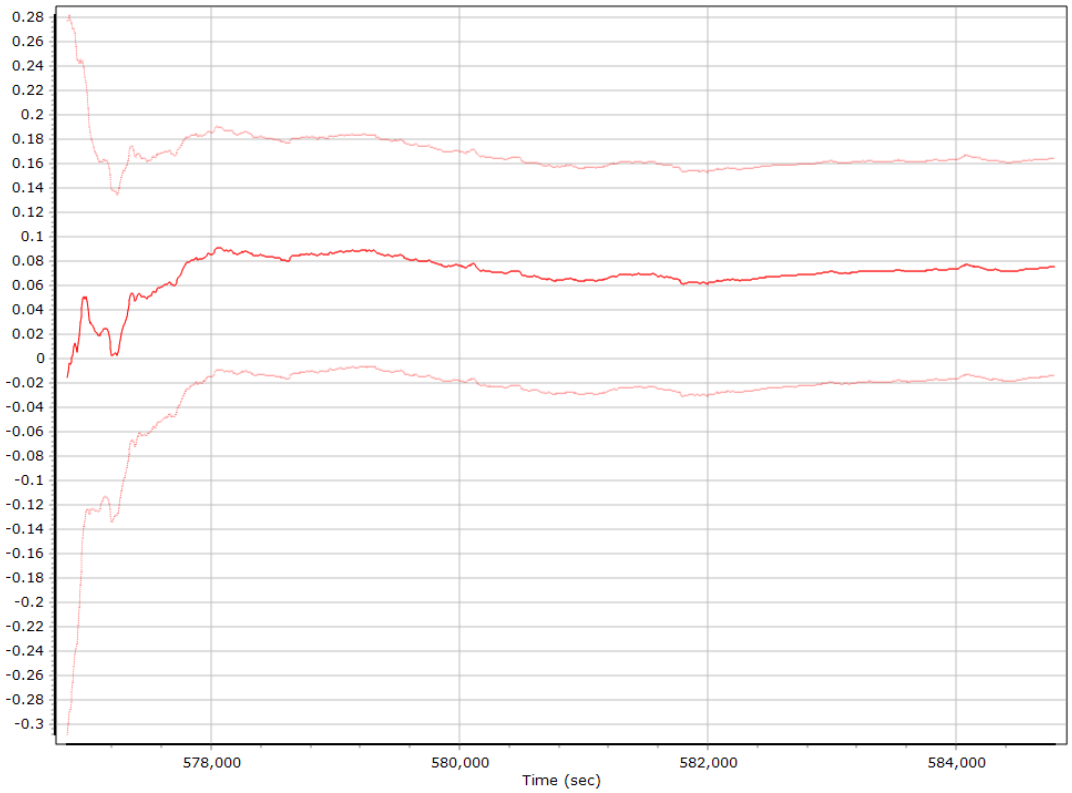

Y Gyro Bias (deg/h)

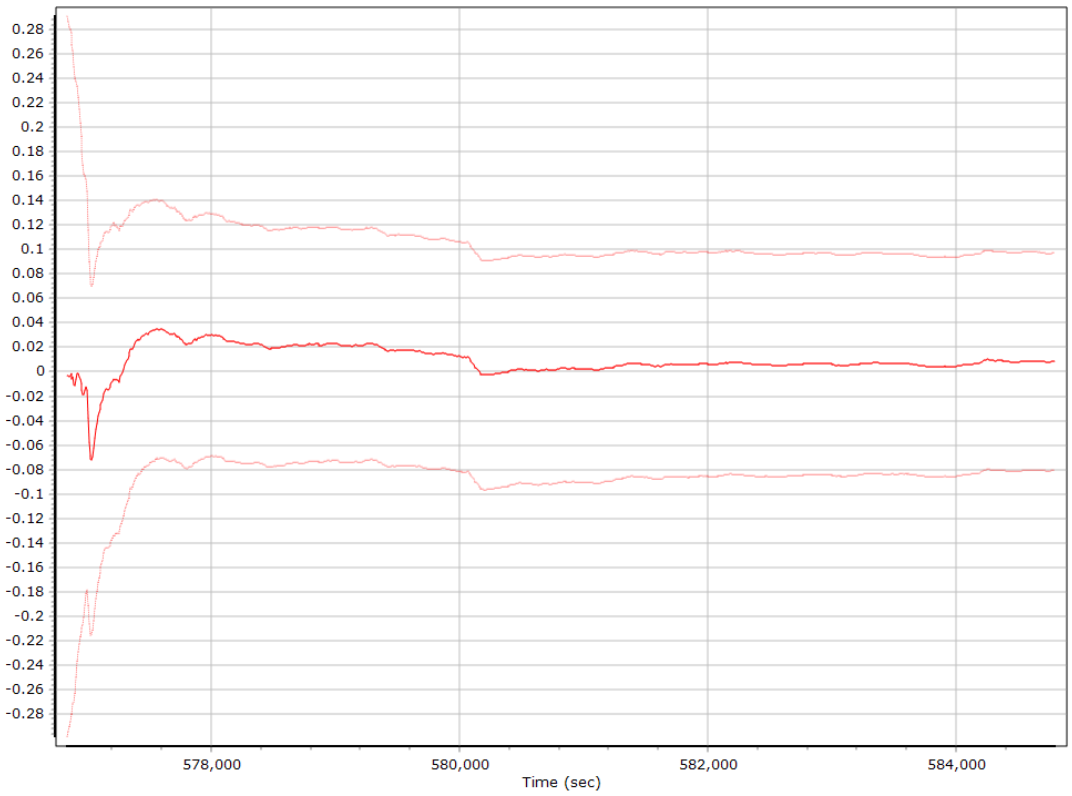

Z Gyro Bias (deg/h)

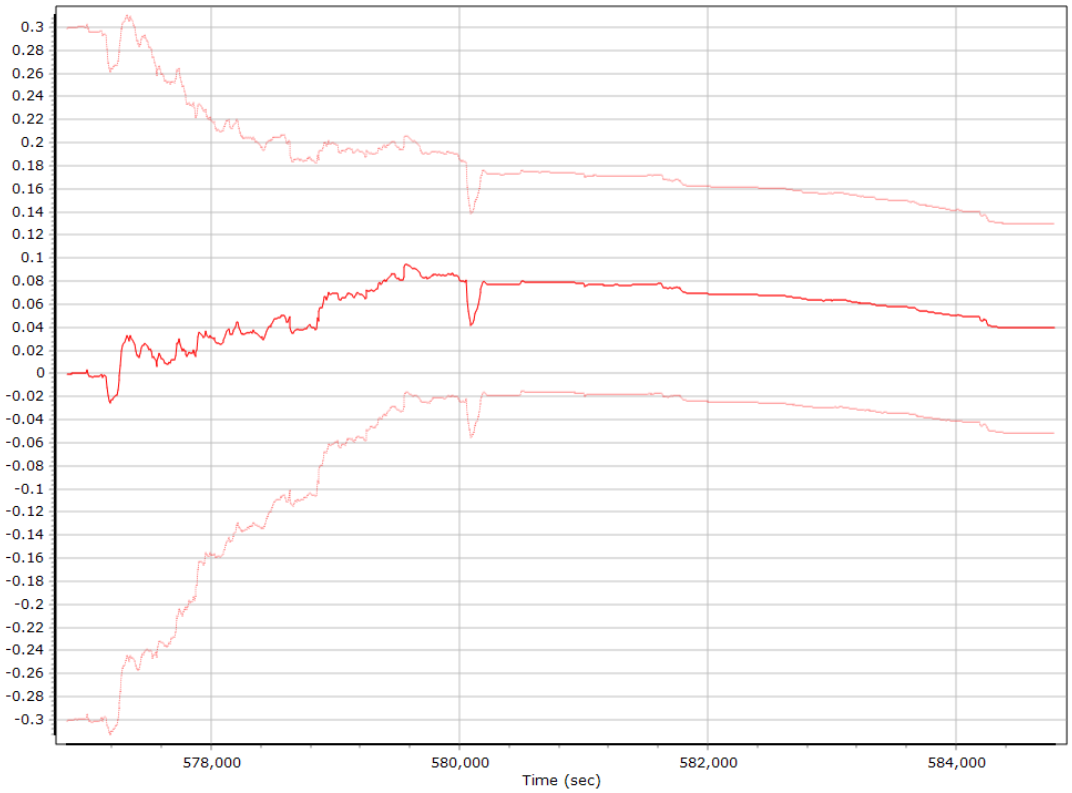

Smoothed Performance Metrics

Position Error RMS (m)

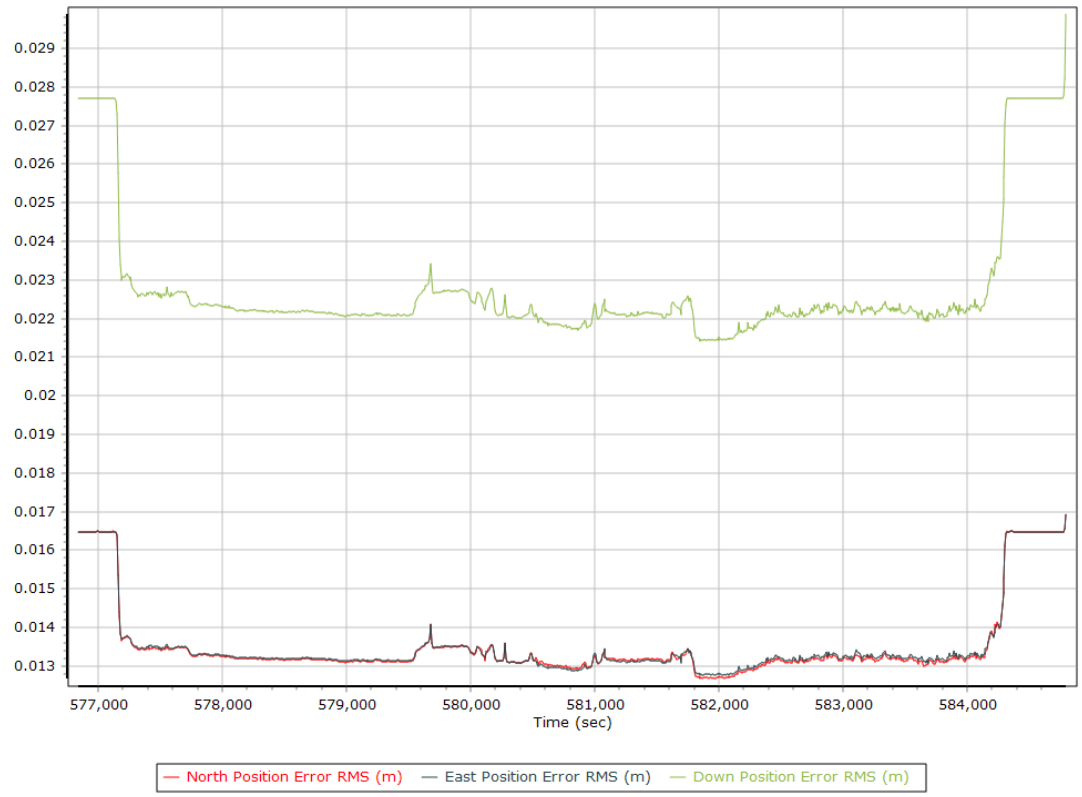

Velocity Error RMS (m/s)

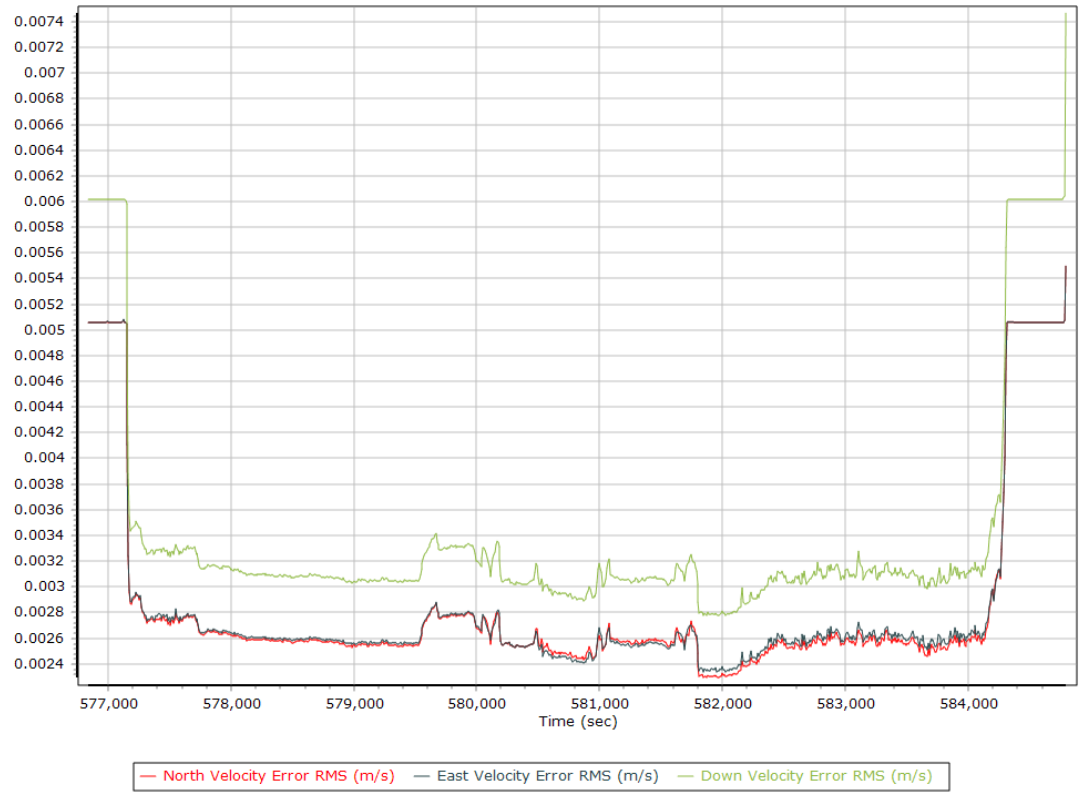

Roll/Pitch Error RMS (arc-min)

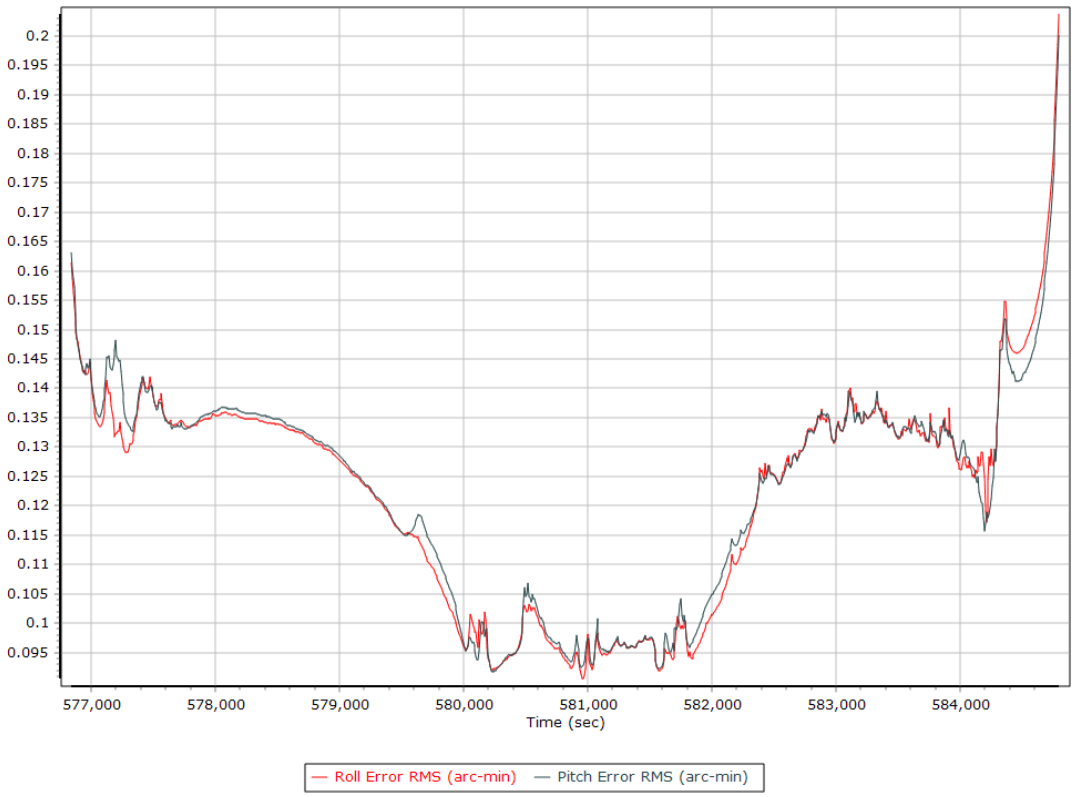

Heading Error RMS (arc-min)

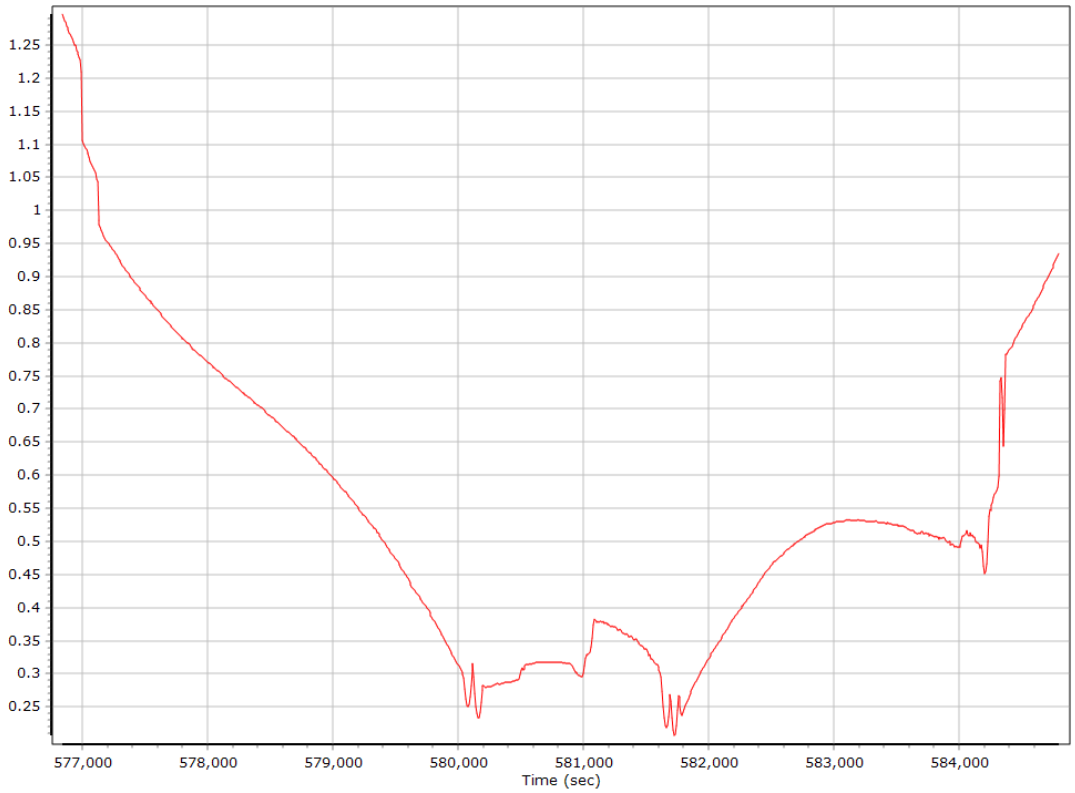

Forward Processed Performance Metrics

Position Error RMS (m)

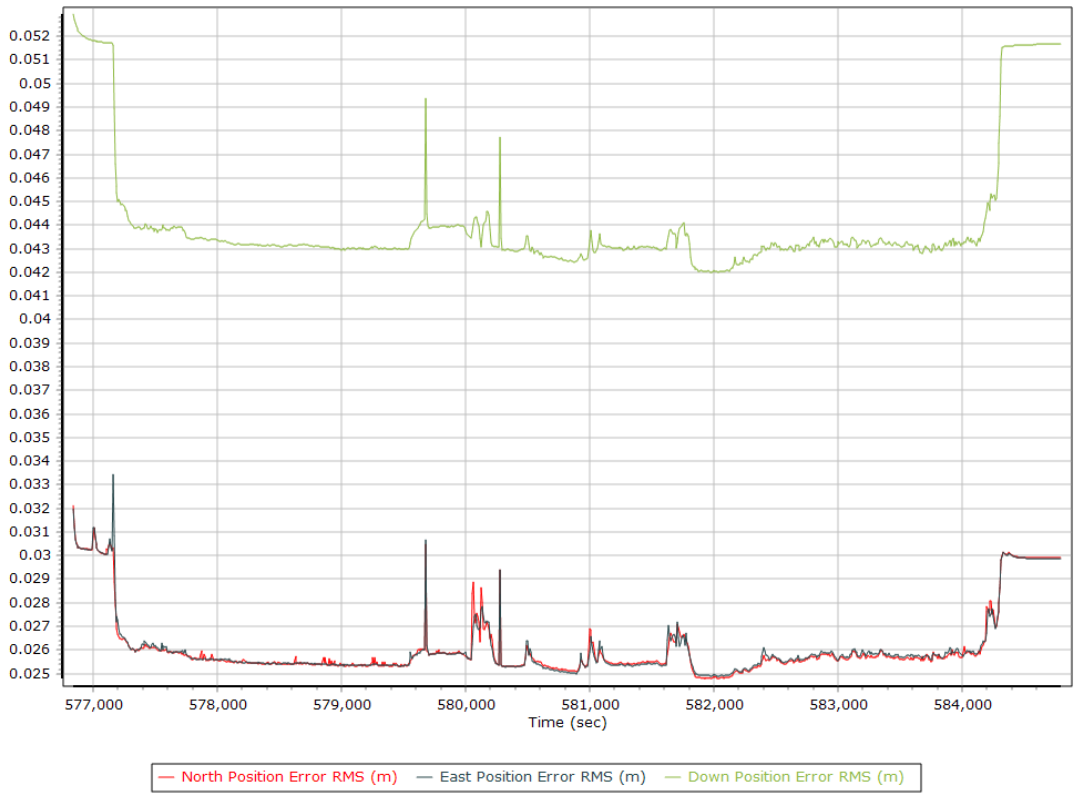

Velocity Error RMS (m/s)

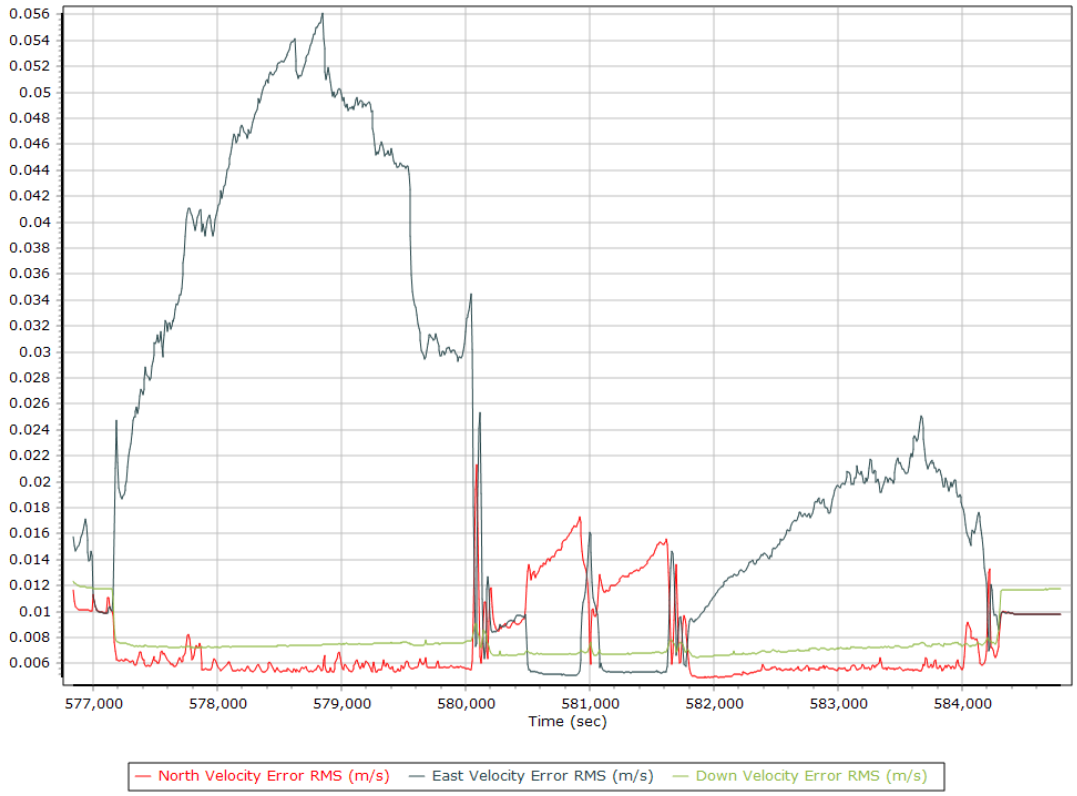

Roll/Pitch Error RMS (arc-min)

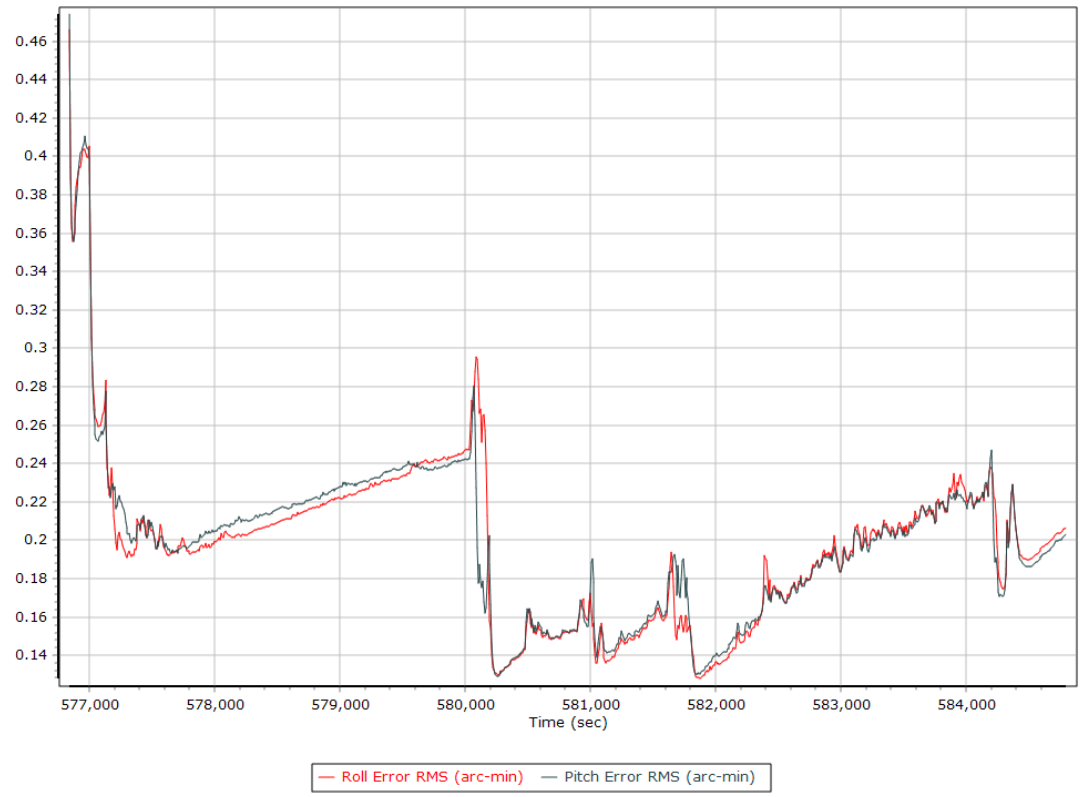

Heading Error RMS (arc-min)

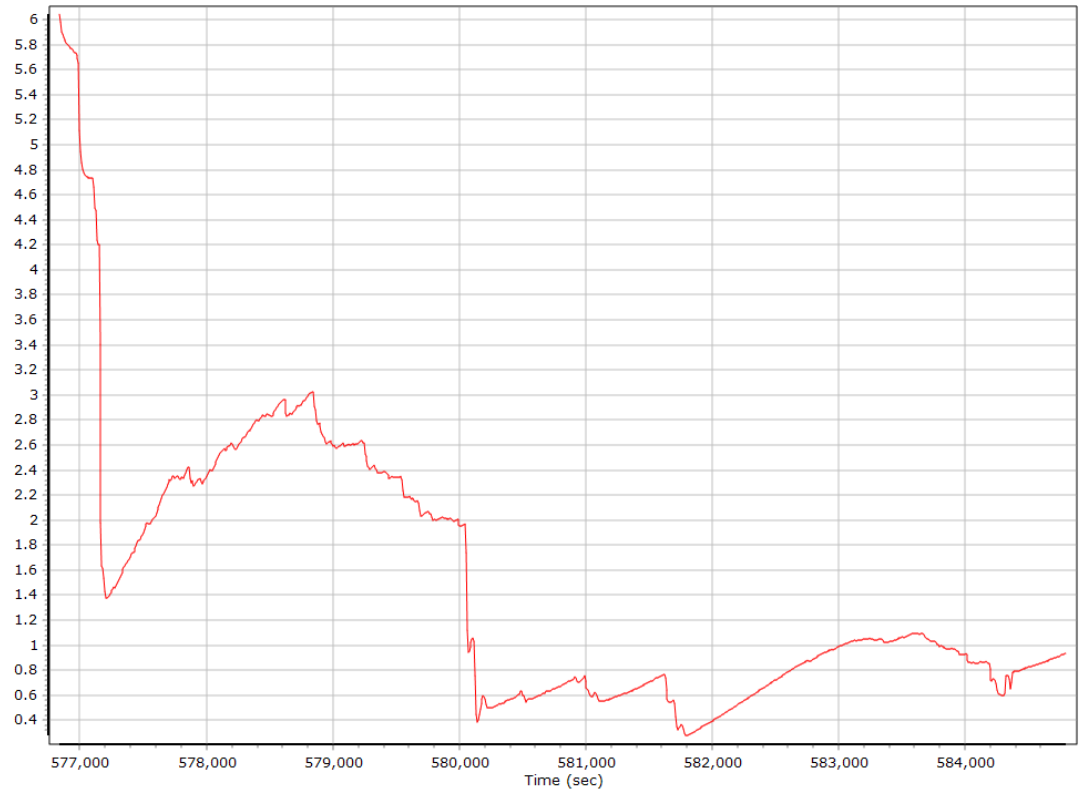

Forward Processed Solution Status

Processing Mode

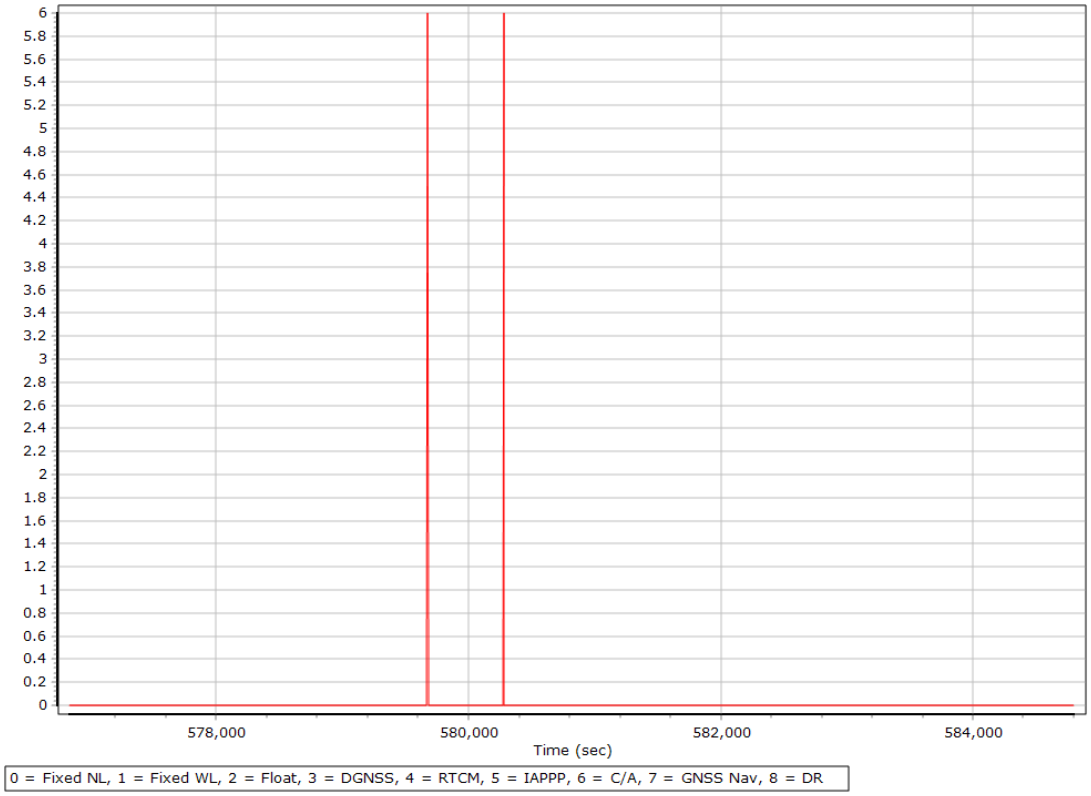

Number of Satellites

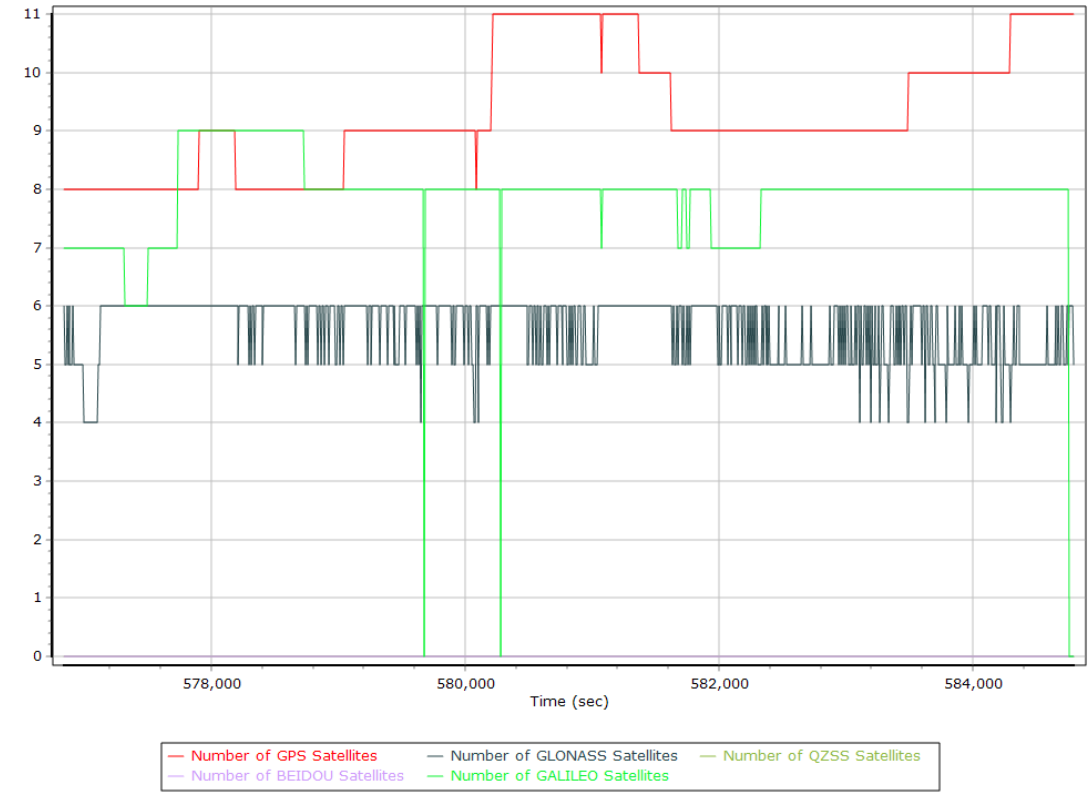

Baseline Length

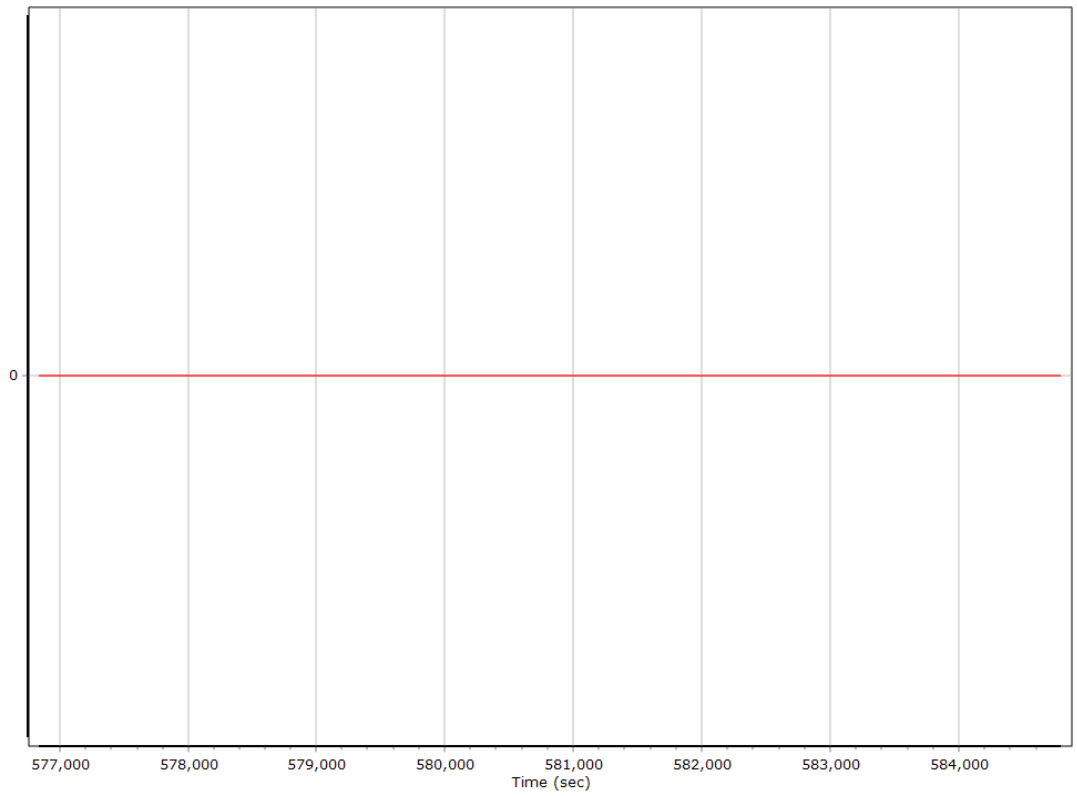

Export Summary

Export file	sbet_210410_A_5060428_nad2011_FINAL.shp		
Export format	Shapefile		
Solution in use	Post-processed		
Output rate	Specified Distance Interval		
Distance Interval (m)	10.000		
Reference to Output lever arm (m)	0.000	0.000	0.000
Reference mounting angles (deg)	0.000	0.000	0.000
Output units (Coordinate / Lat & Lon)	Meter	Deg Decimal	
Export start time	576779.004 (04/10/2021 16:12:59)		
Export end time	584803.000 (04/10/2021 18:26:43)		
Height option	Ellipsoid Height		
WGS84 height flag	False		
Grid	Universal Transverse Mercator		
Zone	UTM North 14 (102W to 96W)		
Datum	NAD83 (2011)		
Ellipsoid	GRS 1980		
Local Transformation	NONE		
Target Epoch	2010		