




LiDAR Quality Assessment Report

The USGS National Geospatial Technical Operations Center, Data Operations Branch is responsible for conducting reviews of all Light Detection and Ranging (LiDAR) point-cloud data and derived products delivered by a data supplier before it is approved for inclusion in the National Elevation Dataset. The USGS recognizes the complexity of LiDAR collection and processing performed by the data suppliers and has developed this Quality Assessment (QA) procedure to accommodate USGS collection and processing specifications with flexibility. The goal of this process is to assure LiDAR data are of sufficient quality for database population and scientific analysis. Concerns regarding the assessment of these data should be directed to the Chief, Data Operations Branch, 1400 Independence Road, Rolla, Missouri 65401.

OR Harney Co 2018

NGTOC
2019-08-28
S Ruhl

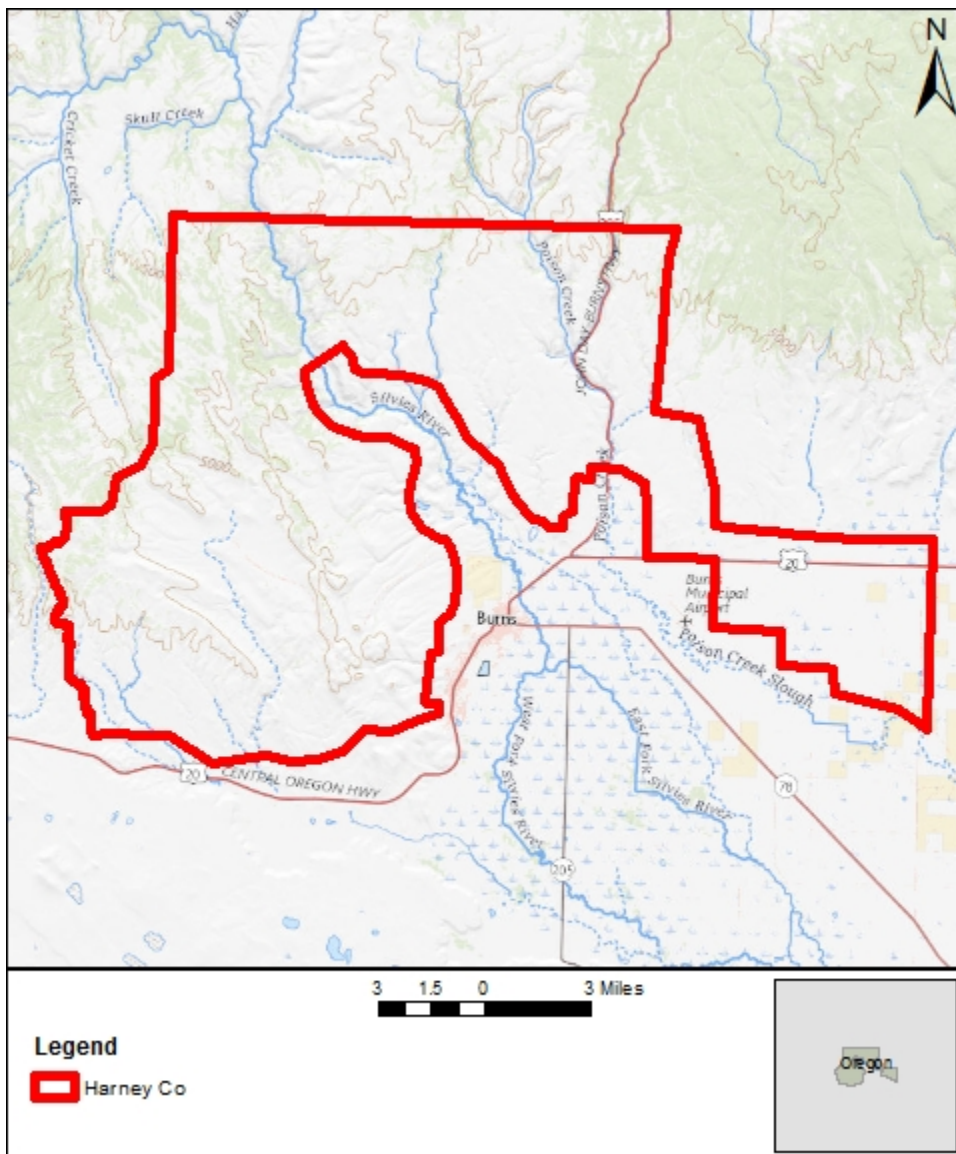

Project Information

Project:

Contractor:

Project Type:
Partnership

Applicable Specification:
Other

Project Points of Contact:

Name:	Type:	Email:
Claire DeV Vaughn	NGP Liaison	cdevaugh@usgs.gov

REPORT QUALIFICATION SUMMARY:
Task Order Overall: <i>Meets Requirements</i>
Metadata: 1 of 1 Reviews Accepted 0 Reviews Not Accepted
Vertical Accuracy: 1 of 1 Reviews Accepted 0 Reviews Not Accepted
Swath/Raw LAS: 0 of 1 Reviews Accepted 0 Reviews Not Accepted
Tiled/Classified LAS: 1 of 1 Reviews Accepted 0 Reviews Not Accepted
Breakline: 1 of 1 Reviews Accepted 0 Reviews Not Accepted
DEM(s): 1 of 1 Reviews Accepted 0 Reviews Not Accepted
NED Review: 1 of 1 DEM tile reviews recommended for NED 1/3rd 0 of 1 DEM tile reviews recommended for NED 1/9th

Project Subdivision:

Dates Collected Range:

Collection Start:

Collection End:

Project Aliases:

Licensing:

Public Domain

Project Description:

The collection of high resolution data that is used to produce three-dimensional models of the earth surface for the purpose of managing natural resources and mapping natural hazards. The collection of this data is also a part of an ongoing pursuit to amass a library of information accessible to government agencies and the general public.

Review Information

Reviewer:

Date Delivered:

3rd Party QA Performed:

Date Assigned:

Action To Contractor Date:	Issue Description:	Return Date:
	<p style="text-align: center;"><u>DEM Errors:</u></p> <p>No Significant DEM Errors were found in the DEM.</p> <p style="text-align: center;"><u>DEM projection:</u></p> <p>Unknown datum based upon the GRS 1980 ellipsoid",DATUM["Not_specified Please describe the DATUM as NAD83 2011. Horizontal CRS EPSG code is missing, thus leaving DATUM undefined/unknown. Projection is ok. RASQC does not read Arc grids correctly.</p> <p style="text-align: center;"><u>LAS/WKT Errors:</u></p> <p>See LAS Review Section</p> <p style="text-align: center;">CORRECTED</p> <p style="text-align: center;"><u>Quality Checkpoints:</u></p> <p>The quality NVA & VVA checkpoints are not distributed well. They are clustered along highways</p> <p style="text-align: center;"><u>2018 OLC Harney 3DEP Report</u></p> <p>It is reported in the Project Overview that the data was acquired on August 3 2018. GPS Times in the LAS point cloud confirm Aug. 3 & 4 2018. Please correct the acquisition date(s) on page 2 of the Project Overview and in Tables 2 & 3 on page 3 of the Project Overview.</p> <p><u>Tribal Lands Note:</u></p> <p>Tribal Lands intersect in southwest and southeast sections of Harney County.</p> <p><u>DEM Note:</u></p> <p>The Vertical CS is missing.</p>	

Notes:

All Grid NoData value are -3.4028

Review Complete:

8/28/2019

Dates Project Worked:

Start:	4/25/2019	6/12/2019	8/28/2019
End:	4/26/2019	6/12/2019	8/28/2019

Project Materials Received

All project deliverables must be supplied according to collection and processing specifications. The USGS will postpone the QA process when any of the required deliverables are missing. When deliverables are missing, the Contracting Officer Technical Representative (COTR) will be contacted by the Elevation Section supervisor and informed of the problem. Processing will resume after the COTR has coordinated the deposition of remaining deliverables.

METADATA

<i>Deliverables</i>	<i>Delivered</i>	<i>XML Metadata</i>	<i>Required</i>	<i>Format</i>	<i>Quantity</i>	<i>Additional Details</i>
<i>Collection Report:</i>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<u>PDF</u>	1	combined in Harney Co Data Report
<i>Survey Report:</i>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<u>PDF</u>	1	combined in Harney Co Data Report
<i>Processing Report:</i>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<u>PDF</u>	1	combined in Harney Co Data Report
<i>QA/QC Report:</i>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<u>PDF</u>	1	combined in Harney Co Data Report
<i>Project Level XML Metadata:</i>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<u>XML</u>	1	
<i>Project Extent:</i>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>.shp</u>	1	
<i>Tile Scheme:</i>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>.shp</u>	1	
<i>Control (Calibration) Points:</i>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>.shp</u>	1	
<i>Check (Validation) Points:</i>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>.shp</u>	2	NVA & VVA
<i>Additional Comments:</i>	project.xml is not required in Base Specification 1.3					

LIDAR DATA

<i>Deliverables</i>	<i>Delivered</i>	<i>XML Metadata</i>	<i>Required</i>	<i>Format</i>	<i>Quantity</i>	<i>Additional Details</i>
Swath Data:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Select...	0	
Classified/ Tiled Data:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	.las	1,099	
Additional Comments:						

DERIVED DELIVERABLES

<i>Deliverables</i>	<i>Delivered</i>	<i>XML Metadata</i>	<i>Required</i>	<i>Format</i>	<i>Quantity</i>	<i>Additional Details</i>
DEM Tiles:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	GRID	1,099	
Breaklines:	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	FGD	1	
Additional Comments:						

OTHER

Additional Comments:	
----------------------	--

Geographic Information

Area Extent: Sq. Miles

Tile Size: Meters

DEM/DTM Grid Spacing: Meters

Coordinate Reference System:

Projection:

Horizontal Datum:

- Meters
- U.S. Feet
- Int'l Feet

Vertical Datum:

- Meters
- U.S. Feet
- Int'l Feet

THIS PROJECTION COORDINATE REFERENCE SYSTEM IS CONSISTENT ACROSS THE FOLLOWING DELIVERABLES

- | | |
|--|--|
| <input checked="" type="checkbox"/> Project Extent | <input checked="" type="checkbox"/> Tiled/Classified XML Metadata |
| <input checked="" type="checkbox"/> Project Extent XML Metadata | <input type="checkbox"/> Tiled/Classified LiDAR |
| <input checked="" type="checkbox"/> Project Tile Scheme | <input type="checkbox"/> projection is GeoTiff |
| <input checked="" type="checkbox"/> Project Tile Scheme XML Metadata | <input type="checkbox"/> DEM(s) |
| <input checked="" type="checkbox"/> Control Points | <input type="checkbox"/> DEM recognizes GRS 1980 as the Datum, not NAD83 |
| <input checked="" type="checkbox"/> Control Points XML Metadata | <input checked="" type="checkbox"/> DEM XML Metadata |
| <input checked="" type="checkbox"/> Checkpoints | <input checked="" type="checkbox"/> Breakline(s) |
| <input checked="" type="checkbox"/> Checkpoint XML Metadata | <input checked="" type="checkbox"/> Breakline XML Metadata |
| <input checked="" type="checkbox"/> Project Level XML Metadata | |

Additional
Comments:

Collection Information

Quality Level: 2

Configured Nominal Pulse Spacing:

0.35 Meters

Additional Comments:

Metadata Review Accepted

Vendor provided metadata files have been parsed using 'mp' metadata parser. Any errors generated by the parser are documented below for reference and/or corrective action.

Parser can be found @ <http://geo-nsdi.er.usgs.gov/validation/>

The Project Level XML Metadata parsed without errors.

Check if 'Best Use' metadata for NED:

The Project Extent XML Metadata parsed without errors.

Check if 'Best Use' metadata for NED:

The Project Tile Scheme XML Metadata parsed without errors.

Check if 'Best Use' metadata for NED:

The Control Point XML Metadata parsed without errors.

Check if 'Best Use' metadata for NED:

The Check Point XML Metadata parsed without errors.

Check if 'Best Use' metadata for NED:

The Classified XML Metadata parsed without errors.

Check if 'Best Use' metadata for NED:

The DEM XML Metadata parsed without errors.

Check if 'Best Use' metadata for NED:

The Breakline XML Metadata parsed without errors.

Check if 'Best Use' metadata for NED:

Additional
Comments:

Missing Classified LAS xml

In all .xmls:

change from: `<enddate>20180803</enddate>`
to: `<enddate>20180804</enddate>`

In `<abstract></abstract>` Please add lidar Specification 1.2 as the data specification for this project. Also please add the NPS for this project.

Not Addressed

In the DEM .xml

remove `<lidar></lidar>` section is not required in raster .xmls

Change from: `<absres>0.01</absres><ordres>0.01</ordres>`
To: `<absres>1</absres><ordres>1</ordres>`

In all xmls with `<ldrinfor>` section:

Change: `<lasver>1.3</lasver>`
To: `<lasver>1.4</lasver>`

Based on this review, the USGS accepts the xml metadata provided.

End of Metadata Review

Vertical Accuracy Review Accepted

ASPRS recommends that checkpoint surveys be used to verify the vertical accuracy of LiDAR data sets. Checkpoints are to be collected by an independent survey firm licensed in the particular state(s) where the project is located. While subjective, checkpoints should be well distributed throughout the dataset. National Standards for Spatial Data Accuracy (NSSDA) guidance states that checkpoints may be distributed more densely in the vicinity of important features and more sparsely in areas that are of little or no interest. Checkpoints should be distributed so that points are spaced at intervals of at least ten percent of the diagonal distance across the dataset and at least twenty percent of the points are located in each quadrant of the dataset.

NSSDA and ASPRS require that a minimum of twenty checkpoints (thirty is preferred) are collected for each major land cover category represented in the LiDAR data. Checkpoints should be selected on flat terrain, or on uniformly sloping terrain in all directions from each checkpoint. They should not be selected near severe breaks in slope, such as bridge abutments, edges of roads, or near river bluffs. Checkpoints are an important component of the USGS QA process. There is the presumption that the checkpoint surveys are error free and the discrepancies are attributable to the LiDAR dataset supplied.

For this dataset, USGS checked the spatial distribution of checkpoints with an emphasis on the bare-earth (open terrain) points; the number of points per class; the methodology used to collect these points; and the relationship between the data supplier and checkpoint collector. When independent control data are available, USGS has incorporated this into the analysis.

Required Vertical Accuracy

Yes No

REQUIRED NON-VEGETATED VERTICAL ACCURACY FOR SWATH AND DEM FILES

Required Unit:

Centimeters

Required # of checkpoints:

Required RMSEz:

Required Vertical Accuracy (RMSEz * 95th CI)

REQUIRED VEGETATED VERTICAL ACCURACY FOR DEM FILES

Required Unit:

Required # of checkpoints:

Required Vertical Accuracy (@ 95th percentile)

Additional Required Vertical Accuracy Information:

The checkpoints provided by the contractor are not distributed well and are clustered along roads.

Reported Vertical Accuracy

Yes No

REPORTED NON-VEGETATED VERTICAL ACCURACY FOR SWATH LIDAR FILES

Reported Unit:

Reported # of checkpoints:

Reported RMSEz:

Reported Vertical Accuracy (RMSEz * 95th CI)

REPORTED NON-VEGETATED VERTICAL ACCURACY FOR DEM FILES

Reported Unit:

Reported # of checkpoints:

Reported RMSEz:

Reported Vertical Accuracy (RMSEz * 95th CI)

REPORTED VEGETATED VERTICAL ACCURACY FOR DEM FILES

Reported Unit:

Reported # of checkpoints:

Reported Vertical Accuracy (95th percentile)

Additional Reported
Vertical Accuracy
Information:

The checkpoints provided by the contractor are not distributed well and are clustered along roads.

Reviewed Vertical Accuracy

Yes No

CHECKPOINT REVIEW

Checkpoints are well distributed?

Enough checkpoints for task order?

Checkpoints meet USGS LiDAR base-spec in quantity and quality?

REVIEWED NON-VEGETATED VERTICAL ACCURACY FOR SWATH LIDAR FILES

Reviewed Unit:

Reviewed # of checkpoints:

Reviewed RMSEz:

Reviewed Vertical Accuracy (RMSEz * 95th CI)

REVIEWED NON-VEGETATED VERTICAL ACCURACY FOR DEM FILES

Reviewed Unit:

Reviewed # of checkpoints:

Reviewed RMSEz:

Reviewed Vertical Accuracy (RMSEz * 95th CI)


REVIEWED VEGETATED VERTICAL ACCURACY

Required Unit:

Required # of checkpoints:

Reviewed Vertical Accuracy (95th percentile)

Checkpoint Distribution Image

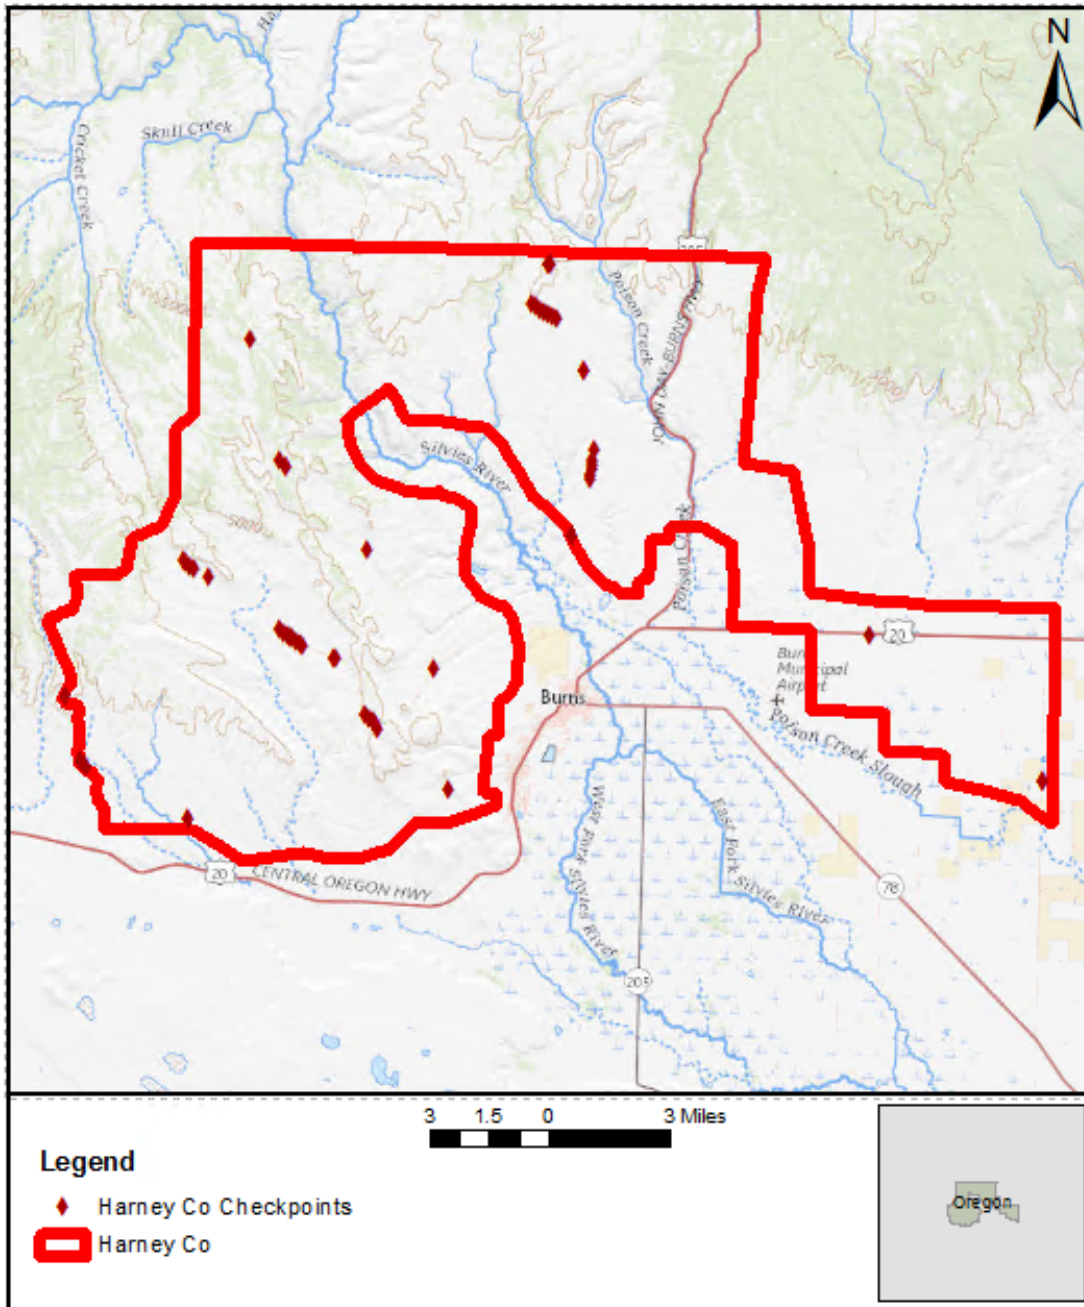

Vertical Accuracy Results:

Additional Reviewed Vertical Accuracy Information:

The checkpoints provided by the contractor are not distributed well and are clustered along roads.

Based on this review, the USGS accepts the vertical accuracy.

End of Vertical Accuracy Review

Raw-Swath LiDAR Review

LAS swath files or raw unclassified LiDAR data are reviewed to assess the quality control used by the data supplier during collection. Furthermore, LAS swath data are checked for positional accuracy. The data supplier should have

calculated the Non-Vegetated Vertical Accuracy using ground control checkpoints measured in clear open terrain (see *Vertical Accuracy Review Section*).

Review Required: Yes No *Not Delivered*

Tiled/Classified LiDAR Review **Accepted**

Classified LAS tile files are used to build digital terrain models using the points classified as ground. Therefore, it is important that the classified LAS are of sufficient quality to ensure that the derivative product accurately represents the landscape that was measured. Classified LAS Tiles are comprised as follows, "all project swaths, returns, and collected points, fully calibrated, adjusted to ground, and classified and cut, by tiles, excluding calibration swaths, cross-ties, and other swaths not used, or intended to be used, in product generation".

Review Required: Yes No

CLASSIFIED LIDAR TILE CHARACTERISTICS

Separate folder for classified/tiled LiDAR files

LAS Version: 1.4

Point Record Format: 6

If specified, *.wpd files for full waveform data have been provided: Not Required

Classified LAS tile files conform to project tiling scheme

Quantity of classified LAS tile files conforms to project tiling scheme

Classified LAS tile files do not overlap

Classified LAS tile files are uniform in size

Correct and properly formatted georeference information is included in all LAS file headers, including the use of OGC 2001 Well Known Text (WKT).

The projection is not WKT compliant. Lasinfo and LASQC verify projection to be non-compliant. The current LAS projection:

Is GeoKey/GeoTiff

Is not well formed

Is not a compound CS

Is missing the Vertical CS in its entirety

CORRECTED

See correct projection below:

Lines in Bold are NGTOC format preference.

```

COMPD_CS["NAD83(2011) / UTM zone 11N + NAVD88 height - GEOID12B",
PROJCS["NAD83(2011) / UTM zone 11N",
GEOGCS["NAD83(2011)",
DATUM["NAD83 (National Spatial Reference System 2011)",
SPHEROID["GRS 1980",6378137,298.257222101,
AUTHORITY["EPSG","7019"]],
AUTHORITY["EPSG","1116"]],
PRIMEM["Greenwich",0,
AUTHORITY["EPSG","8901"]],
UNIT["degree",0.0174532925199433,
AUTHORITY["EPSG","9122"]],
AUTHORITY["EPSG","6318"]],
PROJECTION["Transverse_Mercator"],
PARAMETER["latitude_of_origin",0],
PARAMETER["central_meridian",-117],
PARAMETER["scale_factor",0.9996],
PARAMETER["false_easting",500000],
PARAMETER["false_northing",0],

```

```

UNIT["metre",1,
  AUTHORITY["EPSG","9001"]],
AXIS["X",EAST],
AXIS["Y",NORTH],
AUTHORITY["EPSG","6340"]],
VERT_CS["NAVD88 height - GEOID12B",
  VERT_DATUM["North American Vertical Datum 1988",2005,
    AUTHORITY["EPSG","5103"]],
  UNIT["metre",1,
    AUTHORITY["EPSG","9001"]],
AXIS["Up",UP],
  AUTHORITY["EPSG","5703"]]]
    
```

Adjusted GPS time used with the global encoder id set to 1

Global Encoder is set to 1. Please set encoder to 17.

CORRECTED

Classified LAS tile files have no points classified as '12' (Overlap) and correctly use overlap bit.

Point classifications are limited to the standard values listed below:

Code	Description	Used
1	Processed, but unclassified	<input checked="" type="checkbox"/>
2	Bare-earth/Ground	<input checked="" type="checkbox"/>
7	Noise (low, manually identified, if needed)	<input checked="" type="checkbox"/>
8	Model key points	<input type="checkbox"/>
9	Water	<input checked="" type="checkbox"/>
10	Ignored ground (breakline proximity)	<input type="checkbox"/>
11	Withheld (if the "Withheld Bit" is not implemented in the processing software)	<input type="checkbox"/>
17	Bridges	<input checked="" type="checkbox"/>
18	Noise (high, manually identified, if needed)	<input checked="" type="checkbox"/>

Additional comments:

The SystemID is incorrect. The SystemID should be populated with the sensor(s) used in acquisition of the point cloud data.

The Pnt/Hdr do not agree in 94 tiles

CORRECTED

Based on this review, the USGS accepts classified/tiled LiDAR data.

End of Tiled/Classified LiDAR Review

Breakline Review Accepted

Breaklines are vector feature classes that are used to hydro-flatten the bare earth Digital Elevation Models.

Review Required: Yes No

BREAKLINE FILE CHARACTERISTICS:

- Separate folder for breakline files.
- Breaklines contain elevation values.

Elevation values stored in Attribute Table

Units: Meters

Waterbody Breaklines.

Polyline Polygon

Single elevation value per waterbody feature.

Required.

Waterbody Elevations were created via Unknown waterbody level techniques.

Double Line Stream Breaklines (Streams Approximately > 100 ft).

Single Line Breaklines.

No missing or misplaced breaklines.

Based on this review, the USGS accepts the breakline files.

End of Breakline Review

DEM Review Accepted

The derived bare-earth file(s) receive a review of the vertical accuracies provided by the data supplier, vertical accuracies calculated by the USGS using supplied and independent checkpoints (*see the prior Vertical Accuracy Review Section*), and a thorough visual review for any anomalies or inconsistencies in assessing the quality of the DEM(s).

BARE-EARTH DEM TILE CHARACTERISTICS:

Separate folder for bare-earth DEM files

Raster File Type: GRID

Raster Cell Size: Meters

Tile bit depth/pixel Type:

Interpolation or Resampling Technique: Unknown

DEM tiles do not overlap

DEM tiles conform to Project Tiling Scheme

Quantity of DEM files conforms to Project Tiling Scheme

DEM tiles are uniform in size

DEM tiles properly edge match and free of edge artifacts

Tiles are free from Spikes and Pits

Tiles are free from Data Holidays (*voids due to processing or collection errors*)

Tiles do not exhibit systematic sensor error or corrowing

Hydro Treatment: hydro-flattened

DEM tiles are properly Hydro Flattened Yes No

Waterbodies or greater are flattened

Streams or greater are flattened in a downstream manner

N/A

Tidal Boundaries/Shorelines are flattened

N/A

No missing islands or larger

- Bridges/Overpasses are properly removed
- Culverts are maintained (Not Hydro Enforced)
- Depressions, Sinks, are not filled in (Not Hydro Conditioned)
- Vegetation properly removed
- Manmade structures properly removed

ADDITIONAL COMMENTS, ERRORS, ANOMALIES, OR OTHER ISSUES:

The projection is not well formed. Unknown datum based upon the GRS 1980 ellipsoid", DATUM["Not_specified. Missing horizontal CRS EPSG code.

Projection is ok. RASQC does not read Arc Grids correctly.

There were no significant errors found in the DEM grid.

Tiles recommended for NED 1/3rd: Yes. No.

Tiles recommended for NED 1/9th: Yes. No.

Tiles recommended for NED 1 Meter: Yes. No.

LAS dataset recommended for distribution: tile classified

Based on this review, the USGS accepts the DEM tiles.

End of DEM Review

Based on this review, the provided delivery Meets the Contract and/or Task Order requirements.
Additional Comments:

INTERNAL COMMENTS

END OF REPORT (v2.4.0)